



QUICK GUIDE

VIA Edge AI Developer Kit

1. Packing List

Items for STK-VT6093-01A1

- 1 x SOM-9X20 module
- 1 x SOMDB2 carrier board
- 1 x VT6093 audio module
- 1 x COM cable
- 1 x AC adapter
- 1 x Power cord US type
- 2 x Antennas for Wi-Fi & Bluetooth
- 1 x VT6093-CAM-T Camera-CSI converter board
- 1 x 13MP CMOS camera module
- 1 x FPC cable for CSI connector



Items for STK-VT6093-00A1

- 1 x SOM-9X20 module
- 1 x SOMDB2 carrier board
- 1 x VT6093 audio module
- 1 x COM cable
- 1 x AC adapter
- 1 x Power cord US type
- 2 x Antennas for Wi-Fi & Bluetooth



2. Optional Accessories


Touch Panel

Part Number

99G47-01025F

Description

10.1" MIPI 16:10 (WUXGA 1920 x 1200, 16.7M) LCD Touch panel with USB FPC touch cable and MIPI FPC cable

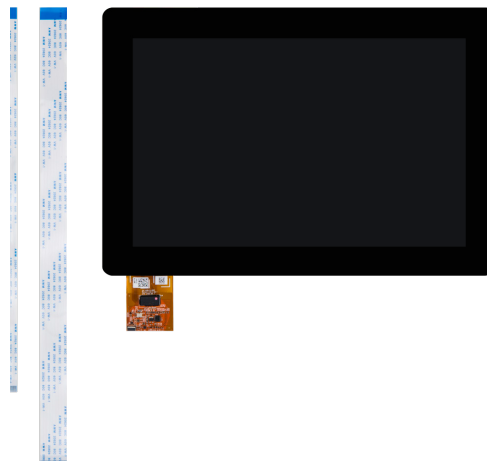


3. Developer Kit Assembly

3.1 Installing the SOM-9X20 Module on the SOMDB2 Carrier Board


Step 1

Align the notch on the SOM-9X20 module with its counterpart on the MXM 3.0 slot on the SOMDB2 carrier board. Then insert the module at a 30° angle.

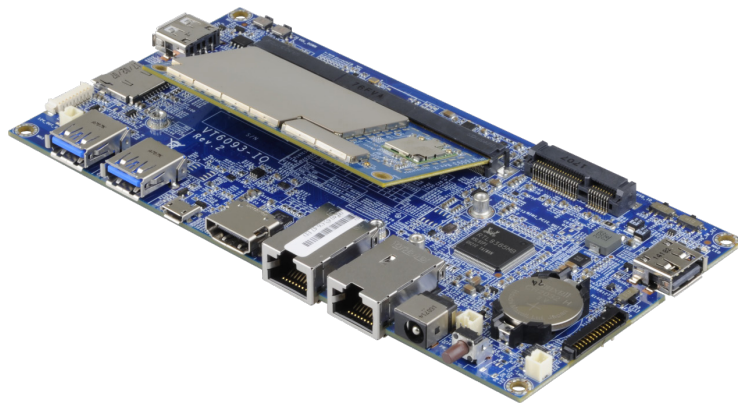

Step 2

Once the SOM-9X20 module has been fully inserted, push down the module until the standoff holes align with the screw holes and then secure the module with the provided screws.

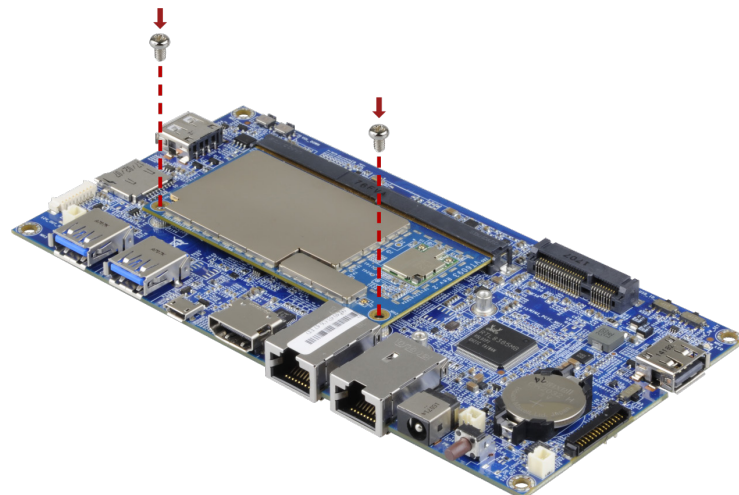

3.2 Connecting the 13MP CMOS Camera Module

Step 1

Connect the FPC cable to the VT6093-CAM-T (Camera-CSI converter board).




Step 2

Connect the 13MP CMOS camera module to the VT6093-CAM-T (Camera-CSI converter board).



Step 3


Connect the other end of the FPC cable to the MIPI CSI connector on the SOMDB2 carrier board.

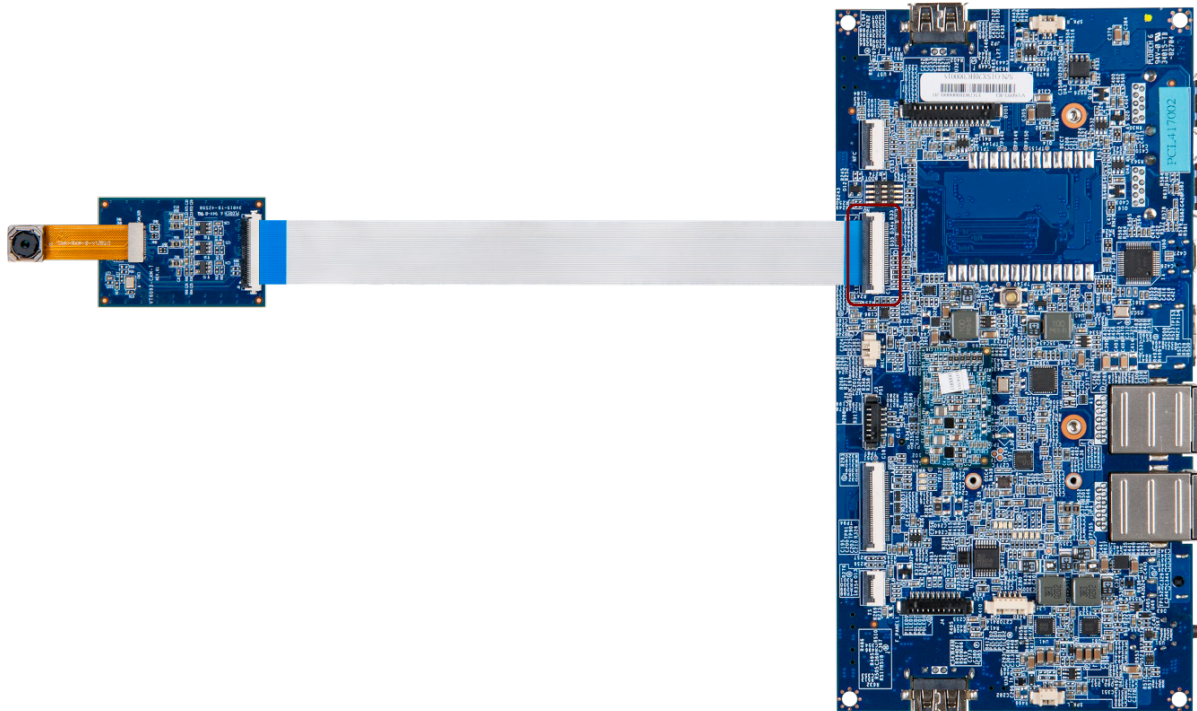

3.3 Connecting Wi-Fi and Bluetooth Antennas


Step 1

Insert the antenna cables into the antenna holes from inside of the chassis (I/O plate). Insert the washers and fasten it with the nuts, and then install the external Wi-Fi and Bluetooth antennas.

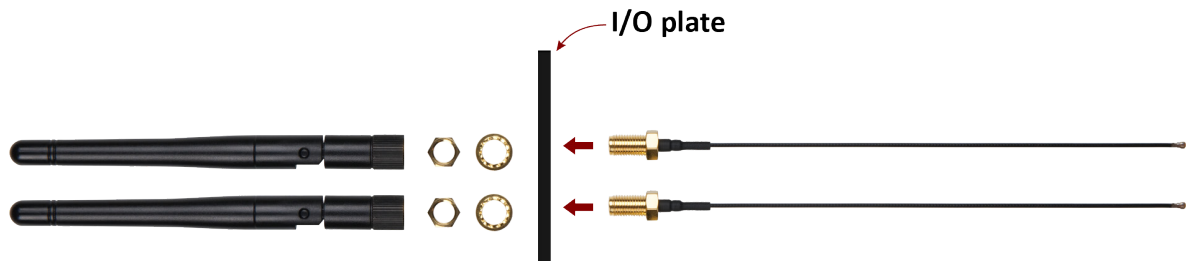

Step 2

Connect the plug connectors of the antenna cables onto the respective micro-miniature RF antenna connectors on the onboard Wi-Fi+BT LGA module on the SOM-9X20 module.

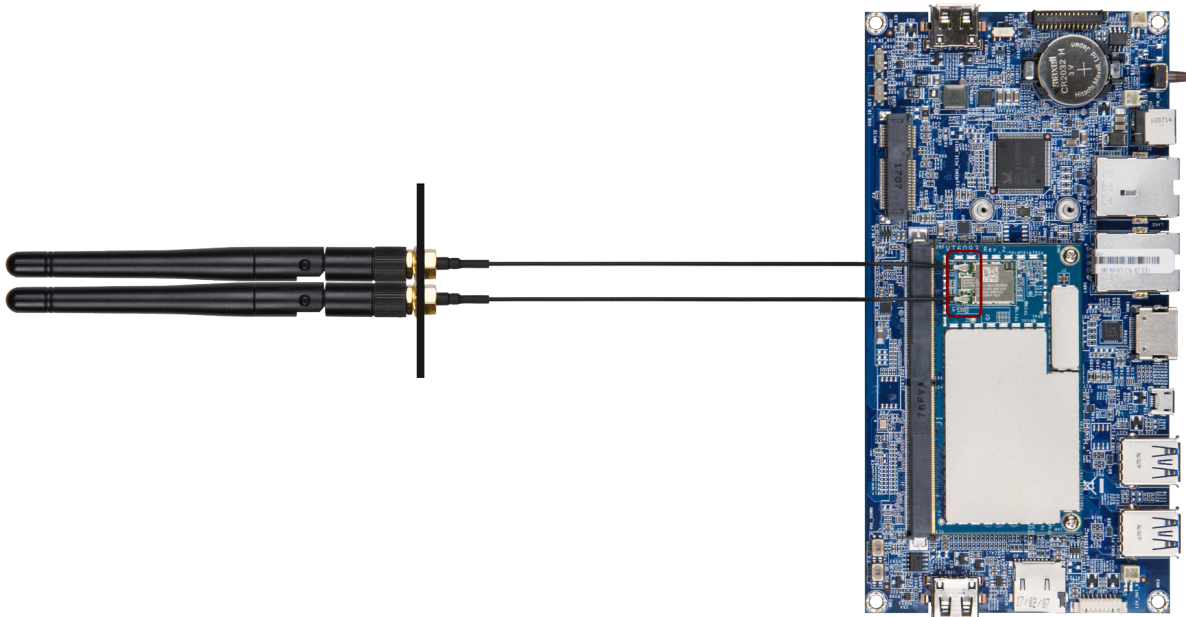


Reminder:

We recommend to use a Jig when mating or unmating the plug connector to and from the micro-miniature RF antenna connector on the onboard Wi-Fi & BT LGA module. For more details, refer to Appendix B.

3.4 Connecting the COM Cable

Step 1

Connect the COM cable to the COM connector on the SOMDB2 carrier board.

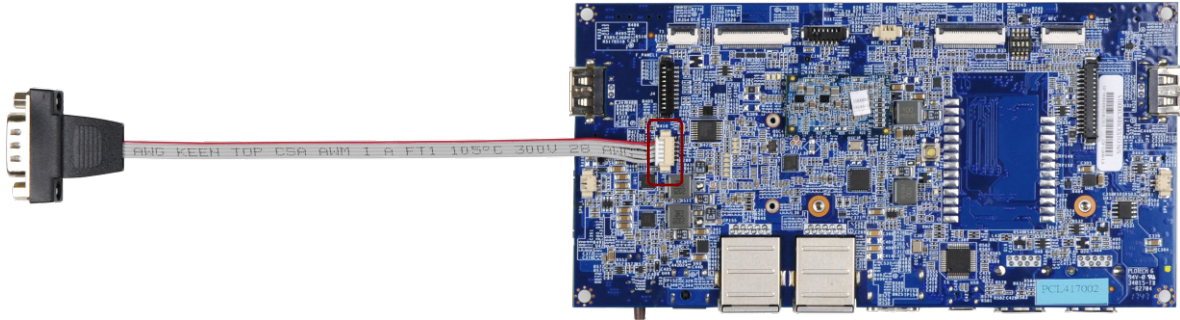


Appendix A. Connecting LCD Touch Panel

A.1. Connecting 10.1" MIPI LCD Touch Panel


Step 1

Connect the USB FPC touch cable to the flexible printed circuit on the LCD touch panel.

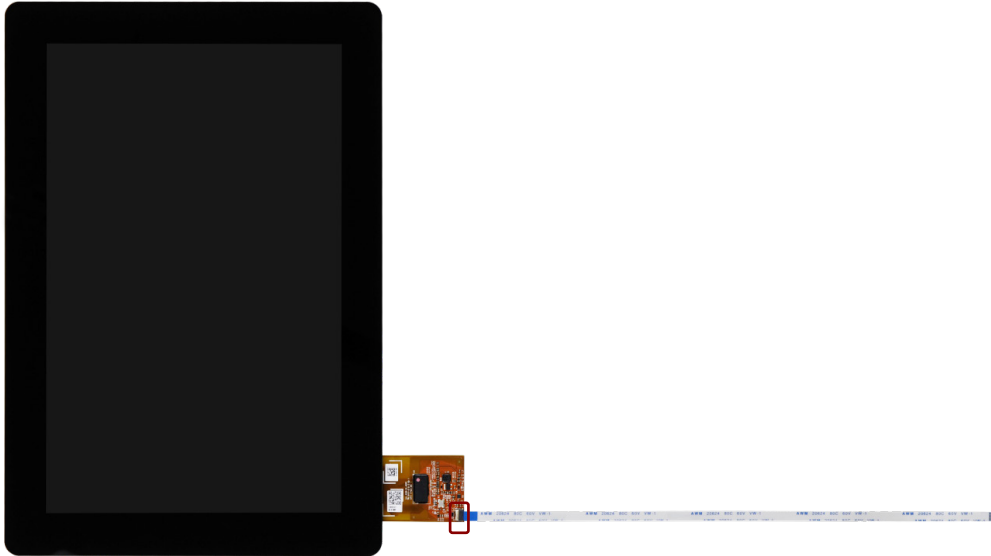

Step 2

Connect the MIPI FPC cable to the LCD connector on the back of the LCD touch panel.

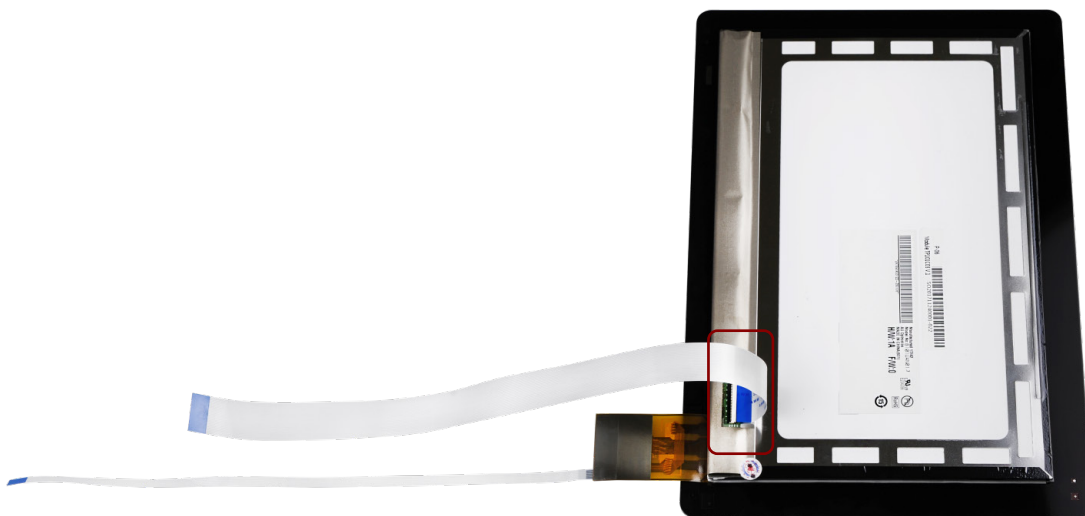


Step 3

Connect the other ends of the USB FPC touch cable and MIPI FPC cable to the P-Cap touch connector and MIPI DSI LCD panel connector respectively on the SOMDB2 carrier board.




Appendix B. Recommended Mating & Unmating Jig

B.1. Jig Dimensions

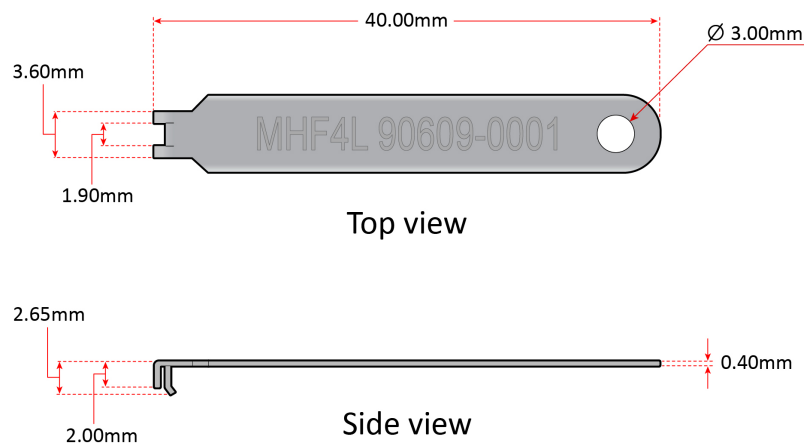

B.2. Mating Method of Plug Connector

Using the jig, align the plug connector onto the micro-miniature RF antenna connector. Then push down gently until the plug connector is fully connected. The recommended force must be 30N (maximum).

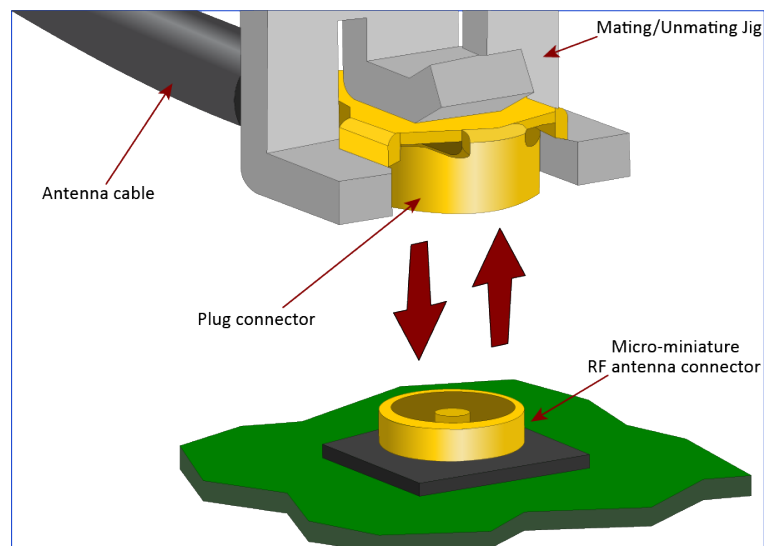



Taiwan Headquarters

1F, 531 Zhong-zheng Road,
Xindian Dist., New Taipei City 231
Taiwan

Tel: 886-2-2218-5452
Fax: 886-2-2218-9860
Email: embedded@via.com.tw



USA

940 Mission Court
Fremont, CA 94539,
USA

Tel: 1-510-687-4688
Fax: 1-510-687-4654
Email: embedded@viatech.com



Japan

3-15-7 Ebisu MT Bldg. 6F,
Higashi, Shibuya-ku
Tokyo 150-0011
Japan

Tel: 81-3-5466-1637
Fax: 81-3-5466-1638
Email: embedded@viatech.co.jp



China

Tsinghua Science Park Bldg. 7
No. 1 Zongguancun East Road,
Haidian Dist., Beijing, 100084
China

Tel: 86-10-59852288
Fax: 86-10-59852299
Email: embedded@viatech.com.cn



Europe

Email: embedded@via-tech.eu

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А