CONNECTOR P1 DESCRIPTION/ PART NO	CONNECTOR P2 DESCRIPTION/ PART NO	CABLE GROUPS; WRENCH CRIMP, (TOOL CRIMP) 1(011) TCC-50-2	2(013A) TCC-75-2	2(013/013B) 4 RG62	3(012) M17/167-00001 (RG223)	1(011) RG58 BLACK	2(013) RG59 BLACK	1(012) RG142	21(011) RG303	CKT CODE
		11-01 DASH NUMBERS 6								
(PL1C-) 1-0453- 1	(PL1C-) 1-0453- 1	-1	-3 10	-4	-2	-88	-189	-203	-228	K1
(PL1WC-) 1-0453-W 1	(PL1WC-) 1-0453-W 1	-5	-7 10	-8	-6	-89	-204	-205	-206	K1
(PL1C-) 1-0453- 1	(PL71-1 FIS) 305-0562-1	-9	—	—	—	-90	—	-207	—	E2
(PL1C-) 1-0453- 1	(PL71-2 FIS) 305-0562-3	—	-10	-11	—	—	-208	—	—	E2
(PL1WC-) 1-0453-W	(PL71-1 FIS) 305-0562-1	-12	—	—	—	-91	—	-209	—	E2
(PL1WC-) 1-0453-W 1	(PL71-2 FIS) 305-0562-3	—	-13	-14	—	—	-236	—	—	E2
(PL20-) 1-0369- 1	(PL1C-) 1-0453- 1	-15	-17	-18	-16	-92	-238	-239	-240	K1
(PL20-) 1-0369- 1	(PL1WC-) 1-0453-W 1	-19	-22	-23	-20	-93	-241	-242	-243	K1
(PL3C-) 1-0045-	(PL3C-) 1-0045-	-244	-245	-246	-21	-247	-248	-249	-250	K1
(PL20-) 1-0369- 1	(PL20-) 1-0369- 1	-24	-26	-27	-25	-251	-190	-252	-253	K1
(PL20-) 1-0369- 1	(PL40-) 1-0014- 1	-28	-254	-255	-29	-94	-256	-257	-258	K1
(CJ20-) 1-0134- 1	(CJ40-) 1-0135- 1	-30	-259	-260	-31	-95	-261	-262	-263	K1
(PL40-) 1-0014- 1	(CJ40-) 1-0135- 1	-32	-33	-34	-264	-96	-265	-266	-267	K1
(PL95-) 1-0370-	(PL95-) 1-0370-	-35	-77	-268	-195	-97	-269	-270	-271	K1
(PL95-) 1-0370-	(PL1C-) 1-0453- 1	-36	-272	-273	-274	-98	-275	-276	-277	K1
(PL1WC-) 1-0453-W 1	(J3WE) 1-0378-W	-278	-37	-279	-280	-281	-282	-283	—	K1
UG111/U 4	UG111/U 4	—	-38	—	—	—	—	—	—	K1
(PL20-) 1-0369- 1	(CJ20-) 1-0134- 1	-62	-63	-64	-39	-106	-284	-285	-286	K1
(BJ26-) 1-0341-	(PL40-) 1-0014- 1	-40	-287	-288	-289	-99	-290	-291	-292	K1
(PL11C-) 1-0326-	(PL11C-) 1-0326-	-293	-82	-41	-294	-295	-296	-297	-298	K1
(PL94-) 1-0029-	(PL20-) 1-0369- 1	-42	-299	-300	-301	-100	-302	-303	-304	K1
(PL123-) 1-0390-	((PL1C-)) 1-0453-	-43	-44	-45	-305	-101	-306	-307	-308	K1
(UPL123-) 1-0390-U	(PL1WC-) 1-0453-W	-46	-47	-48	-309	-102	-310	-311	-312	K1
(MP2W) 1-0398	(PL1WC-) 1-0453-W 1	—	-49	-313	—	—	-314	—	—	K1
(CJ40-) 1-0135- 1	(PL60-) 1-0353-	-50	—	—	-315	-103	—	-316	-317	K1
(PL20-) 1-0369- 1	(PL50-) 1-0016-	-170	-172	-51	-231	-318	-319	-320	—	K1
(PL20-) 1-0369- 1	(BANANA PLUG) 210-103 5	-52	—	—	—	-104	—	—	—	X1
(PL20-) 1-0369- 1	(BANANA PLUG) 210-102 5	—	-53	—	—	—	—	—	—	X1
(J12-) 1-0258-	(PL1WC-) 1-0453-W 1	-321	-54	-322	-323	-324	-325	-326	—	K1
(PL11C-) 1-0326-	(J3WE-) 1-0378-W	-327	-55	-328	-329	-330	-340	-350	—	K1
(UPL20-) 1-0369-U 1	(UPL20-) 1-0369-U 1	-351	-66	-56	-352	-353	-354	-355	-356	K1
(PL94-) 1-0029-	(PL1C-) 1-0326- 1	-357	-358	-359	-57	-360	-361	-362	-363	K1
(PL11C-) 1-0326-	(UPL20-) 1-0369-U 1	-364	-58	-365	-366	-367	-368	-369	-370	K1
(PL40-) 1-0014- 1	(PL40-) 1-0014- 1	-84	-371	-372	-59	-112	-373	-192	-374	K1
(PL20-) 1-0369- 1	(RT ANG SMA) DSM531-2 6	-60	—	—	—	-105	—	-382	—	K1
(PL1WC-) 1-0453-W 1	(PL11C-) 1-0326-	-375	-61	-376	-377	-378	-379	-380	-381	K1
(PL20-) 1-0369- 1	(RT ANG BNC(M)) 31-335 4	-65	—	—	—	-107	—	-383	—	K1
(MP3W-) 1-0410-W	(MP3W-) 1-0410-W	-67	-68	-384	—	-108	-385	-386	—	K1
(J3WE-) 1-0378-W	—	-387	-69	-388	-389	-390	-391	-392	—	K2
(PL20-) 1-0369- 1	(F59A) 7	—	-70	-393	—	—	—	—	—	K1
(PL40-) 1-0014- 1	(PL60-) 1-0353-	-71	—	—	-394	-109	—	-396	-397	K1
(PL123-) 1-0390-	(PL123-) 1-0390-	-72	-73	-75	-212	-110	-398	-399	-400	K1
(UPL123-) 1-0390-U	(UPL123-) 1-0390-U	-401	-74	-76	-402	-403	-404	-405	-406	K1
(PL95-) 1-0370-	(PL20-) 1-0369- 1	-120	-78	-407	-201	-408	-409	-410	-411	K1
(PL95-) 1-0370-	(PL1WC-) 1-0453-W 1	-412	-79	-413	-414	-415	-416	-417	-418	K1
(PL60-) 1-0353-	(BJ69-) 1-0355-	-80	—	—	-395	-111	—	-419	-420	K1
(PL11C-) 1-0326-	(PL50-) 1-0016-	-421	-81	-422	-423	-424	-425	-426	—	K1
(PL20-) 1-0369- 1	—	-214	-427	-83	-233	-428	-429	-430	-431	K2
(PL95-) 1-0370-	(PL130-) 105-0181-	-432	-85	-433	-434	-435	-436	-437	—	K1

CONNECTOR P1 DESCRIPTION/ PART NO	CONNECTOR P2 DESCRIPTION/ PART NO	CABLE GROUPS; WRENCH CRIMP, (TOOL CRIMP) 1(011) TCC-50-2	2(013A) TCC-75-2	2(013/013B) 4 RG62	3(012) M17/167-00001 (RG223)	1(011) RG58 BLACK	2(013) RG59 BLACK	1(012) RG142	21(011) RG303	CKT CODE
		11-01 DASH NUMBERS 6								
(PL1C-) 1-0453-	(UG536 B/U) 4	-86	—	—	—	-113	—	—	—	K1
(BJ29-) 1-0126-	(PL20-) 1-0369- 1	-128	-438	-439	-440	-87	-441	-442	-443	K1
(UPL20-) 1-0369-U 1	(PL1C-) 1-0453- 1	-444	-114	-115	-445	-446	-447	-448	-449	K1
(UPL20-) 1-0369-U 1	(PL1WC-) 1-0453-W 1	-450	-116	-117	-451	-452	-453	-454	-455	K1
(UPL123-) 1-0390-U	(PL1C-) 1-0453- 1	-456	-118	-119	-457	-458	-459	-460	-461	K1
(PL20-) 1-0369- 1	(BJ95-) 1-0175-	-121	-462	-463	-464	-465	-466	-467	-468	K1
(PL20-) 1-0369- 1	(PL11C-) 1-0326-	-469	-122	-470	-471	-472	-473	-474	-475	K1
(UPL40-) 1-0014-U 1	(PL11C-) 1-0326-	-476	-123	-477	-478	-479	-480	-481	-482	K1
(UPL40-) 1-0014-U 1	(PL1WC-) 1-0453-W 1	-483	-124	-484	-485	-486	-487	-488	-489	K1
(J12NMF-) 105-0910-	(PL1WC-) 1-0453-W 1	-490	-125	-491	-492	-493	-494	-495	—	K1
(J3E-) 1-0378-	(PL20-) 1-0369- 1	-496	-497	-126	-498	-499	-500	-501	—	K1
(PL20-) 1-0369- 1	(PL75-1 FOS) 305-0111-1	-127	—	—	—	-502	—	-503	—	E1
(UPL95-) 1-0370-U	(PL11C-) 1-0326-	-504	-129	-505	-506	-507	-508	-509	-510	K1
(UPL95-) 1-0370-U	(PL1WC-) 1-0453-W 1	-511	-130	-512	-513	-514	-515	-516	-517	K1
(PL220-) 1-0442- 1	(PL1C-) 1-0453- 1	-131	-132	-133	-518	-159	-519	-520	-521	K1
(PL220-) 1-0442- 1	(PL1WC-) 1-0453-W 1	-134	-135	-136	-522	-160	-523	-524	-525	K1
(PL220-) 1-0442- 1	(PL220-) 1-0442- 1	-137	-138	-139	-197	-161	-526	-527	-528	K1
(PL223-) 1-0009-	(PL1C-) 1-0453- 1	-140	-141	-142	-529	-162	-530	-531	-532	K1
(UPL223-) 1-0050-	(PL1WC-) 1-0453-W 1	-143	-144	-145	-533	-163	-534	-535	-536	K1
(UPL220-) 1-0468- 1	(UPL220-) 1-0468- 1	-537	-147	-146	-538	-539	-540	-541	-542	K1
(PL223-) 1-0009-	(PL223-) 1-0009-	-148	-149	-151	-543	-164	-544	-545	-546	K1
(UPL223-) 1-0050-	(UPL223-) 1-0050-	-547	-150	-152	-548	-549	-550	-551	-552	K1
(UPL220-) 1-0468- 1	(PL1C-) 1-0453- 1	-553	-153	-154	-554	-555	-556	-557	-558	K1
(UPL220-) 1-0468- 1	(PL1WC-) 1-0453-W 1	-559	-155	-156	-560	-561	-562	-563	-564	K1

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS			11-01	SH 1
REV	EO	DESCRIPTION	DWN	APPROVED	DATE
CB	12871	ADDED -1164	DAR	NAVARETTE	1/03/03

MARKING TABLE 3	
MARK MODEL NO ONLY ON CABLES LISTED-MARK PART NO. ON ALL OTHERS	
DASH NO	MODEL NO
-1	PC-1-50
-3	PC-1-75
-4	PC-1-93
-5	PCW-1-50
-7	PCW-1-75
-8	PCW-1-93
-9	PCV-1-50
-10	PCV-1-75
-11	PCV-1-93
-12	PCWV-1-50
-13	PCWV-1-75
-14	PCWV-1-93
-15	PCX-1-50
-17	PCX-1-75
-18	PCX-1-93
-19	PCWX-1-50
-22	PCWX-1-75
-23	PCWX-1-93
-24	PCY-1-50
-26	PCY-1-75
-27	PCY-1-93
-43	PCPX-1-50
-44	PCPX-1-75
-45	PCPX-1-93
-46	UPCPWX-1-50
-47	UPCPWX-1-75
-48	UPCPWX-1-93
-49	MPCW-1-75
-56	UPCY-1-93
-66	UPCY-1-75

MARKING TABLE 3	
MARK MODEL NO ONLY ON CABLES LISTED-MARK PART NO. ON ALL OTHERS	
DASH NO	MODEL NO
-67	PPCW-1-50
-68	PPCW-1-75
-72	PCP-1-50
-73	PCP-1-75
-74	UPCP-1-75
-75	PCP-1-93
-76	UPCP-1-93
-114	UPCX-1-75
-115	UPCX-1-93
-116	UPCWX-1-75
-117	UPCWX-1-93
-118	UPCPX-1-75
-119	UPCPX-1-93
-131	PCXC-1-50
-132	PCXC-1-75
-133	PCXC-1-93
-134	PCWXC-1-50
-135	PCWXC-1-75
-136	PCWXC-1-93
-137	PCYC-1-50
-138	PCYC-1-75
-139	PCYC-1-93
-140	PCPXC-1-50
-141	PCPXC-1-75
-142	PCPXC-1-93
-143	PCPWXC-1-50
-144	PCPWXC-1-75
-145	PCPWXC-1-93
-146	UPCYC-1-93
-147	UPCYC-1-75

MARKING TABLE 3	
MARK MODEL NO ONLY ON CABLES LISTED-MARK PART NO. ON ALL OTHERS	
DASH NO	MODEL NO
-148	PCPC-1-50
-149	PCPC-1-75
-150	UPCPC-1-75
-151	PCPC-1-93
-152	UPCPC-1-93
-153	UPCXC-1-75
-154	UPCXC-1-93
-155	UPCWXC-1-75
-156	UPCWXC-1-93
-157	UPCPXC-1-75
-158	UPCPXC-1-93
-166	PCPWX-1-50
-167	PCPWX-1-75
-168	PCPWX-1-93

25 PIGTAIL UNTERMINATED END USING 6 INCH EACH 700-0604 PLUS 700-0605 WIRE

24 AMP COAX SOCKET TO BE TERMINATED W/AMP 330478 FERRULE + 201142-2 SPRING.

41 IF PLASTIC STRAIN RELIEF IS REQUIRED, SUFFIX PART NO WITH BT, ADD 1 STRAIN RELIEF EACH CONNECTOR AS FOLLOWS:

- A ACA1
- B ACA2
- C ACB013-7 FOR VIOLET CABLE ALL OTHERS USE -0 BLACK
- D ACC011
- E ACC013

10 WHEN ASSEMBLY IS ORDERED BY MODEL NO ADD ACB013-7 PLASTIC STRAIN RELIEF 2 PER EACH CABLE ASSY 3

9. EXAMPLE OF COMPLETE PART NO:

11-01- X - 1 YEL

DASH NO — 6

8. SEE 11-08 FOR CABLE ASSEMBLIES WITH BEND RELIEF SPRING(S)

7 JERROLD

6 BELL IND

5 H.H SMITH

4 AMPHENOL

3 IDENTIFY PER MARKING TABLE CENTER ONLY ON CABLES 60 INCHES OR LESS; AT BOTH ENDS ON CABLES OVER 60 INCHES LONG

2. SEE CONN DWG FOR CABLE STRIPPING & ASSY INSTRUCTIONS

1 LENGTH IN INCHES TOL PER TT-03

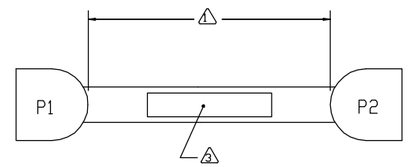

23 INSTALL ACA1 -0 BOOT OVER CONNECTOR CRIMP.

22 PIGTAIL UN-TERMINATED END USING 3' EACH 700-0094 + 700-0095 HOOK-UP WIRE.

21 SWITCHCRAFT

20 MALE 'F' CONN (PL120HB-AUGAT LRC)

19 CUSTOMER FURNISHED CONNECTORS (ALLIED SIGNAL)

18 SMB CONNECTOR, ITT CANNON RF PRODUCTS OR EQUIV

17 EF JOHNSON

16 IF ALTERNATIVE COLOR IS REQUIRED, SUFFIX P/N WITH COLOR DESIGNATION AND REPLACE TCC-75-2 WITH APPROPRIATE CABLE AS FOLLOWS:

BLK FOR TCC-75-2 BLACK
BLU FOR TCC-75-2 BLUE
GRN FOR TCC-75-2 GREEN
RED FOR TCC-75-2 RED
YEL FOR TCC-75-2 YELLOW

IF COLORED 50 OHM CABLE IS REQUIRED, REPLACE TCC-50-2 WITH THE FOLLOWING:
RED: RG58/RED
BLUE: RG58/BLU

15 MAY SUBSTITUTE (UPLR220-) (1-0504-)

14 SEE CONNECTOR TOP ASSEMBLY FOR CORRECT CABLE GROUP DASH NUMBER

13 'BT' SUFFIX WILL NOT BE UTILIZED ON ASSEMBLIES LISTED IN NOTES 10 AND 12

12 WHEN ASSEMBLY IS ORDERED BY MODEL NO. ADD ACB013-7 PLASTIC STRAIN RELIEF 1 PER EACH PATCH CORD END 3

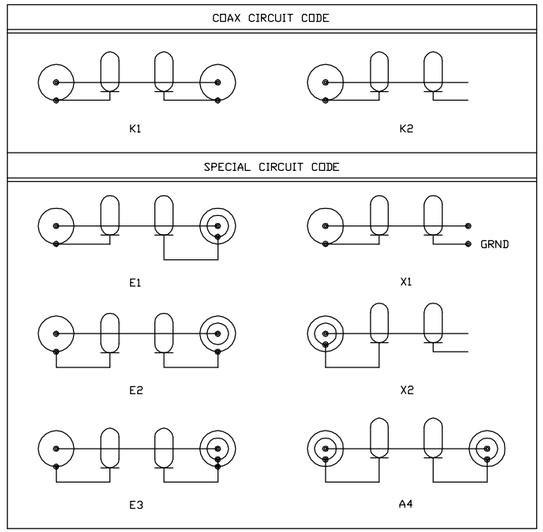

QTY	DESCRIPTION			PART NUMBER	ITEM
TOL UNLESS SPECIFIED .XX ± .XXX ± .XXXX± ANGLES±	TROMPETER ELECTRONICS,INC.			RG58/RG59/RG62/RG223, M17/167-00001/RG303/ TCC-50-2/TCC-75-2 CABLE ASSEMBLIES	
DWN	DAR	5/24/99	MATERIAL --------	CODE IDENT 14949	DRAWING NO. 11-01	REV CB
QA	MG	1/27/03				
MANU	A F	1/29/03				
NEXT ASSY	ENG	R T	1/30/03	SCALE —	DATE 10-10-83	SHEET 1 OF 2

CONNECTOR P1 DESCRIPTION/ PART NO	CONNECTOR P2 DESCRIPTION/ PART NO	CABLE GROUPS; WRENCH CRIMP, (TOOL CRIMP) 1(011) TCC-50-2	2(013A) TCC-75-2	2(013/013B) △4 RG62	3(012) M17/167-00001 (RG223)	1(011) RG58 BLACK	2(013) RG59 BLACK	1(012) RG142	21(011) RG303	CKT CODE
		11-01 DASH NUMBERS △6								
(UPL223-) 1-0050-	(PL1C-) 1-0453- △1	-565	-157 C	-158 C	-566	-567	-568 C	-569	-570	K1
(UPL40-) 1-0014-U △1	(UPL40-) 1-0014-U △1	-571 A	-165 B	-572 B	-573	-574 A	-575 B	-576 A	-577	K1
(PL123-) 1-0390-	(PL1WC-) 1-0453-W △1	-166	-167 C	-168 C	-578	-579	-580 C	-581	-582	K1
(UPL220-) 1-0468-	(MP3-) 1-0410-	-583 D	-169 E	-584	—	-585 D	-586 E	-587	—	K1
(PL50-) 1-0016-	(PL130-) 105-0181-	-588	-171	-589	-590	-591	-592	-593	—	K1
(UPL95-) 1-0370-U	(UPL95-) 1-0370-U	-594	-173	-595	-596	-597	-598	-599	-600	K1
(PL20-) 1-0369- △1	(BJ26-) 1-0341-	-174 A	-175 B	-176	-177	-178 A	-601 B	-602 A	-603	K1
(PL1C-) 1-0453- △1	(PL1WC-) 1-0453-W △1	-179	-180 C	-181 C	-182	-183	-604 C	-605	-606	K1
(PL75-1 FOS) 305-0111-1	—	-184	—	—	—	-607	—	-608	—	X2
(PL75-1 FOS) 305-0111-1	(PL75-1 FOS) 305-0111-1	-185	—	—	—	-609	—	-610	—	A4
(UPL20-) 1-0369-U △1	—	-611 A	-186 B	-612	-613	-614 A	-615 B	-616 A	-617	K2
(J3E-) 1-0378-	(J3E-) 1-0378-	-618	-619	-187	-620	-621	-622	-623	—	K1
(PL20-) 1-0369- △1	(PL123-) 1-0390-	-624 A	-188 B	-625	-211	-219 A	-626 B	-627 A	-628	K1
(PL50-) 1-0016-	(UCJ20-) 1-0134-U △1	-629 A	-630 B	-191 B	-631	-632 A	-633 B	-634 A	—	K1
(BJ46-) 1-0448-	(PL40-) 1-0014- △1	-635 A	-636 B	-637 B	-638	-639 A	-640 B	-193 A	-641	K1
(BJ246GF-) 1-0480-	—	-194	-642	-643	-644	-645	-646	-647	-648	K2
(PL95-) 1-0370-	(BJ95-) 1-0175-	-229	-649	-650	-196	-651	-652	-653	-654	K1
(PL223-) 1-0009-	(PL95-) 1-0390-	-198	-655	-656	-657	-658	-659	-660	-661	K1
(PL223-) 1-0009-	(BJ95-) 1-0175-	-199	-662	-663	-664	-665	-666	-667	-668	K1
(PL75-3 FIS) 305-0603-1	(PL20-) 1-0369-	—	—	—	-200	—	—	—	—	E2
(PL220-) 1-0442- △1	—	-202 D	-669 E	-670 E	-671	-672 D	-673 E	-674	-675 D	K2
(PL40-) 1-0014- △1	(PL1C-) 1-0453- △1	-210 A	-676 B	-677 B	-678	-679 A	-680 B	-681 A	-682	K1
(PL240-) 1-0446- △1	(PL240-) 1-0446- △1	-213 D	-683 E	-684 E	-685	-686 D	-687 E	-688	-689 D	K1
(PL95-) 1-0370-	(PL40-) 1-0014- △1	-690 A	-691 B	-692 B	-693	-215 A	-694 B	-695 A	-696	K1
(PL95-) 1-0370-	(BJ26-) 1-0341-	-697	-698	-699	-700	-216	-701	-702	-703	K1
(BJ21-) 1-0010-1	—	-704	-217	-705	-706	-707	-708	-709	-710	K2
(UBJ26-) 1-0341-	—	-711	-218	-712	-713	-714	-715	-716	-717	K2
(PL11C-) 1-0326-	(UPL220-) 1-0468- △1	-718 D	-220 E	-719 E	-720	-721 D	-722 E	-723	-724 D	K1
(PL1C-) 1-0453-	(PL71-1 FOS) 305-0643	-221	—	—	—	-725	—	-726	—	E1
(PL50-) 1-0016-	(PL40-) 1-0014- △1	-222 A	-727 B	-728 B	-729	-730 A	-731 B	-732 A	—	K1
(PL223-) 1-0009-	—	-223	-733	-734	-735	-736	-737	-738	-739	K2
(PL20-) 1-0369- △1	(MP3-) 1-0410-	-224 A	-740 B	-741	—	-742 A	-743 B	-744 A	—	K1
(PL20-) 1-0369- △1	(MP3W-) 1-0410-W	-745 A	-225 B	-746	—	-747 A	-748 B	-749 A	—	K1
(PL1C-) 1-0453- △1	(MP3-) 1-0410-	-226	-750 C	-751	—	-752	-753 C	-754	—	K1
(PL1WC-) 1-0453-W △1	(MP3W-) 1-0410-W	-755	-227 C	-756	—	-757	-758 C	-759	—	K1
(UPL20-) 1-0369-U △1	(UCJ20-) 1-0134-U △1	-760 A	-230 B	-761 B	-762	-763 A	-764 B	-765 A	-766	K1
(PL50-) 1-0016-	—	-767	-768	-769	-232	-770	-771	-772	—	K2
(CJ220-) 1-0443- △1	—	-234 D	-773 E	-774 E	-775	-776 D	-777 E	-778	-779 D	K2
(CJ220-) 1-0443- △1	(PL220-) 1-0442- △1	-235 D	-780 E	-781 E	-782	-783 D	-784 E	-785	-786 D	K1
(PL3C-) 1-0045-	(PL95-) 1-0370-	-237	-787	-788	-789	-790	-791	-792	-793	K1
(PL1WC-) 1-0453-W △1	(UCJ20-) 1-0134-U △1	-794 D	-795 E	-796 E	-797	-798 D	-799 E	-800	-801 D	K1
(UBJ26-) 1-0341-U	(UPL20-) 1-0369-U △1	-802 A	-803 B	-804 B	-805	-806 A	-807 B	-808 A	-809	K1
(BJ74-2FOS) 305-0189-4	(UPL20-) 1-0369-U △1	-----	-810 B	-811 B	-----	-----	-812 B	-----	-----	E1
(UPL20) 1-0369-U △1	(PL40) 1-0014- △1	-813 A	-814 B	-815 B	-816	-817 A	-818 B	-819 A	-820	K1
(UPL20) 1-0369-U	(UPL122-) 1-0431-U	—	-821	—	—	—	—	—	—	K1
(PL3C-) 1-0045-	(PL20-) 1-0369-	—	—	—	-822	—	—	—	—	K1
(BJ29-) 1-0126-	(BJ29-) 1-0126-	-823	-824	-825	-826	-827	-828	-829	-830	K1
(BJ59-) 1-0174-	—	-831	-832	-833	-834	-835	-836	-837	-838	K2

CONNECTOR P1 DESCRIPTION/ PART NO	CONNECTOR P2 DESCRIPTION/ PART NO	CABLE GROUPS; WRENCH CRIMP, (TOOL CRIMP) 1(011) TCC-50-2	2(013A) TCC-75-2	2(013/013B) △4 RG62	3(012) M17/167-00001 (RG223)	1(011) RG58 BLACK	2(013) RG59 BLACK	1(012) RG142	21(011) RG303	CKT CODE
		11-01 DASH NUMBERS △6								
(PL1C-) 1-0453- △1	(CJ220-) 1-0443-	-839	-840 C	-841	-842	-843	-844 C	-845	-846	K1
(PL2-) 1-0002-	(PL2-) 1-0002-	—	-848	-849	—	—	-850	—	-851	K1
(UPL20-) 1-0369-U △1	(UBJ29-) 1-0126-U	-852 A	-853 B	-854	-855	-856 A	-857 B	-858 A	-859	K1
(PL1WC-) 1-0453-W △1	(CJ20-) 1-0134- △1	-860 A	-861 B	-862 B	-863	-864 A	-865 B	-866 A	-867	K1
(UCJ20-) 1-0134-U	(UCJ20-) 1-0134-U	-868	-869	-870	-871	-872	-873	-874	-875	K1
(UPL20-) 1-0369-U △1	(UBJ96-) 105-0185-U	-876 A	-877 B	-878	-879	-880 A	-881 B	-882 A	-883	K1
(BJ79 FOS-) 305-0189-3	(PL20-) 1-0369-2	—	-884 B	-885 B	—	—	-886 B	—	—	E1
(PL130-) 105-0181	(PL130-) 105-0181	-887	-888	-889	-890	-891	-892	-893	-894	K1
(BJ29-) 1-0126-	(CJ20-) 1-0134- △1 △12	-895 A	-896 B	-897 B	-898	-899 A	-900 B	-901 A	-902	K1
(PL1C) 1-0453- △1	(PL3C) 1-0045-	-903	-904 C	-905 C	-906	-907	-908 C	-909	-910	K1
(UBJ29) 1-0126-U	(UBJ29) 1-0126-U	-911	-912	-913	-914	-915	-916	-917	-918	K1
(UPL223) 1-0050-	(UPL220) 1-0468-	-919	-920	-921	-922	-923	-924	-925	-926	K1
(PL130-) 105-0181	(UPL20-) 1-0369-U △1	-927 A	-928 B	-929 B	-930	-931 A	-932 B	-933 A	-934	K1
(BJ79 FOS) 305-0111-3	(PL20-) 1-0369- △1	-935 A	—	—	—	-936 A	—	-937 A	—	E1
(UPL95-) 1-0370-U	(UPL20-) 1-0369-U △1	-938 A	-939 B	-940 B	-941	-942 A	-943 B	A	-950	K1
(PL3C-) 1-0045-	(PL220-) 1-0442- △1	-951 A	-952 B	-953 B	-954	-955 A	-956 B	-957 A	-958	K1
(PL1C) 1-0453- △1	(UPLRN220) 105-1252- △15	—	-959 C	-960 C	—	—	-961 C	—	—	K1
(UPLRN220) 105-1252- △15	(UPLRN220) 105-1252- △15	—	-962	-963	—	—	-964	—	—	K1
(UPL20-) 1-0369-U △1	(PL75-FOS) 305-0189-1	—	-965 B	-966	—	—	-967 B	—	—	E1
(PL40-) 1-0014- △1	(BJ95-) 1-0175-	-968 A	-969 B	-970 B	-971	-972 A	-973 B	-974 A	-975	K1
(PL130-) 105-0181-	(PL75SC) 305-0692-1	—	-976	-977	—	—	-978	—	—	E3
(PL1WC) 1-0453-W △1	(PL130-) 105-0181-	-979	-980 C	-981 C	-982	-983	-984 C	-985	—	K1
(BJ379 FOS) 305-0111-7	(PL20-) 1-0369- △1	-986 A	—	—	—	-987 A	—	-988 A	—	E1
(UCJ220-) 1-0494- △1	(UPL220-) 1-0468- △1	-989 D	-990 E	-991 E	-992	-993 D	-994 E	-995	-996 D	K1
(UPL20-) 1-0369-U △1	(UPL123-) 1-0390-U △1	-997 A	-998 B	-999 B	-1000	-1001 A	-1002 B	-1003 A	-1004	K1
(PL123-) 1-0390-1	(CJ20-) 1-0134- △1	-1005 A	-1006 B	-1007 B	-1008	-1009 A	-1010 B	-1011 A	-1012	K1
(UPL220-) 1-0468- △1	(UPLRN220-) 105-1252- △15	—	-1013 E	-1014 E	—	—	-1015 E	—	—	K1
(PL130-) 105-0181-	(UBJ29-) 1-0126-U	-1016	-1017	-1018	-1019	-1020	-1021	-1022	-1023	K1
(UPL240-) 1-0041-	(UBJ96-) 105-0185-U	-1024	-1025	-1026	-1027	-1028	-1029	-1030	-1031	K1
(UPL220-) 1-0468-	(UBJ96-) 105-0185-U	-1032	-1033	-1034	-1035	-1036	-1037	-1038	-1039	K1
(PL20-) 1-0369- △1	(CJ70TLSC) 305-0561-10 △1	-1040 A	—	—	—	-1041 A	—	-1042 A	—	E3
(PL11C-) 1-0326-	(PL75SC) 305-0561-1	-1043	—	—	—	-1044	—	-1045	—	E3
(PL2W) 1-0002-2W	(PL2W) 1-0002-2W	—	-1046	—	—	—	-1047	—	—	K1
(UPL220-) 1-0468- △1	AMPHENOL # 34475 (FOS)	—	-1048 E	—	—	—	—	—	—	E1
(PL50-) 1-0016-	(CJ20-) 1-0134- △1	-1049 A	-1050 B	-1051 B	-1052	-1053 A	-1054 B	-1055 A	-1056	K1
(PL50-) 1-0016-	(PL80-FOS) 305-0321-1	-1058	—	—	—	—	—	—	—	E1
(PL20-) 1-0369-	(PL80-FOS) 305-0321-1	-1057	—	—	—	—	—	—	—	E1
(PL50-) 1-0016-	(PL50-) 1-0016-	-1059	-1060	-1061	-1062	-1063	-1064	-1065	—	K1
(BJ49-) 1-0173-	(PL20-) 1-0369- △1	-1066 A	-1067 B	-1068 B	-1069	-1070 A	-1071 B	-1072 A	-1073	K1
(UPL20-) 1-0369- △1	(UPL40-) 1-0014- △1	-1074 A	-1075 B	-1076 B	-1077	-1078 A	-1079 B	-1080 A	-1081	K1
(BJ79-FOS) 305-0189-3	(UPL20-) 1-0369-U △1	—	-1082 B	—	—	—	—	—	—	E1
(CJ370-SC) 305-0561-6	(PL40-) 1-0014-	-1083	—	—	—	—	—	—	—	E3
(PL122-) 1-0431-	(BJ120C-) 105-0513-	-1084	—	—	-1085	-1086	—	-1087	-1088	K1
(UPLRN220-) 105-1252- △15	AMPHENOL #34475	—	-1089	—	—	—	—	—	—	E1
(PL130-) 105-0181-	(UPL95-) 1-0370-U	—	-1090	—	—	—	-1091	—	—	K1
(UPLRN220-) 105-1252- △15	(UBJ226-) 1-0489-	—	-1092	—	—	—	-1093	—	—	K1
(BJ79TLFOS) 305-0189-11	(UPL220-) 1-0468-	—	-1094	—	—	—	—	—	—	E1
(PL11AC-) 105-1324-	(PL11AC-) 105-1324-	—	—	-1095	—	—	-1096	—	—	K1
(PL223-) 1-0009-	(PL220-) 1-0442- △1	-1097 D	—	—	—	-1098 D	—	—	—	K1

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS			11-01	SH 2
REV	ED	DESCRIPTION	DWN	APPROVED	DATE
		SEE SHEET 1			

CONNECTOR P1 DESCRIPTION/ PART NO	CONNECTOR P2 DESCRIPTION/ PART NO	CABLE GROUPS; WRENCH CRIMP, (TOOL CRIMP) 1(011) TCC-50-2	2(013A) TCC-75-2	2(013/013B) △4 RG62	3(012) M17/167-00001 (RG223)	1(011) RG58 BLACK	2(013) RG59 BLACK	1(012) RG142	21(011) RG303	CKT CODE
		11-01 DASH NUMBERS △6								
(UPL95-) 1-0370-U	(BJ139-2) 105-0293-	—	-1099	-1100	—	—	-1101	—	—	K1
(PL80-FOS) 305-0321-1	(PL80-FOS) 305-0321-1	-1102	—	—	—	-1103	—	—	—	A4
(PL11C-) 1-0326-	(PL95-) 1-0390-	-1104	—	—	—	—	—	—	—	K1
(PL94-) 1-0029-	(PL20-) 1-0369- △1	-1105 A	—	—	—	—	—	—	—	K1
SMA-1420408-011 △7	SMA-1420408-011 △7	-1106	—	—	1130	-1107	—	-1108	—	K1
(PL220-011) 1-0442- △1	(PL75-1FIS) 305-0229-1	-1109	—	—	—	-1110	—	—	—	E2
(BJ95-) 1-0175-	SMA 1420408-011 △7	—	—	—	—	—	—	-1111	—	K1
(BJ29-) 1-0126-	SMA 1420408-011 △7	—	—	—	—	—	—	-1112	—	K1
(UBJ26GF-) 1-0477-	(UPL20-) 1-0369-	—	-1113	—	—	—	-1114	—	—	K1
(PL220-) 1-0442- △1	50-607-3141-310 △18	-1115	—	—	—	-1116	—	—	—	K1
(PL220-) 1-0442- △1	SMA 1420408-011 △7	-1117	—	—	1134	-1118	—	—	—	K1
(UPL220-) 1-0468-	019-912-2011 △19	—	-1119	—	—	—	-1120	—	—	K1
(UPL220-) 1-0468-	M39029/75-416 △19	—	-1121	—	—	—	-1122	—	—	K1
142-0408-011	142-0308-011 △7	—	—	—	-1123	—	—	-1124	—	K1
(UPL20-) 1-0369-U △1	PL130-2 105-0181 △20	—	-1125	—	—	—	-1126	—	—	K1
(PL220-) 1-0442- △1	SMA-1420408-011 △7	-1127	—	—	—	-1128	—	-1129	—	K1
(PL1WC-) 1-0453- △1	(AUDIO PLUG) PJ051R △21	—	-1131	-1132	—	—	-1133	—	—	E2
(PL40-3) 1-0014	SMA 1420408-011 △7	—	—	—	-1135	—	—	—	—	K1
(PL95-) 1-0370-	SMA 1420408-011 △7	—	—	—	—	—	—	-1136	—	K1
(PL40-1) 1-0014-1	50-628-9142-310 RT SMA △7	—	—	—	—	—	—	-1137	—	K1
(PL95-1) 1-0370-1	50-628-9142-310 RT SMA △7	—	—	—	—	—	—	-1138	—	K1
(PL20-1) 1-0369	— △22	—	—	—	—	—	—	-1139	—	K1
(PL123-1BR) 1-0390-1 BR	50-607-3141-310 ST,MALE, CLAMP SMA △23	—	—	—	—	-1140	—	—	—	K1
(PL123-1) 1-0390 △23	50-607-3141-310 ST,MALE, CLAMP SMA △23	—	—	—	—	-1141	—	—	—	K1
(PL220-012) 1-0442	201146-4 △4 SOCKET,COAX AMP 201142-2 SPRING AMP 330478 FERRULE AMP	—	—	—	-1142	—	—	—	—	K1
(UPL20-) 1-0369	(AUDIO PLUG) PJ051R △21	-1143	-1144	-1145	-1146	-1147	-1148	-1149	-1150	K1
(PL123-1BR) 1-0390-1BR	SMA-1420408-011 CRIMP △23 △17	-1151	—	—	—	-1152	—	-1153	—	K1
(PL123-1 1-0390-1 △23	SMA-1420408-011 CRIMP △23 △17	-1154	—	—	—	-1155	—	-1156	—	K1
(UPL20) 1-0369	TT-253 △21	-1158	—	—	—	-1159	—	-1157	—	E1
(BJ29-1) 1-0126-1	RT ANGLE BNC 31-33S △4	-1162	—	—	—	-1161	—	-1160	—	K1
(PL20-1) 1-0369-1	△25	—	—	—	—	—	—	-1163	—	K1
(PL40-1) 1-0014	1675-103 △5	-1164								K1

QTY	DESCRIPTION			PART NUMBER	ITEM
TOL UNLESS SPECIFIED .XX ± .XXX ± .XXXX± ANGLES±	TROMPETER ELECTRONICS,INC.			RG58/RG59/RG62/RG223, M17/167-00001/RG303 TCC-50-2/TCC-75-2 CABLE ASSEMBLIES	
DWN	DAR	5/24/99	MATERIAL --------	CODE IDENT 14949	DRAWING NO. 11-01	REV CB
CHK					
ENGR					
APPR			SCALE ——	DATE 10/10/83	SHEET 2

NEXT ASSY

I:\11-xx\11-01.dwg, 09/15/2004 10:36:44 AM, Acrobat PDFWriter

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения **«JONHON»**, а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов **«FORSTAR»**.

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А