

## PC Board Fuseclips for 5mm Diameter Fuses


## HTC-15M, HTC-140M

## PCB Mounted Fuse Holder & Snap-On Cover

Voltage Rating: 250V, 6.3A, 1.6W

HTC-15M (fuse holder), HTC-140M (natural cover),  
HTC-150M\* (transparent cover)

\*Available in bulk only. Use this format: BK/HTC-150M

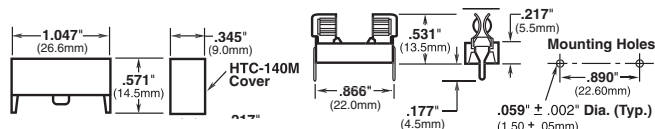


## HTC-200M

## PCB Mounted Fuseclip

Construction: Tin-plated bronze

Tape and Fan Fold packed

Ammo Pack (AP/HTC-200M) 1000 pieces per box

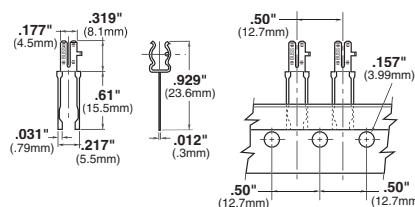


## HTC-211M

### PCB Mounted Fuseclip with End Stops

Construction: Tin-plated brass

\*Equivalent replacement to HTC-210M

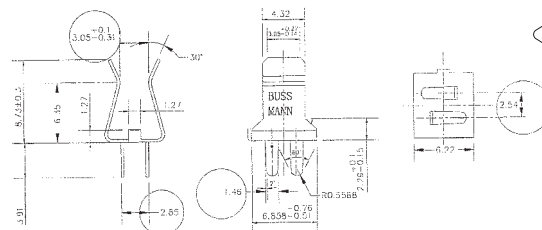


## 1A3399 Series\*\*

## PCB Fuseclips with End Stops & Straight Leads

| Catalog Numbers | Clip Material*    | Finish     |
|-----------------|-------------------|------------|
| 1A3399-01       | Beryllium copper* | Silver     |
| 1A3399-04       | Beryllium copper* | Bright tin |
| 1A3399-10       | Spring bronze     | Bright tin |

\*Beryllium copper recommended for amps higher than 15 amps (¼" clips).

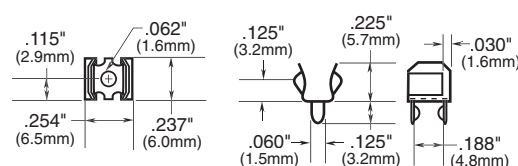


## 1A5018 Series\*\*

## PCB High Profile Fuseclips with End Stops & Straight Leads

| Catalog Numbers | Clip Material* | Finish     |
|-----------------|----------------|------------|
| 1A5018-07       | Spring bronze  | Silver     |
| 1A5018-10       | Spring bronze  | Bright tin |


\*Beryllium copper recommended for amps higher than 15 amps (1/4" clips).

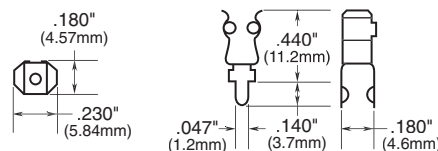

## 1A5601 Series

### PCB Fuseclips (0-7A)


|                       |                      |               |
|-----------------------|----------------------|---------------|
| <b>Catalog Number</b> | <b>Clip Material</b> | <b>Finish</b> |
| 1A5601                | Cartridge brass      | Bright tin    |

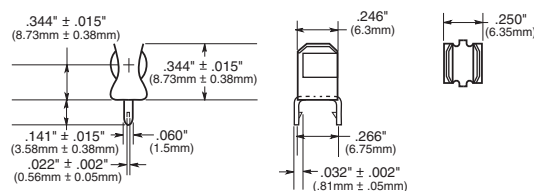

## 1A5602 Series

## PCB Fuseclips (0-7A)

|                       |                      |               |
|-----------------------|----------------------|---------------|
| <b>Catalog Number</b> | <b>Clip Material</b> | <b>Finish</b> |
| 1A5602                | Cartridge brass      | Bright tin    |

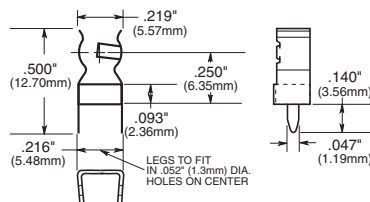


**\*\*For RoHS compliant version, add “-R” option code suffix to part number.**

# PC Board Fuseclips for 1/4" Diameter Fuses

## 1A3398 Series\*\*

PCB Fuseclips without End Stops or Straight Leads

| Catalog Numbers | Clip Material   | Finish     |
|-----------------|-----------------|------------|
| 1A3398-07       | Cartridge brass | Bright tin |

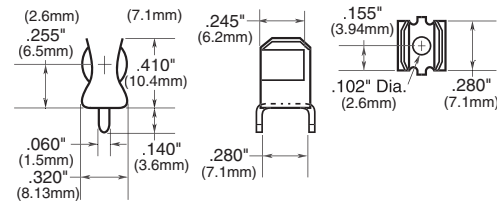


## 1A1907 Series\*\*

PCB Fuseclips with End Stops & Straight Leads

| Catalog Numbers | Clip Material*    | Finish             |
|-----------------|-------------------|--------------------|
| 1A1907-02       | Cartridge brass   | None/bright dipped |
| 1A1907-03       | Beryllium copper* | Bright tin         |
| 1A1907-05       | Beryllium copper* | Silver             |
| 1A1907-06       | Cartridge brass   | Bright tin         |

\*Beryllium copper recommended for amps higher than 15A (1/4" clips).

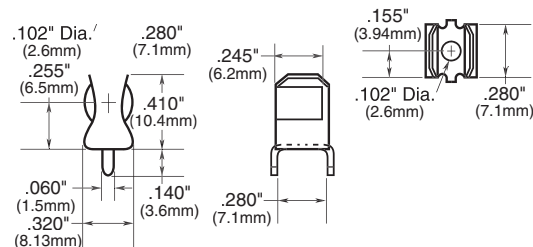


## 1A4533 Series\*\*

PCB Fuseclips without End Stops or Angled Out Leads

| Catalog Numbers | Clip Material*    | Finish     |
|-----------------|-------------------|------------|
| 1A4533-01       | Beryllium copper* | Bright tin |
| 1A4533-06       | Cartridge brass   | Bright tin |

\*Beryllium copper recommended for amps higher than 15A (1/4" clips).

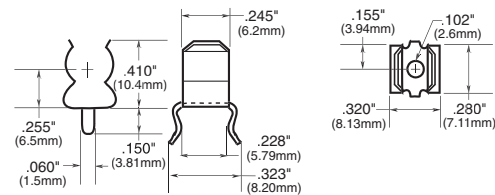


## 1A4534 Series\*\*

PCB Fuseclips with End Stops & Angled Out Leads

| Catalog Numbers | Clip Material*    | Finish     |
|-----------------|-------------------|------------|
| 1A4534-01       | Beryllium copper* | Bright tin |
| 1A4534-06       | Cartridge brass   | Bright tin |

\*Beryllium copper recommended for amps higher than 15A (1/4" clips).

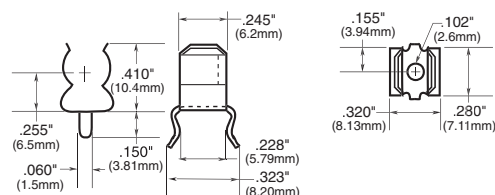


## 1A1119 Series\*\*

Fuseclips with End Stops & Angled In Leads

| Catalog Numbers | Clip Material*    | Finish     |
|-----------------|-------------------|------------|
| 1A1119-04       | Beryllium copper* | Bright tin |
| 1A1119-05       | Beryllium copper* | Silver     |
| 1A1119-10       | Cartridge brass   | Bright tin |

\*Beryllium copper recommended for amps higher than 15A (1/4" clips).

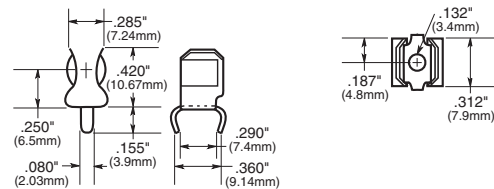


## 1A1120 Series\*\*

PCB Fuseclips without End Stops or Angled In Leads

| Catalog Numbers | Clip Material*    | Finish             |
|-----------------|-------------------|--------------------|
| 1A1120-02       | Cartridge brass   | None/bright dipped |
| 1A1120-05       | Beryllium copper* | Silver             |
| 1A1120-06       | Beryllium copper* | Bright tin         |
| 1A1120-09       | Cartridge brass   | Bright tin         |

\*Beryllium copper recommended for amps higher than 15A (1/4" clips).

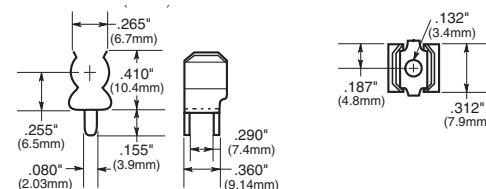

\*\*For RoHS compliant version, add "-R" option code suffix to part number.

### North America

Cooper Electronic Technologies  
1225 Broken Sound Parkway NW  
Suite F  
Boca Raton, FL 33487-3533  
Tel: 1-561-998-4100  
Fax: 1-561-241-6640  
Toll Free: 1-888-414-2645

Cooper Bussmann  
P.O. Box 14460  
St. Louis, MO 63178-4460  
Tel: 1-636-394-2877  
Fax: 1-800-544-2570

### Europe

Cooper Electronic Technologies  
Cooper (UK) Limited  
Burton-on-the-Wolds  
Leicestershire • LE12 5TH UK  
Tel: +44 (0) 1509 882 737  
Fax: +44 (0) 1509 882 786

Cooper Electronic Technologies  
Avda. Santa Eulalia, 290  
08223  
Terrassa, (Barcelona), Spain  
Tel: +34 937 362 812  
+34 937 362 813  
Fax: +34 937 362 719

### Asia Pacific

Cooper Electronic Technologies  
1 Jalan Kilang Timor  
#06-01 Pacific Tech Centre  
Singapore 159303  
Tel: +65 278 6151  
Fax: +65 270 4160

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А