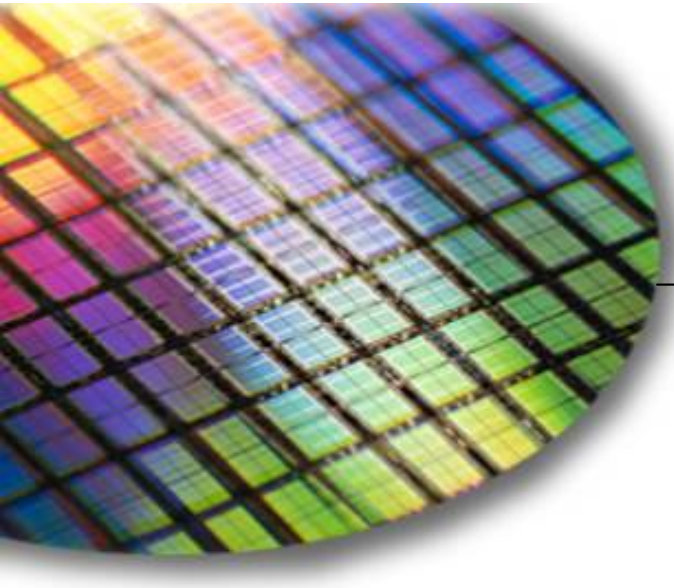

The World Leader in High-Performance Signal Processing Solutions

iSensor®

ADIS16240 Evaluation Tool Overview

Mark Looney
***i*Sensor® Application Engineer**
September 7, 2009

ANALOG DEVICES

iSensor® *The Simple Solution for Sensor Integration*
Evaluation Tool Overview

1. **Evaluation/Interface Board (ADIS16240/PCBZ) for simpler connection to an existing processor/system PCB.**
   - These boards provide a simple connector translation that enables user to bypass BGA soldering. The 2mm pitch connectors are easy to interface with 1mm ribbon cable or solder to.
   - Part number for ordering: **ADIS16240/PCBZ**
2. **Evaluation System (ADISUSBZ) for those that prefer a simple PC interface**
   - This system provides a simple USB interface, along with a simple Graphical User Interface (GUI) package, for evaluating most of the ADIS16240 functions and performance.
   - Supports approximately 150-200SPS sample rate.
   - This system is not a development kit that comes with PC development tools, source code and software support.
   - Part number for ordering: **ADISUSBZ**

ADIS16240/PCBZ

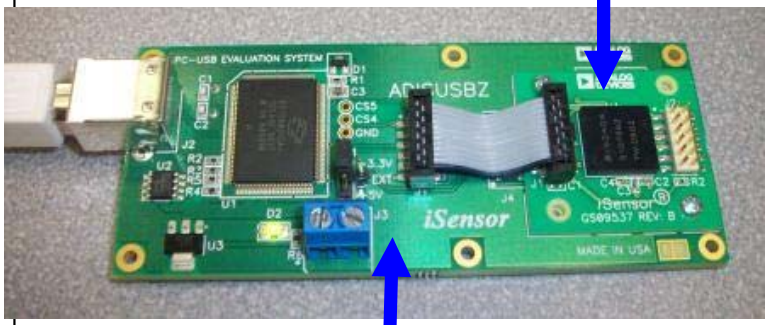

ADISUSBZ

ANALOG DEVICES

*i*Sensor® *The Simple Solution for Sensor Integration*
Hooking up to the ADIS16240/PCBZ

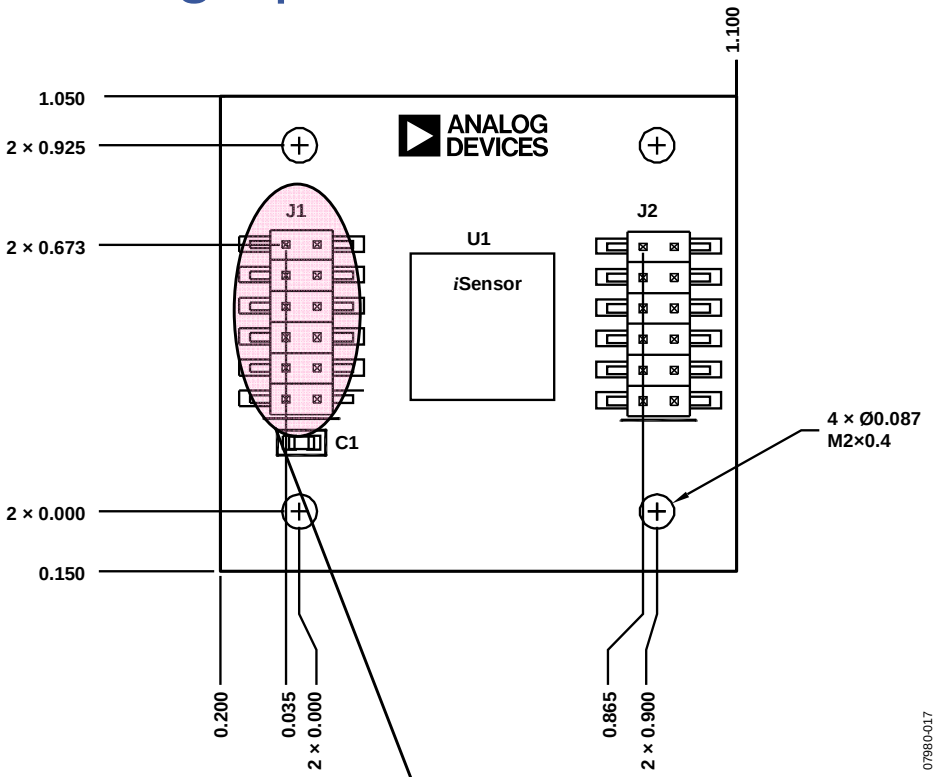

J1 Ribbon Cable Interface Parts

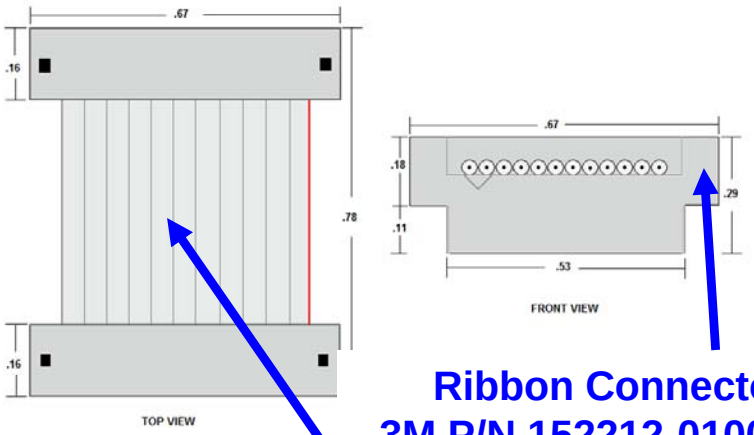

Ribbon Connector
3M P/N 152212-0100-GB

Ribbon Cable
3M P/N 3625/12 (100m)

Master Processor Connection

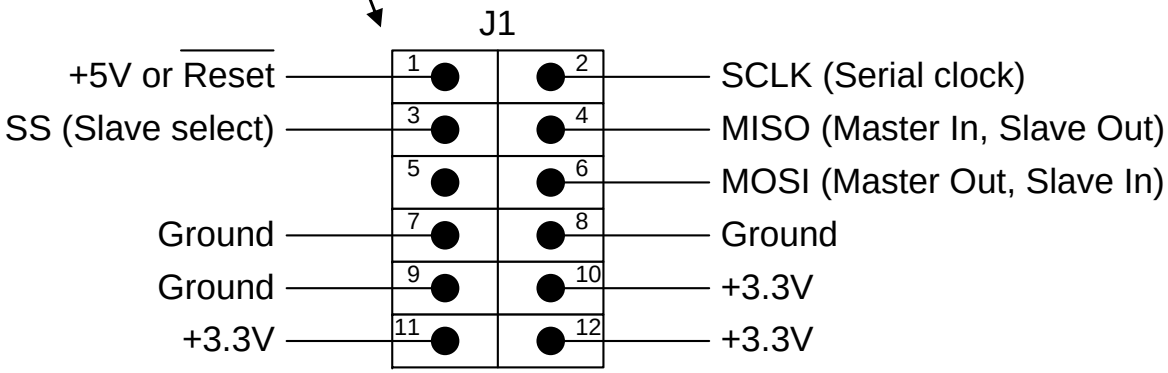

ADISUSBZ uses the following cable assembly from Samtec:

ASP-140062-01

*i*Sensor® The Simple Solution for Sensor Integration
ADIS16240 Demonstration Software Installation

The ADIS16240 demonstration software can be found at
www.analog.com/isensor-evaluation

1. **Click on "Evaluation Software Downloads"**
2. **Click on 240ES.zip and save it to a temporary directory**
3. **Open it and double click on setup.exe.**

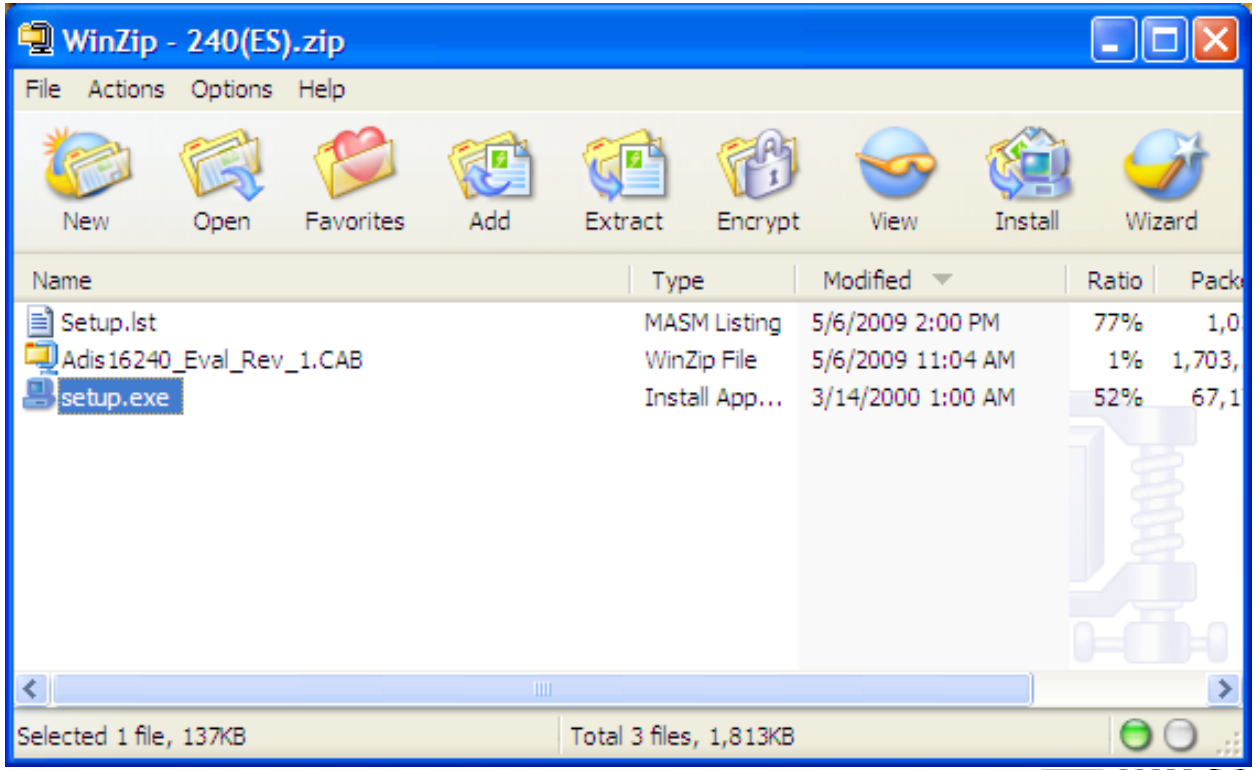

*i*Sensor® The Simple Solution for Sensor Integration

ADIS16240 Demonstration Software Installation

Installation Steps (continued)

4. **Click OK on next screen**
5. **Click here to start installation**

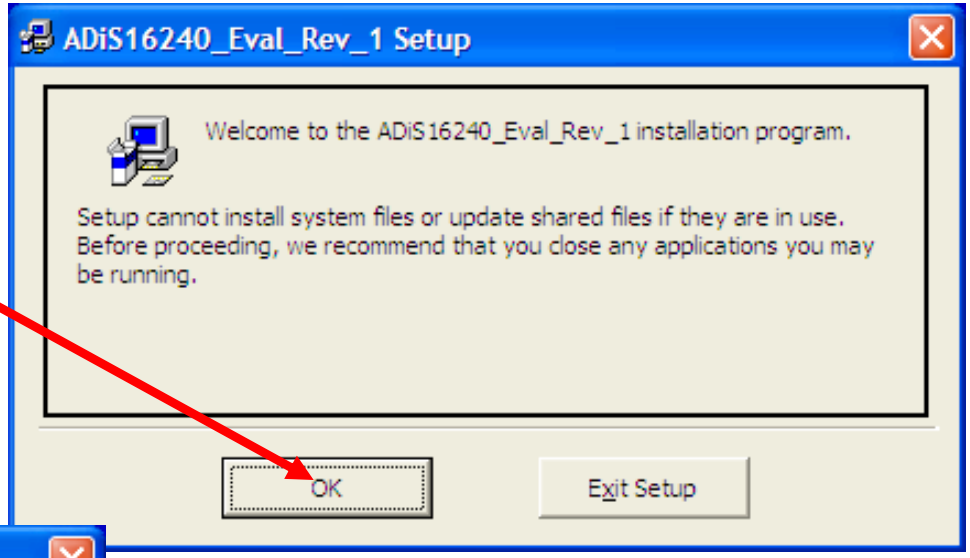

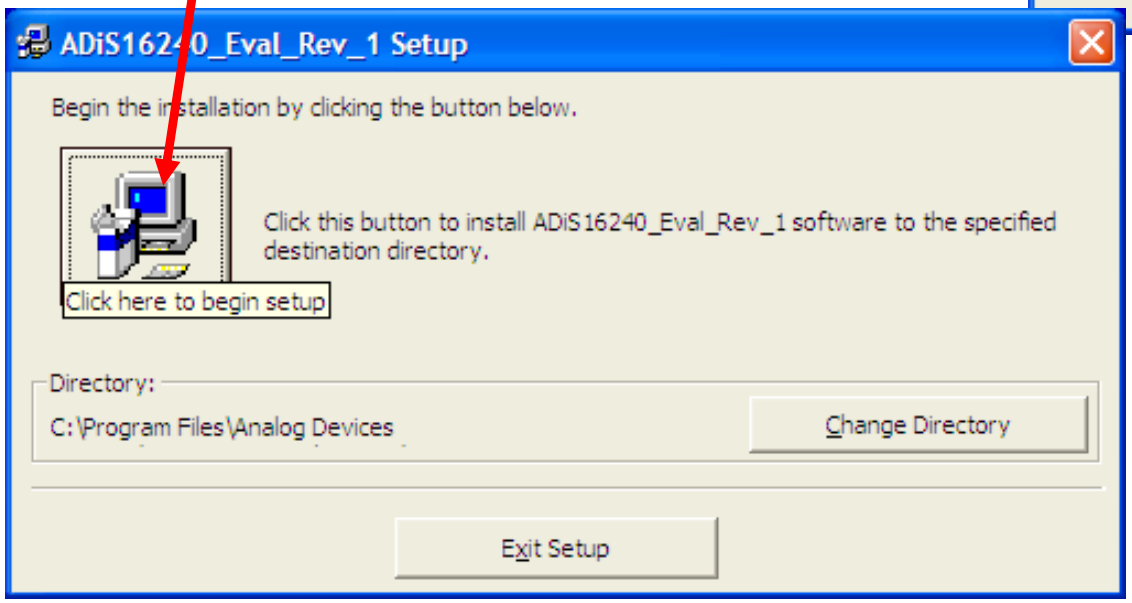

iSensor® The Simple Solution for Sensor Integration
ADIS16240 Demonstration Software Installation

Installation Steps (continued)

6. **Click Continue**
7. **If this message comes up, click on "No"**
8. **Click OK**

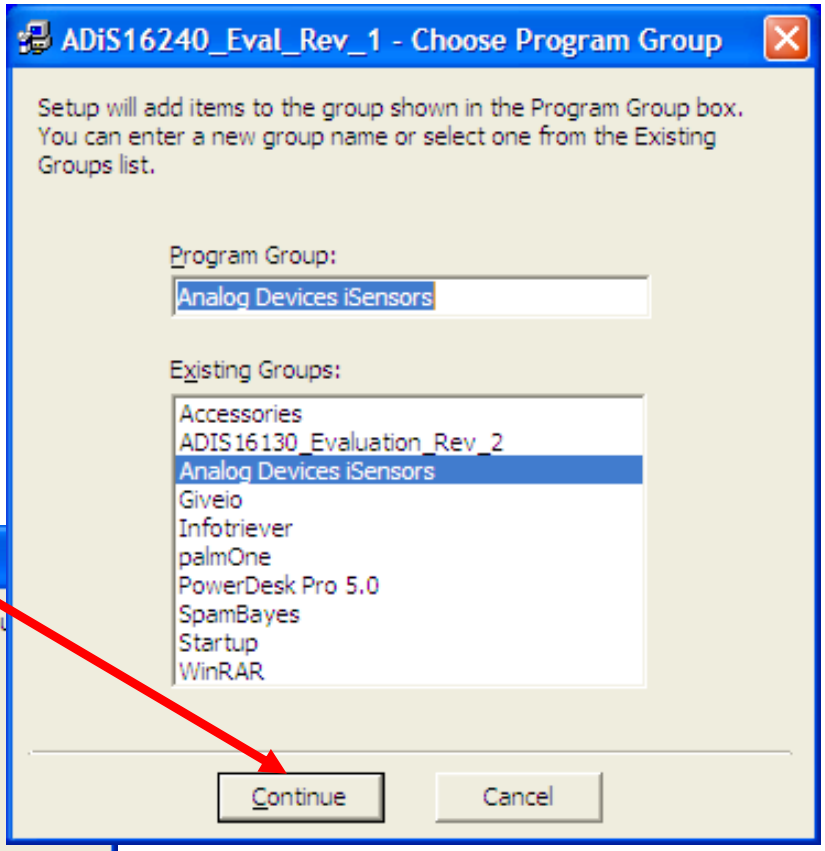

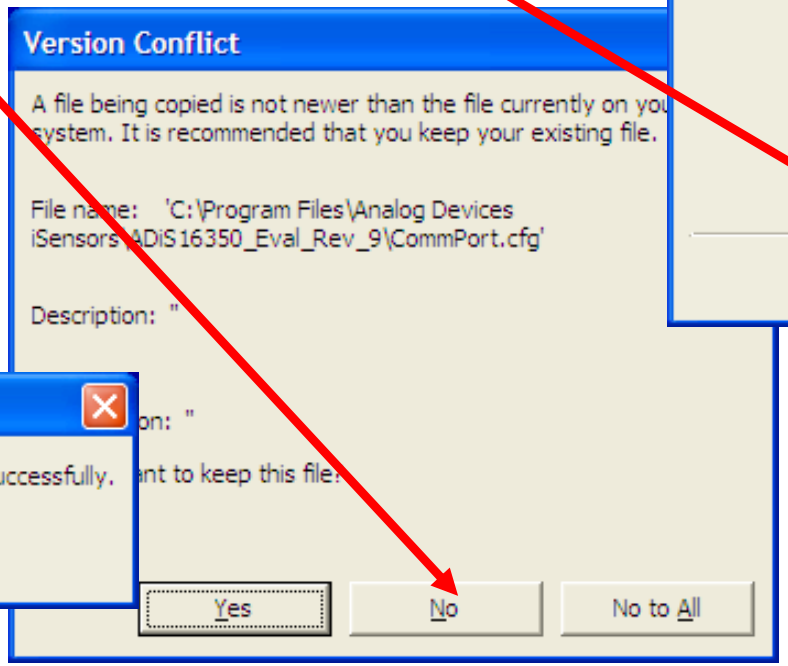

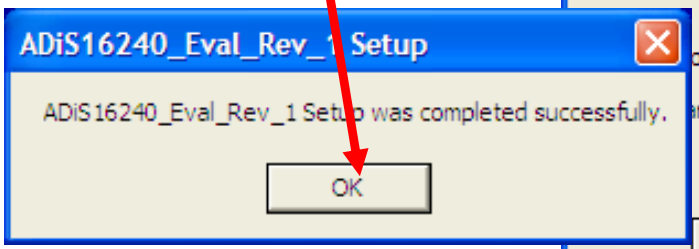

iSensor® The Simple Solution for Sensor Integration

ADIS16240 Demonstration Software Installation

Installation Steps (continued)

9. **Open the newly created directory and double-click onto “giveio.exe”**
10. **Click “Install,” then “ IAgree”**

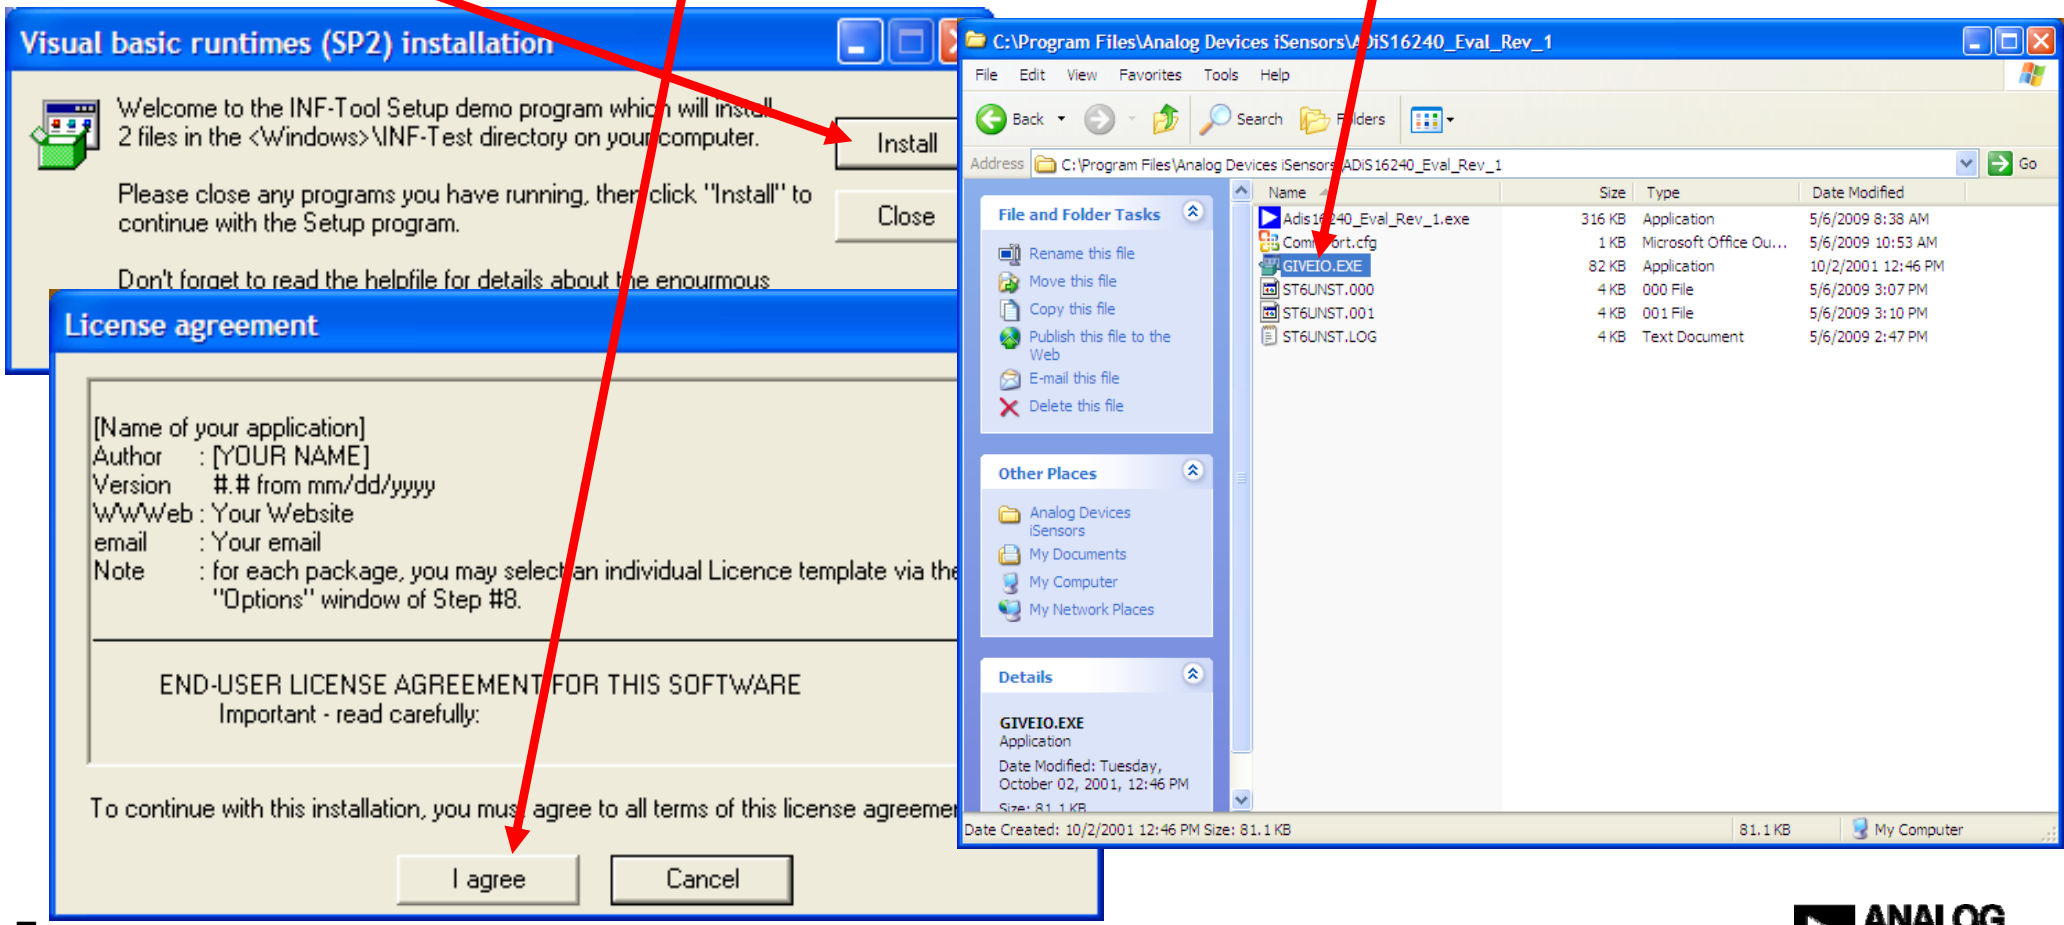

iSensor® The Simple Solution for Sensor Integration
ADIS16240 Demonstration Software Installation

Installation Steps (continued)

11. Click “yes”

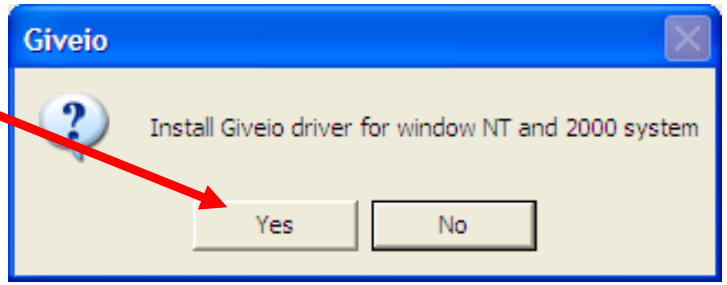

12. Giveio Driver complete

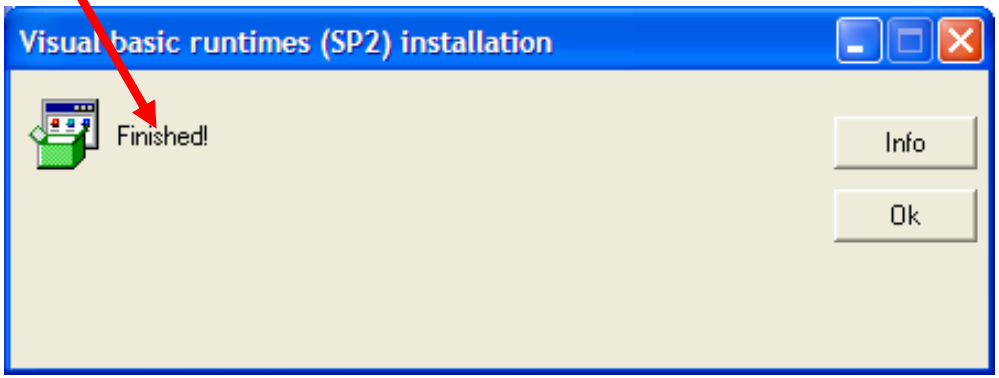

ANALOG DEVICES

iSensor® The Simple Solution for Sensor Integration

ADIS16240 Installation on ADISUSBZ

Installation Steps (continued)

13. Install 240/PCBZ on ADISUSBZ

14. Plug in USB cable

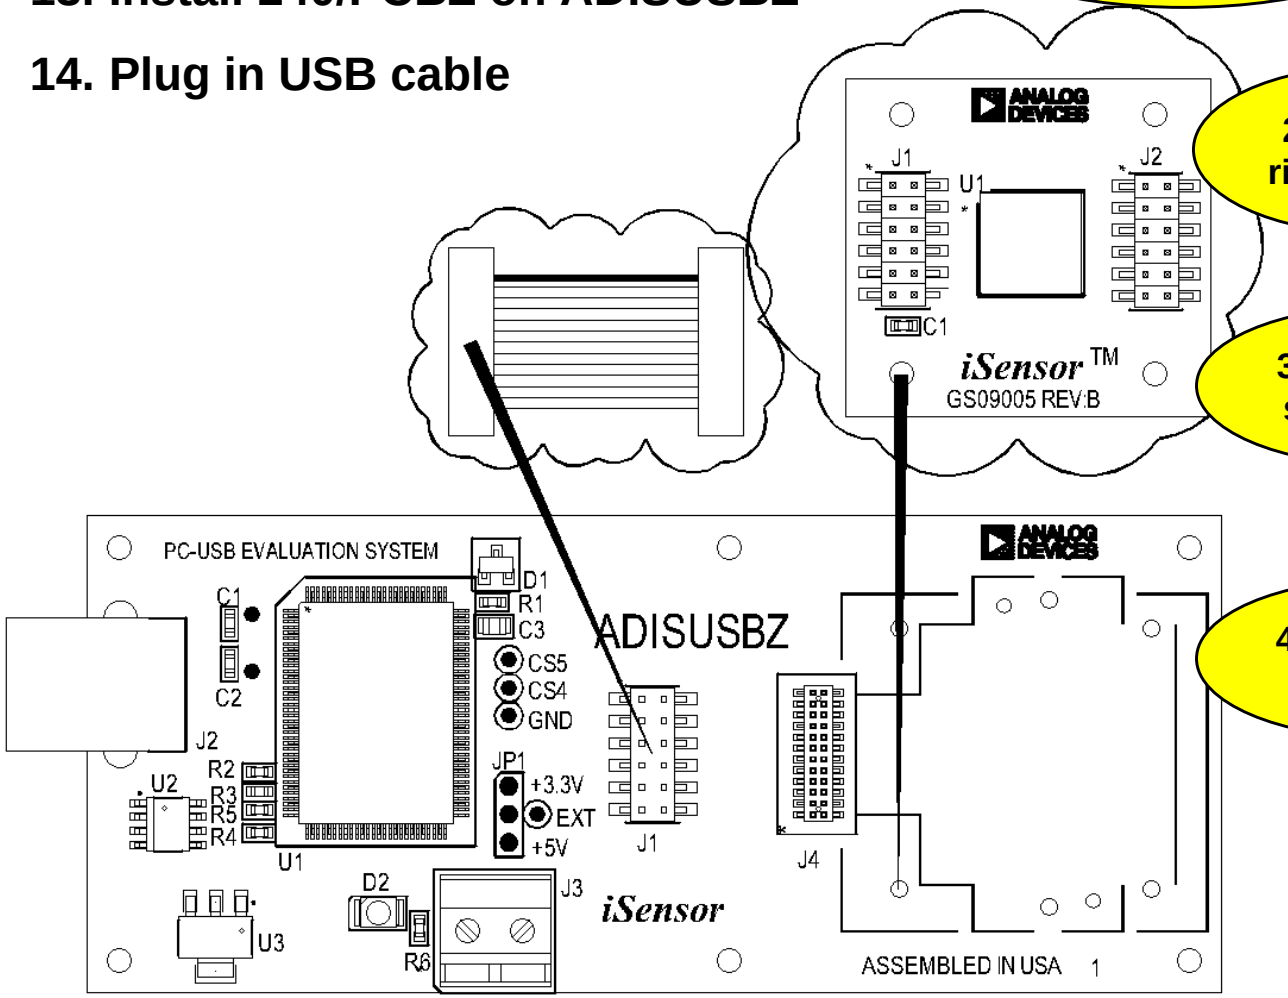

1. Secure 240/PCBZ w/ 2mm screws

2. Connect ribbon cable

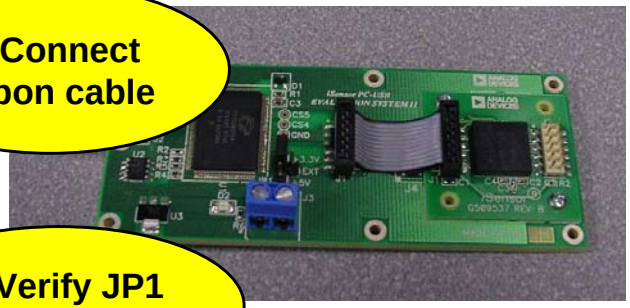

3. Verify JP1 set to +3.3V

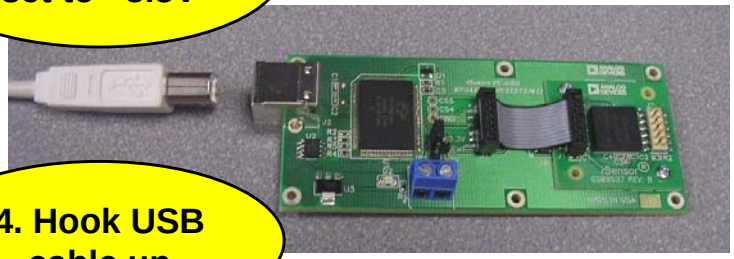

4. Hook USB cable up

ANALOG DEVICES

iSensor® The Simple Solution for Sensor Integration

ADIS16240 Demonstration Software Installation

Installation Steps (continued)

15. **USB Driver screen will pop-up**
    Click "Next" to start this process

16. **Then click on**
    "Continue Anyway"

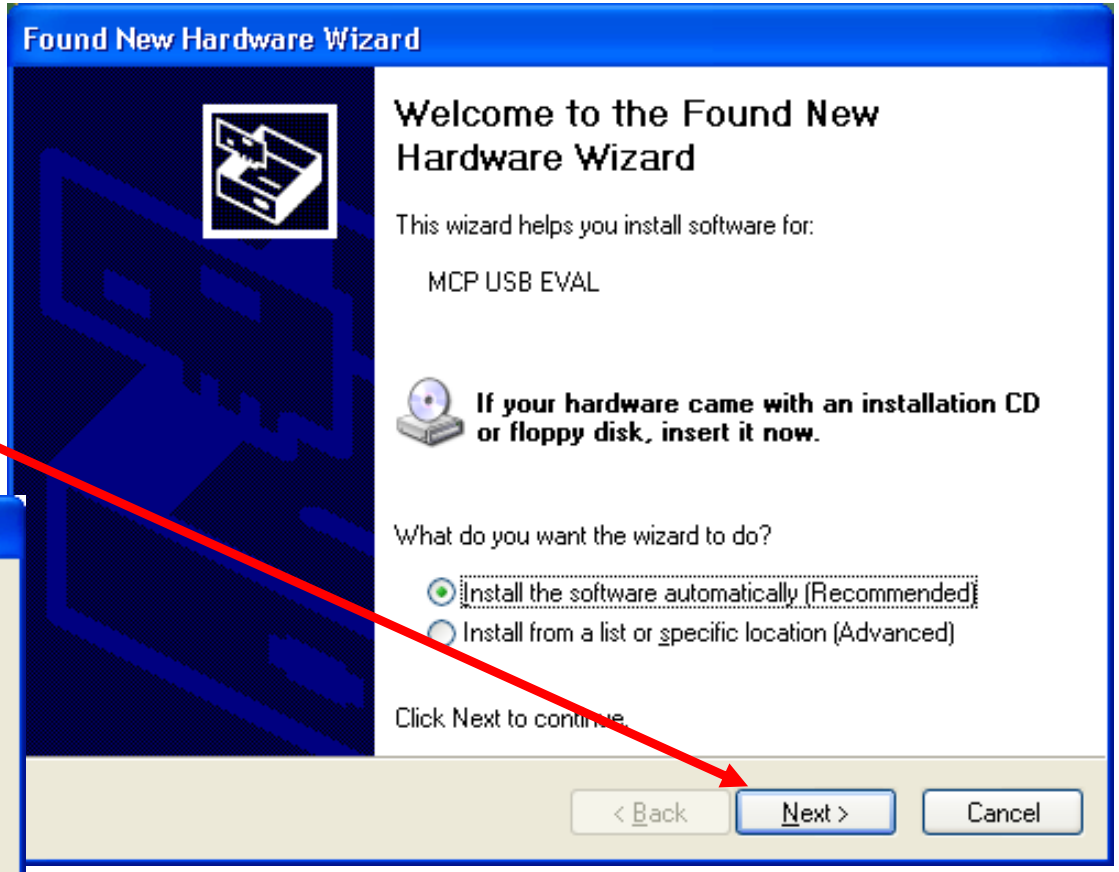

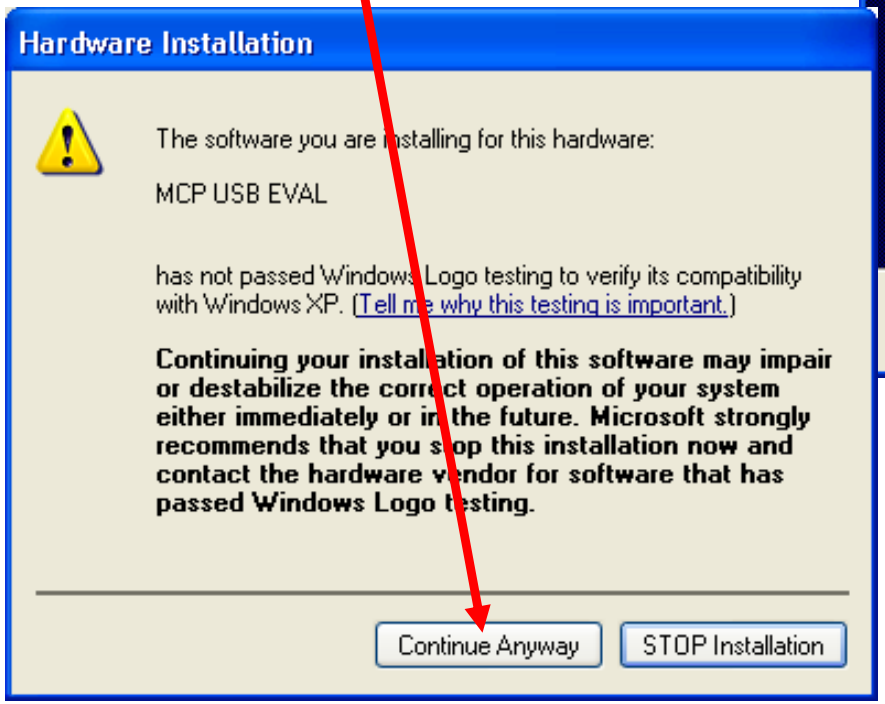

This process will repeat for a second driver file. Just follow the instructions and allow it to go through one more time. After completing this, then the devices is ready for test.

iSensor® The Simple Solution for Sensor Integration

ADIS16240 Demonstration Software Screen

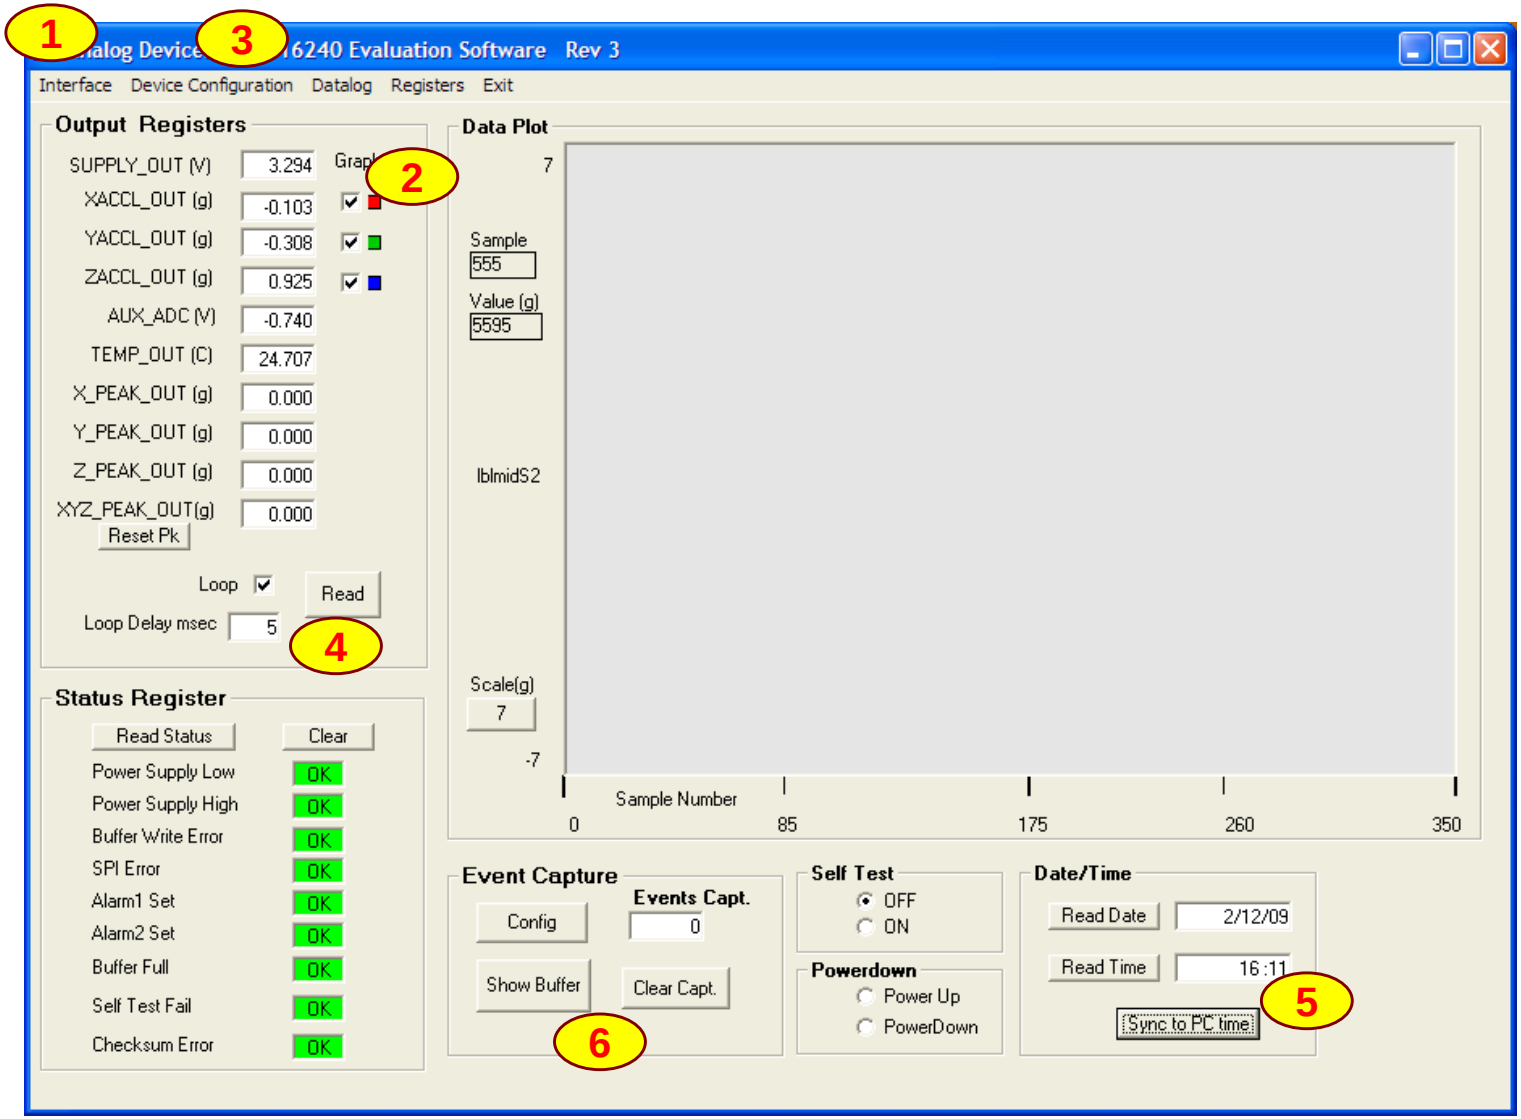

1. **Click on “Interface” and select USB, then OK when the pop-up window shows the USB device is connected.**
2. **Click to enable different accelerometer axes (x,y,z)**
3. **Device configuration options. Turn on peak tracking (MSC_CTRL option), adjust sample rate, etc.**
4. **Start on-screen log**
5. **Sync ADIS16240’s time to the current PC time.**
6. **Capture, Click on Config button and see next page**

ANALOG DEVICES

iSensor® The Simple Solution for Sensor Integration

ADIS16240 Demonstration Software Installation

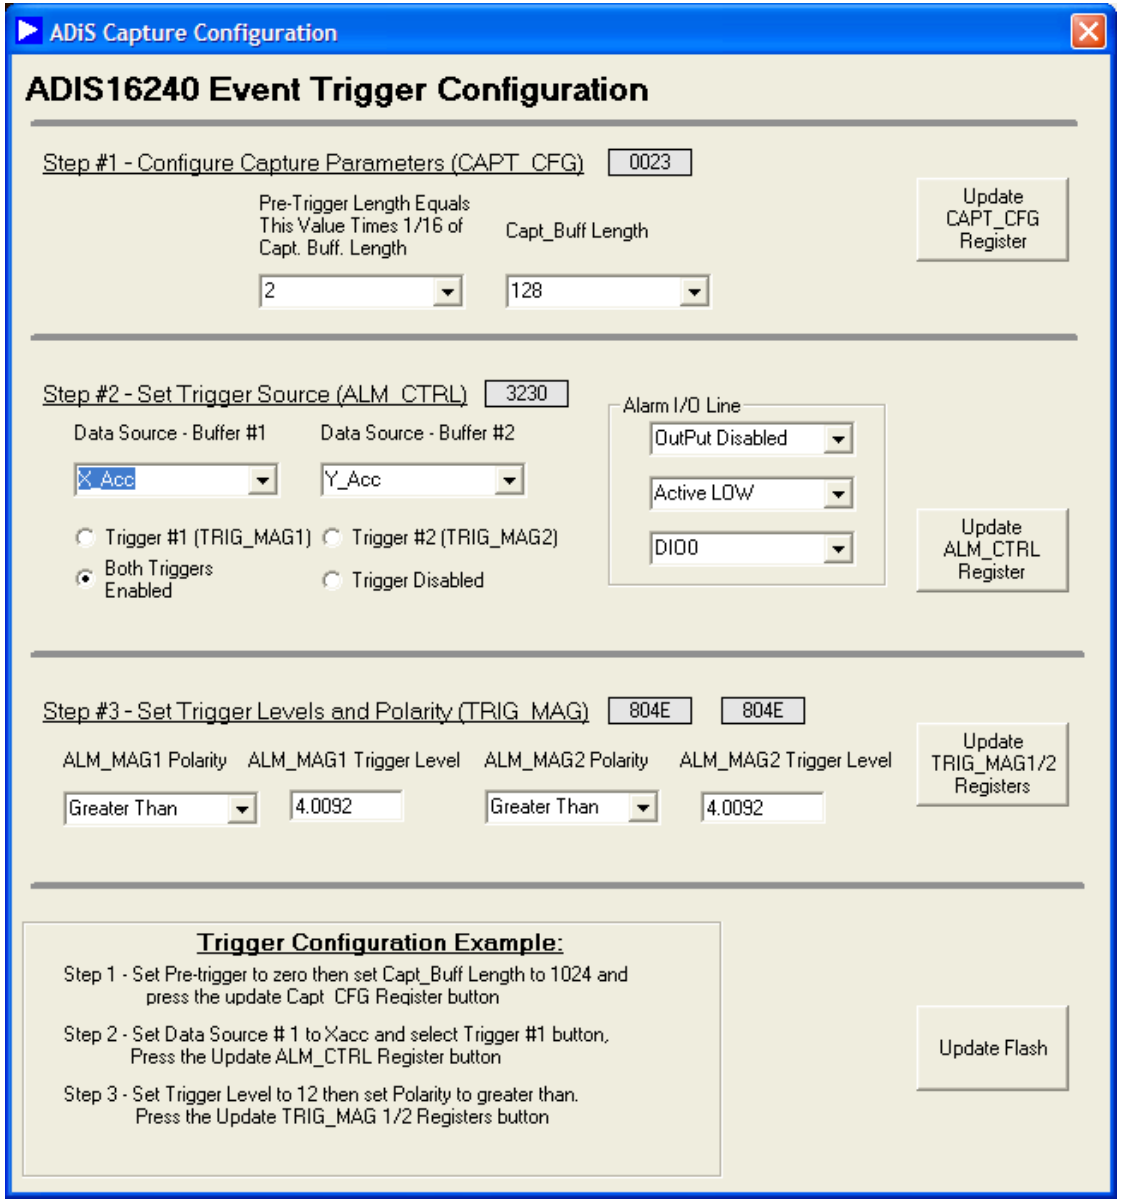

1. **Set number of captures vs. capture length and pre-capture length. Remember to click on the update button!**
2. **Set trigger source. Suggest both triggers. Remember to click on the Update button!**
3. **Set trigger levels and polarity, then hit the Update button.**
4. **Updating the flash makes the changes non-volatile.**
5. **Click on the red X to close and return to the main menu**

ANALOG DEVICES

*i*Sensor® The Simple Solution for Sensor Integration

ADIS16240 Demonstration Software Installation

Analog Devices - ADIS16240 Evaluation Software Rev 3

Interface Device Configuration Datalog Registers Exit

Output Registers

		Graph
SUPPLY_OUT (V)	3.314	
XACCL_OUT (g)	-0.154	☑
YACCL_OUT (g)	-1.285	☑
ZACCL_OUT (g)	0.000	☑
AUX_ADC (V)	-0.751	
TEMP_OUT (C)	24.951	
X_PEAK_OUT (g)	0.000	
Y_PEAK_OUT (g)	0.000	
Z_PEAK_OUT (g)	0.000	
XYZ_PEAK_OUT(g)	0.000	

Reset Pk

Loop ☑ STOP

Loop Delay msec 5

Status Register

Read Status Clear

Power Supply Low	OK
Power Supply High	OK
Buffer Write Error	OK
SPI Error	Alarm
Alarm1 Set	Alarm
Alarm2 Set	Alarm
Buffer Full	OK
Self Test Fail	OK
Checksum Error	OK

Data Plot

Event Capture

Config Events Capt. 7

Show Buffer Clear Capt.

Self Test

OFF

ON

Date/Time

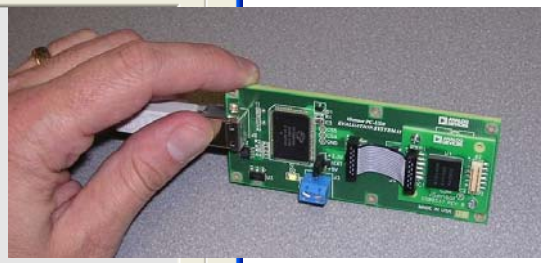

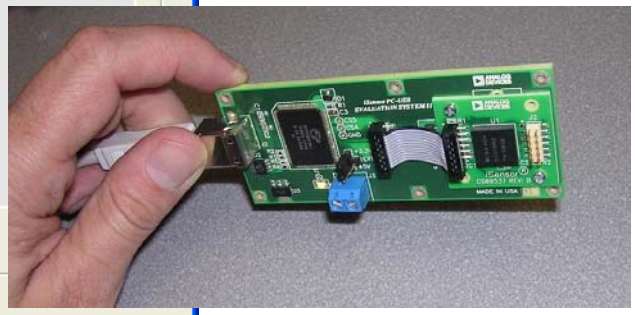

Click on Run and start tapping ADISUSBZ on the desk, then click stop, then "Show Buffer"

Note that the event counter is increasing with each time the ADISUSBZ tap exceeds the pre-set shock level

ANALOG DEVICES

*i*Sensor® The Simple Solution for Sensor Integration
ADIS16240 Demonstration Software Installation

1. **Place the mouse pointer over different spikes to see the Event header in the upper right hand corner change.**
2. **Slider bar in lower left hand corner will move event log as desired.**

- **CONTACTS:**
  - **MARKETING: Bob Scannell, 1-336-605-4031**
  - **APPLICATIONS ENGINEER: Mark Looney, 1-336-605-4139**

MORE INFORMATION:

- **www.analog.com/isensor**
- **New Brochure: *i*Sensor Motion Sensor Products**
  - BR067755-2.5-4/08(A)
- **CD's with Product Info and Eval SW**

ANALOG DEVICES

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А