

Data contained in this document is proprietary to Trompeter Electronics and shall not be disclosed, copied or used for procurement or manufacture without written express permission.	REVISIONS			TCS-CABLE-ASSY		SH	1
	REV	ECO	DESCRIPTION	DWN	APPROVED	DATE	
	K	5995	New Options, V=CSM Cable	DWS	R. Thiele	3/31/2004	
	L	7055	New Options, Various	DWS	R. Thiele	3/31/2004	
	M	7302	Change to KWK Desc.	MRM	R. Thiele	1/5/2006	
	N	7406	ADD WU & ZI CODE	DWS	R. Thiele	8/10/2006	
	P	52139	Remove Hot Stamp Option	CWW	T. Kohler	3/9/2010	
Q	53323	Add Date Code to the Labelin	CWW	B,Ryan	5/17/2011		

### Cable Assembly "TALKING DOG" Part Numbering System


**"Building"** your own part number is as easy as **1 - 2 - 3:**

1. Obtain all necessary information regarding customer requirements.
2. Find corresponding codes for connector(s), cable, schematic, length, and any special requirements.
3. "Assemble" the codes you found to form a complete part number. (See example)  
( NOTE: Always specify connectors in Alpha-Numeric Sequence. )

#### Part Number Schematic (Example)

Type	Connector 1		Schem.	Cable		Spec.	Connector 2			Length (inches)
	Series	Keying					Type	Series	Keying	
K	R	K	0	C	2	1	P	2	A	2 4 0 0
	(PL1WC)			(TCC-75-2)		(boot)	(UPL20)			(200 ft.)

#### Example of Typical Cable Assembly

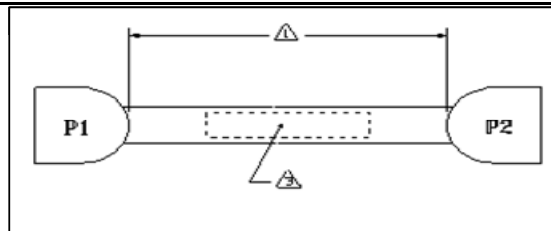

- |   |  |   |                                  |
|---|--|---|----------------------------------|
| 3 | Using printed heat shrink, Identify with 14949, Date code and Assembly Number at Center Only On Cables 60 Inches Long or Less; At Both Ends on cables over 60 inches long. | 6 | All Tolerances per TT-03 Drawing |
| 2 | See Connector Drawing For Cable Stripping & Assembly Instructions  | 5 | Workmanship per TFS-4 Drawing    |
| 1 | Length In Inches TOL Per TT-03   | 4 | Testing (QA) per TFS-8 Drawing   |

DWN	CWW	3/9/2010		<b>CABLE ASSEMBLIES</b> Talking Dog Part Numbering System		
ENG						
QA					<u>DRAWING NO.</u>	<u>REV</u>
MAT					TCS-CABLE-ASSY	Q
<u>MATERIAL</u>		<u>CODE IDENT</u>	<b>Connectivity Solutions</b>	<u>SHEET:</u> 1 of 6		
SCALE: N/A		DATE: 3/9/2010				

CONNECTOR CODE SPECIFIER					
TYPE		SERIES		KEYING	
Code	Description	Code	Description	Code	Description
0	No Connector	0	Do Not Use	0	Do Not Use
A	Bulkhead Jack "F"	1	BNC 50 Ohm	1	P Polarization, 70 series tool crimp
B	Bulkhead Jack	2	BNC 75 Ohm	2	R Polarization, 70 series tool crimp
C	Cable Jack	3	TNC 50 Ohm	3	T Polarization, 70 series tool crimp
D	Digital UPL2000	4	TNC 75 Ohm	4	V Polarization, 70 series tool crimp
F	45 Degree Plug	5	N 50 Ohm	5	W Polarization, 70 series tool crimp
G	Digital Right Angle UPLR200	6	N 75 Ohm	6	X Polarization, 70 series tool crimp
I	Insulated Bulkhead Jack	7	120 series 50 Ohm	7	Y Polarization, 70 series tool crimp
J	Patch Jack	8	120 series 75 Ohm	8	Z Polarization, 70 series tool crimp
K	Patch Plug	9	130 series	9	Push-on, MC
P	Plug	A	50 series/SMA (male)	A	2 LUG, wrench crimp, (BNC)
R	Right Angle Plug	B	PL3 (C)/SMB (male)	B	3 LUG, wrench crimp
S	SMA/SMB/SMC	C	70 series/SMC (male)	C	4 LUG, wrench crimp
L	Rt. Angle SMA/SMB/SMC	D	150 series/SMC (female)	D	Threaded, wrench crimp
U	Shrink Tubing as strain relief on both connectors	E	30 series/SMB (female)	E	Push-on, wrench crimp (incl patch jack)
		F	SPC8S/SMA (female)	F	2 LUG, tool crimp (BNC)
		G	SPC8P	G	3 LUG, tool crimp
		H	80 series	H	4 LUG, tool crimp, (incl 450 series)
		J	101 series	J	Threaded, tool crimp, (incl 450s & TNC)
		K	J3C/E	K	Push-on, tool crimp, (incl patch jack)
		L	J3WC/E	L	2 LUG, MC
		M	J13C	M	3 LUG, MC
		N	J13WC	N	4 LUG, MC
		P	450 P series	P	Threaded, MC
		Q	PL1/C: PL2 (RG59)	Q	450 series, P Polarization
		R	PL1W/C: PL2W (RG59)	R	450 series, R Polarization
		S	450 S series	S	P Polarization, 70 series wrench crimp
		T	PL93/94	T	R Polarization, 70 series wrench crimp
		U	J12/C	U	T Polarization, 70 series wrench crimp
		V	PL11/AC	V	V Polarization, 70 series wrench crimp
		W	PL11C	W	W Polarization, 70 series wrench crimp
		X	PL150/J150	X	X Polarization, 70 series wrench crimp
		Y	PL71	Y	Y Polarization, 70 series wrench crimp
		Z	PL71L	Z	Z Polarization, 70 series wrench crimp

SCHEMATIC CODE		SPECIAL REQUIREMENTS CODE			
Code	Schematic	Code	Special Requirement	Code	Special Requirement
0	STD - Standard	0	No Special Requirements	M	Mil-Qualified Connectors
1	FOS - Floating Outer (E1)	1	Boot Connector 1	N	Boot on one connector / Shrink other connector
2	FIS - Floating Inner (E2)	2	Boot Connector 2	P	1P1 Plating on contacts
3	SC - Shields Common (E3)	3	Boot both Connectors	R	Measure Length Tip of Conn. to Tip of Conn.
4	CROSS *	4	Bend Relief Spring Connector 1	S	Silver Plating on Connectors
V	INVERT **	5	Bend Relief Spring Connector 2	T	Tin Plating on Connectors (See PO)
P	PIGTAIL ***	6	Bend Relief Spring both Conn.	U	Shrink Tubing as Strain Relief on both Conn
C	Floating Center Pin	7	75 Ohm conn. (if not normally 75 )	V	Customer Supplied Cable
5	A6 Circuitry	A	Reverse Gender Connector 1	X	Out-Gassed Connectors (Vacum-Rated)
6	G1 Circuitry	B	Reverse Gender Connector 2	Y	Shrink Tubing as Strain Relief Connector 1
7	G2 Circuitry	C	Reverse Gender both Connectors	Z	Misc./Special Requirements by P.O.
8	Pin/Shields Common (E5)	D	Labelling		
9	Invert / SC (D6)	E	Safety Wire Holes on Connectors		
*	Cross wiring, ie: pin to shield/shield to pin.	F	Reverse Gender both Conn & Special Label		
**	White conductor to pin rather than blue to pin.	G	2G Gold Plating on connectors		
***	Pigtail dimensions to be specified by Purchase Order.	H	5G Gold Plating on connectors		
****	Hot stamp is not available for standard TCS-Cable-Assy.	J	Boot Connector 1 & Bend Relief Connector 2		
		K	Shrink Tubing as Strain Relief Connector 2		
		L	Special Labelling specified by P.O. ****		

<b>DRAWING NO. TCS-CABLE-ASSY</b>	<b>REV.</b>	<b>CAGE CODE: 14949</b>
	<b>Q</b>	<b>SHEET: 2 of 6</b>

**CABLE CODE**

(sorted by CABLE CODE)




CODE	PART#	Type	Ohm	Cable Group	CODE	PART#	Type	Ohm	Cable Group	CODE	PART#	Type	Ohm	Cable Group
B1	BWC400	COAX			DP	82907	COAX	50		T4	TRC-75-2	TRIAX	75	7/308
B2	LMR400-FR	COAX		/050	DR	88240	COAX	50	21	T5	88232	TRIAX	75	
B3	RG402	COAX	50		DS	734S1	COAX	75	63/025	T6	BL982-TIMES	TRIAX	98	9/215
C1	TCC-50-2	COAX	50	1/011	DT	89907	COAX	50	21	T7	9222	TRIAX	50	7
C2	TCC-75-2	COAX	75	2/013A	DV	88241	COAX	75		T8	9267	TRIAX	75	
C3	RG58/BLACK	COAX	50	1/011	DW	1505A	COAX	75	2/025	T9	9888	TRIAX	50	14A
C4	RG59/BLACK	COAX	75	2/013	DW	88281	COAX	75	41	TA	G02330HT	TRIAX	50	
C5	RG62	COAX	93	2/013	DX	1417B	COAX	75	009	TB	M17/134-00001	TRIAX	50	7
C6	RG223 (M17/167-00001)	COAX	50	3/012	DY	1186A	COAX	75		TC	TRF-58	TRIAX	50	7
C7	RG142 (M17/060-004142)	COAX	50	1/012	DZ	RG9	COAX	50	6B	TD	8233	TRIAX	75	14
C8	RG122/GREEN	COAX	50	4/010	EA	RG196	COAX	50	5A	TE	RG403	TRIAX	50	
C9	8218	COAX	75	4/009	EB	1505A/RED	COAX	75	2/025	TF	10598/CABLE	TRIAX	75	64/303
CA	RG174	COAX	50	5/003	EC	F59HEC	COAX	75		TG	AA-8314	TRIAX	75	
CB	RG316/U	COAX	50	5/003	ED	82120	COAX	75	34/024	TH	SC-22	TRIAX		23
CC	RG188/U	COAX	50	5/003	EE	83264	COAX	75	5/004	TJ	TRCH-50-2	TRIAX	50	7/306
CD	RG179	COAX	75	5/004	EF	M4244	COAX	75	4/009	TK	8232	TRIAX	75	13A
CE	RG187	COAX	75	5/004	EG	M17/152-00001	COAX	50		TL	M17/134-00002	TRIAX	50	
CF	RG400	COAX	50	1/012	EH	9231	COAX	75	6/016	TM	RT-316	TRIAX	50	
CG	RG8	COAX	50	6A	EJ	1694A	COAX	75	020	TN	RT-400	TRIAX	50	
CH	734D	COAX	75	63/025	EK	89259	COAX	75		TP	M17/134-00004	TRIAX	50	7/306
CJ	735A	COAX	75	026	EL	83267	COAX	75	36/004	TR	7530	COAX	75	/054
CK	73506	COAX	75	026	EM	9913F	COAX	50	50	TS	1858A	TRIAX	75	
CL	73512	COAX	75	026	EN	9259	COAX	75	2A/023	TT	1857A	TRIAX	75	
CM	TCC-75-4S	COAX	75		EP	9066	COAX	75	41/020	TU	10612-24-9	TWINAX	78	
CN	TCC-75-4D	COAX	75		ER	1695A	COAX	75		W1	TWC-124-1A	TWINAX	124	29/203
CP	TCC-75-2YEL	COAX	75	2/013A	ES	DB142	COAX	50	1/12A	W2	TWC-124-2	TWINAX	124	9/214
CQ	TCC-75-2BLK	COAX	75	2/013A	ET	F59HEC				W3	TWC-78-1	TWINAX	78	29/202
CR	TCC-75-2RED	COAX	75	2/013A	EU	1406B	3X COAX	75	22/009	W4	TWC-78-2	TWINAX	78	9/213
CS	TCC-75-2GRN	COAX	75	2/013A	EV	9913	COAX	50	/050	W5	TWCP-124-2	TWINAX	124	9/214
CT	TCC-75-2BLU	COAX	75	2/013A	EW	9248	COAX	50	41/020	W6	M17/176-00002	TWINAX	77	47/201
CU	73508	COAX	75	026	EX	7538	COAX	75	37/009	W7	TWCP-78-1	TWINAX	78	29/202
CV	RG214	COAX	50	6B	EY	1865A	COAX	75	22/009	W8	TWCP-124-3	TWINAX	124	55/224
CW	8281	COAX	75	6/016	EZ	RG225	COAX	50	6B	W9	TWCP-124-5	TWINAX	124	
CX	RG6	COAX	75	6E/017	FA	1855A	COAX	75		WA	81553	TWINAX	77	47/201
CY	RG11	COAX	75	6A	FB	LDF4-50-A	COAX	50		WB	9272	TWINAX	78	9/213
CZ	734A	COAX	75	63/025	FC	RG400/U	COAX	75		WC	9463	TWINAX	78	9
D1	RG307	TRIAX	75		FD					WD	9859	TWINAX	78	9/213
D2	9268	COAX	93	2B/018	FE	SI-142 (88093-02)		50		WE	9860	TWINAX	124	46
D3	8212	COAX	75	2/014	FF	RD316	COAX	50		WF	TWAC-78-1F2	TWINAX	78	49/205
D4	8216	COAX	50	5/003	FG	BPE100	COAX	50	5/003	WG	CXN2702	TWINAX	100	
D5	8219	COAX	50	1	FH	BPE195	COAX	50	1/011	WH	9207	TWINAX	100	
D6	8281BLU	COAX	75	6/016	FJ	BPE400	COAX	50	6B	WJ	NDBC-TFE222S75	TWINAX		218
D7	8281GRN	COAX	75	6/016	FK	M17/183-00001	COAX	50	1/011	WK	TWCH-78-1	TWINAX	78	
D8	8281RED	COAX	75	6/016	H1	8259	COAX	50	1	WL	TWCH-78-2	TWINAX	78	
D9	8281B-VIOLET	COAX	75	6/016	JA	SF-142	COAX	50	011/1	WM	M27500-22ML2T08	TWINAX		204
DA	8281F	COAX	75	6/016	JB	SF-214	COAX		6B	WN	RG108	TWINAX	78	9/213
DB	RG122/BLACK	COAX	50	4/010	JC					WP	TWCP-78-2	TWINAX	78	9/213
DC	9310	COAX	50	1/011	JD	734JUDD	COAX	75	025	WQ	7726	COAX	50	3/102
DD	RG178	COAX	50	5A/001	JE	735JUDD	COAX	75	026	WR	89207	TWINAX	100	
DE	RG180	COAX	95	22/008	JF	83242	COAX	50	1/011	WS	89999	TWINAX	78	
DF	RG213	COAX	50	6A	JG	7731A Benden	COAX	75		WT	M27500-24TE2T14	TWINAX		
DG	RG216	COAX	75	6B	JH					WU	TWC-78-1BLK	TWINAX	78	29/202
DH	RG303	COAX	50	21/011	Q1	QRC-78-1	QUADRAX	78	39	WV	9271	TWINAX	124	
DJ	RG393	COAX	50		Q2	QRC-78-2	QUADRAX	78	17	WW	9180 (Belden)	TWINAX	110	204
DK	89292	COAX	75		Q3	QRC-78-3	QUADRAX	78	38	WX	9167	COAX	50	2/014
DL	9221	COAX	75		Q4	QRC-124-2	QUADRAX	124	40	WY	M17/186-00001	TWINAX	78	9
DM	8241	COAX	75	2/013	Q5	QRC-124-3	QUADRAX	124	38	WZ	73502	DUAL COAX		
DN	RG6/QUAD	COAX	75		T1	TRC-50-1	TRIAX	50	32/309	X1	M17/179-00001	TRIAX	75	305
					T2	TRC-50-2	TRIAX	50	7/306	Z1	TRC-75-2BLK	TRIAX	75	7/308
					T3	TRC-75-1	TRIAX	75	33/307	ZZ	CSM CABLE			

CABLE CODE (sorted by PART NUMBER)					CABLE CODE (sorted by PART NUMBER)					CABLE CODE (sorted by PART NUMBER)				
CODE	PART#	Type	Ohm	Cable Group	CODE	PART#	Type	Ohm	Cable Group	CODE	PART#	Type	Ohm	Cable Group
TR	7530	COAX	75	/054	WU	18553	TWINAX	77		CE	RG187	COAX	75	5/004
EX	7538	COAX	75	37/009	ER	1695A	COAX	75		CC	RG188/U	COAX	50	5/003
WQ	7726	COAX	50	3/102	FA	1855A	COAX	75		EA	RG196	COAX	50	5A
D3	8212	COAX	75	2/014	TT	1857A	TRIAX	75		DF	RG213	COAX	50	6A
D4	8216	COAX	50	5/003	TS	1858A	TRIAX	75		CV	RG214	COAX	50	6B
C9	8218	COAX	75	4/009	EY	1865A	COAX	75	22/009	DG	RG216	COAX	75	6B
D5	8219	COAX	50	1	JD	734/JUDD	COAX	75	025	C6	RG223 (M17/167-0)	COAX	50	3/012
TK	8232	TRIAX	75	13A	JZ	734A	COAX	75	63/025	EZ	RG225	COAX	50	6B
TD	8233	TRIAX	75	14	CH	734D	COAX	75	63/025	DH	RG303	COAX	50	21/011
DM	8241	COAX	75	2/013	DS	734S1	COAX	75	63/025	D1	RG307	TRIAX	75	
H1	8259	COAX	50	1	JE	735/JUDD	COAX	75	026	CB	RG316/U	COAX	50	5/003
CW	8281	COAX	75	6/016	CJ	735A	COAX	75	026	DJ	RG393	COAX	50	
EP	9066	COAX	75	41/020	D6	8281BLU	COAX	75	6/016	CF	RG400	COAX	50	1/012
WX	9167	COAX	50	2/014	D9	8281B-VIOLET	COAX	75	6/016	FC	RG400/U	COAX	75	
WH	9207	TWINAX	100		DA	8281F	COAX	75	6/016	B3	RG402	COAX	50	
DL	9221	COAX	75		D7	8281GRN	COAX	75	6/016	TE	RG403	TRIAX	50	
T7	9222	TRIAX	50	7	D8	8281RED	COAX	75	6/016	C3	RG58/BLACK	COAX	50	1/011
FD					WW	9180 (Belden)	TWINAX	110	204	C4	RG59/BLACK	COAX	75	2/013
EH	9231	COAX	75	6/016	EM	9913F	COAX	50	50	CX	RG6	COAX	75	6E/017
EW	9248	COAX	50	41/020	TG	AA-8314	TRIAX	75		DN	RG6/QUAD	COAX	75	
EN	9259	COAX	75	2A/023	T6	BL982-TIMES	TRIAX	98	9/215	C5	RG62	COAX	93	2/013
T8	9267	TRIAX	75		FG	BPE100	COAX	50	5/003	CG	RG8	COAX	50	6A
D2	9268	COAX	93	2B/018	FH	BPE195	COAX	50	1/011	DZ	RG9	COAX	50	6B
WV	9271	TWINAX	124		FJ	BPE400	COAX	50	6B	TM	RT-316	TRIAX	50	
WB	9272	TWINAX	78	9/213	B1	BWC400	COAX			TN	RT-400	TRIAX	50	
DC	9310	COAX	50	1/011	ZZ	CSM CABLE				TH	SC-22	TRIAX		23
WC	9463	TWINAX	78	9	WG	CXN2702	TWINAX	100		JA	SF-142	COAX	50	011/1
WD	9859	TWINAX	78	9/213	ES	DB142	COAX	50	1/12A	JB	SF-214	COAX		6B
WE	9860	TWINAX	124	46	EC	F59HEC	COAX	75		FE	SI-142 (88093-02)		50	
T9	9888	TRIAX	50	14A	ET	F59HEC				C1	TCC-50-2	COAX	50	1/011
EV	9913	COAX	50	/050	TA	G02330HT	TRIAX	50		C2	TCC-75-2	COAX	75	2/013A
WZ	73502	DUAL COAX			FB	LDF4-50-A	COAX	50		CQ	TCC-75-2BLK	COAX	75	2/013A
CK	73506	COAX	75	026	B2	LMR400-FR	COAX		/050	CT	TCC-75-2BLU	COAX	75	2/013A
CU	73508	COAX	75	026	TB	M17/134-00001	TRIAX	50	7	CS	TCC-75-2GRN	COAX	75	2/013A
CL	73512	COAX	75	026	TL	M17/134-00002	TRIAX	50		CR	TCC-75-2RED	COAX	75	2/013A
WA	81553	TWINAX	77	47/201	TP	M17/134-00004	TRIAX	50	7/306	CP	TCC-75-2YEL	COAX	75	2/013A
ED	82120	COAX	75	34/024	EG	M17/152-00001	COAX	50		CN	TCC-75-4D	COAX	75	
DP	82907	COAX	50		W6	M17/176-00002	TWINAX	77	47/201	CM	TCC-75-4S	COAX	75	
JF	83242	COAX	50	1/011	X1	M17/179-00001	TRIAX	75	305	T1	TRC-50-1	TRIAX	50	32/309
EE	83264	COAX	75	5/004	FK	M17/183-00001	COAX	50	1/011	T2	TRC-50-2	TRIAX	50	7/306
EL	83267	COAX	75	36/004	WY	M17/186-00001	TWINAX	78	9	T3	TRC-75-1	TRIAX	75	33/307
T5	88232	TRIAX	75		WM	M27500-22ML2T08	TWINAX		204	T4	TRC-75-2	TRIAX	75	7/308
DR	88240	COAX	50	21	WT	M27500-24TE2T14	TWINAX			Z1	TRC-75-2BLK	TRIAX	75	7/308
DU	88241	COAX	75		EF	M4244	COAX	75	4/009	TJ	TRCH-50-2	TRIAX	50	7/306
DW	88281	COAX	75	41	WJ	NDBC-TFE222SJ75	TWINAX		218	TC	TRF-58	TRIAX	50	7
WR	89207	TWINAX	100		Q4	QRC-124-2	QUADRAX	124	40	WF	TWAC-78-1F2	TWINAX	78	49/205
EK	89259	COAX	75		Q5	QRC-124-3	QUADRAX	124	38	W1	TWC-124-1A	TWINAX	124	29/203
DK	89292	COAX	75		Q1	QRC-78-1	QUADRAX	78	39	W2	TWC-124-2	TWINAX	124	9/214
DT	89907	COAX	50	21	Q2	QRC-78-2	QUADRAX	78	17	W3	TWC-78-1	TWINAX	78	29/202
WS	89999	TWINAX	78		Q3	QRC-78-3	QUADRAX	78	38	WU	TWC-78-1BLK	TWINAX	78	29/202
TF	10598/CABLE	TRIAX	75	64/303	WN	RG108	TWINAX	78	9/213	W4	TWC-78-2	TWINAX	78	9/213
DY	1186A	COAX	75		CY	RG11	COAX	75	6A	WK	TWCH-78-1	TWINAX	78	
EU	1406B	3X COAX	75	22/009	DB	RG122/BLACK	COAX	50	4/010	WL	TWCH-78-2	TWINAX	78	
DX	1417B	COAX	75	009	C8	RG122/GREEN	COAX	50	4/010	W5	TWCP-124-2	TWINAX	124	9/214
DV	1505A	COAX	75	2/025	C7	RG142 (M17/060-004142)	COAX	50	1/012	W8	TWCP-124-3	TWINAX	124	55/224
EB	1505A/RED	COAX	75	2/025	CA	RG174	COAX	50	5/003	W9	TWCP-124-5	TWINAX	124	
EJ	1694A	COAX	75	020	DD	RG178	COAX	50	5A/001	W7	TWCP-78-1	TWINAX	78	29/202
					CD	RG179	COAX	75	5/004	WP	TWCP-78-2	TWINAX	78	9/213
					DE	RG180	COAX	95	22/008					

**CONNECTOR CODE**

(sorted by CONNECTOR CODE)



CODE	Connector	TYPE	CODE	Connector	TYPE	CODE	Connector	TYPE	CODE	Connector	TYPE
AHA	BJ89F	TRC	CAM	UBJ220		KBK	PL3C	TPS	PKD	PL153AC	TRS
AHD	BJ389F	TRN	CCA	CJ70TL	TRB	KQE	PL2	FOR RG59	PEA	PL30	TWBNC
BIA	BJ29	BNC	CCB	CJ70	TRB	KQE	PL1	FOR RG58	PED	PL330	TWTNC
B1F	BJ229	BNC	CCC	CJ70FL	TRB	KQK	PL1C	RCA	PFK	SPC8S	SIZE 8
B2A	UBJ29	BNC	CCD	CJ370	TRT	KRE	PL1W	FOR RG58	PGK	SPC8P	SIZE 8
B2F	UBJ229	BNC	CCF	CJ70CTL	TRB	KRE	PL2W	FOR RG59	PHA	PL80	TRC
B2J	UBJ250	MINIBNC	CCG	CJ70C	TRB	KRK	PL1WC	WECO	PHB	PL803	TRC
B3D	BJ49	TNC	CCH	CJ70CFL	TRB	KVE	PL11	MiniWECO	PHD	PL380	TRN
B3J	BJ249	TNC	CCJ	CJ370C	TRT	KVK	PL11AC	MiniWECO	PJA	PL101	QRC
B4D	UBJ49	TNC	CDB	CJ150	TRS	KWE	PL11C	WECO 440	PPH	PL455ACFLP	450
B4J	UBJ249	TNC	CDC	CJ150FL	TRS	KWK	PL11SC	MiniWECO	PPJ	PL3455ACP	450
B5D	BJ95	N	CDD	CJ3150	TTM	KWL	PL11SCLT	MiniWECO	PPQ	PL455ACPP	450
B6D	UBJ95	N	CDG	CJ150AC	TRS	KYE	PL71		PPR	PL455ACRP	450
B7E	PL122	BNC	CDH	CJ150ACFL	TRS	KZE	PL71L		PPW	PL455ACWP	450
B7K	BJ120C	BNC	CDJ	CJ3150AC	TTM	LAD	SEE SMA LIST		PSH	PL455ACFLS	450
B8K	UBJ120C		CHA	CJ80	TRC	LAJ	SEE SMA LIST		PSJ	PL3455ACS	450
B9D	BJ139	F	CHB	CJ803	TRC	LBK	SEE SMA LIST		PSQ	PL455ACPS	450
BAB	BJ59	TPS	CHD	CJ380	TRN	LCP	LOOPING PLUG		PSR	PL455ACRS	450
BAC	BJ59FL	TPS	CPH	CJ450ACFLP	450	P1A	PL20	BNC	PSW	PL455ACWS	450
BAD	BJ359	TCM	CPJ	CJ3450ACP	450	P1F	UPL220	BNC	PTA	PL94	C
BCA	BJ79TL	TRB	CPQ	CJ450ACPP	450	P2A	UPL20	BNC	PTE	PL93	C
BCB	BJ79	TRB	CPR	CJ450ACRP	450	P2F	UPL220	BNC	PXF	PL150	
BCC	BJ79FL	TRB	CPW	CJ450ACWP	450	P3D	PL40	TNC	R1F	31-335/PE4393	RT BNC
BCD	BJ379	TRT	CSH	CJ450ACFLS	450	P3J	PL240	TNC	RIJ	PE4450	
BCF	BJ79CTL	TRB	CSJ	CJ3450ACS	450	P4D	UPL40	TNC	R2F	UPLR220	BNC
BCG	BJ79C	TRB	CSQ	CJ450ACPS	450	P4J	UPL240	TNC	R3D	PLR40	TNC
BCH	BJ79CFL	TRB	CSR	CJ450ACRS	450	P5A	UPL50C		R5D	PLR95	N
BCJ	BJ379C	TRT	CSW	CJ450ACWS	450	P5D	PL95	N	R9D	PL131	F
BDB	BJ159	TRS	D2F	UPL2000		P5J	PL95C	N	R9J	PLR130SC	
BDC	BJ159FL	TRS	DAF	UPL250	MINI BNC	P6D	UPL95	N	RAD		
BDD	BJ3159	TTM	F2F	UPLFF220	BNC	P7E	PL123	BNC	RAF	UPLR250	MINI BNC
BDG	BJ159AC	TRS	G2F	UPLR2000		P7K	PL223	BNC	RCF	PLR74C	
BDH	BJ159ACFL	TRS	H2F	UPLFF2000		P8E	UPL123		RCG	PLR75C	
BDJ	BJ3159AC	TTM	I1A	BJ26	BNC	P8K	UPL223		RDG	PLR155AC	
BEA	BJ39	TWBNC	I1F	BJ226	BNC	P9D	PL130	F	RDH	PLR155ACFL	
BED	BJ339	TWBNC	I2A	UBJ26	BNC	P9J	PL130SC	F	RDJ	PLR3155AC	TTM
BHA	BJ89	TRC	I2F	UBJ226	BNC	PAB	PL50	TPS	RDK	PL3155ACS	
BHB	BJ893	TRC	I3D	BJ46	TNC	PAC	PL50FL	TPS	RPG	PLR455ACRP	450
BHD	BJ389	TRN	I3J	BJ246	TNC	PAD	PL350	TCM	RPJ	PLR3455ACP	
BPJ	BJ3459ACP	450	I4D	UBJ46	TNC	PAE	PL53	TPS	RPQ	PLR455ACPP	450
BPQ	BJ459ACPP	450	I4J	UBJ246	TNC	PAG	PL50C	TPS	RPR	PLR455ACRP	450
BPR	BJ459ACRP		I5D	BJ96	N	PAH	PL50CFL	TPS	RPW	PLR455ACWP	450
BPW	BJ459ACWP	450	I6D	UBJ96	N	PAJ	PL350C	TCM	RPX	PLR455ACFLP	
BSH	BJ459ACFLS	450	ICA	BJ74TL	TRB	PBA	UBJ220		RSH	PLR455ACFLS	450
BSJ	BJ3459ACS	450	ICB	BJ74	TRB	PCA	PL74	TRB	RSJ	PLR3455ACS	CNTWC
BSR	BJ459ACRS		ICC	BJ74FL	TRB	PCB	PL75	TRB	RSQ	PLR455ACPS	450
BSS	BJ459ACPS	450	ICD	BJ374	TRT	PCC	PL75FL	TRB	RSR	PLR455ACRS	450
BSW	BJ459ACWS	450	ICF	BJ74CTL	TRB	PCD	PL375	TRT	RSW	PLR455ACWS	450
C1A	CJ20	BNC	ICG	BJ74C	TRB	PCE	PL73	TRB	SAD	SEE SMA LIST	
C1F	CJ220	BNC	ICH	BJ74CFL	TRB	PCF	PL74C	TRB	SAJ	SEE SMA LIST	
C2A	UCJ20	BNC	IDB	BJ154	TRS	PCG	PL75C	TRB	SAP	SEE SMA LIST	
C2F	UCJ220	BNC	IDC	BJ154FL	TRS	PCH	PL75CFL	TRB	SBE	SEE SMA LIST	
C3D	CJ40	TNC	IDD	BJ3154	TTM	PCJ	PL375C	TRT	SBF	SEE SMA LIST	
C3J	CJ240	TNC	IDG	BJ154AC	TRS	PCK	PL73C	TRB	SBK	SEE SMA LIST	
C4D	UCJ40	TNC	IDH	BJ154ACFL	TRS	PCL	PL74MC	TRB	SBM	SEE SMA LIST	
C4J	UCJ240	TNC	IDJ	BJ3154AC	TTM	PCM	PL75MC	TRB	SBZ	UPL143	
C8E	UPL122		JKE	J3E	RCA	PDB	PL155	TRS	SCD	SEE SMA LIST	
CAB	CJ50	TPS	JKK	J3C	RCA	PDC	PL155FL	TRS	SEK	SEE SMA LIST	
CAC	CJ50FL	TPS	JLE	J3WE	WECO	PDD	PL3155	TTM	SFJ	SEE SMA LIST	
CAD	CJ350	TCM	JLK	J3WC	WECO	PDE	PL153	TRS			
CAG			JUE	J12	MiniWECO	PDG	PL155AC	TRS			
CAH			JUK	J12C	MiniWECO	PDH	PL155ACFL	TRS			
CAJ			JXE	J150	TRS	PDJ	PL3155AC	TTM			
CAL			KBE	PL3	TPS						

**CONNECTOR CODE**

(sorted by CONNECTOR)



CODE	Connector	TYPE	CODE	Connector	TYPE	CODE	Connector	TYPE	CODE	Connector	TYPE
R1F	31-335/PE4393	RT BNC	CDH	CJ150ACFL	TRS	KRE	PL1W	FOR RG58	RCF	PLR74C	
B7K	BJ120C	BNC	CDC	CJ150FL	TRS	KRK	PL1WC	WECO	RCG	PLR75C	
B9D	BJ139	F	C1A	CJ20	BNC	KQE	PL2	FOR RG59	R5D	PLR95	N
IDB	BJ154	TRS	C1F	CJ220	BNC	PIA	PL20	BNC	LAD	SEE SMA LIST	
IDG	BJ154AC	TRS	C3J	CJ240	TNC	PIF	PL220	BNC	LAJ	SEE SMA LIST	
IDH	BJ154ACFL	TRS	CDD	CJ3150	TTM	P7K	PL223	BNC	LBK	SEE SMA LIST	
IDC	BJ154FL	TRS	CDJ	CJ3150AC	TTM	P3J	PL240	TNC	SAD	SEE SMA LIST	
BDB	BJ159	TRS	CPJ	CJ3450ACP	450	KRE	PL2W	FOR RG59	SAJ	SEE SMA LIST	
BDG	BJ159AC	TRS	CSJ	CJ3450ACS	450	KBE	PL3	TPS	SAP	SEE SMA LIST	
BDH	BJ159ACFL	TRS	CAD	CJ350	TCM	PEA	PL30	TWBNC	SBE	SEE SMA LIST	
BDC	BJ159FL	TRS	CCD	CJ370	TRT	PDD	PL3155	TTM	SBF	SEE SMA LIST	
I1F	BJ226	BNC	CCJ	CJ370C	TRT	PDJ	PL3155AC	TTM	SBK	SEE SMA LIST	
B1F	BJ229	BNC	CHD	CJ380	TRN	PED	PL330	TWTNC	SBM	SEE SMA LIST	
I3J	BJ246	TNC	C3D	CJ40	TNC	PPJ	PL3455ACP	450	SCD	SEE SMA LIST	
B3J	BJ249	TNC	CPH	CJ450ACFLP	450	PSJ	PL3455ACS	450	SEK	SEE SMA LIST	
I1A	BJ26	BNC	CSH	CJ450ACFLS	450	PAD	PL350	TCM	SEJ	SEE SMA LIST	
B1A	BJ29	BNC	CPQ	CJ450ACPP	450	PAJ	PL350C	TCM	PGK	SPC8P	SIZE 8
IDD	BJ3154	TTM	CSQ	CJ450ACPS	450	PCD	PL375	TRT	PFK	SPC8S	SIZE 8
IDJ	BJ3154AC	TTM	CPR	CJ450ACRP	450	PCJ	PL375C	TRT	B8K	UBJ120C	
BDD	BJ3159	TTM	CSR	CJ450ACRS	450	PHD	PL380	TRN	CAM	UBJ220	
BDJ	BJ3159AC	TTM	CPW	CJ450ACWP	450	KBK	PL3C	TPS	PBA	UBJ220	
BED	BJ339	TWBNC	CSW	CJ450ACWS	450	P3D	PL40	TNC	I2F	UBJ226	BNC
BPJ	BJ3459ACP	450	CAB	CJ50	TPS	PPH	PL455ACFLP	450	B2F	UBJ229	BNC
BSJ	BJ3459ACS	450	CAC	CJ50FL	TPS	PSH	PL455ACFLS	450	I4J	UBJ246	TNC
BAD	BJ359	TCM	CCB	CJ70	TRB	PPQ	PL455ACPP	450	B4J	UBJ249	TNC
ICD	BJ374	TRT	CCG	CJ70C	TRB	PSQ	PL455ACPS	450	I2A	UBJ26	BNC
BCD	BJ379	TRT	CCH	CJ70CFL	TRB	PPR	PL455ACRP	450	B2A	UBJ29	BNC
BCJ	BJ379C	TRT	CCF	CJ70CTL	TRB	PSR	PL455ACRS	450	I4D	UBJ46	TNC
BHD	BJ389	TRN	CCC	CJ70FL	TRB	PPW	PL455ACWP	450	B4D	UBJ49	TNC
AHD	BJ389F	TRN	CCA	CJ70TL	TRB	PSW	PL455ACWS	450	B6D	UBJ95	N
BEA	BJ39	TWBNC	CHA	CJ80	TRC	PAB	PL50	TPS	I6D	UBJ96	N
BPQ	BJ455ACPP	450	CHB	CJ803	TRC	PAG	PL50C	TPS	C2A	UCJ20	BNC
BSH	BJ459ACFLS	450	JUE	J12	MiniWECO	PAH	PL50CFL	TPS	C2F	UCJ220	BNC
BSS	BJ459ACPS	450	JUK	J12C	MiniWECO	PAC	PL50FL	TPS	C4J	UCJ240	TNC
BPR	BJ459ACRP		JXE	J150	TRS	PAE	PL53	TPS	C4D	UCJ40	TNC
BSR	BJ459ACRS		JKK	J3C	RCA	KYE	PL71		C8E	UPL122	
BPW	BJ459ACWP	450	JKE	J3E	RCA	KZE	PL71L		P8E	UPL123	
BSW	BJ459ACWS	450	JLK	J3WC	WECO	PCE	PL73	TRB	SBZ	UPL143	
I3D	BJ46	TNC	JLE	J3WE	WECO	PCK	PL73C	TRB	P2A	UPL20	BNC
B3D	BJ49	TNC	RIJ	PE4450		PCA	PL74	TRB	D2F	UPL2000	
BAB	BJ59	TPS	KQE	PL1	FOR RG58	PCF	PL74C	TRB	P2F	UPL220	BNC
BAC	BJ59FL	TPS	PJA	PL101	QRC	PCL	PL74MC	TRB	P8K	UPL223	
ICB	BJ74	TRB	KVE	PL11	MiniWECO	PCB	PL75	TRB	P4J	UPL240	TNC
ICG	BJ74C	TRB	KVK	PL11AC	MiniWECO	PCG	PL75C	TRB	DAF	UPL250	MINI BNC
ICH	BJ74CFL	TRB	KWE	PL11C	WECO 440	PCH	PL75CFL	TRB	P4D	UPL40	TNC
ICF	BJ74CTL	TRB	KWL	PL11SCLT	MiniWECO	PCC	PL75FSL	TRB	P5A	UPL50C	
ICC	BJ74FL	TRB	B7E	PL122	BNC	PCM	PL75MC	TRB	P6D	UPL95	N
ICA	BJ74TL	TRB	P7E	PL123	BNC	PHA	PL80	TRC	H2F	UPLFF2000	
BCB	BJ79	TRB	P9D	PL130	F	PHB	PL803	TRC	F2F	UPLFF220	BNC
BCG	BJ79C	TRB	P9J	PL130SC	F	PTE	PL93	C	G2F	UPLR2000	
BCH	BJ79CFL	TRB	R9D	PL131	F	PTA	PL94	C	R2F	UPLR220	BNC
BCF	BJ79CTL	TRB	PXF	PL150		P5D	PL95	N	RAF	UPLR250	MINI BNC
BCC	BJ79FL	TRB	PDE	PL153	TRS	P5J	PL95C	N	CAG		
BCA	BJ79TL	TRB	PDK	PL153AC	TRS	RDG	PLR155AC		CAH		
BHA	BJ89	TRC	PDB	PL155	TRS	RDH	PLR155ACFL		CAJ		
BHB	BJ893	TRC	PDG	PL155AC	TRS	RDJ	PLR3155AC	TTM	CAL		
AHA	BJ89F	TRC	PDH	PL155ACFL	TRS	RPJ	PLR3455ACP		PBC		
B5D	BJ95	N	PDC	PL155FL	TRS	RSJ	PLR3455ACS	CNTWC	RPR	PLR455ACRP	450
I5D	BJ96	N	KQK	PL1C	RCA	RPX	PLR455ACFLP		RSR	PLR455ACRS	450
CDB	CJ150	TRS	RSQ	PLR455ACPS	450	RPQ	PLR455ACPP	450			
CDG	CJ150AC	TRS	LCC			R9J	PLR130SC		B2J	UBJ250	MINIBNC
			LCP	LOOPING PLUG		RDK	PL3155ACS				

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А