



LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	PRODUCTION RELEASE	05 JUN 2019	JW	SH

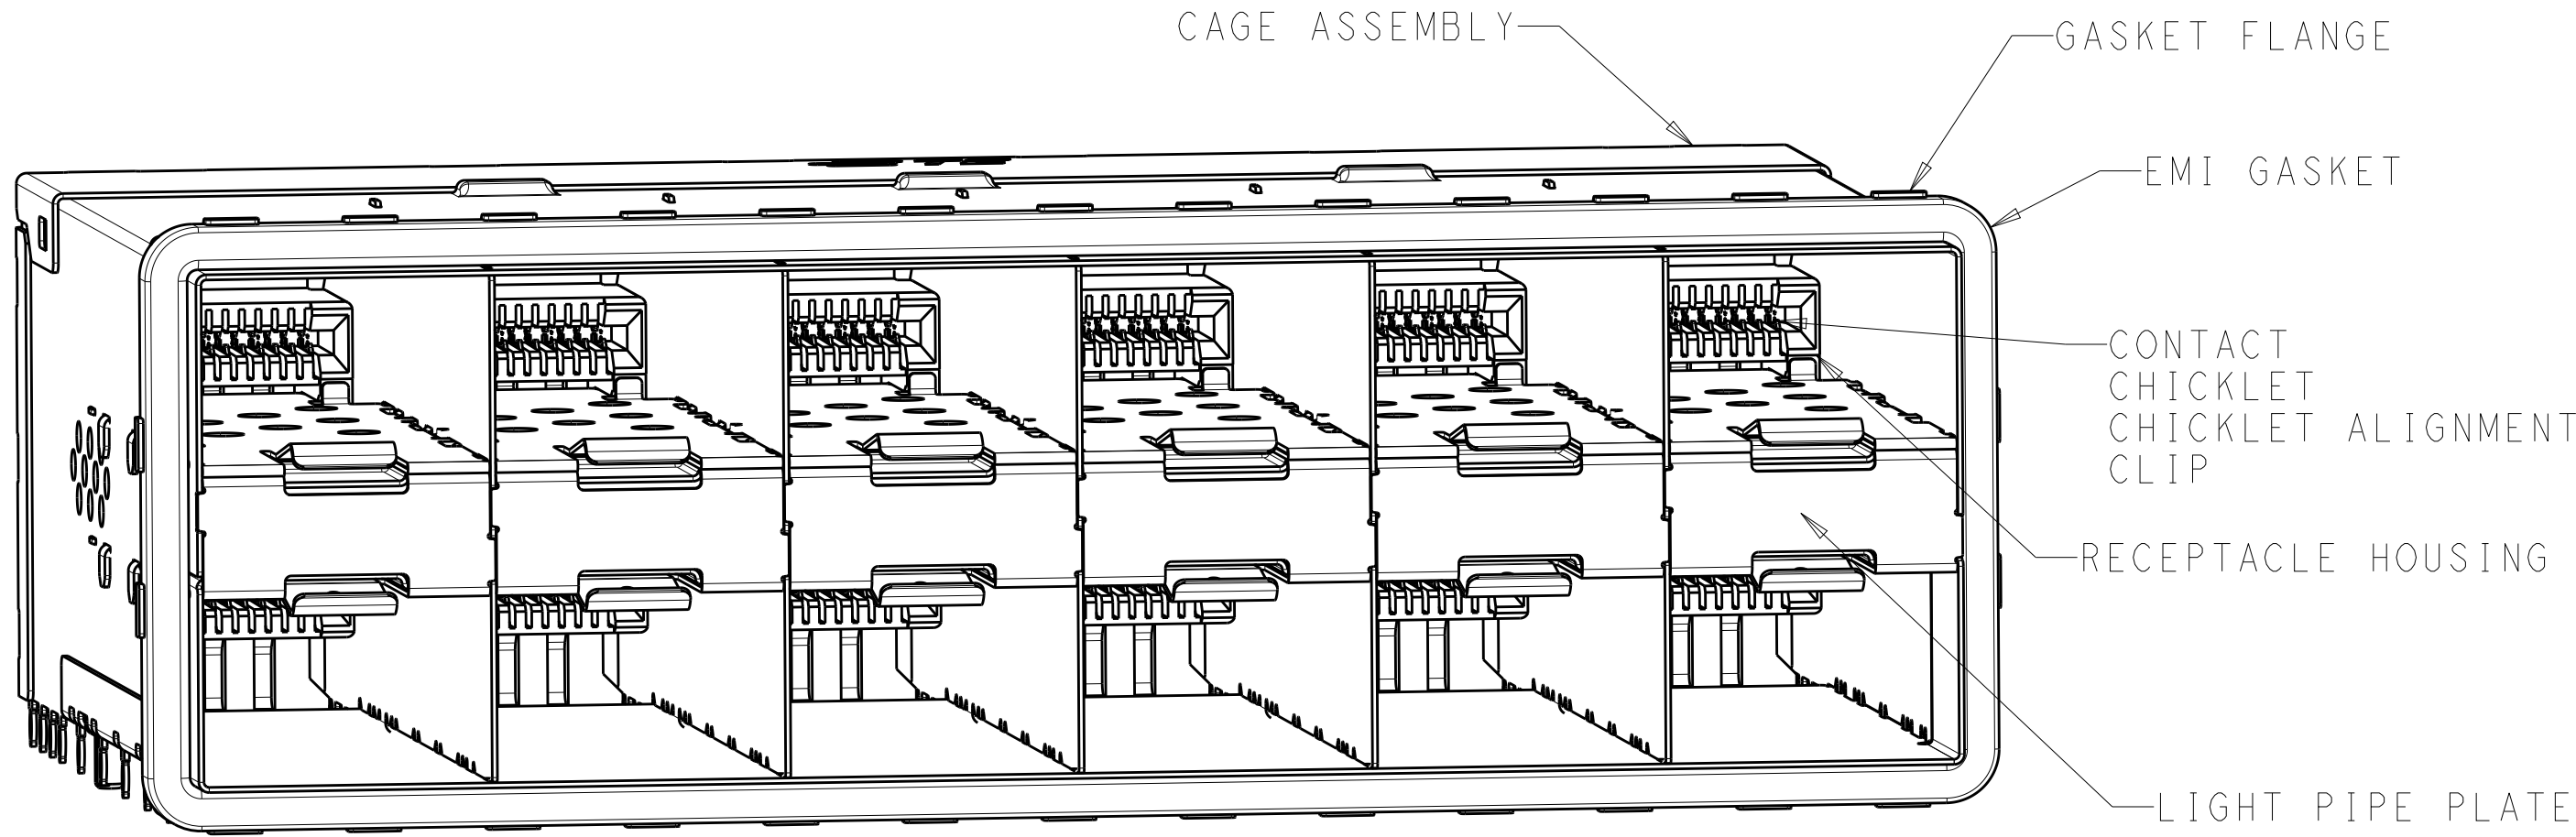

2347721-1
SCALE 3:1



1. MATERIALS:
CAGE ASSEMBLY - NICKEL-SILVER ALLOY PER ASTM B 122
CONNECTOR HOUSING - LCP, BLACK, UL 94V-O RATED
CHICKLET - LCP, BLACK, UL 94V-O RATED
CHICKLET ALIGNMENT CLIP - LCP, BLACK, UL 94V-O RATED
CONTACT - COPPER ALLOY
EMI GASKET - ELASTOMERIC
GASKET FLANGE - STAINLESS STEEL
EMI SPRINGS - PHOSPHOR BRONZE PER ASTM B 103,
0.8µm MIN TIN PER ASTM B 545
LIGHT PIPE - POLYCARBONATE
LIGHT PIPE PLATE- STAINLESS STEEL
2. CONTACT FINISH:
CONFORMS TO THE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2481, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE
3. PCB MINIMUM THICKNESS = 1.5mm

4. FOR HOLE SIZE AND PLATINGS,
SEE APPLICATION SPECIFICATION 114-13319
5. LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE
LED PACKAGE WITH A HEIGHT OF 0.8mm
6. DIMENSIONS APPLY FOR EMI SPRINGS ONLY
7. THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT,
INDICATED BY THE DASHED LINE, TO BE CONSIDERED
THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL
TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED
WITHIN CONNECTOR HOLE PATTERN

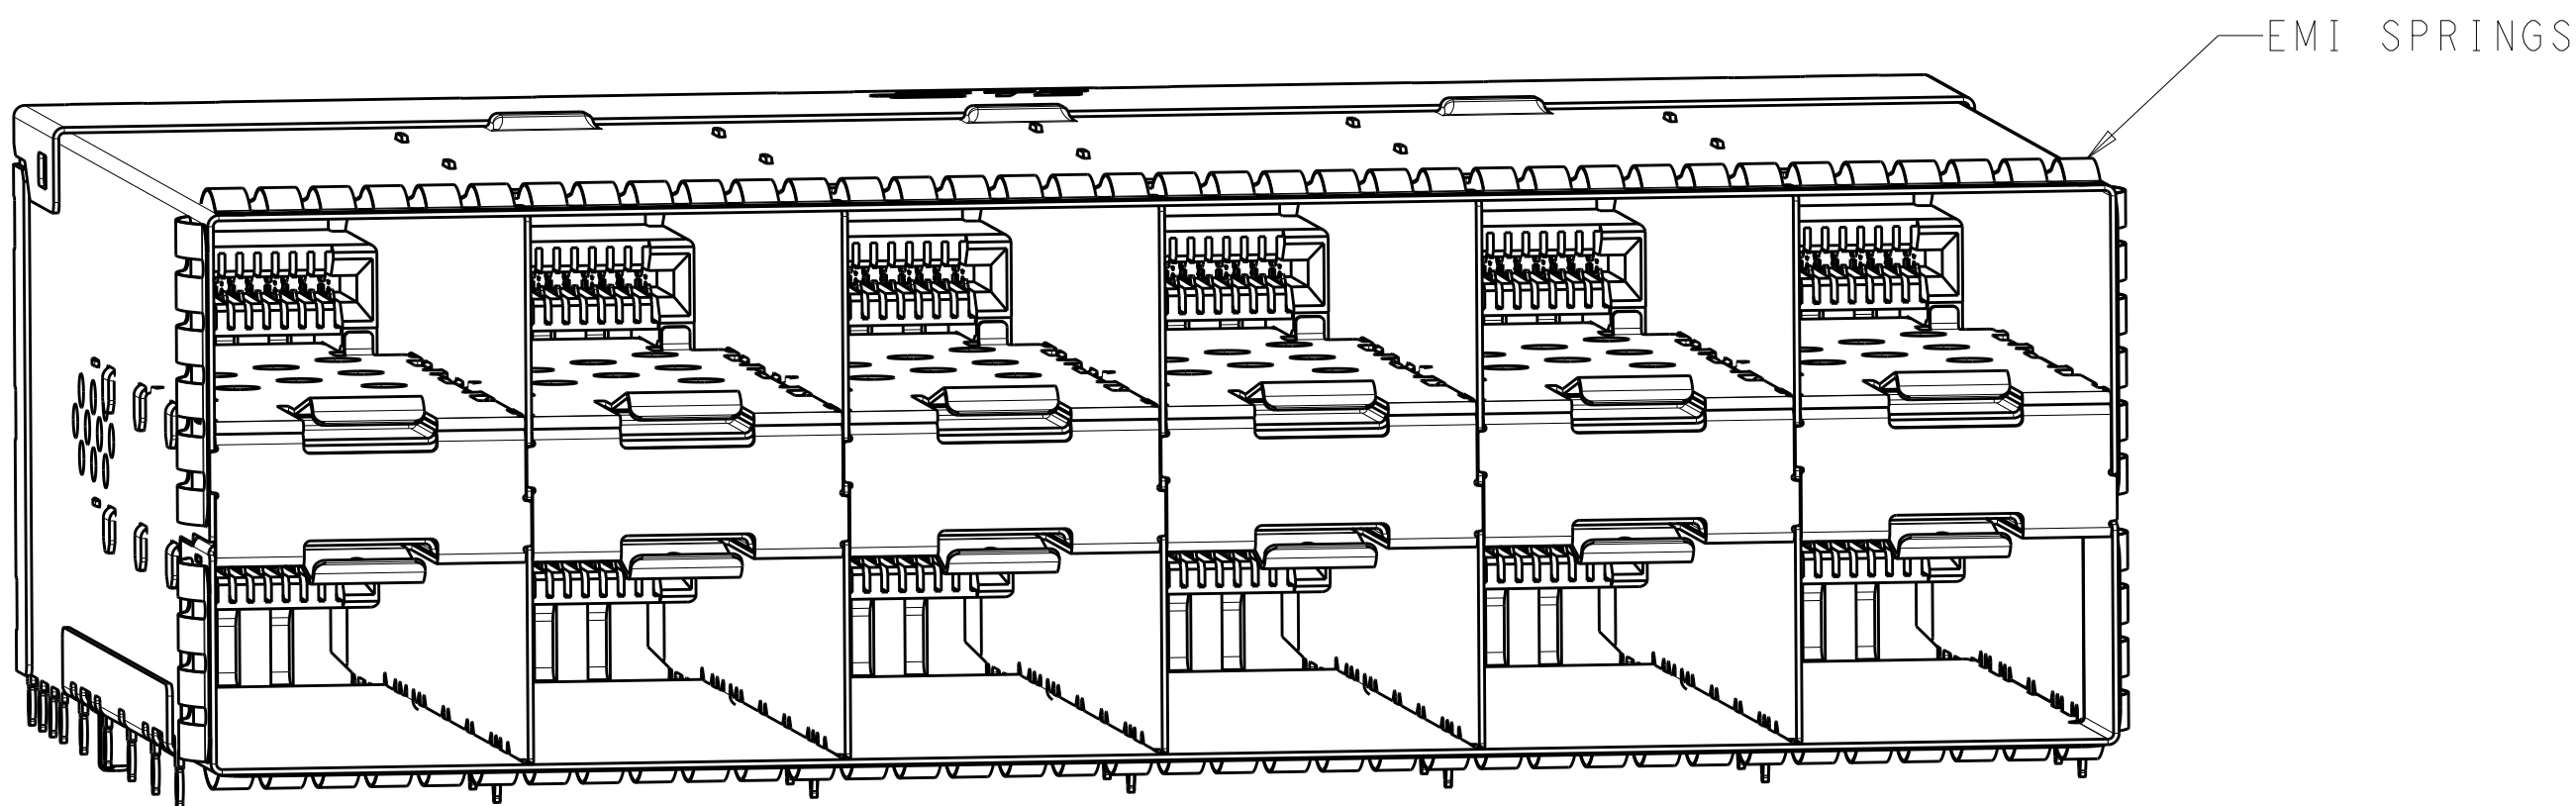


2347721-5
SCALE 3:1


REVERSED INNER LIGHT PIPES
2-2347721-1, 1-2347721-3
SCALE 4:1

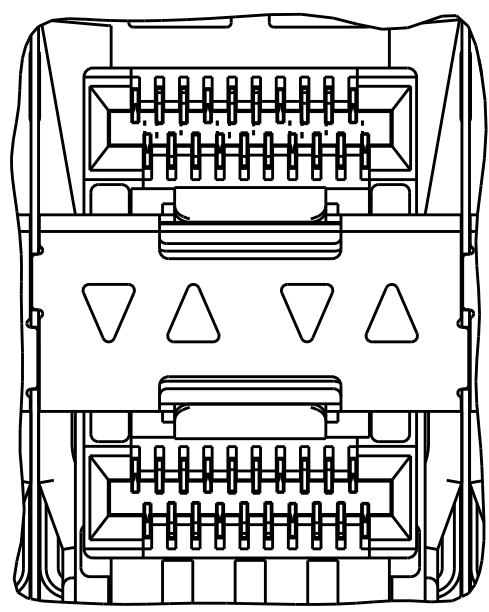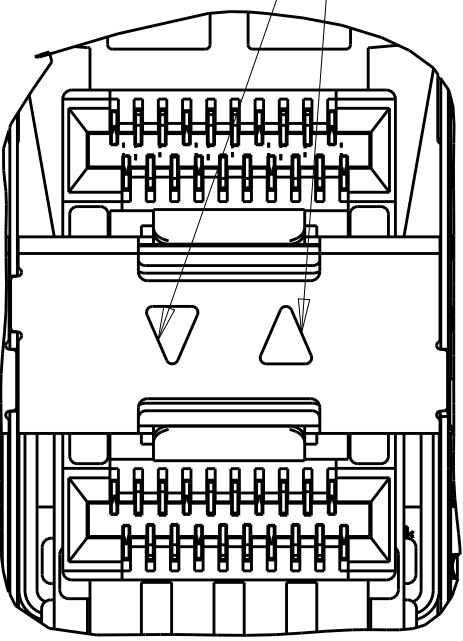


INNER/OUTER LIGHT PIPES
2347721-2, 2347721-6
SCALE 4:1

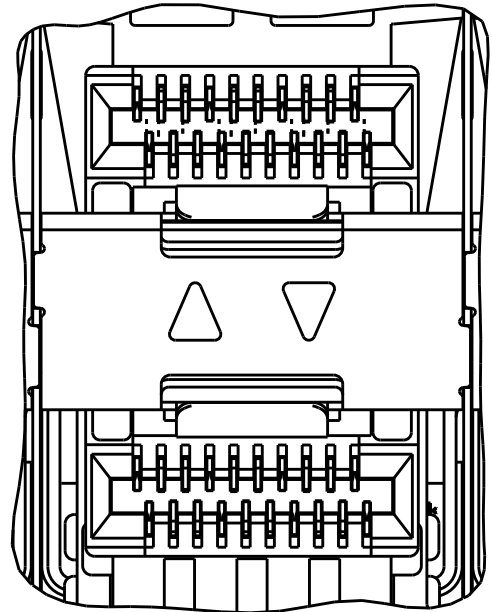


INNER LIGHT PIPES
2347721-3, 2347721-7
SCALE 4:1

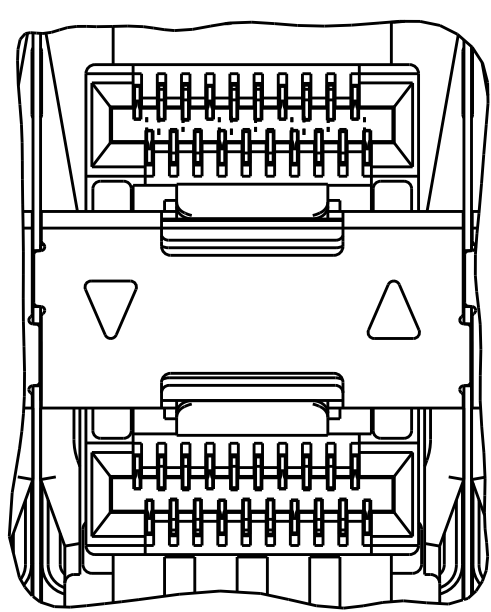

OUTER LIGHT PIPES
2347721-4, 2347721-8
SCALE 4:1

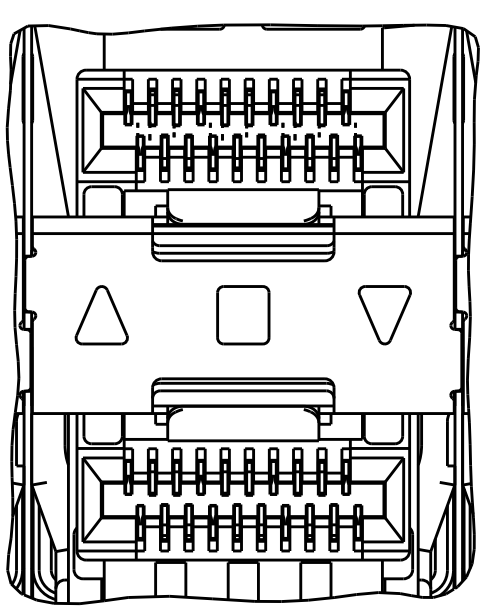

CENTER/REVERSED OUTER
1-2347721-7, 1-2347721-9
SCALE 4:1

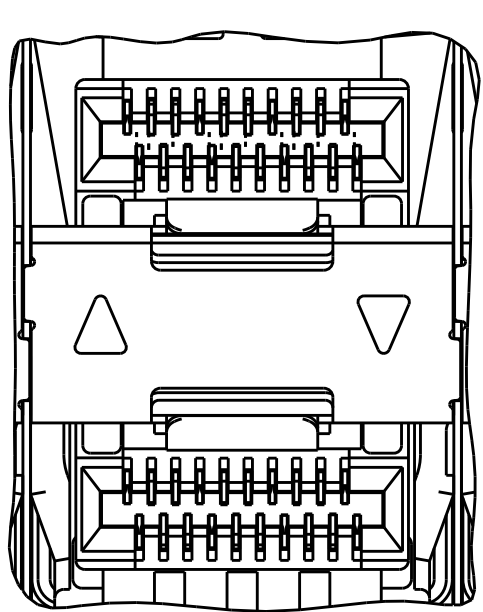


REVERSED OUTER
1-2347721-8, 2-2347721-0
SCALE 4:1

88	EMI SPRING AIRFLOW ENHANCE TYPE	NONE	3-2347721-1
90.75	EMI GASKET AIRFLOW ENHANCE TYPE	NONE	3-2347721-0
88	EMI SPRINGS	REVERSED INNER	2-2347721-1
		REVERSED OUTER	2-2347721-0
		CENTER/REVERSED OUTER	1-2347721-9
90.75	EMI GASKET	REVERSED OUTER	1-2347721-8
		CENTER/REVERSED OUTER	1-2347721-7
88	EMI SPRINGS WITH NICKEL PLATING ONLY	REVERSED INNER	1-2347721-3
		OUTER	1-2347721-2
		INNER	1-2347721-1
		INNER/OUTER	1-2347721-0
88	EMI SPRINGS	NONE	2347721-9
		OUTER	2347721-8
		INNER	2347721-7
		INNER/OUTER	2347721-6
90.75	EMI GASKET	NONE	2347721-5
		OUTER	2347721-4
		INNER	2347721-3
		INNER/OUTER	2347721-2
(E)	CAGE TYPE	NONE	2347721-1
		LIGHT PIPE CONFIGURATION	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG 26FEB2019	 TE Connectivity	
DIMENSIONS:		CHK S. HAN 26FEB2019		
mm		APVD S. HAN 26FEB2019	NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56	
		PRODUCT SPEC		SIZE A1
		108-2481		
		APPLICATION SPEC		CAGE CODE 00779
		114-13319		
MATERIAL SEE NOTES		WEIGHT -	DRAWING NO 2347721	
		CUSTOMER DRAWING		RESTRICTED TO -
		SCALE 4:1		SHEET 1 OF 6
				REV A

LOC		DIST		REVISIONS				
GP		00		P	LTR	DESCRIPTION		DATE
				-		SEE SHEET 1		-
								-
								-
								-


AIRFOLW ENHANCE TYPE

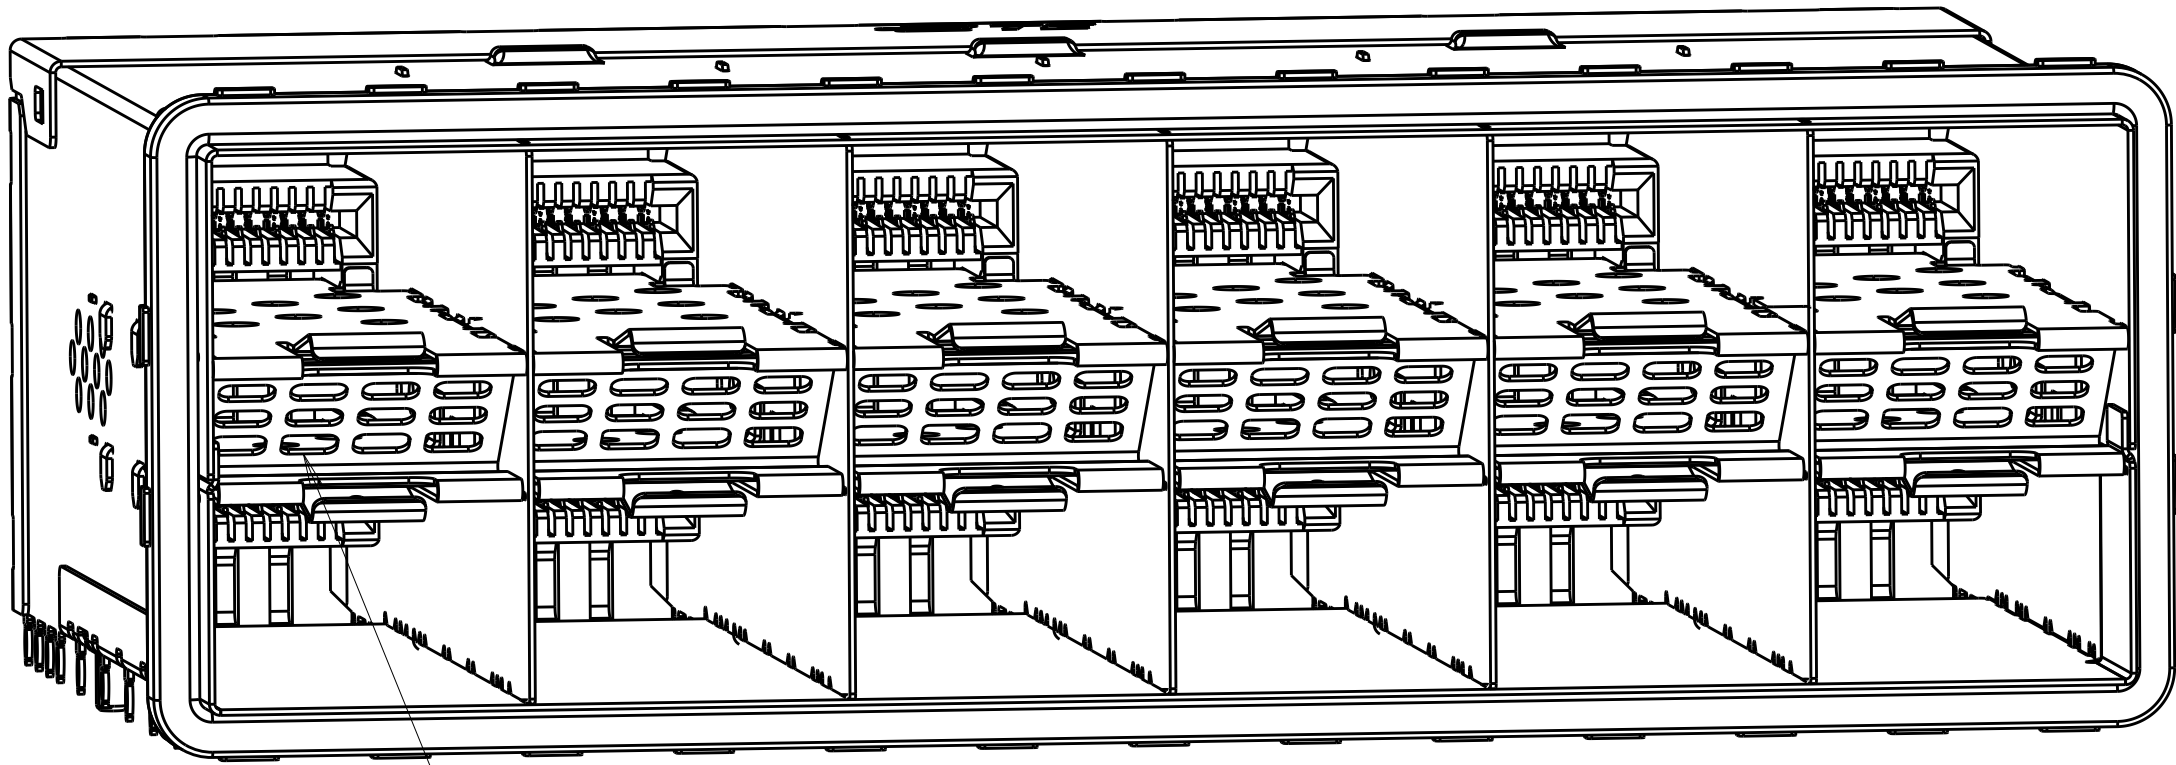

AIR VENTS

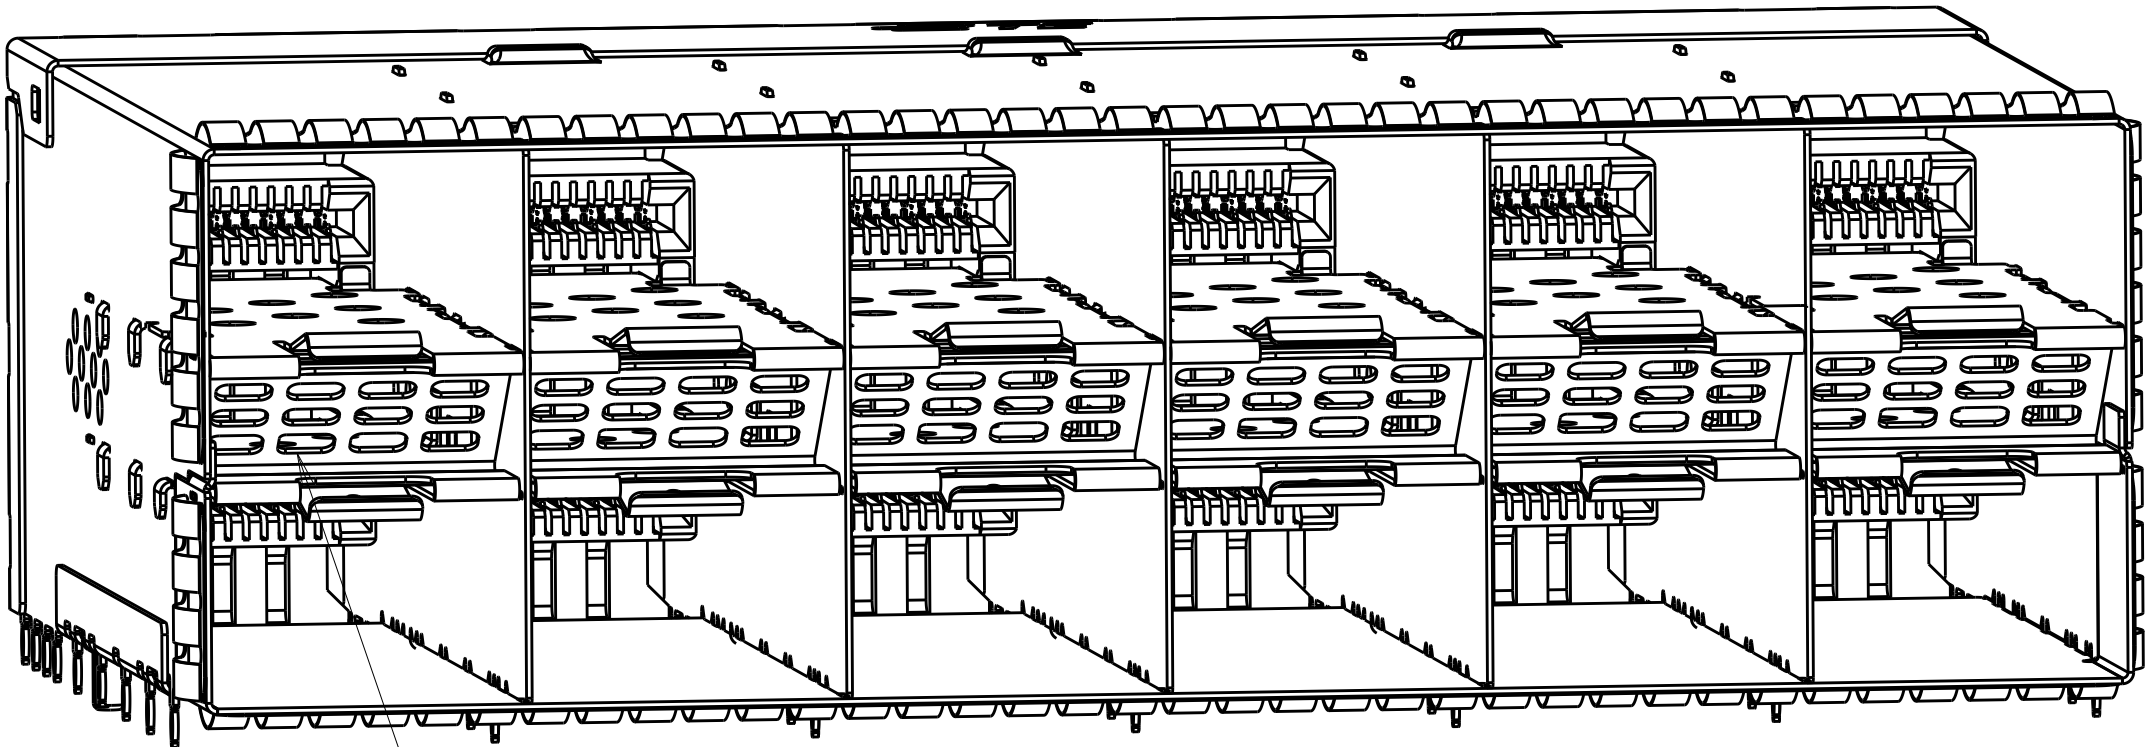


AIR VENTS

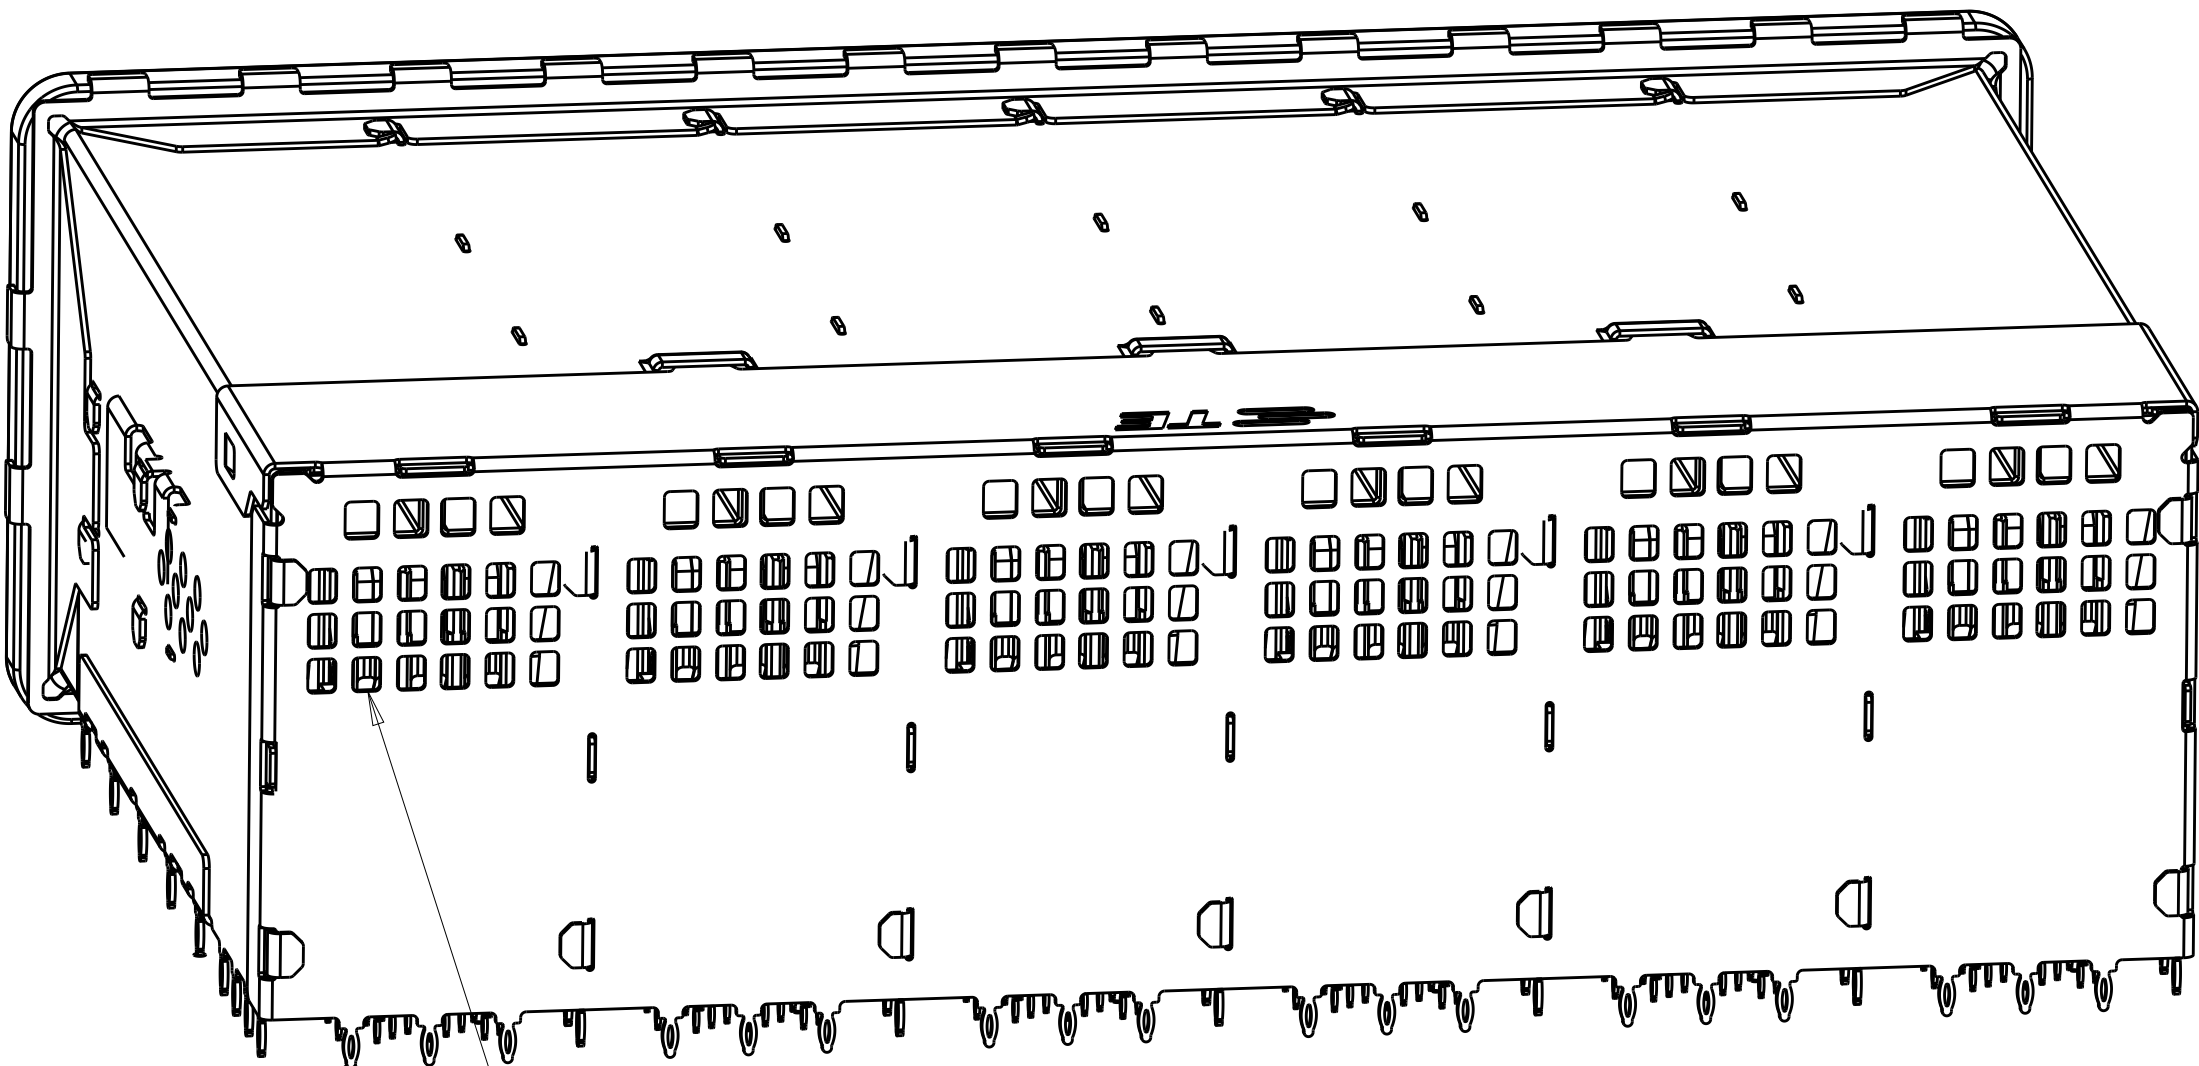


AIR VENTS

3-2347721-0
EMI GASKET TYPE


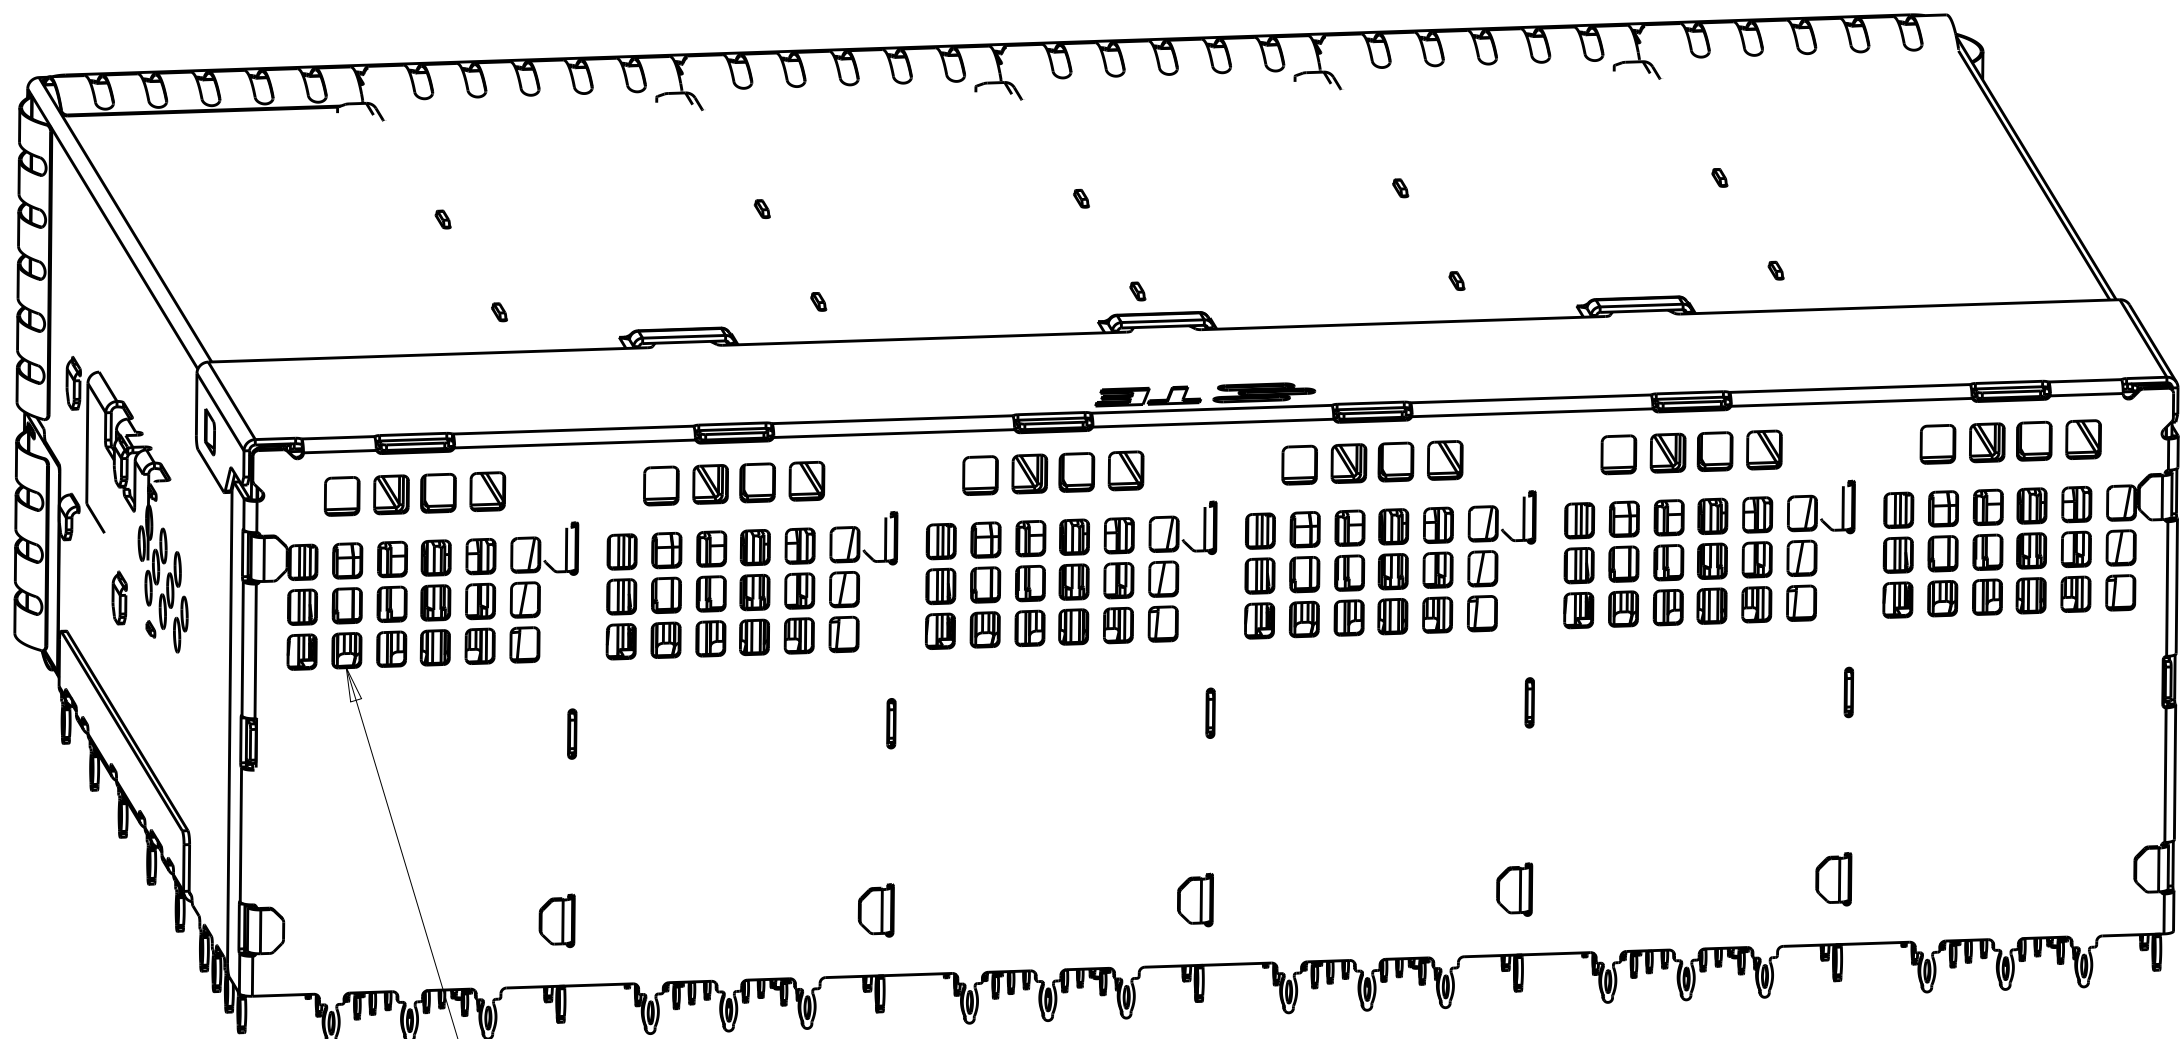


AIR VENTS



3-2347721-1
EMI SPRING TYPE


THIS DRAWING IS A CONTROLLED DOCUMENT.				OWN	J. WANG	26FEB2019	 TE Connectivity				
				CHK	S. HAN	26FEB2019					
				APVD	S. HAN	26FEB2019					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56					
mm		0 PLC ±0.25		PRODUCT SPEC		108-2481					
		1 PLC ±0.25		APPLICATION SPEC		114-13319					
		2 PLC ±0.25		WEIGHT		-					
		3 PLC ±0.25		CUSTOMER DRAWING		SCALE 1:1					
		4 PLC ±0.25				SHEET 2 OF 6					
ANGLES ±°		FINISH				REV A					
MATERIAL		SEE NOTES									

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-



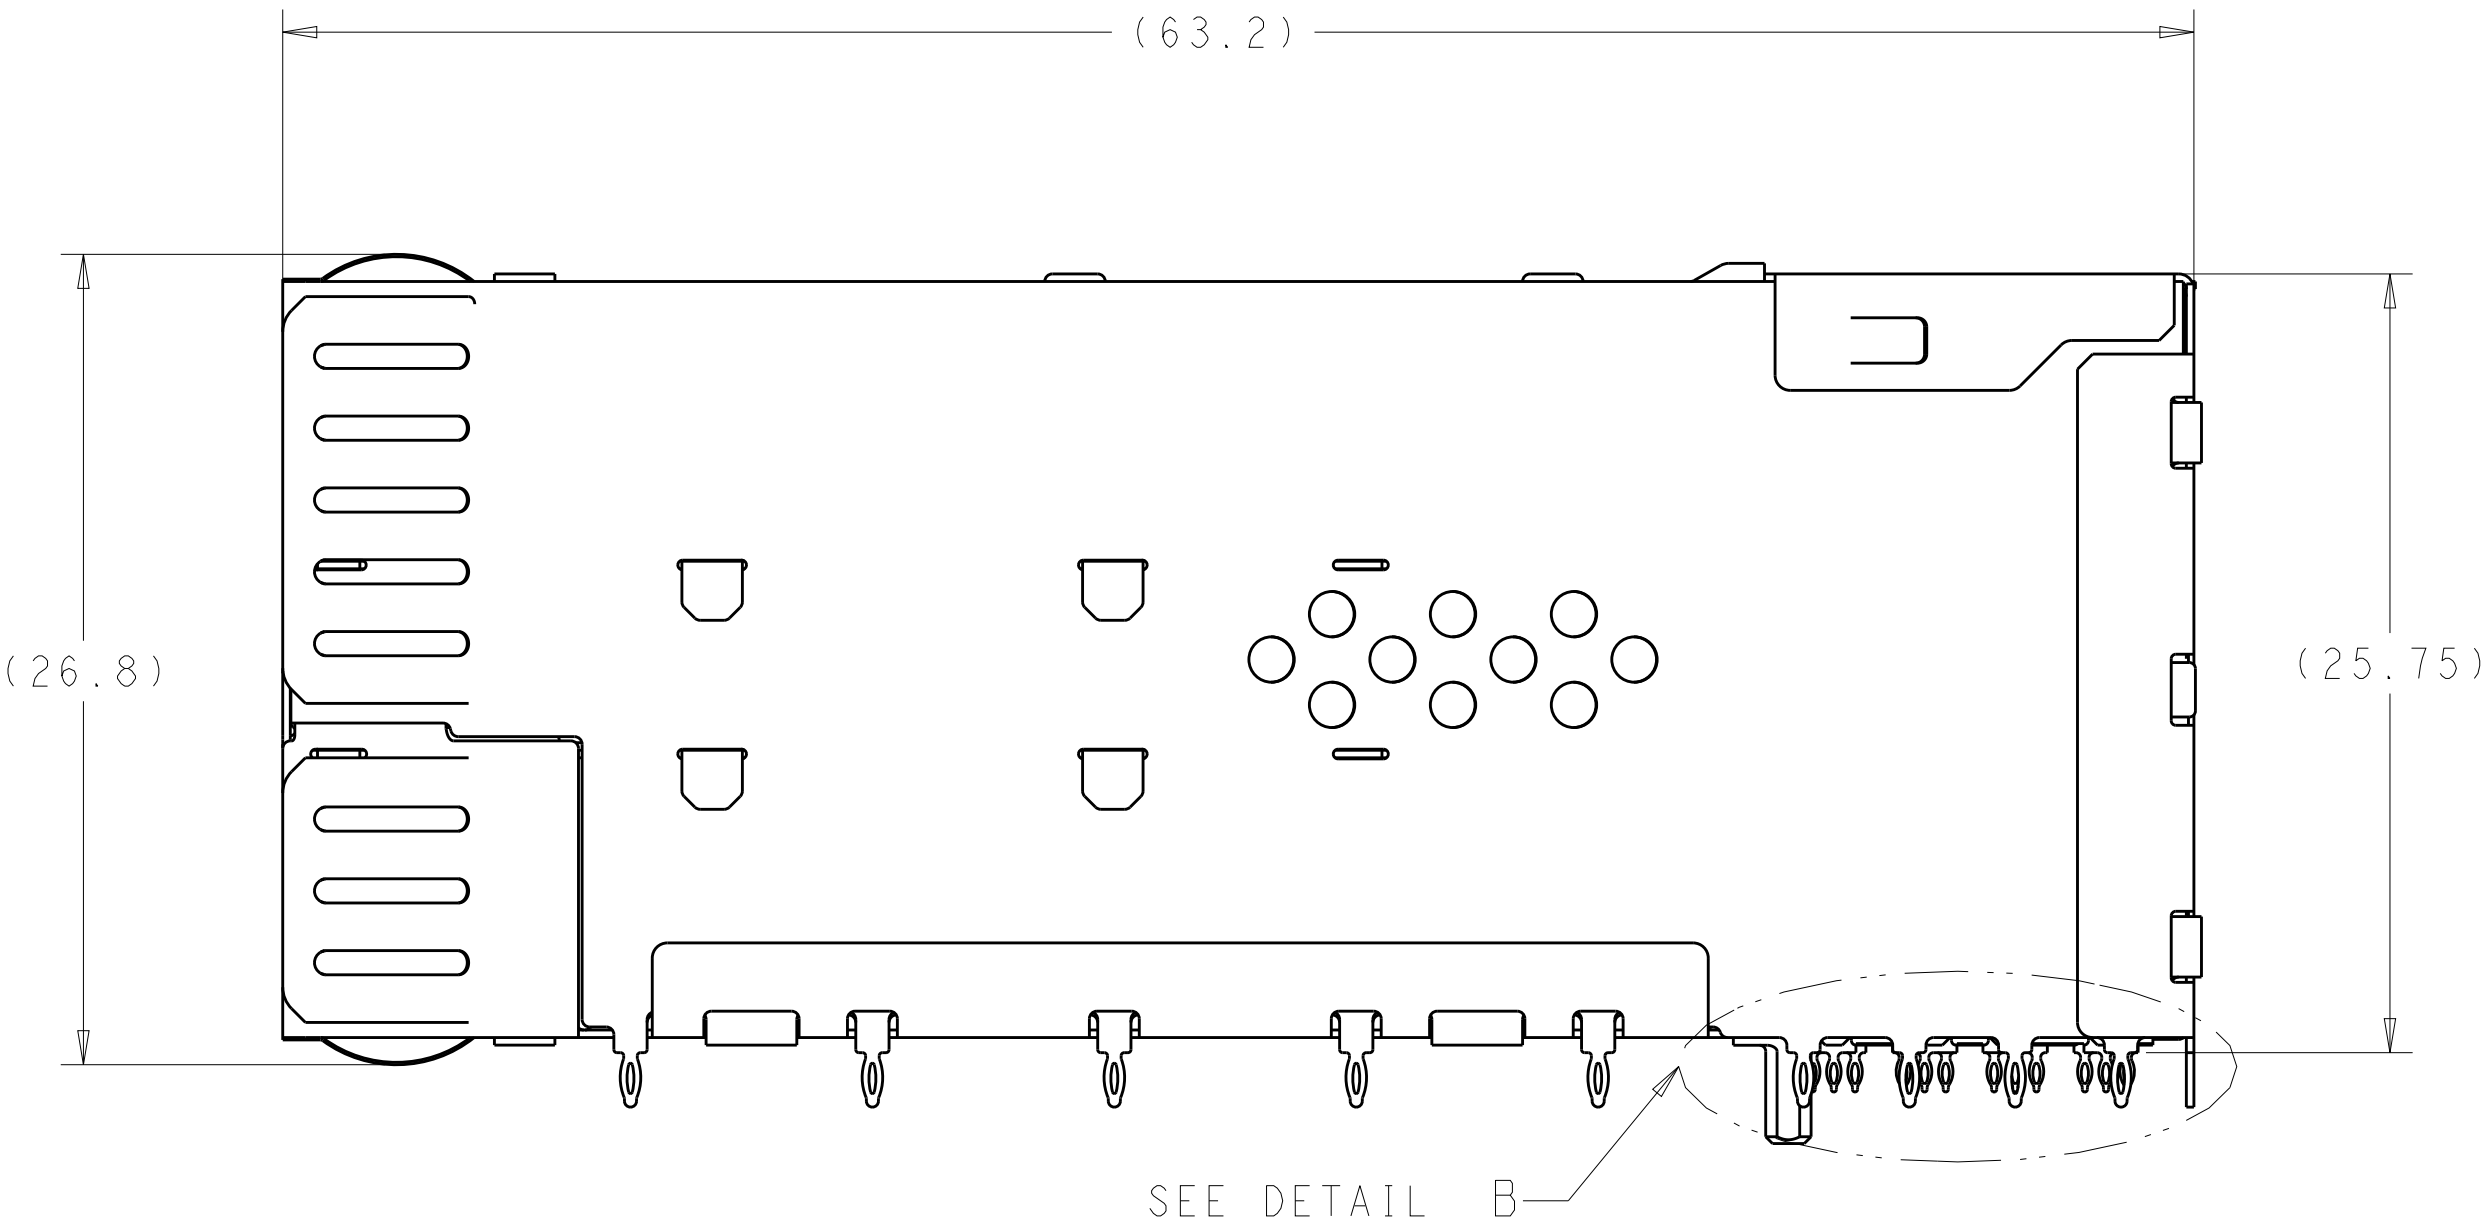
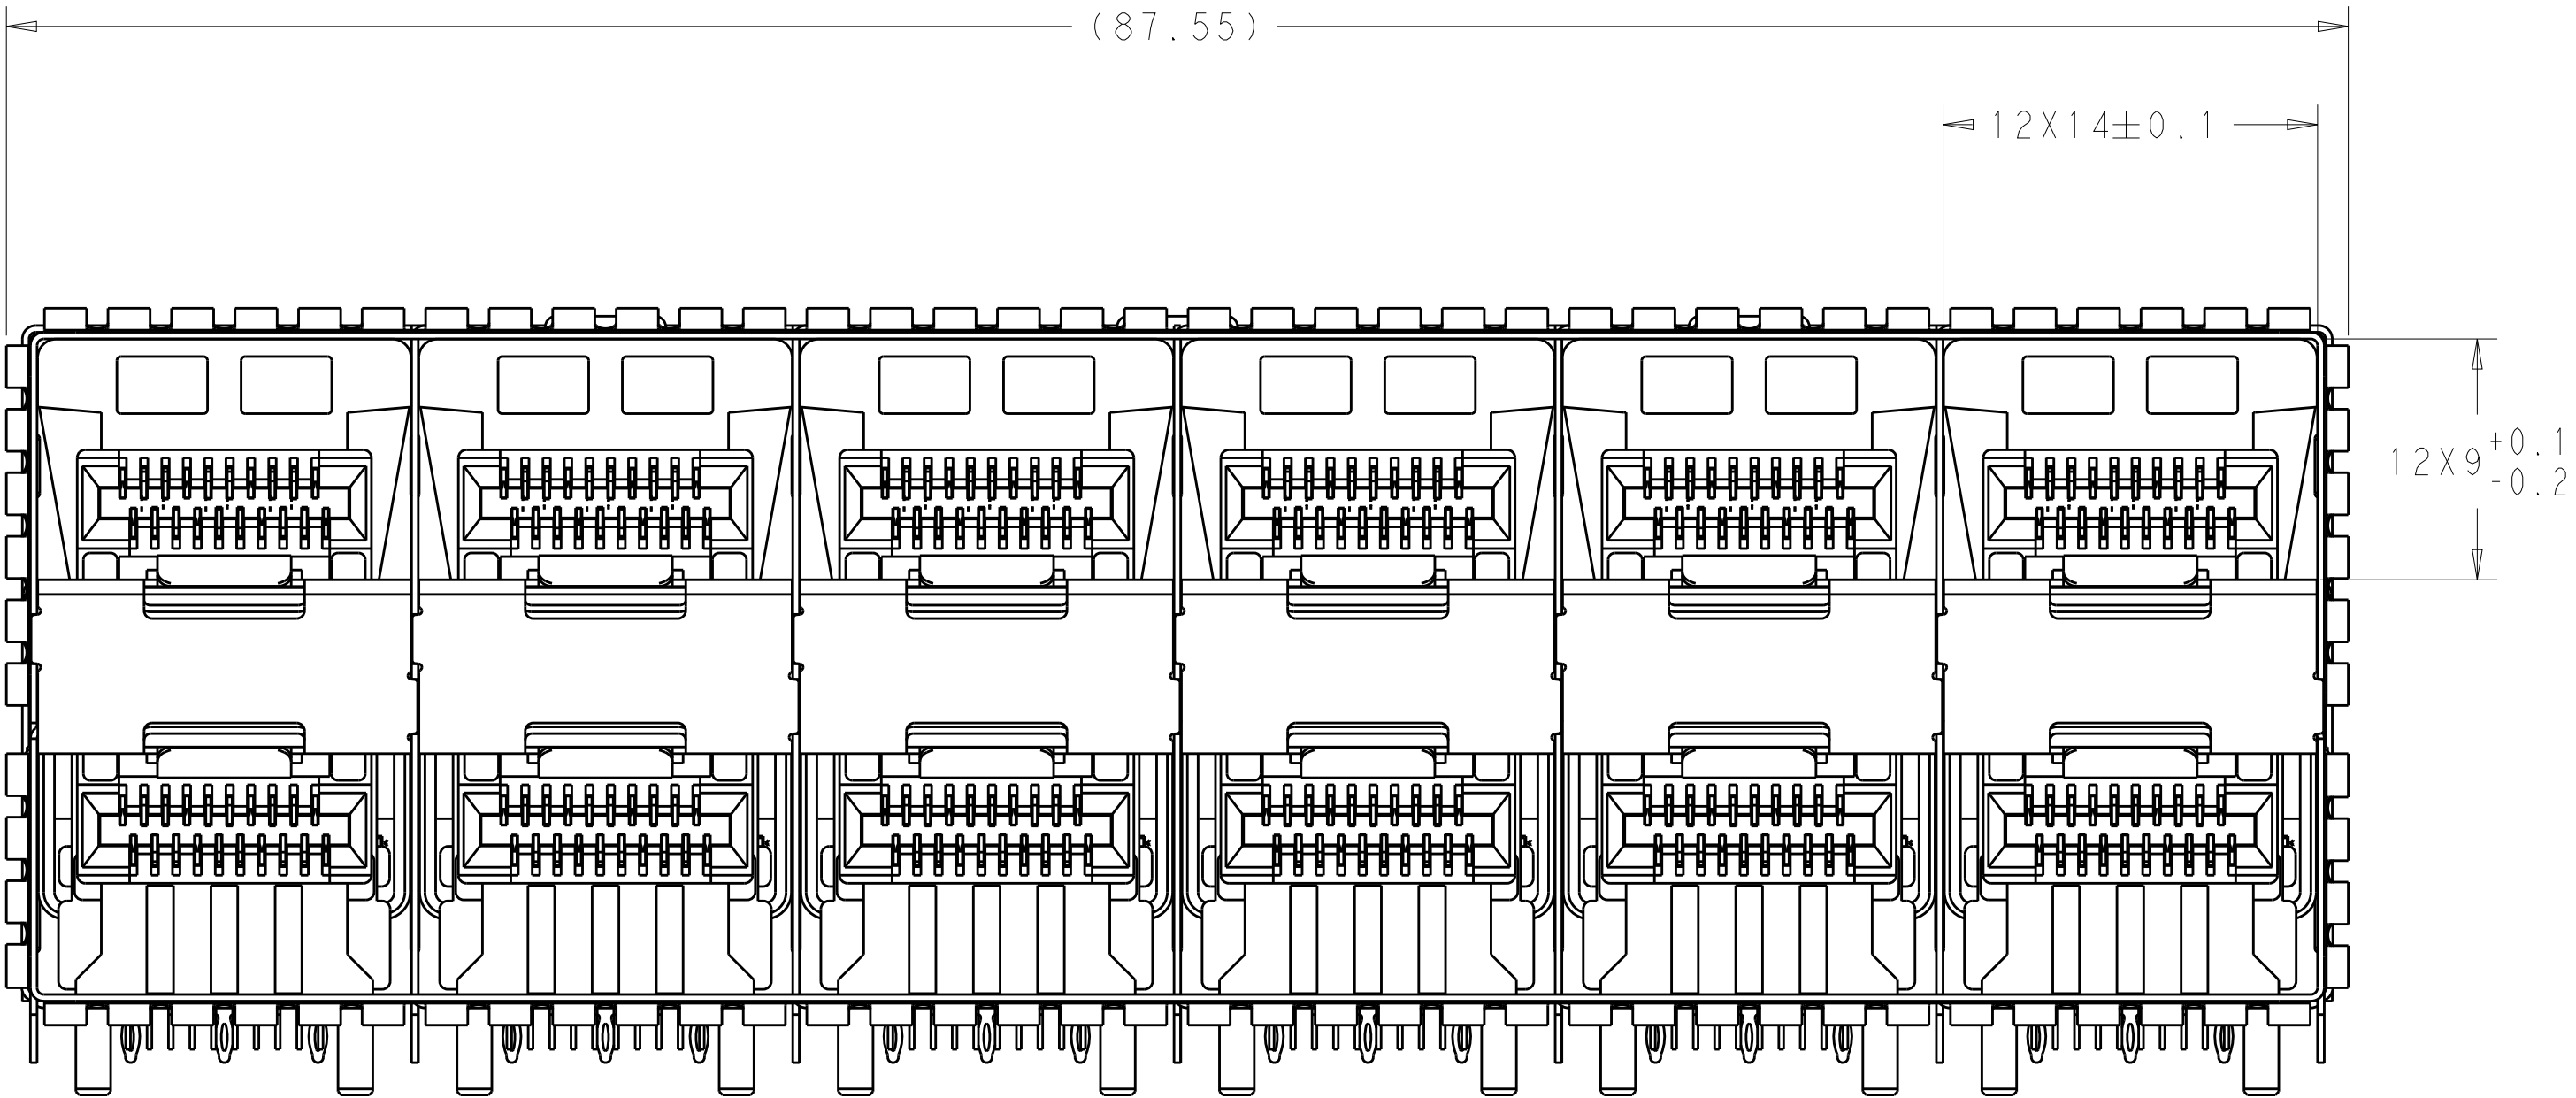


2347721-5 THRU 1-2347721-2, 1-2347721-9, 2-2347721-0,2-2347721-1
EMI SPRINGS ONLY
SCALE 4:1

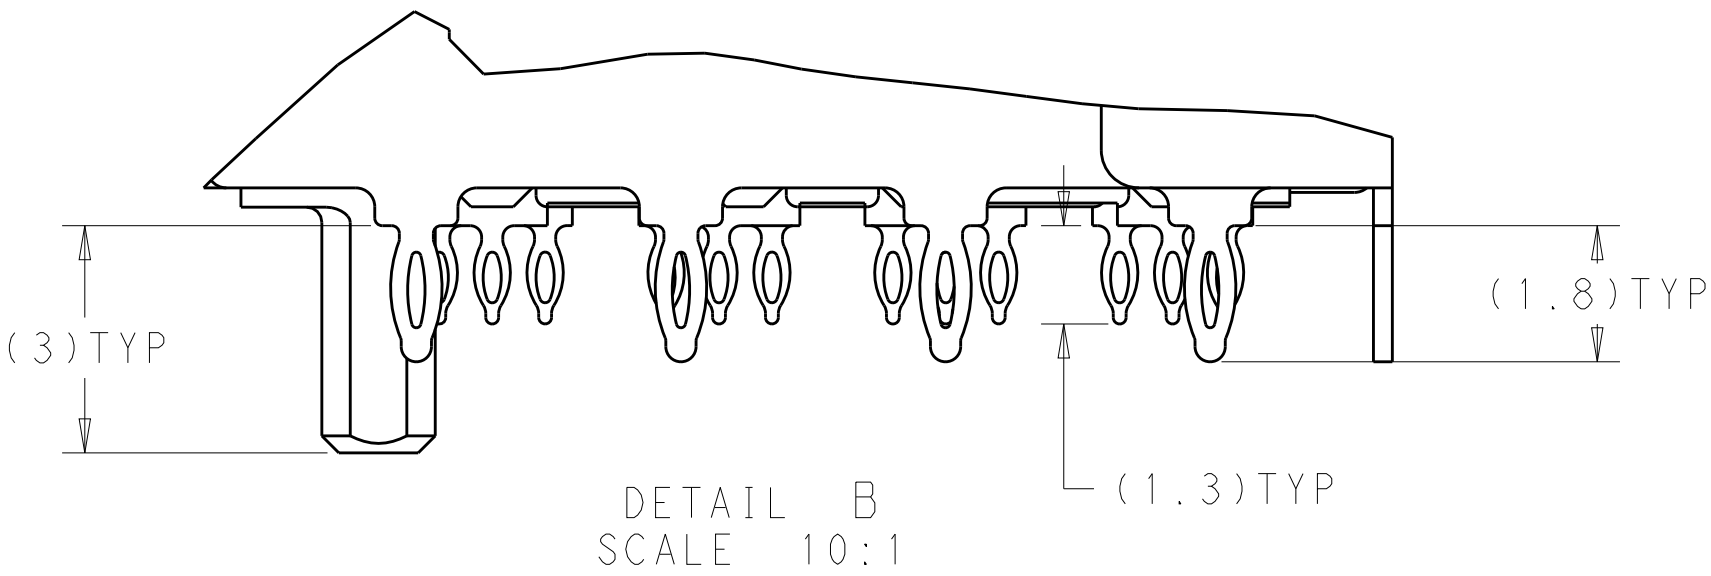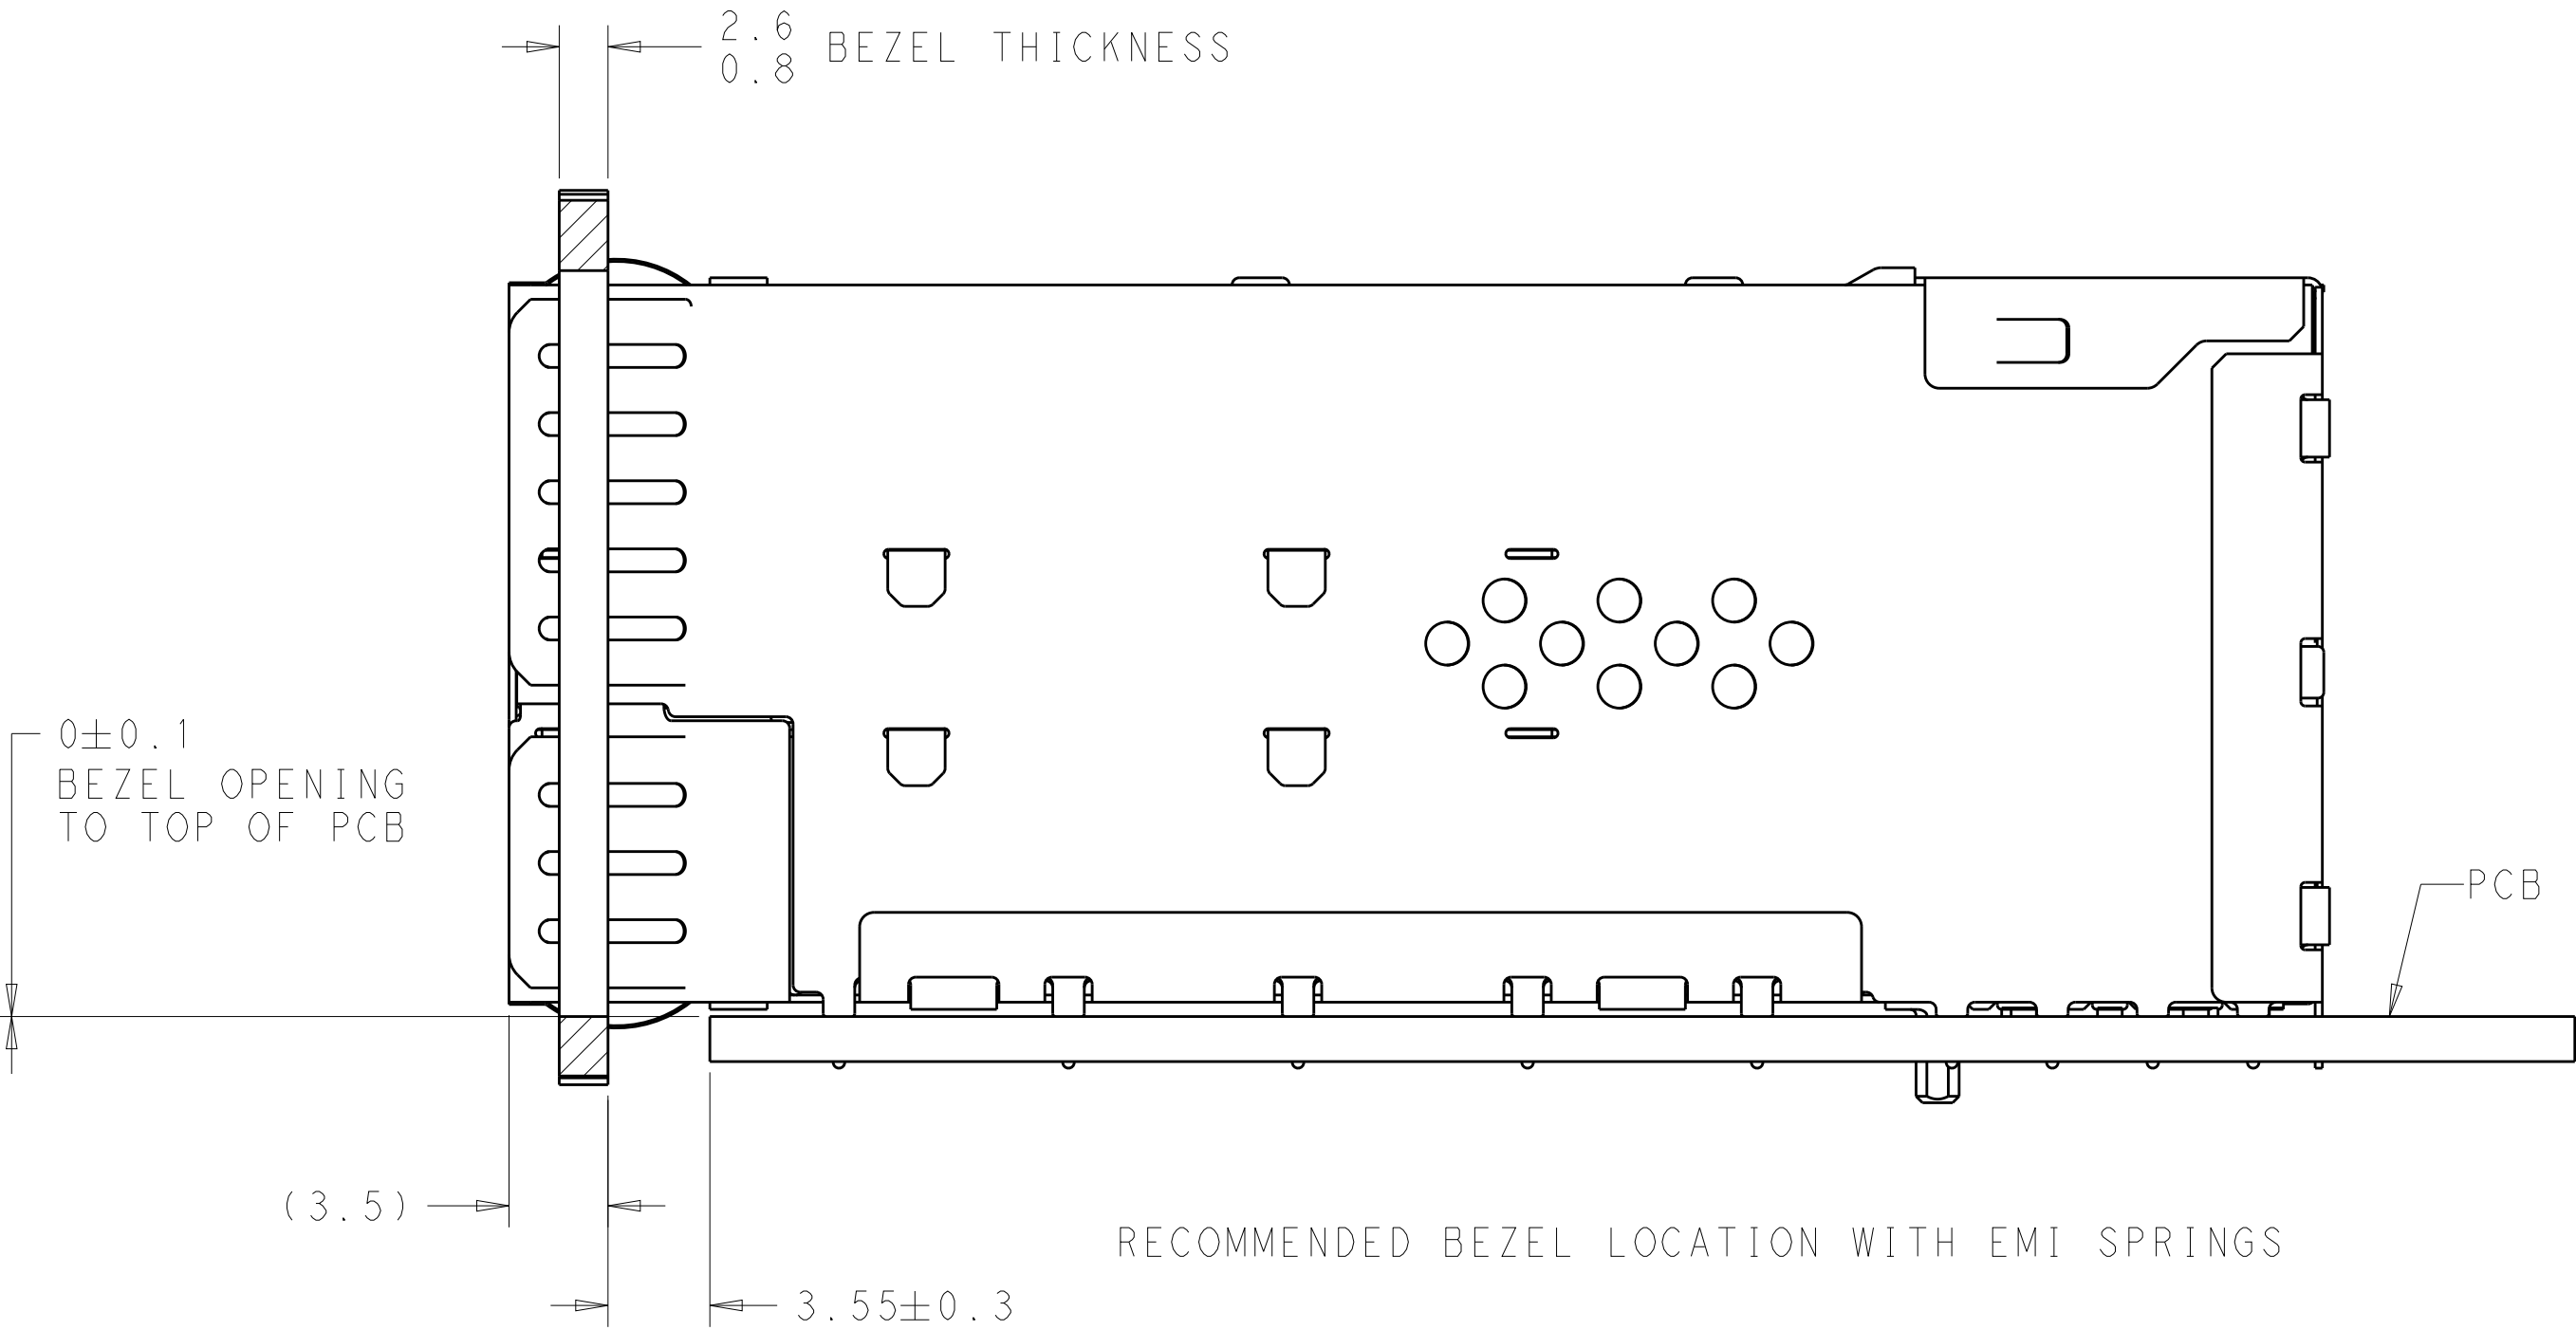


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG 26FEB2019	 TE Connectivity	
		CHK S. HAN 26FEB2019		
DIMENSIONS:		APVD S. HAN 26FEB2019	NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56	
mm		PRODUCT SPEC 108-2481		
		APPLICATION SPEC 114-13319	SIZE CAGE CODE DRAWING NO. A100779C=2347721	
		ANGLES FINISH SEE NOTES		
MATERIAL SEE NOTES		WEIGHT -	RESTRICTED TO -	
		CUSTOMER DRAWING	SCALE 1:1 SHEET 3 OF 6 REV A	

LOC		DIST		REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD		
		-		SEE SHEET 1	-	-	-		

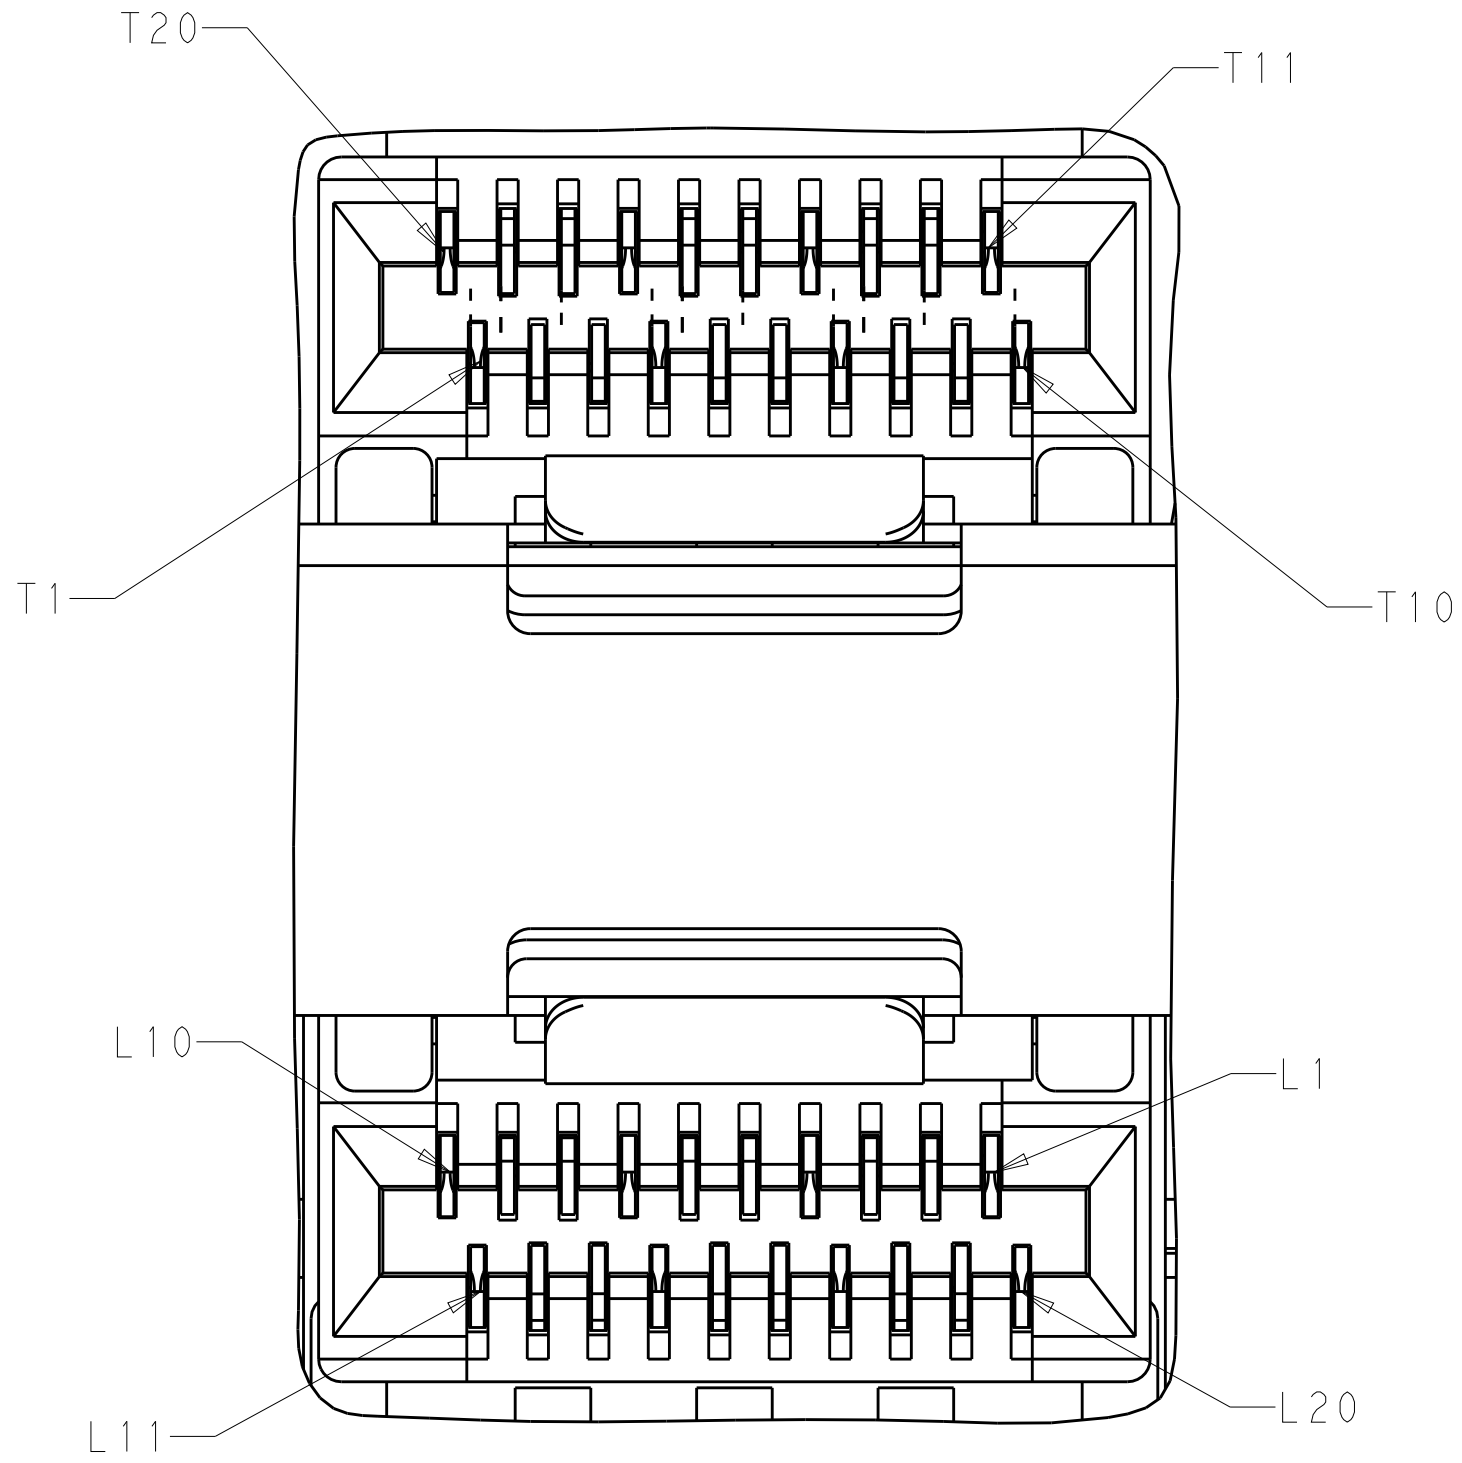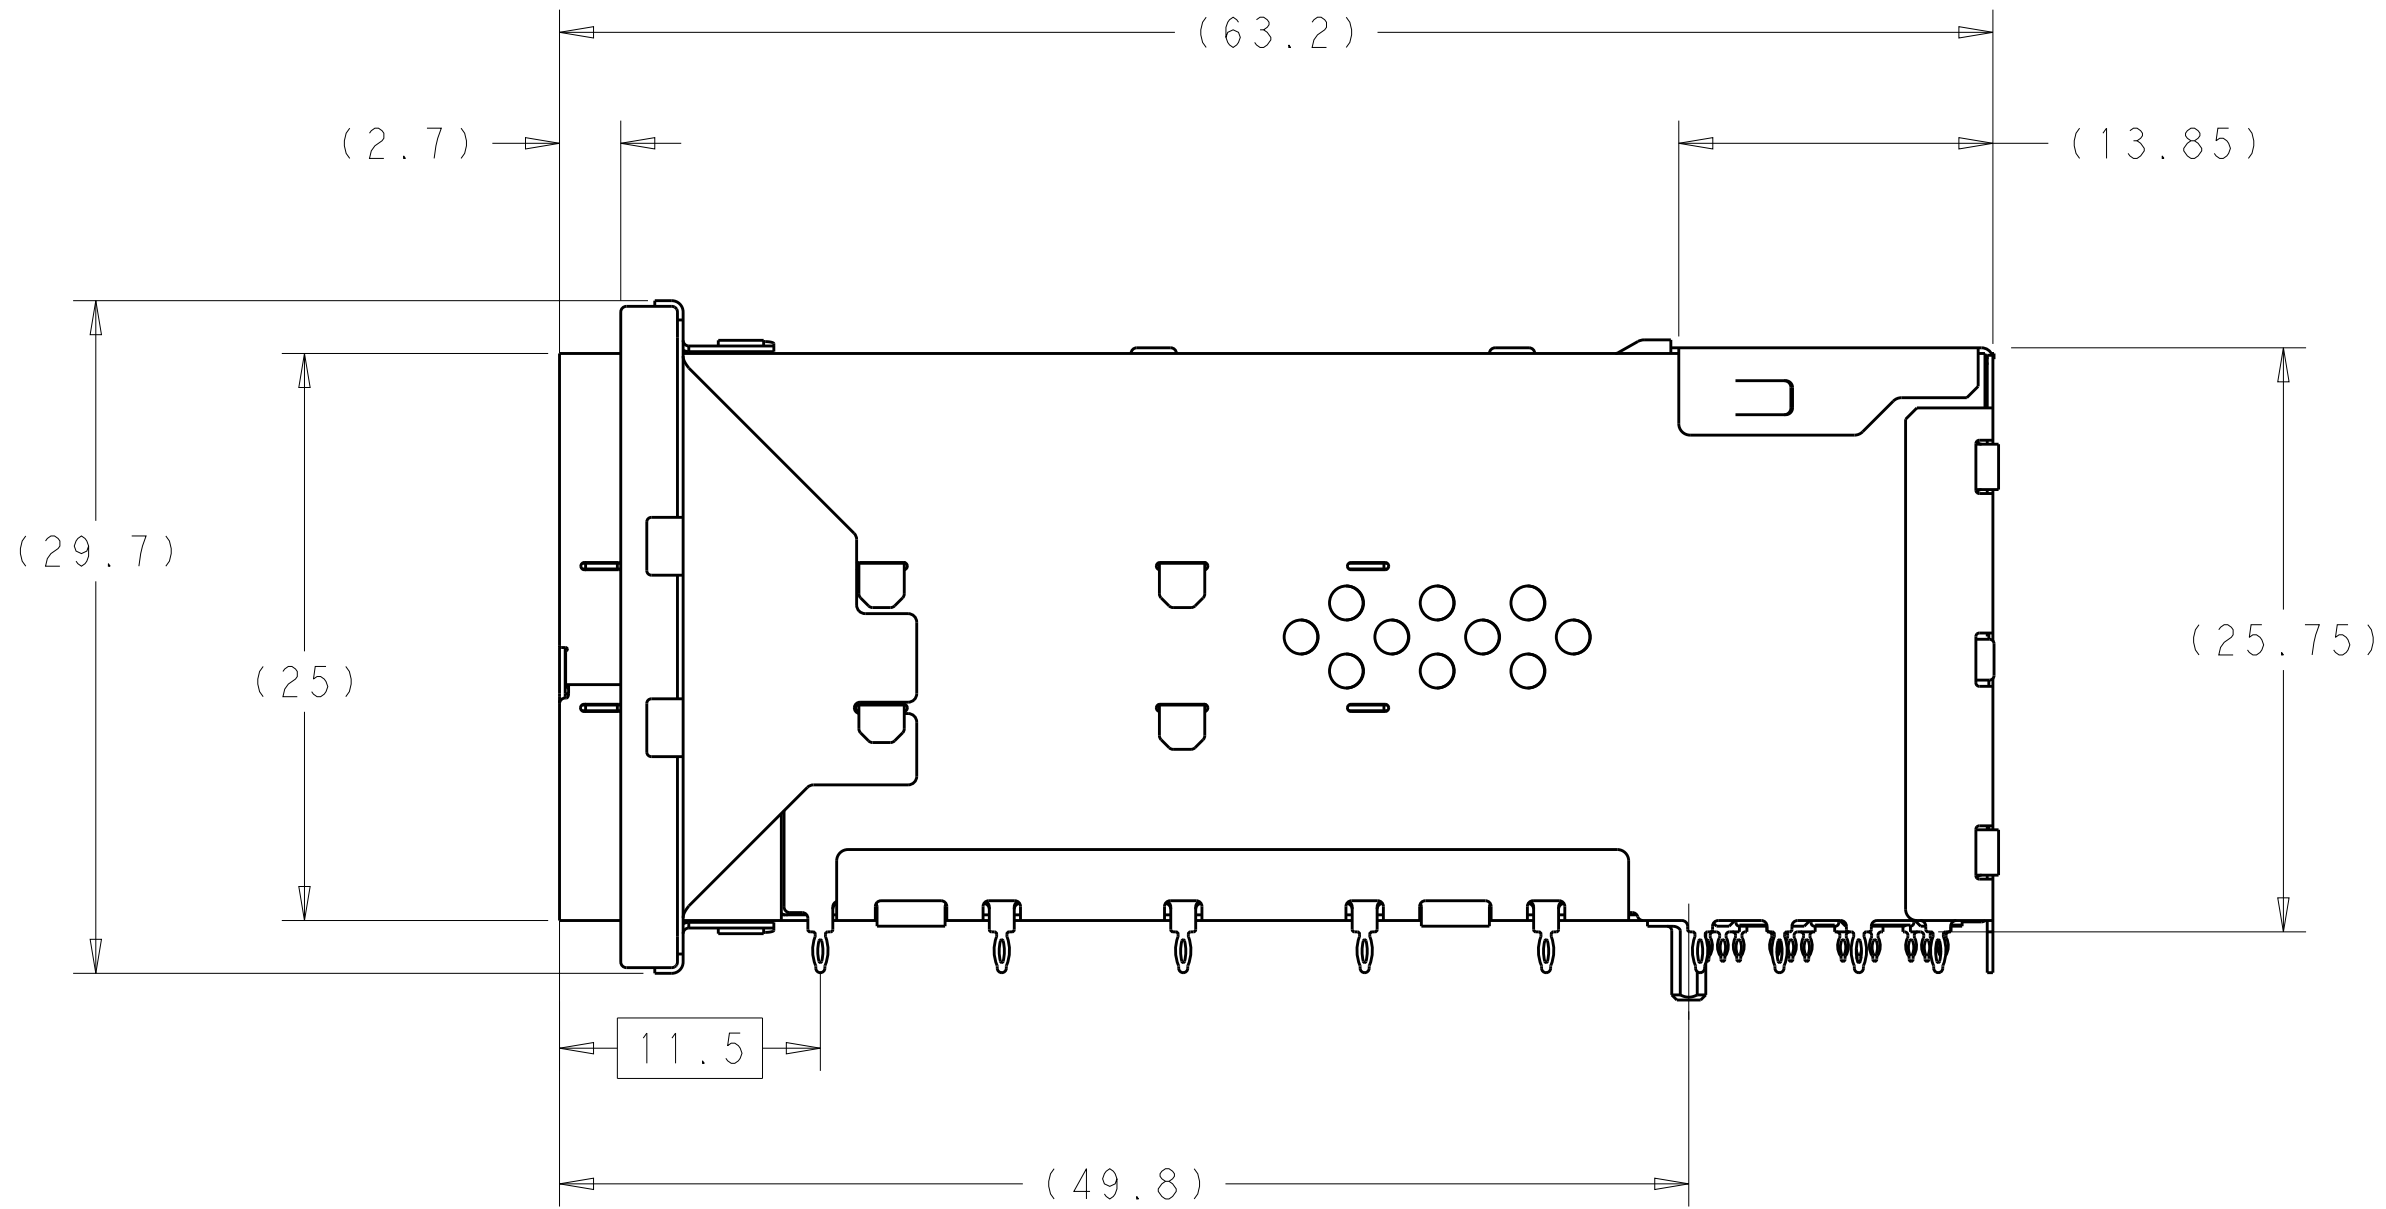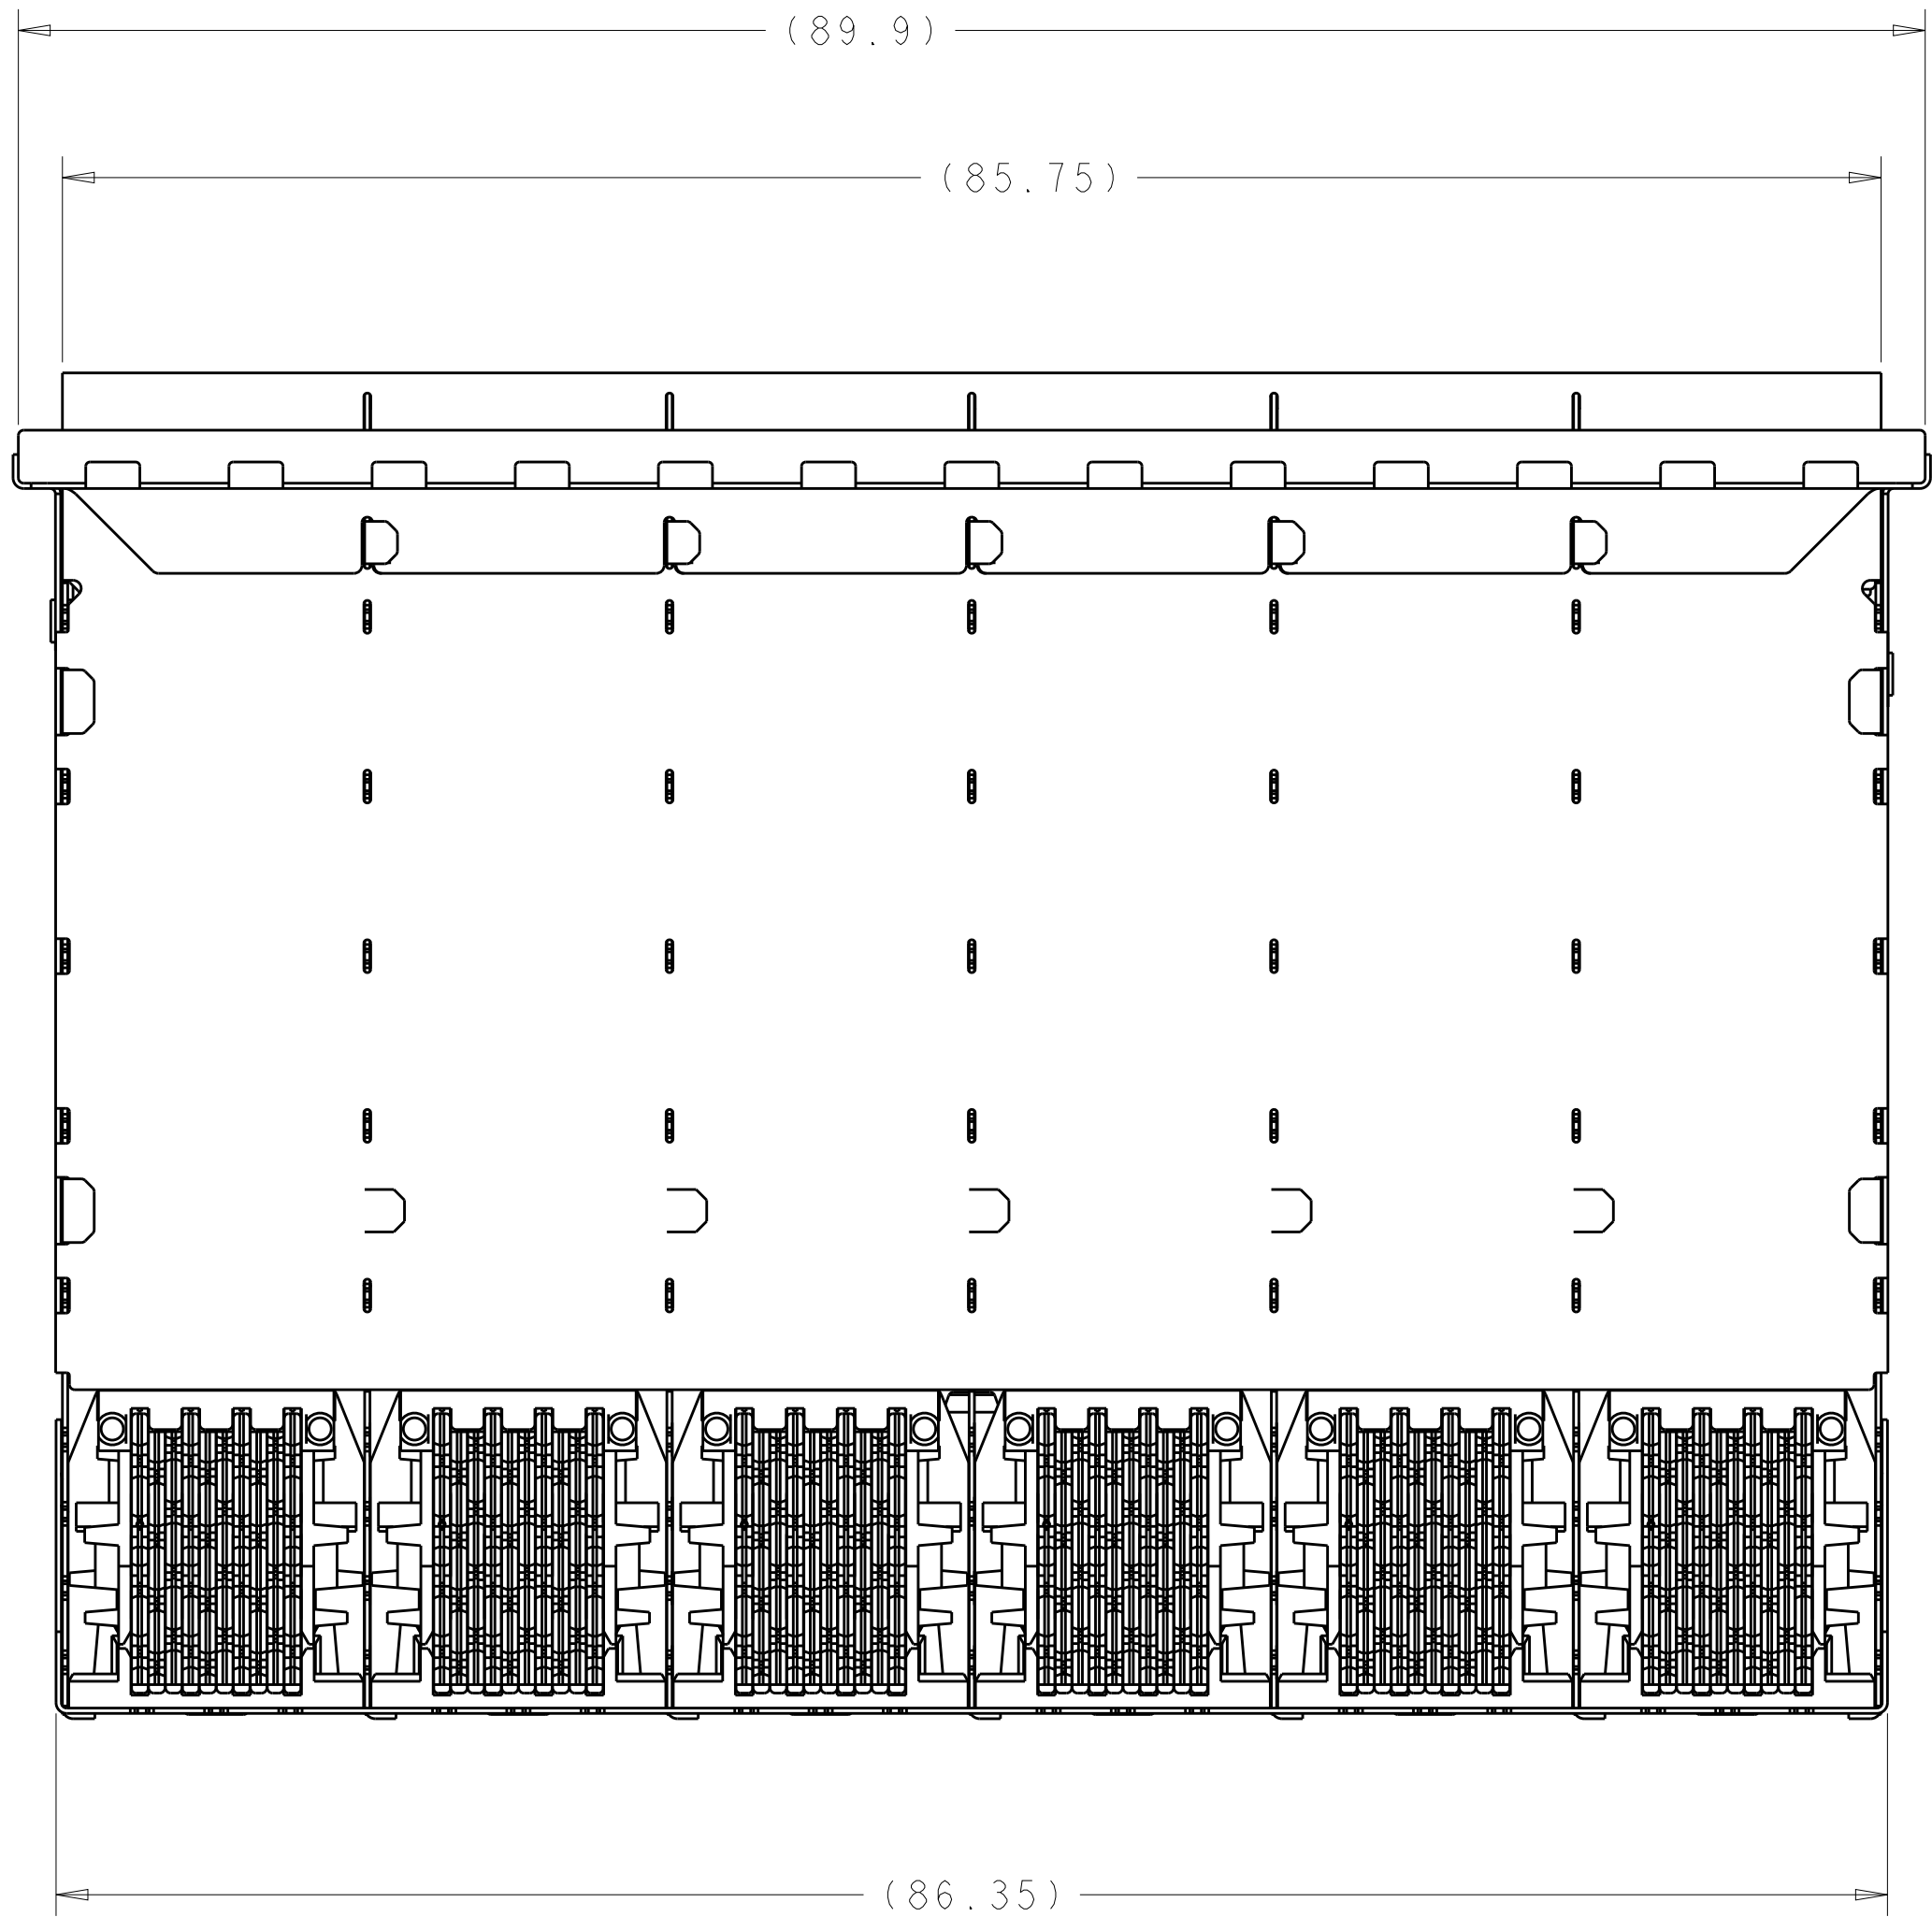
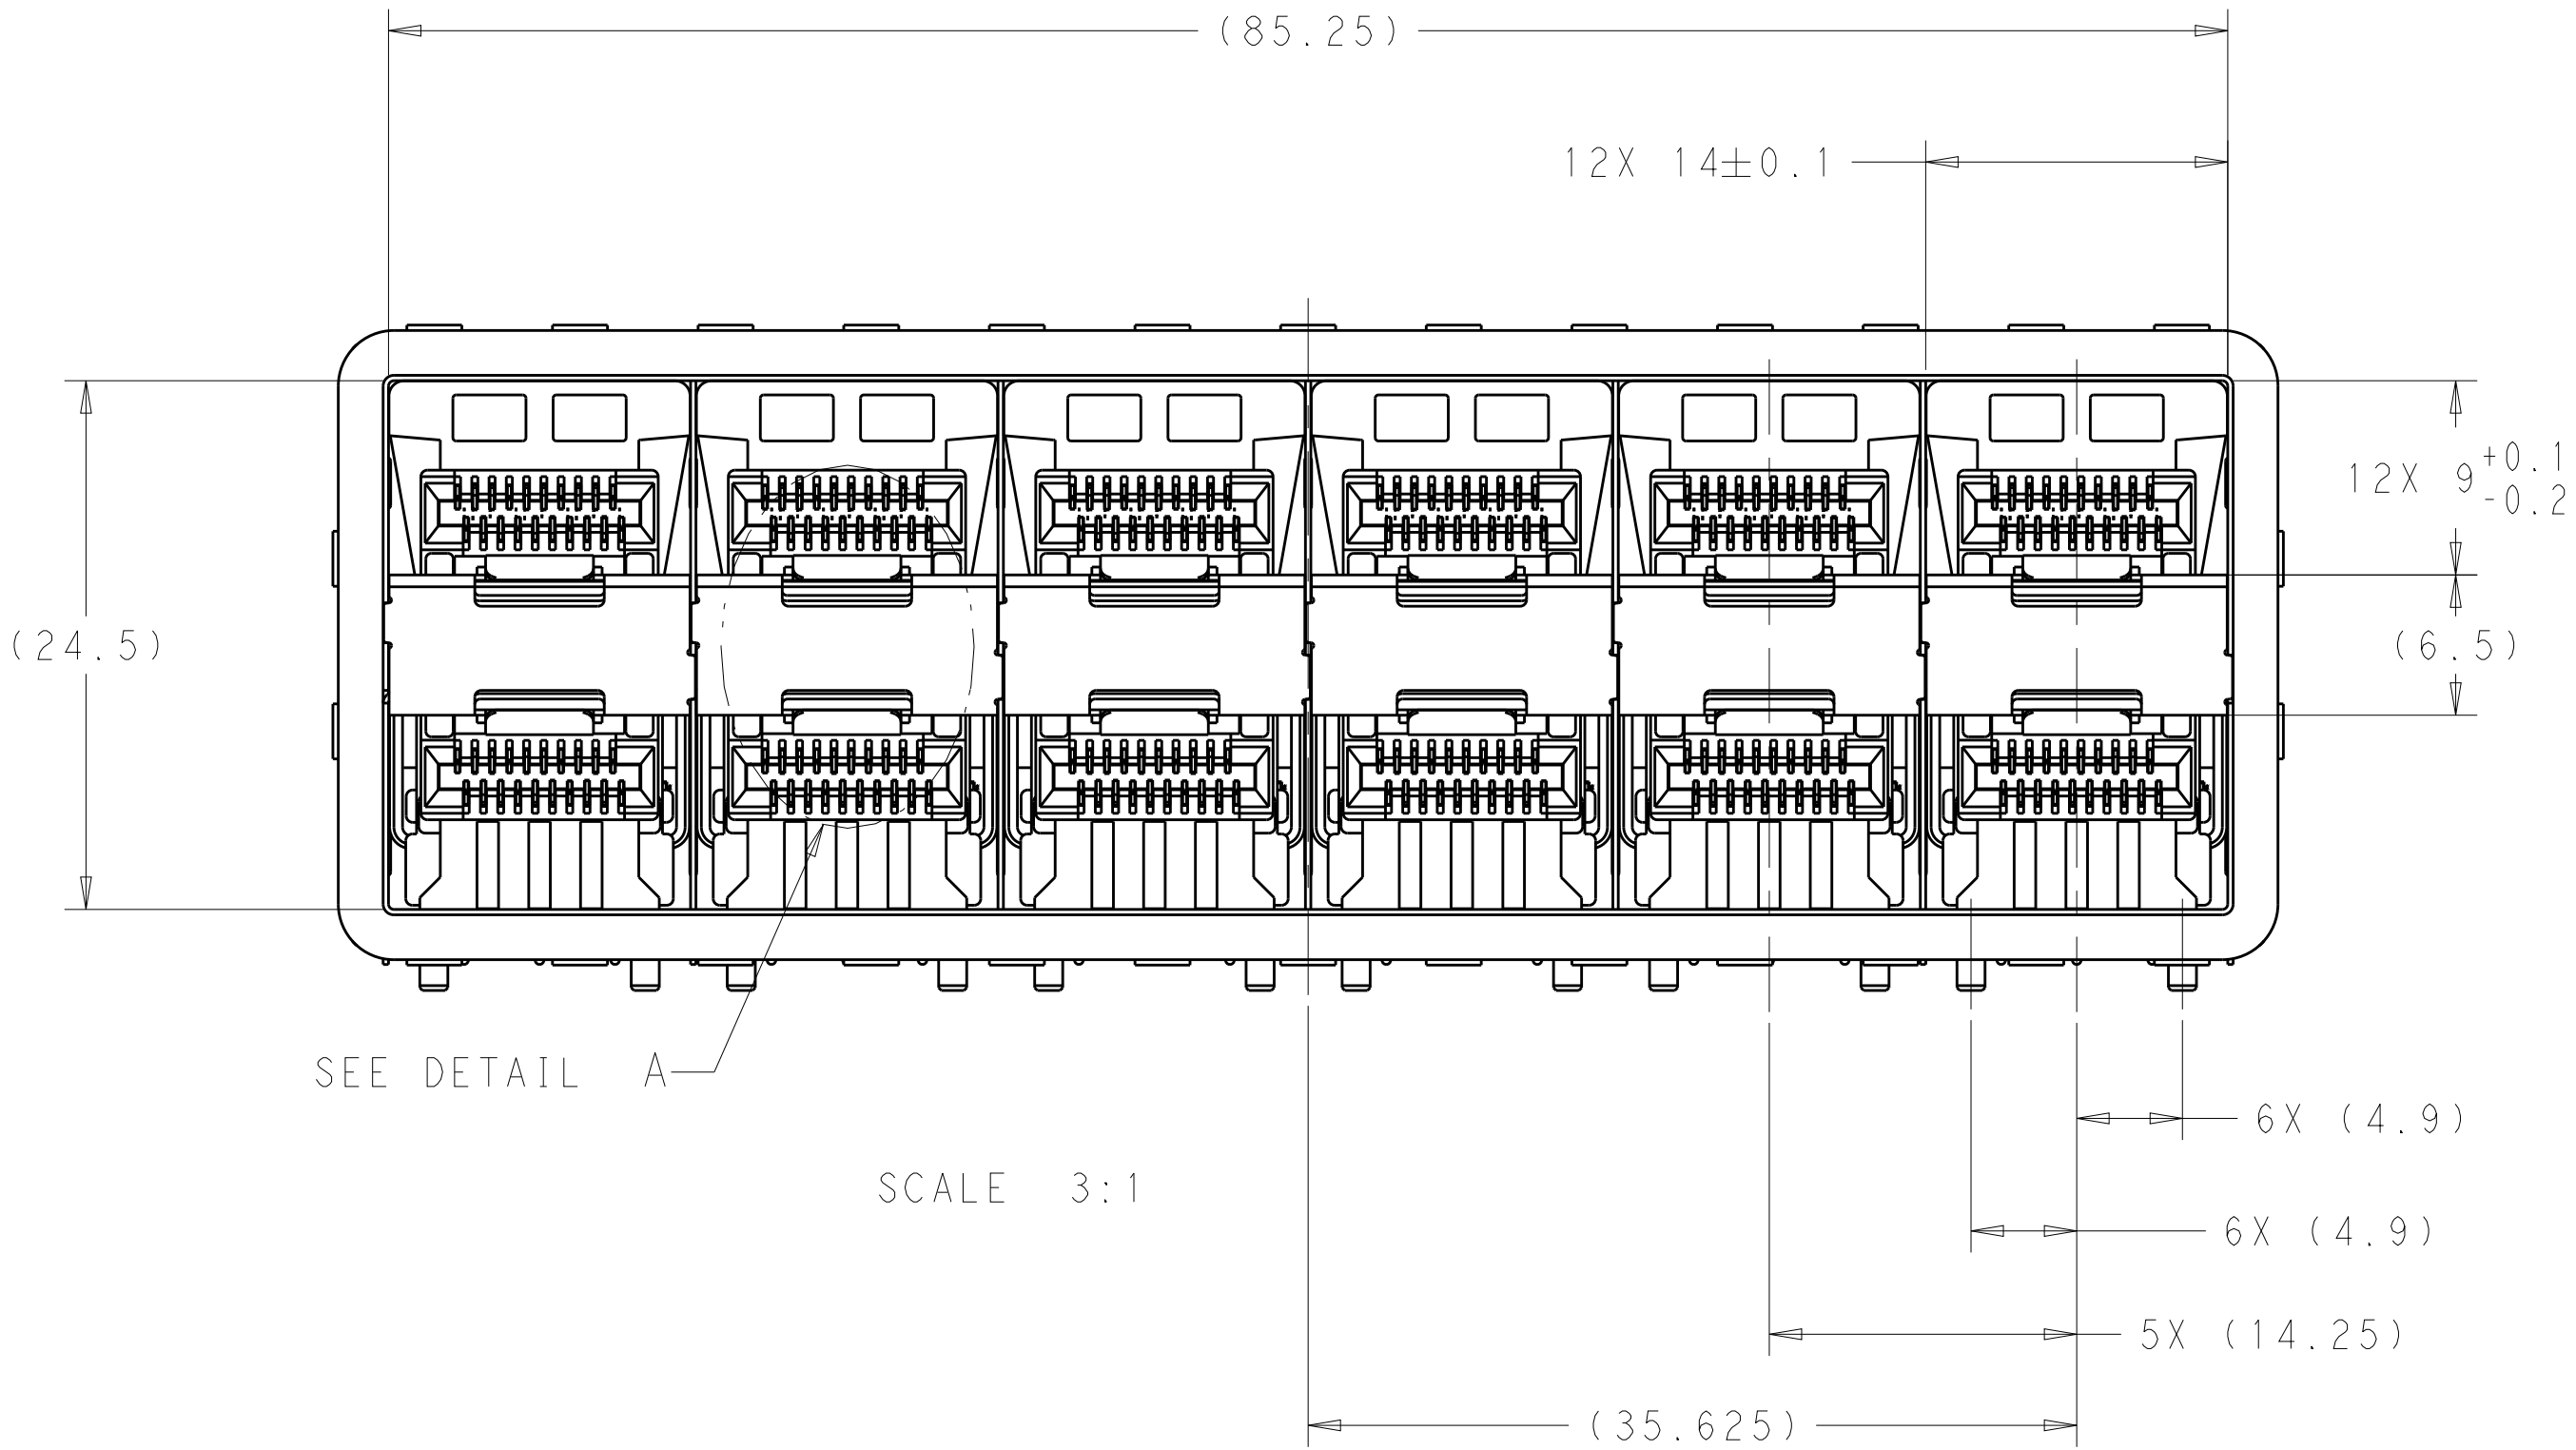


DETAIL A
6X INDIVIDUALLY
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.										DWN J. WANG 26FEB2019		 TE Connectivity							
DIMENSIONS:										CHK S. HAN 26FEB2019									
mm										APVD S. HAN 26FEB2019		NAME		RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56					
										TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC							
										0 PLC ±0.25		108-2481							
										1 PLC ±0.25		APPLICATION SPEC							
										2 PLC ±0.25		114-13319							
										3 PLC ±0.25		WEIGHT							
										ANGLES ±°		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
										FINISH		A100779C=2347721							
MATERIAL SEE NOTES										CUSTOMER DRAWING		SCALE 4:1		SHEET 4 OF 6		REV A			

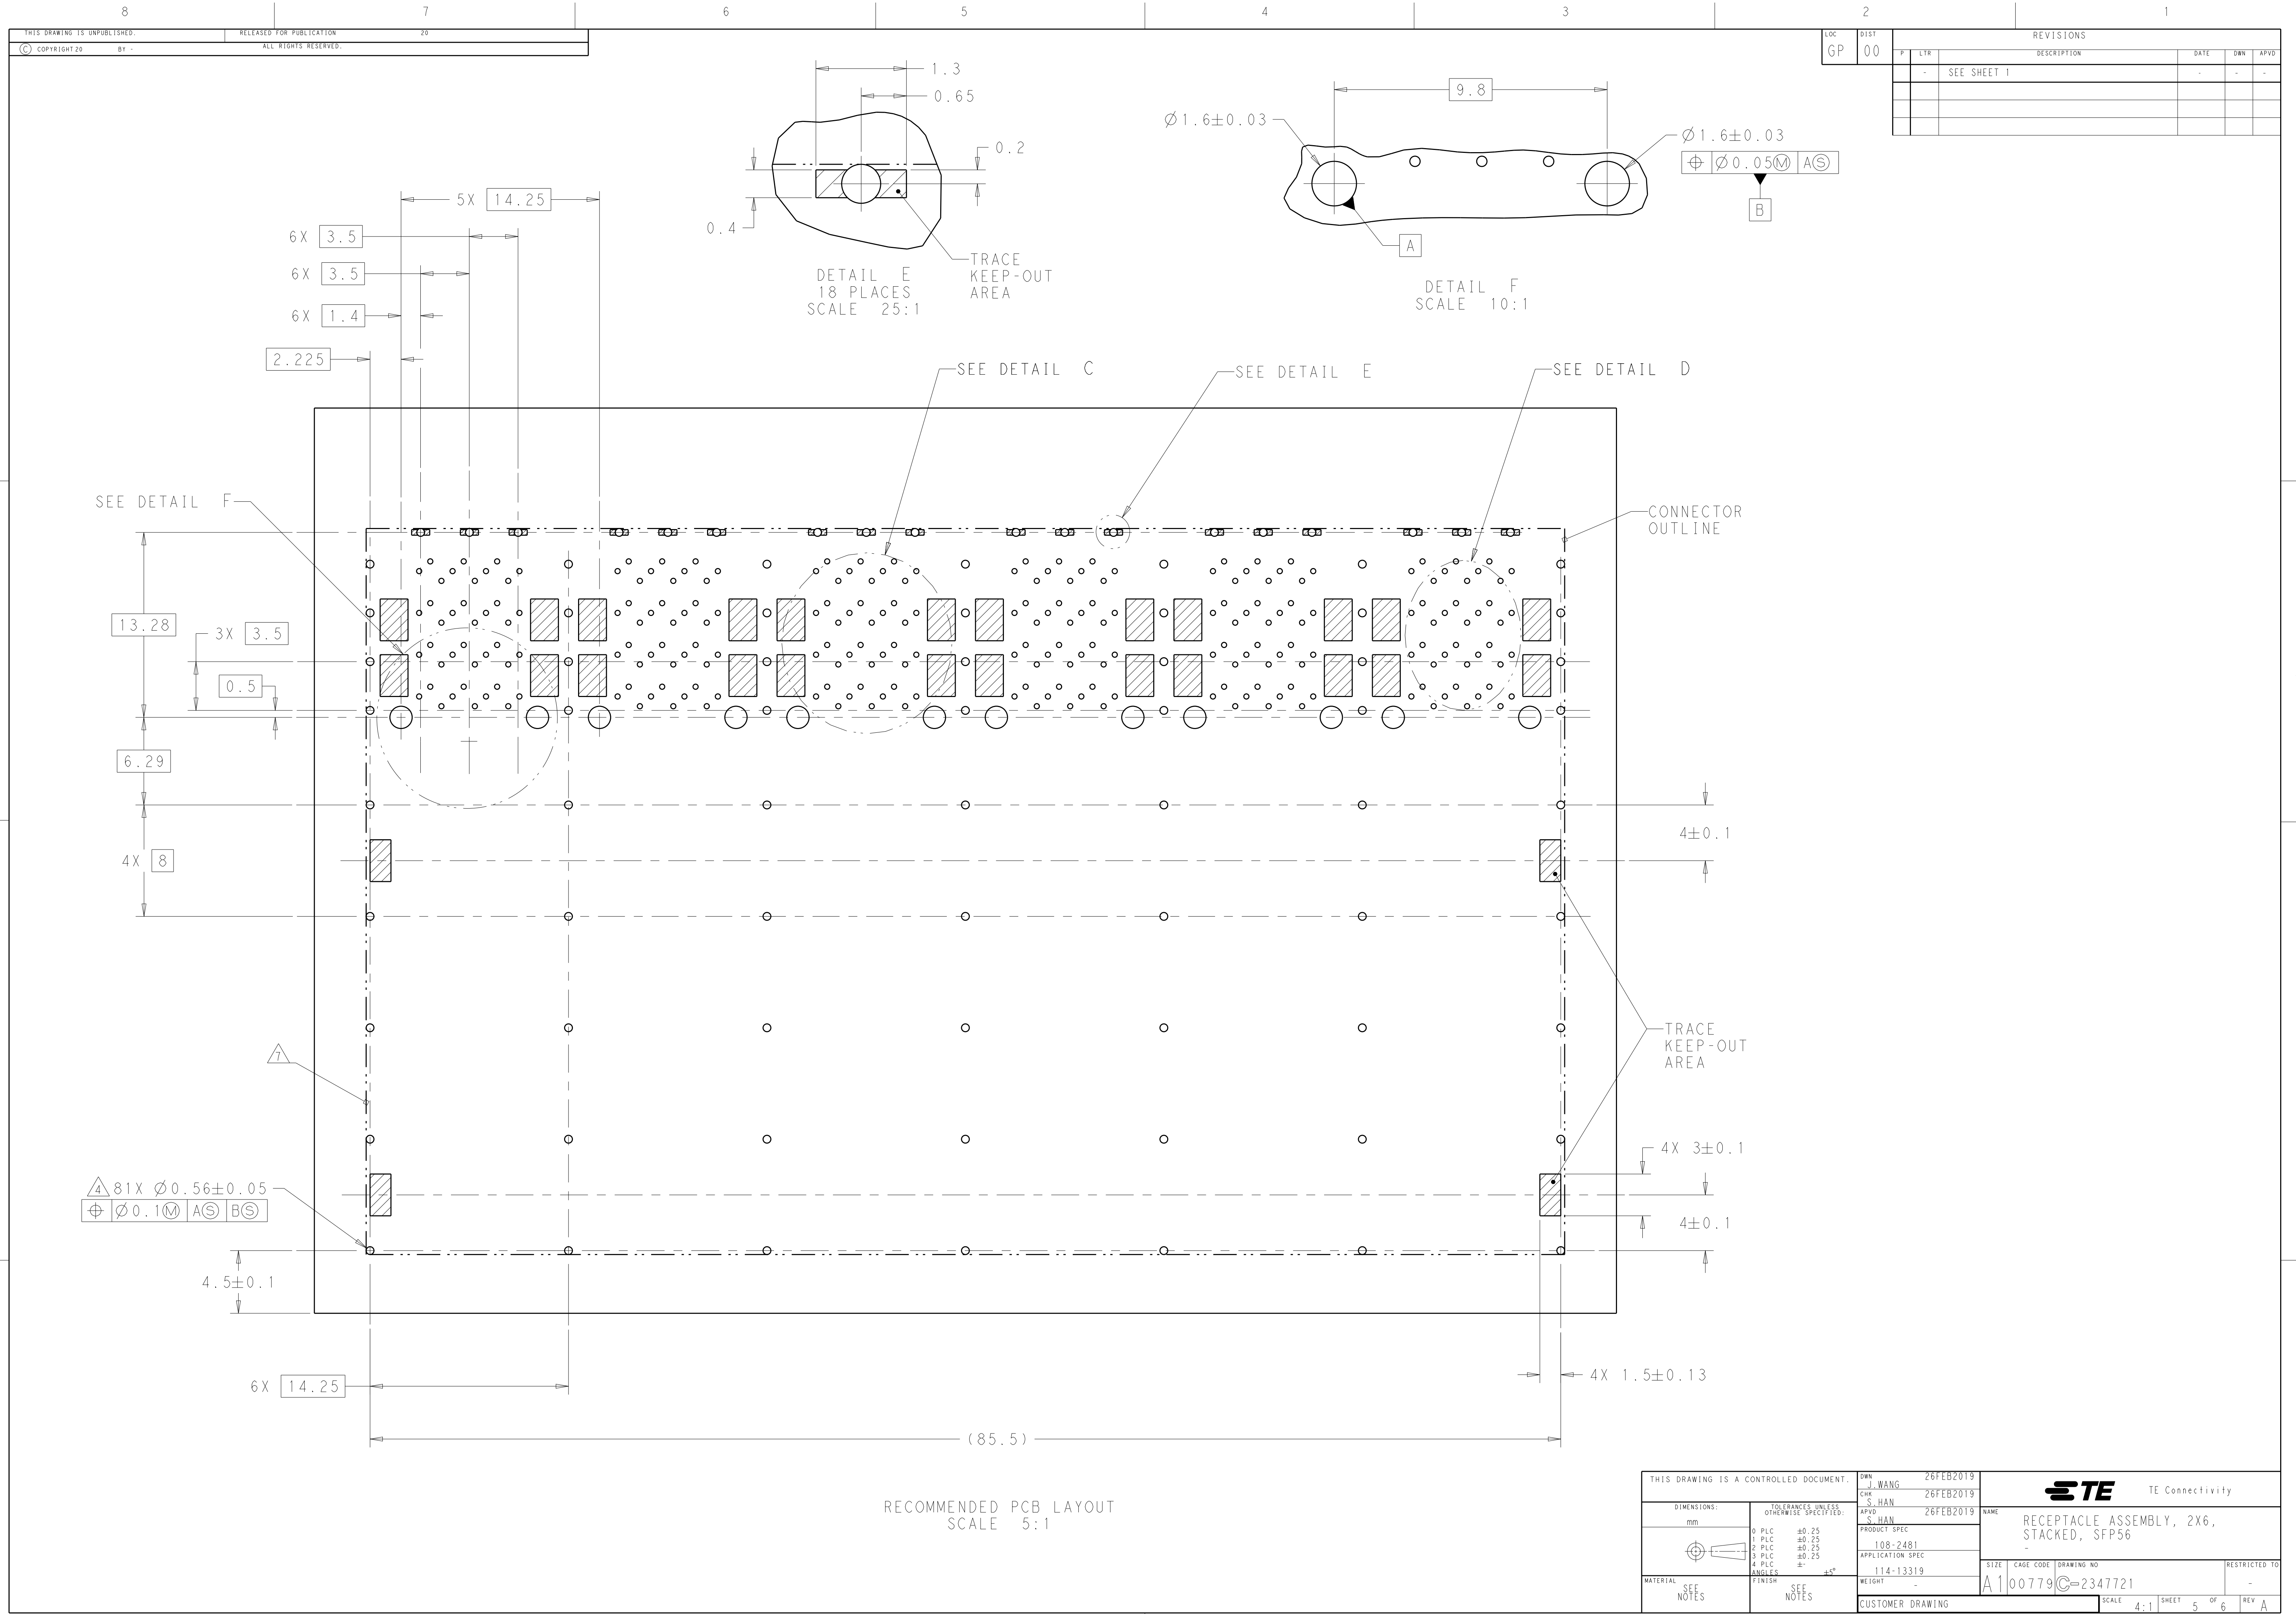


LOC		DIST		REVISIONS				
GP		00		P	LTR	DESCRIPTION		DATE
				-	-	SEE SHEET 1		-

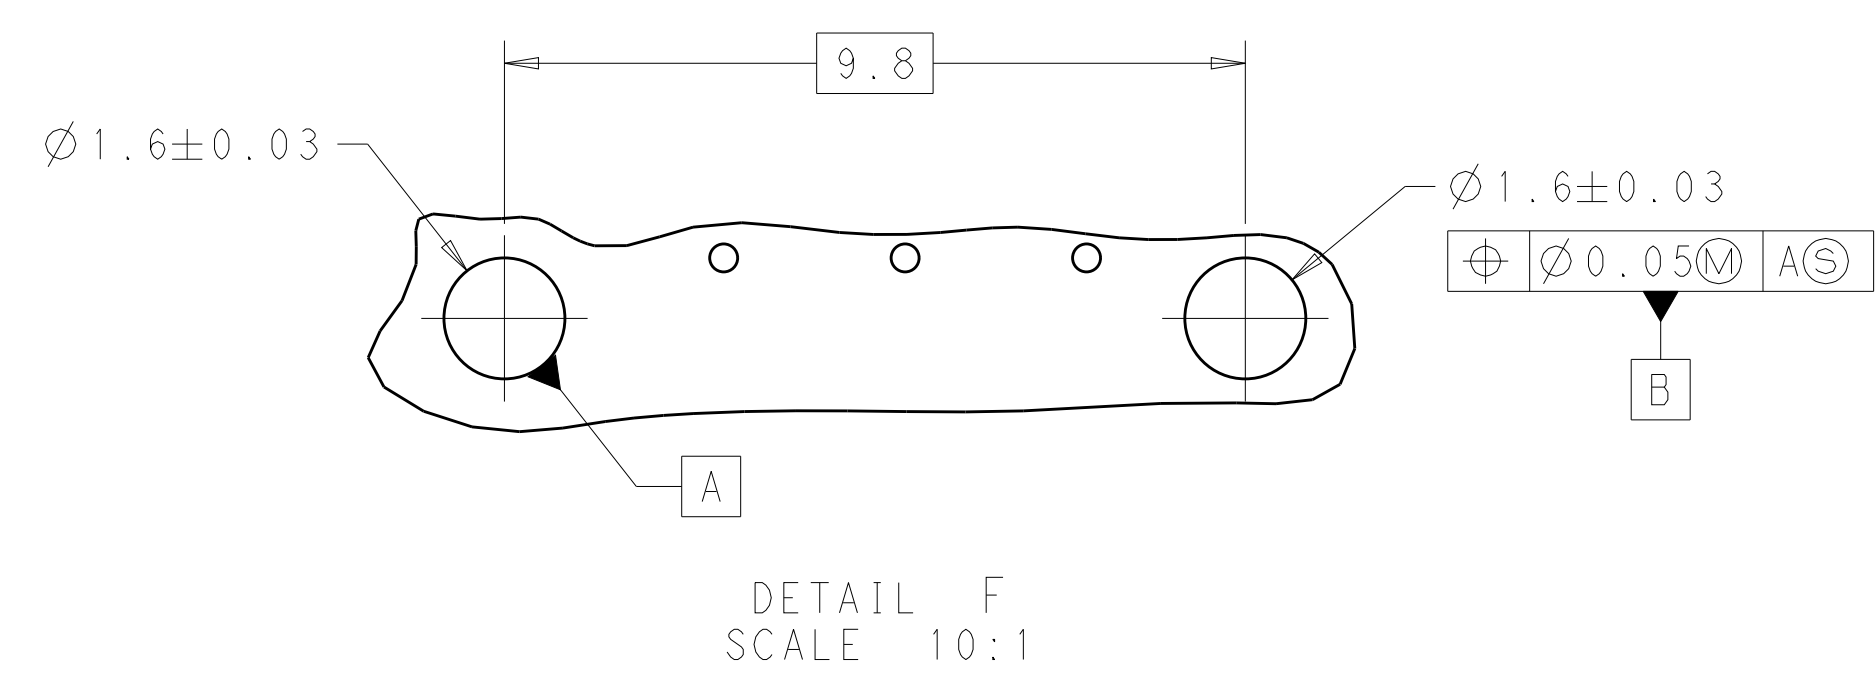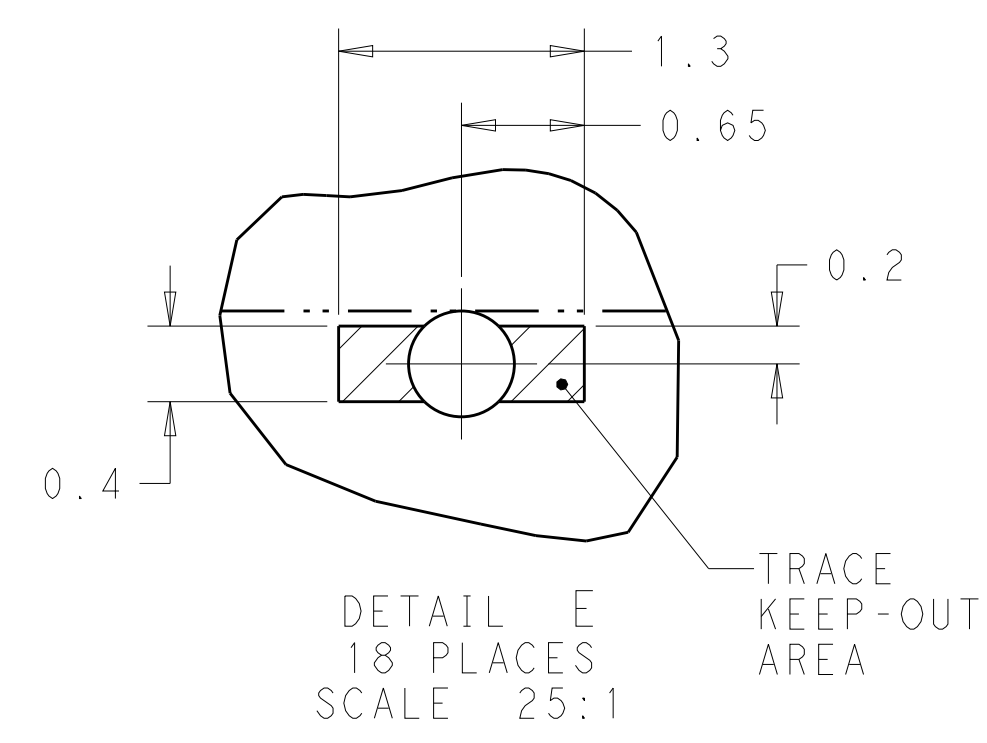


RECOMMENDED PCB LAYOUT
SCALE 5:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG 26FEB2019	TE Connectivity	
DIMENSIONS: mm		CHK S. HAN 26FEB2019		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. HAN 26FEB2019	NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56	
0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.25 3 PLC ±0.25 4 PLC ±0.25 ANGLES ±° FINISH ±°		PRODUCT SPEC 108-2481 APPLICATION SPEC 114-13319 WEIGHT -	SIZE A1	
MATERIAL SEE NOTES		CAGE CODE 00779	DRAWING NO C=2347721	
		CUSTOMER DRAWING	RESTRICTED TO -	
		SCALE 4:1	SHEET 5 OF 6	
			REV A	

LOC		DIST		REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-	-	SEE SHEET 1	-	-	-	

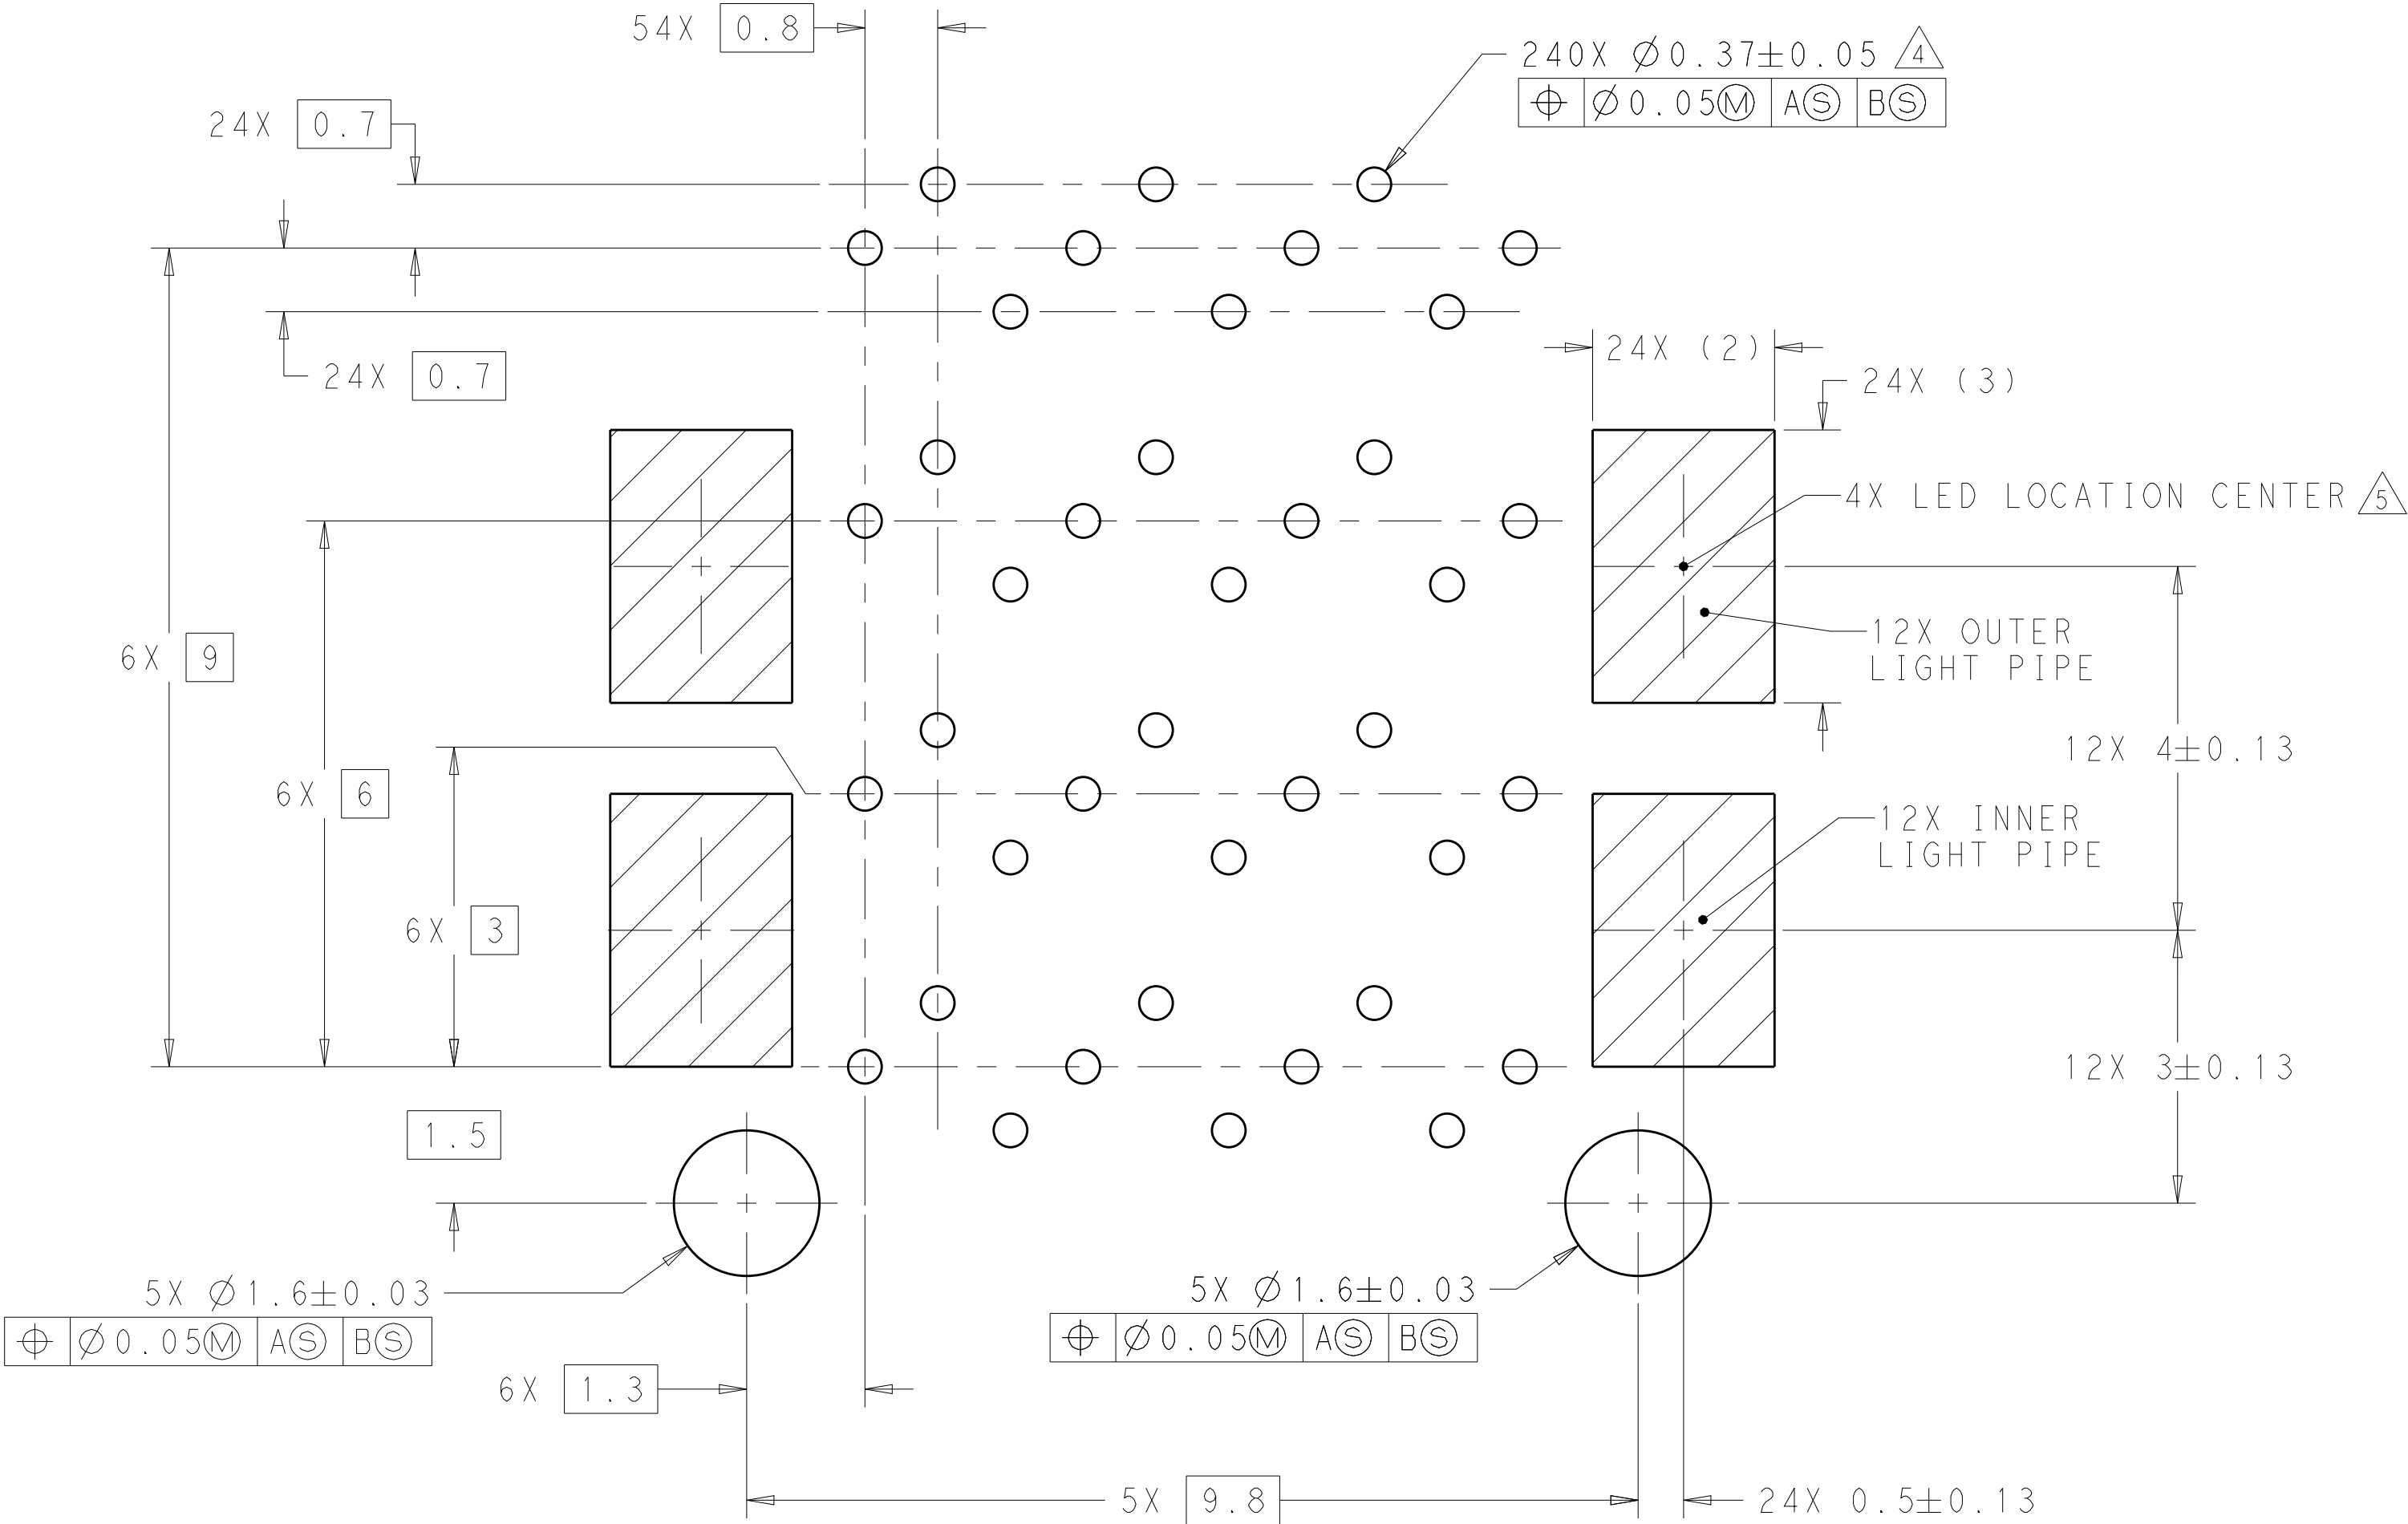


DETAIL C
RECOMMENDED PIN AND LIGHT PIPE LAYOUT
SCALE 15:1

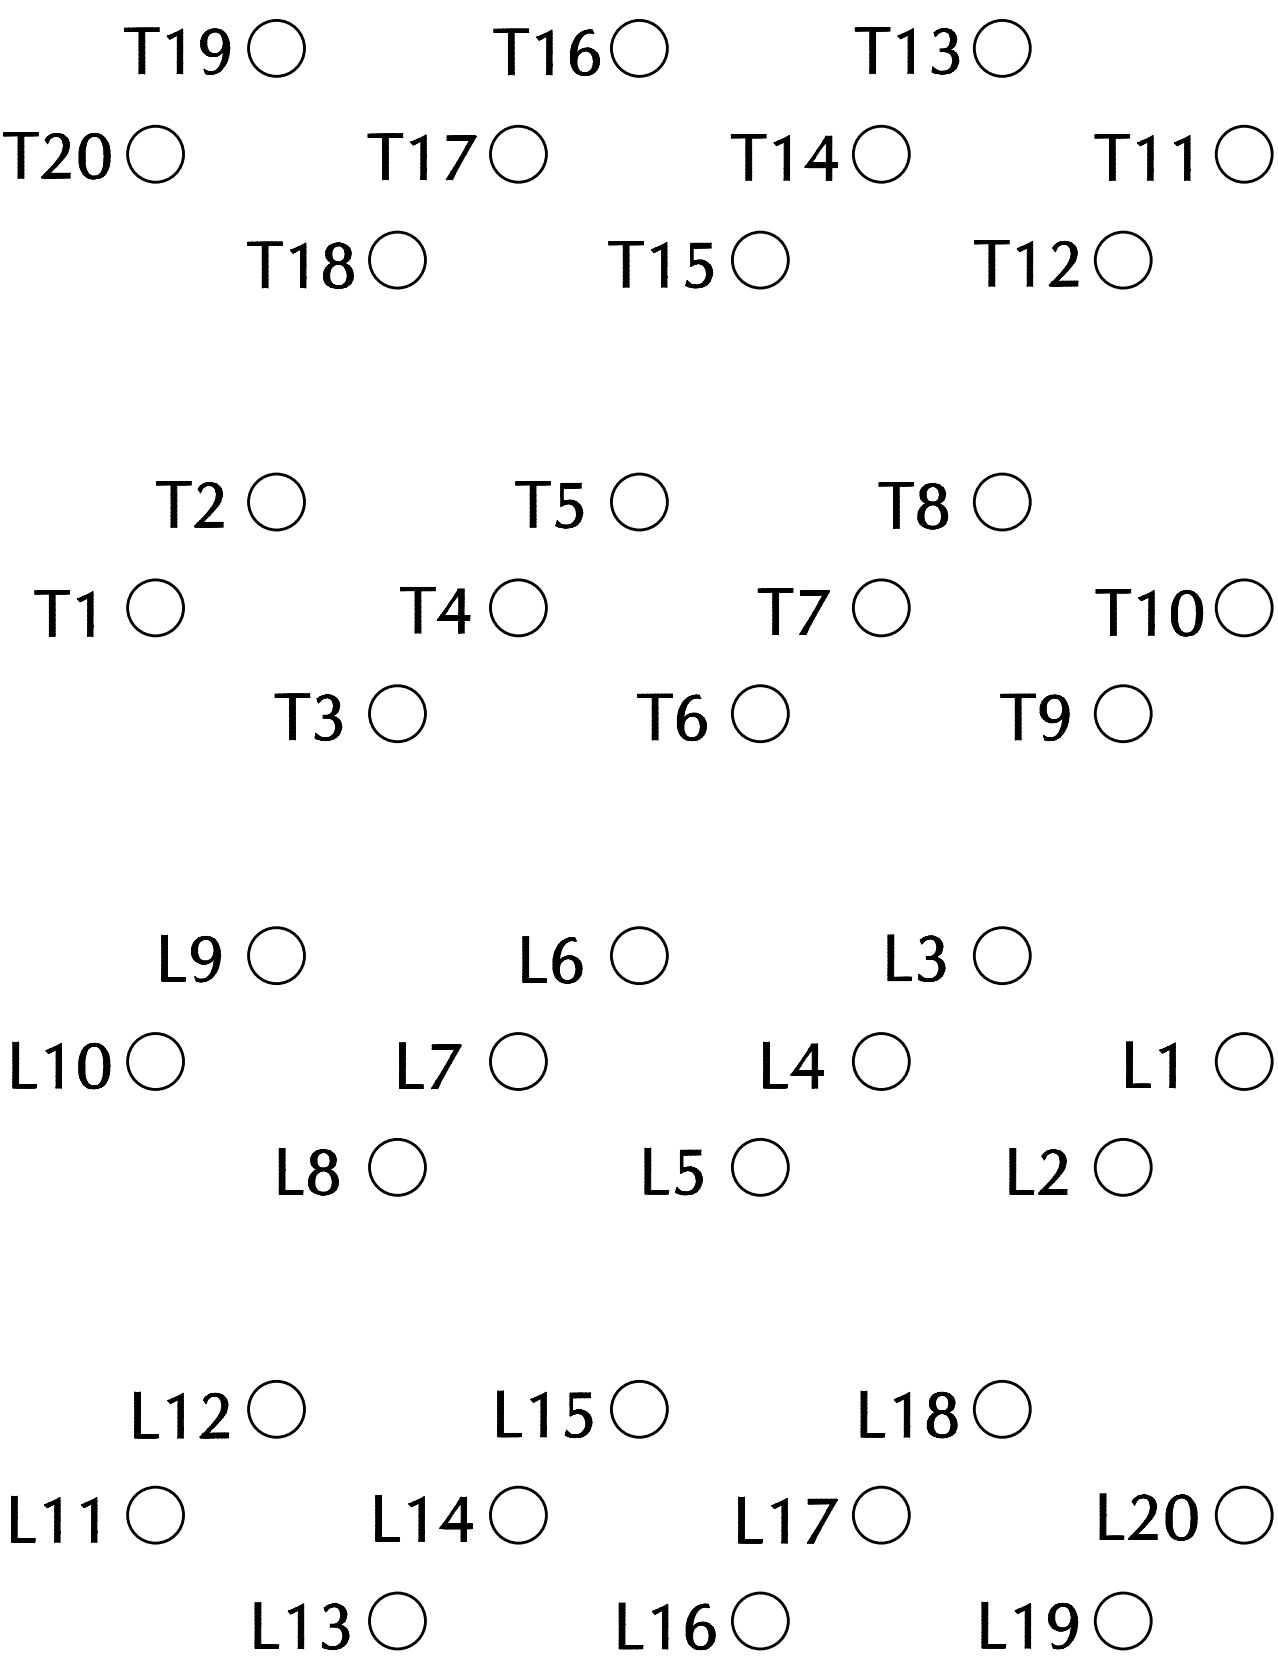


DETAIL D
PIN MAP
6 PLACES
SCALE 20:1

PIN MAP LEGEND	
PIN NUMBER	FUNCTION
L1/T1	VEET
L2/T2	TX-FAULT
L3/T3	TX-DISABLE
L4/T4	SDA
L5/T5	SCL
L6/T6	MOD_ABS
L7/T7	RSO
L8/T8	RX_LOS
L9/T9	RS1
L10/T10	VEER
L11/T11	VEER
L12/T12	RD-
L13/T13	RD+
L14/T14	VEER
L15/T15	VCCR
L16/T16	VCCT
L17/T17	VEET
L18/T18	TD+
L19/T19	TD-
L20/T20	VEET

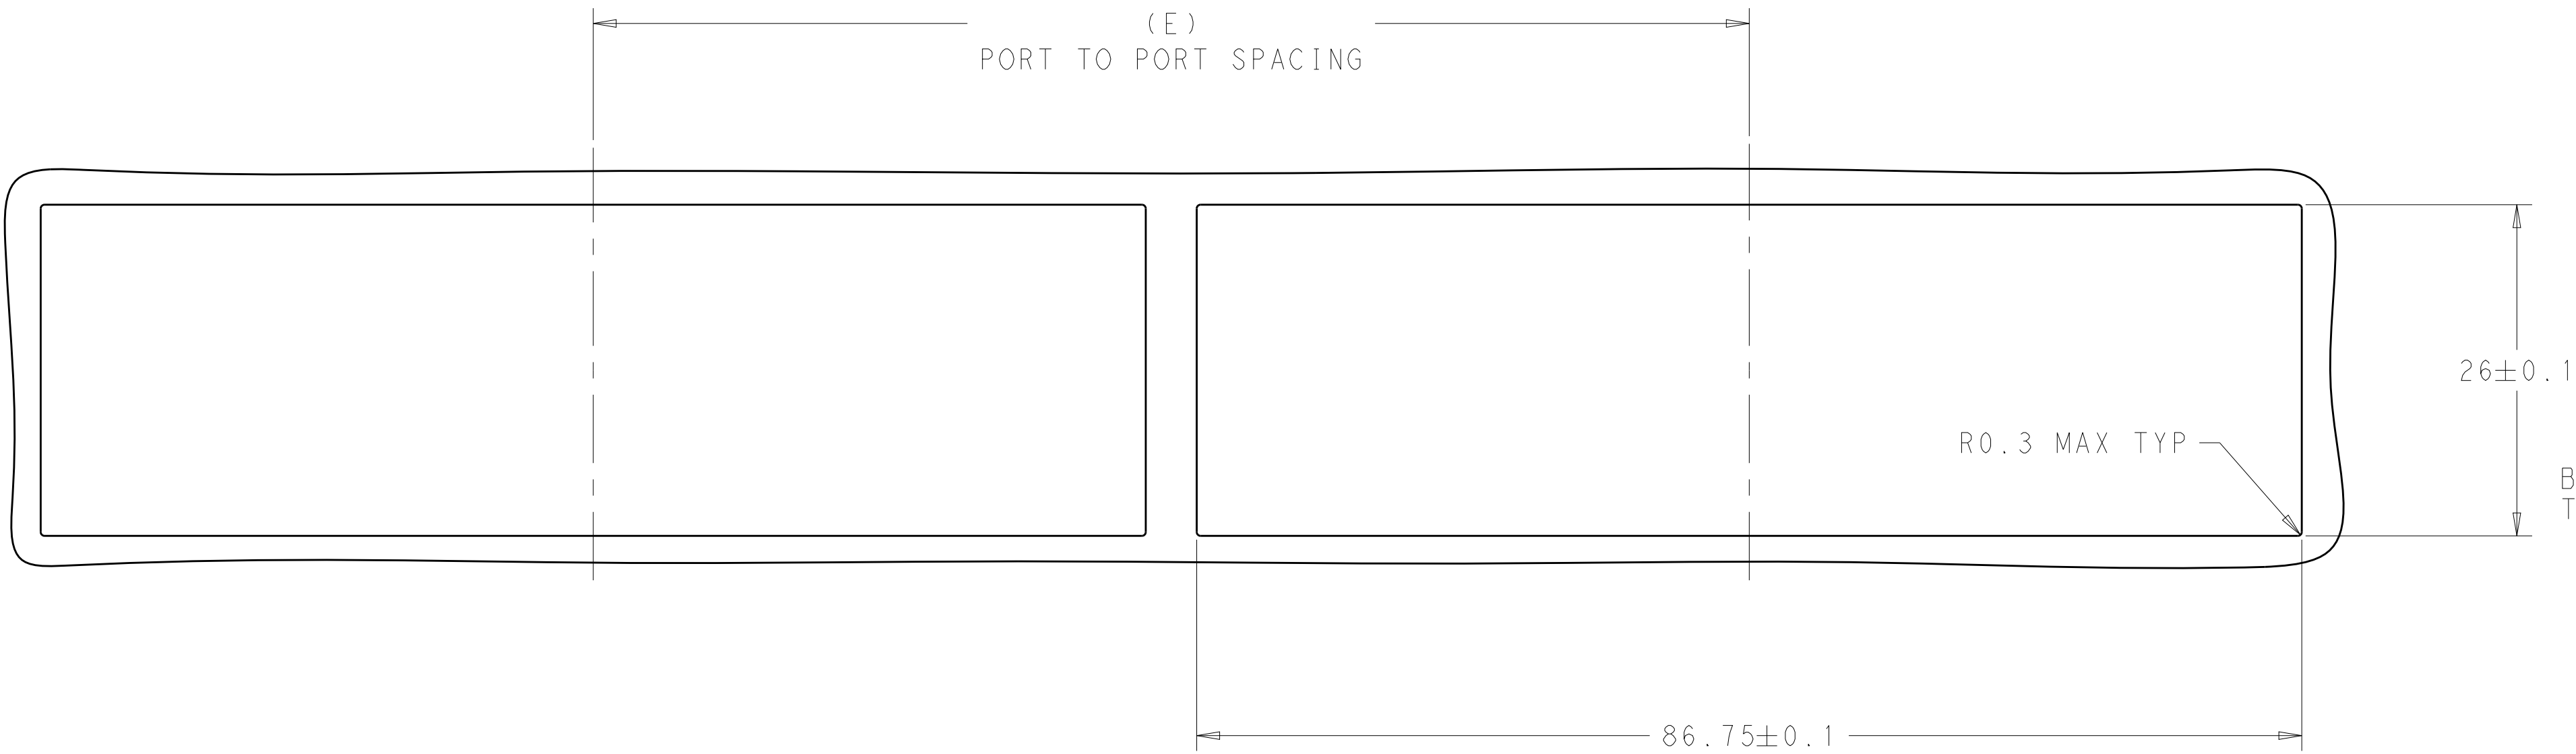

RECOMMENDED BEZEL CUT-OUT DETAIL
SCALE 5:2

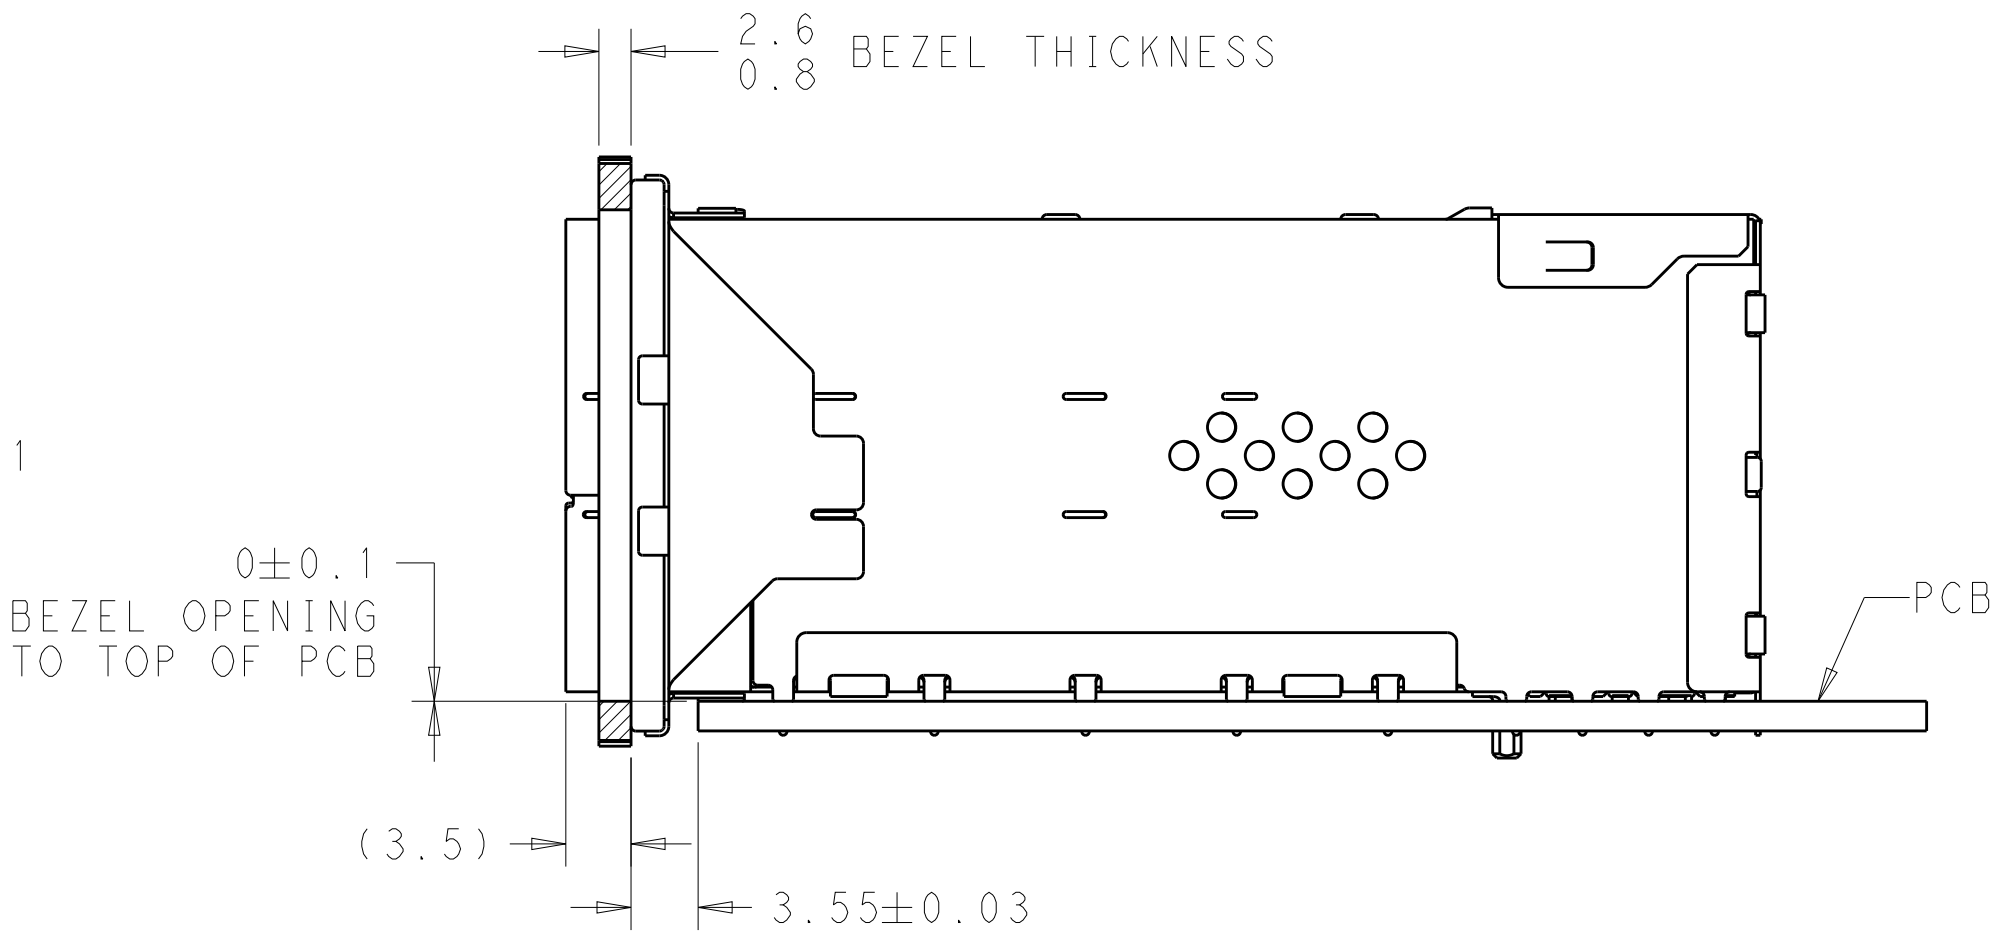

RECOMMENDED BEZEL LOCATION WITH EMI GASKET
SCALE 5:2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG 26FEB2019	 TE Connectivity			
DIMENSIONS:		CHK S. HAN 26FEB2019				
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. HAN 26FEB2019	NAME	RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56		
		PRODUCT SPEC				
	0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.25 3 PLC ±0.25 4 PLC ±0.25 ANGLES ±°	108-2481	SIZE			
		APPLICATION SPEC				
MATERIAL	FINISH	114-13319	CAGE CODE		DRAWING NO	
		WEIGHT -	A100779C=2347721			
SEE NOTES		CUSTOMER DRAWING		SCALE 4:1	SHEET 6 OF 6	REV A

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А