



LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	PRODUCTION RELEASE	05 JUN 2019	JW	SH

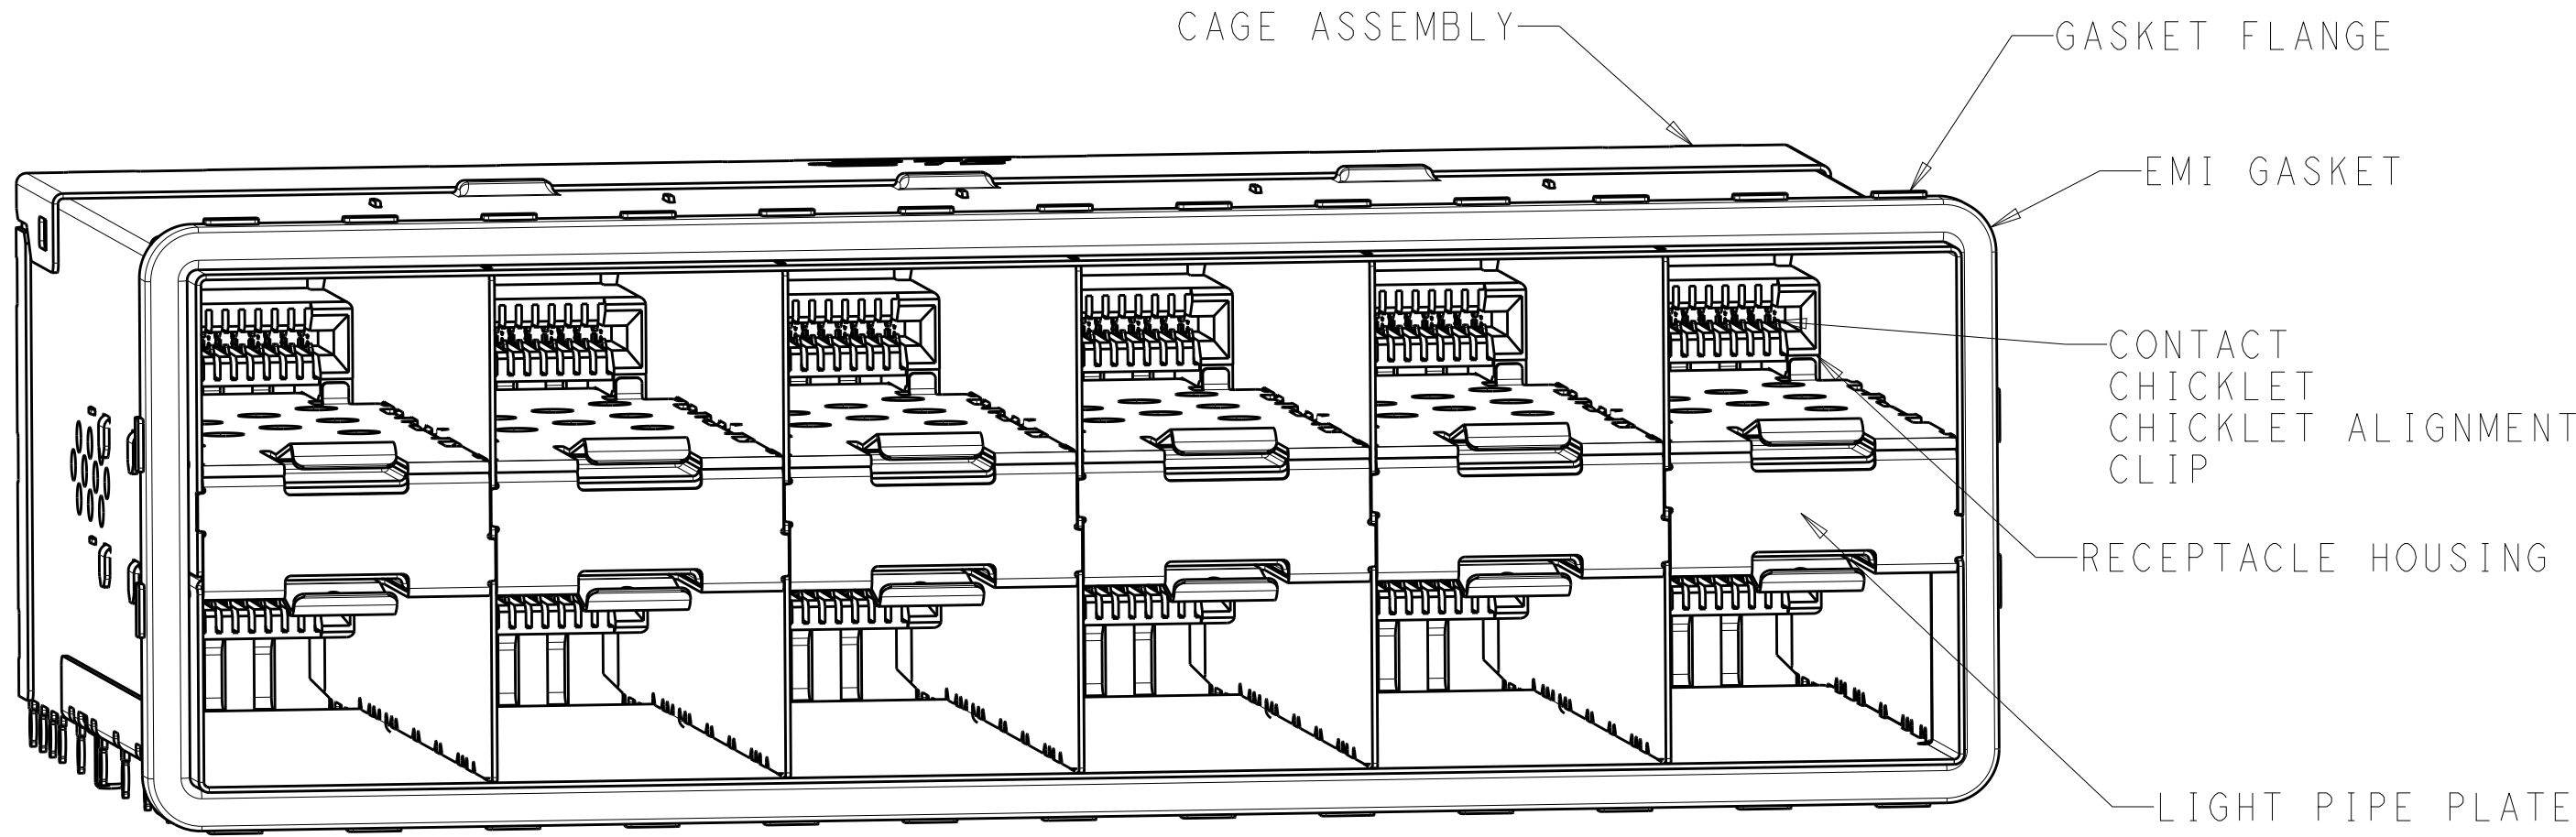


2347721-1
SCALE 3:1

1. MATERIALS:
CAGE ASSEMBLY - NICKEL-SILVER ALLOY PER ASTM B 122
CONNECTOR HOUSING - LCP, BLACK, UL 94V-O RATED
CHICKLET - LCP, BLACK, UL 94V-O RATED
CHICKLET ALIGNMENT CLIP - LCP, BLACK, UL 94V-O RATED
CONTACT - COPPER ALLOY
EMI GASKET - ELASTOMERIC
GASKET FLANGE - STAINLESS STEEL
EMI SPRINGS - PHOSPHOR BRONZE PER ASTM B 103,
0.8µm MIN TIN PER ASTM B 545
LIGHT PIPE - POLYCARBONATE
LIGHT PIPE PLATE- STAINLESS STEEL
2. CONTACT FINISH:
CONFORMS TO THE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2481, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE
3. PCB MINIMUM THICKNESS = 1.5mm


- △4 FOR HOLE SIZE AND PLATINGS,
SEE APPLICATION SPECIFICATION 114-13319
- △5 LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE
LED PACKAGE WITH A HEIGHT OF 0.8mm
- △6 DIMENSIONS APPLY FOR EMI SPRINGS ONLY
- △7 THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT,
INDICATED BY THE DASHED LINE, TO BE CONSIDERED
THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL
TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED
WITHIN CONNECTOR HOLE PATTERN

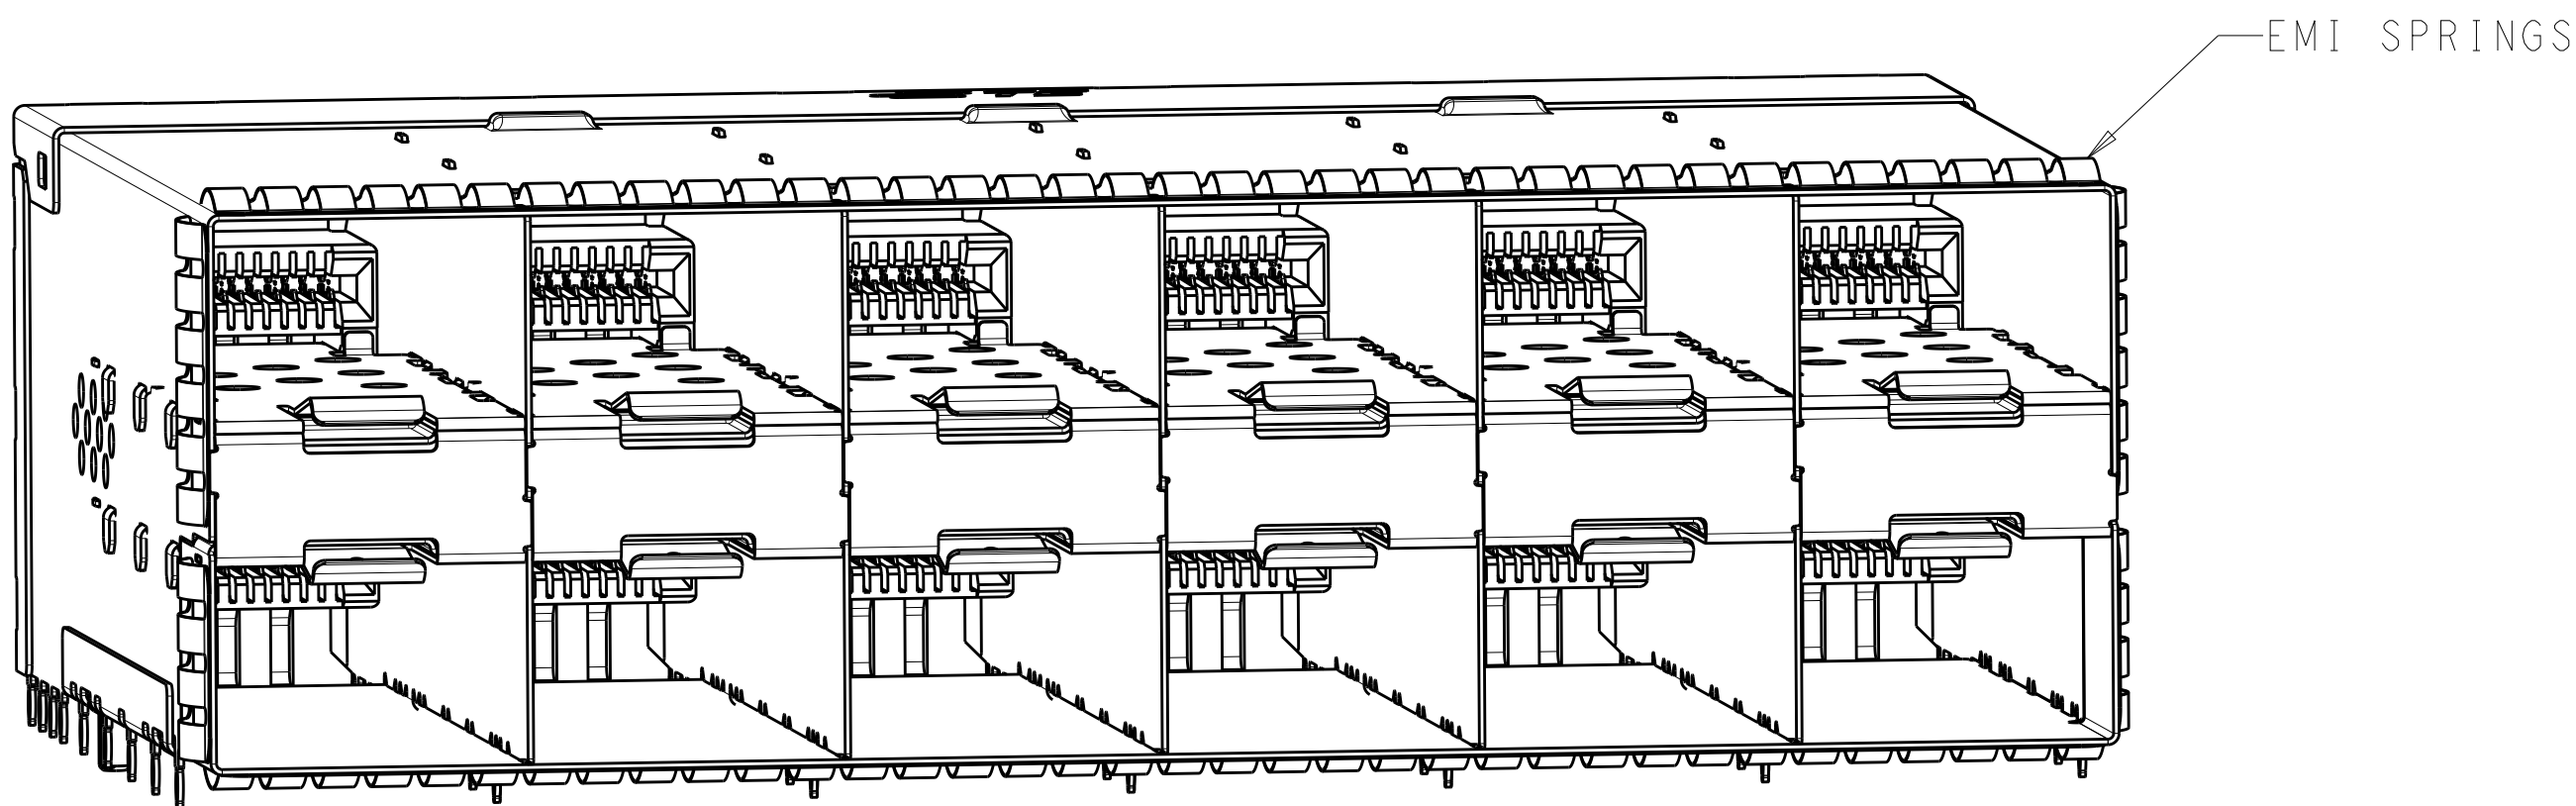


2347721-5
SCALE 3:1

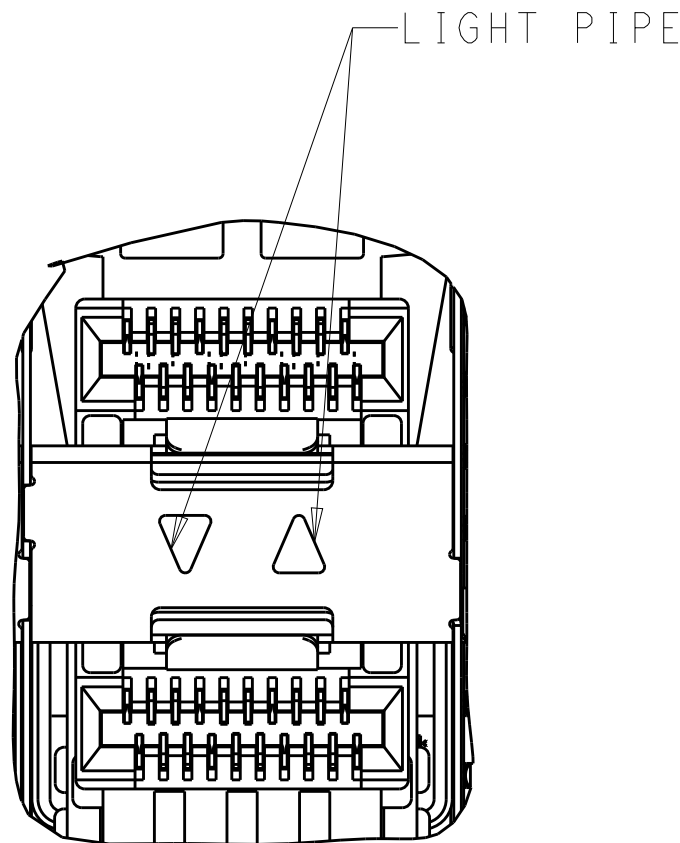


REVERSED INNER LIGHT PIPES
2-2347721-1, 1-2347721-3
SCALE 4:1

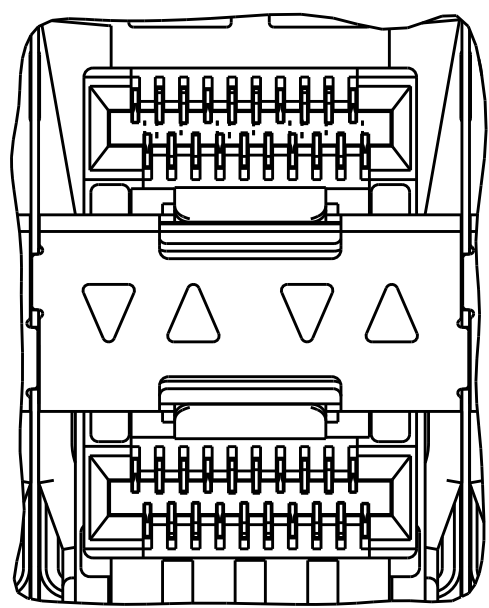


INNER/OUTER LIGHT PIPES
2347721-2, 2347721-6
SCALE 4:1

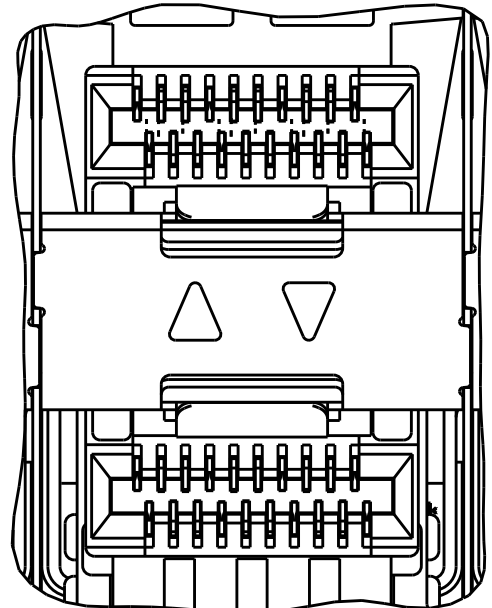


INNER LIGHT PIPES
2347721-3, 2347721-7
SCALE 4:1

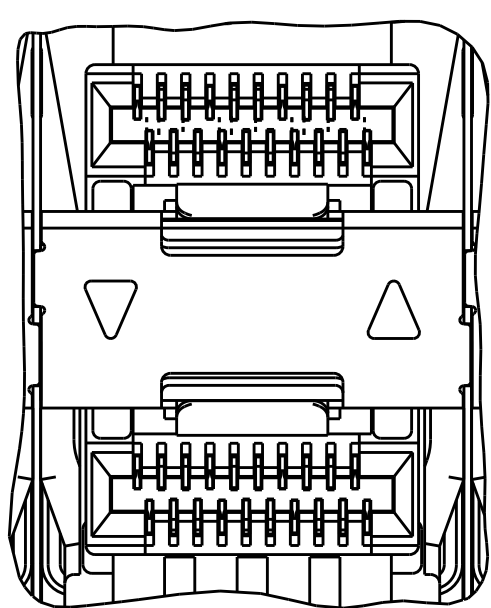

OUTER LIGHT PIPES
2347721-4, 2347721-8
SCALE 4:1

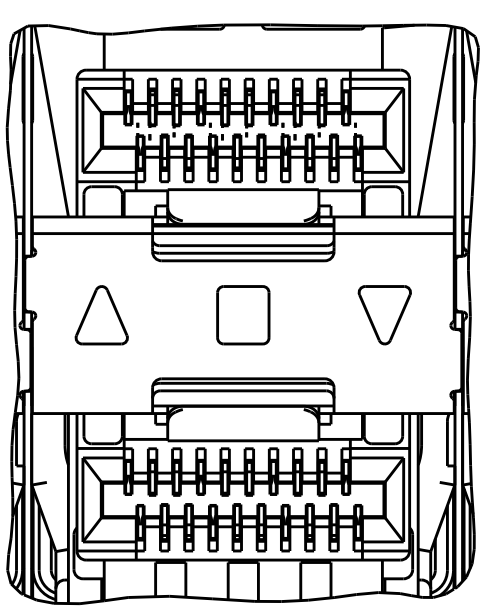

CENTER/REVERSED OUTER
1-2347721-7, 1-2347721-9
SCALE 4:1

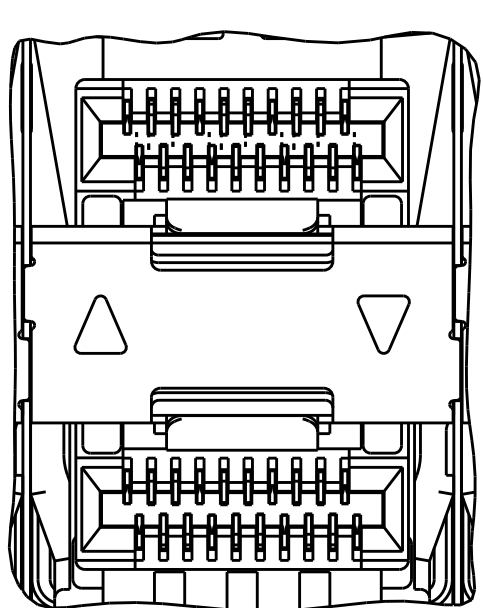


REVERSED OUTER
1-2347721-8, 2-2347721-0
SCALE 4:1

88	EMI SPRING AIRFLOW ENHANCE TYPE	NONE	3-2347721-1
90.75	EMI GASKET AIRFLOW ENHANCE TYPE	NONE	3-2347721-0
88	EMI SPRINGS	REVERSED INNER	2-2347721-1
		REVERSED OUTER	2-2347721-0
		CENTER/REVERSED OUTER	1-2347721-9
90.75	EMI GASKET	REVERSED OUTER	1-2347721-8
		CENTER/REVERSED OUTER	1-2347721-7
88	EMI SPRINGS WITH NICKEL PLATING ONLY	REVERSED INNER	1-2347721-3
		OUTER	1-2347721-2
		INNER	1-2347721-1
		INNER/OUTER	1-2347721-0
88	EMI SPRINGS	NONE	2347721-9
		OUTER	2347721-8
		INNER	2347721-7
		INNER/OUTER	2347721-6
90.75	EMI GASKET	NONE	2347721-5
		OUTER	2347721-4
		INNER	2347721-3
		INNER/OUTER	2347721-2
		NONE	2347721-1
(E)	CAGE TYPE	LIGHT PIPE CONFIGURATION	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG 26FEB2019	 TE Connectivity	
DIMENSIONS:		CHK S. HAN 26FEB2019		
mm		APVD S. HAN 26FEB2019	NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56	
		PRODUCT SPEC 108-2481		SIZE A1
		APPLICATION SPEC 114-13319		
MATERIAL SEE NOTES		WEIGHT -	CAGE CODE 00779	
		FINISH SEE NOTES		REV A
		CUSTOMER DRAWING		SCALE 4:1
		SHEET 1 OF 6		

LOC		DIST		REVISIONS				
GP		00		P	LTR	DESCRIPTION		DATE
				-		SEE SHEET 1		-
								-
								-
								-


AIRFOLW ENHANCE TYPE

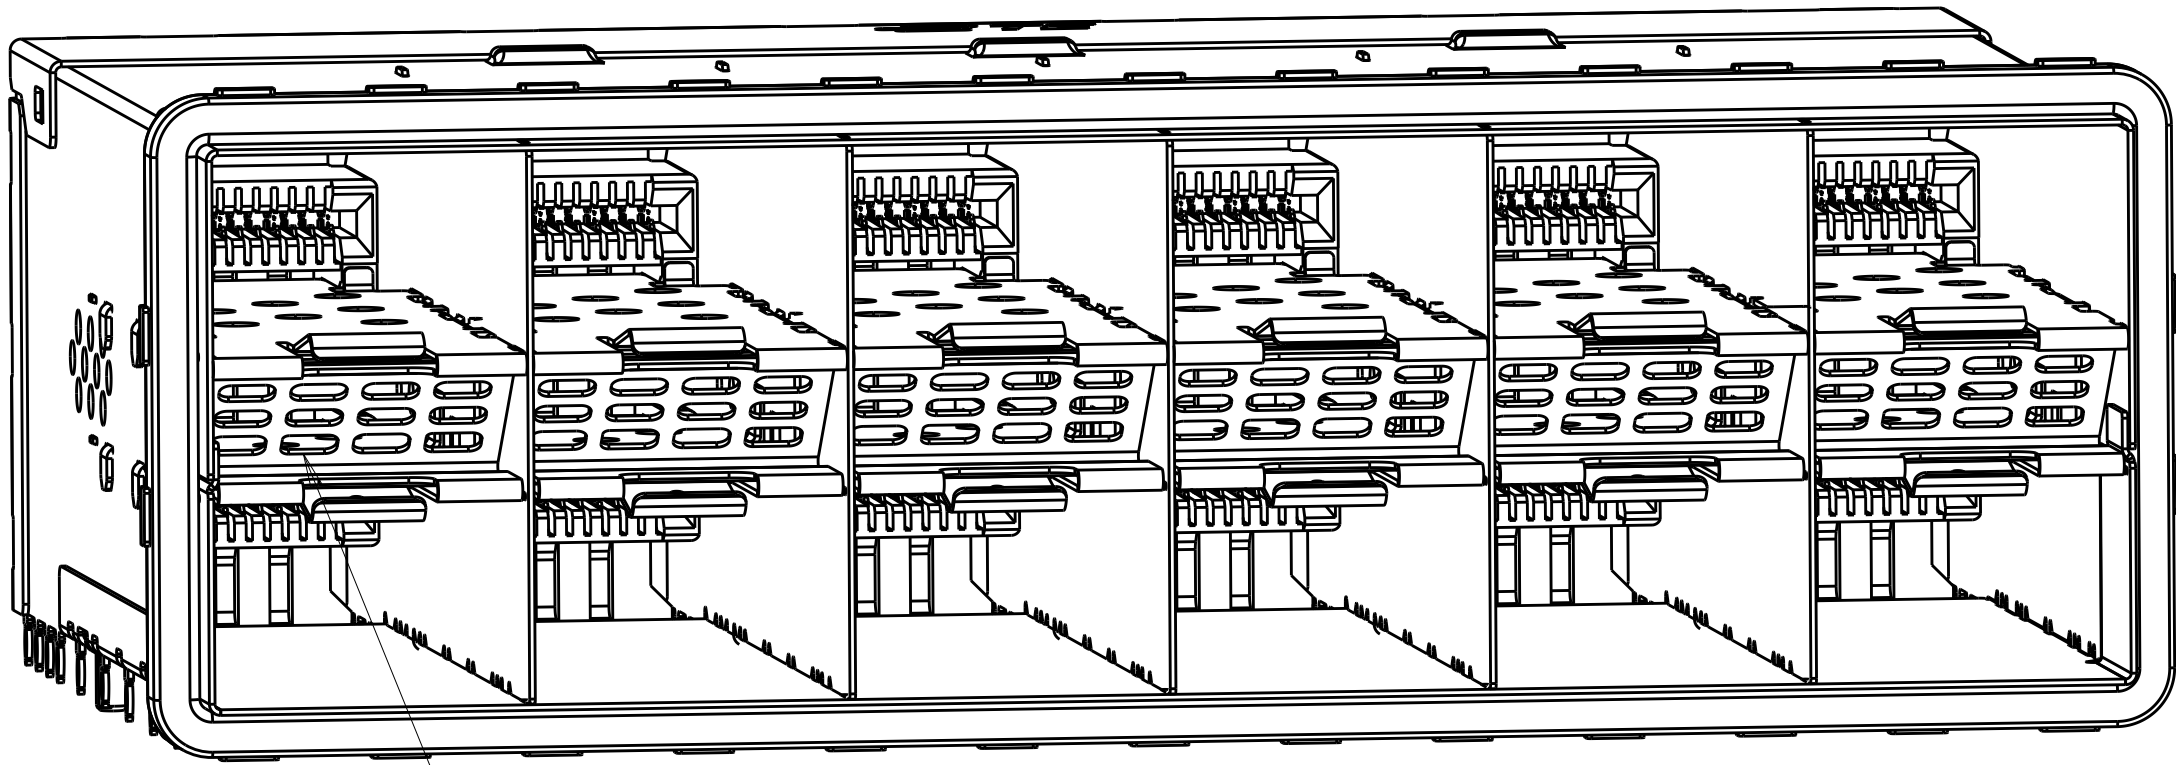

AIR VENTS

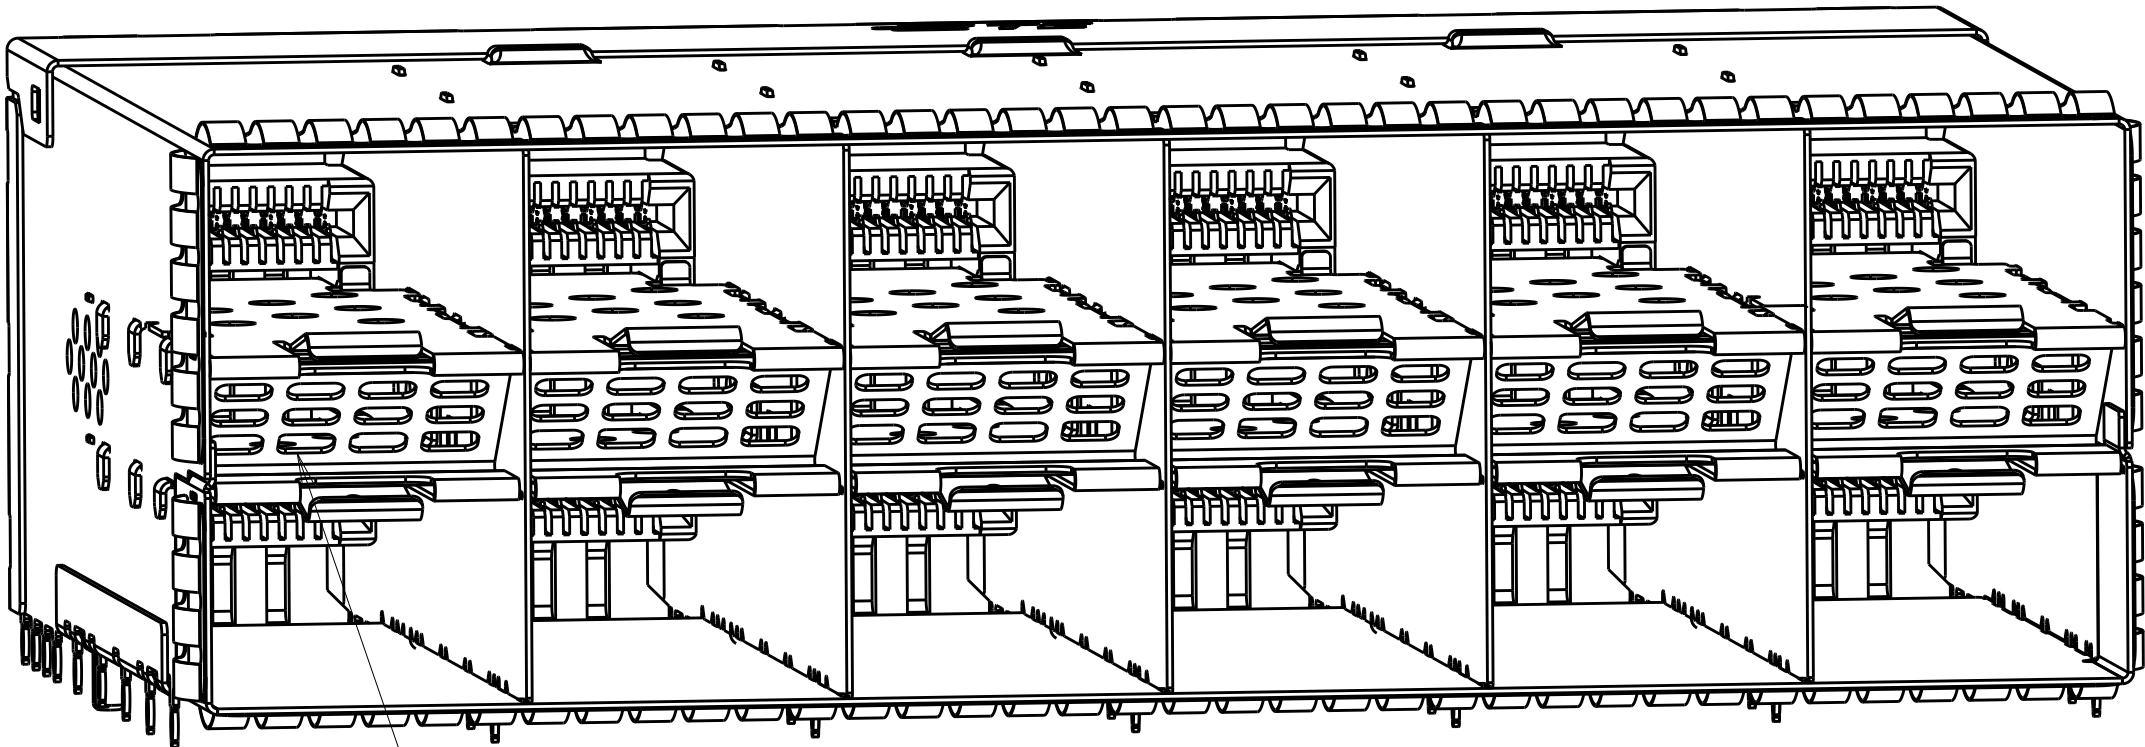


AIR VENTS

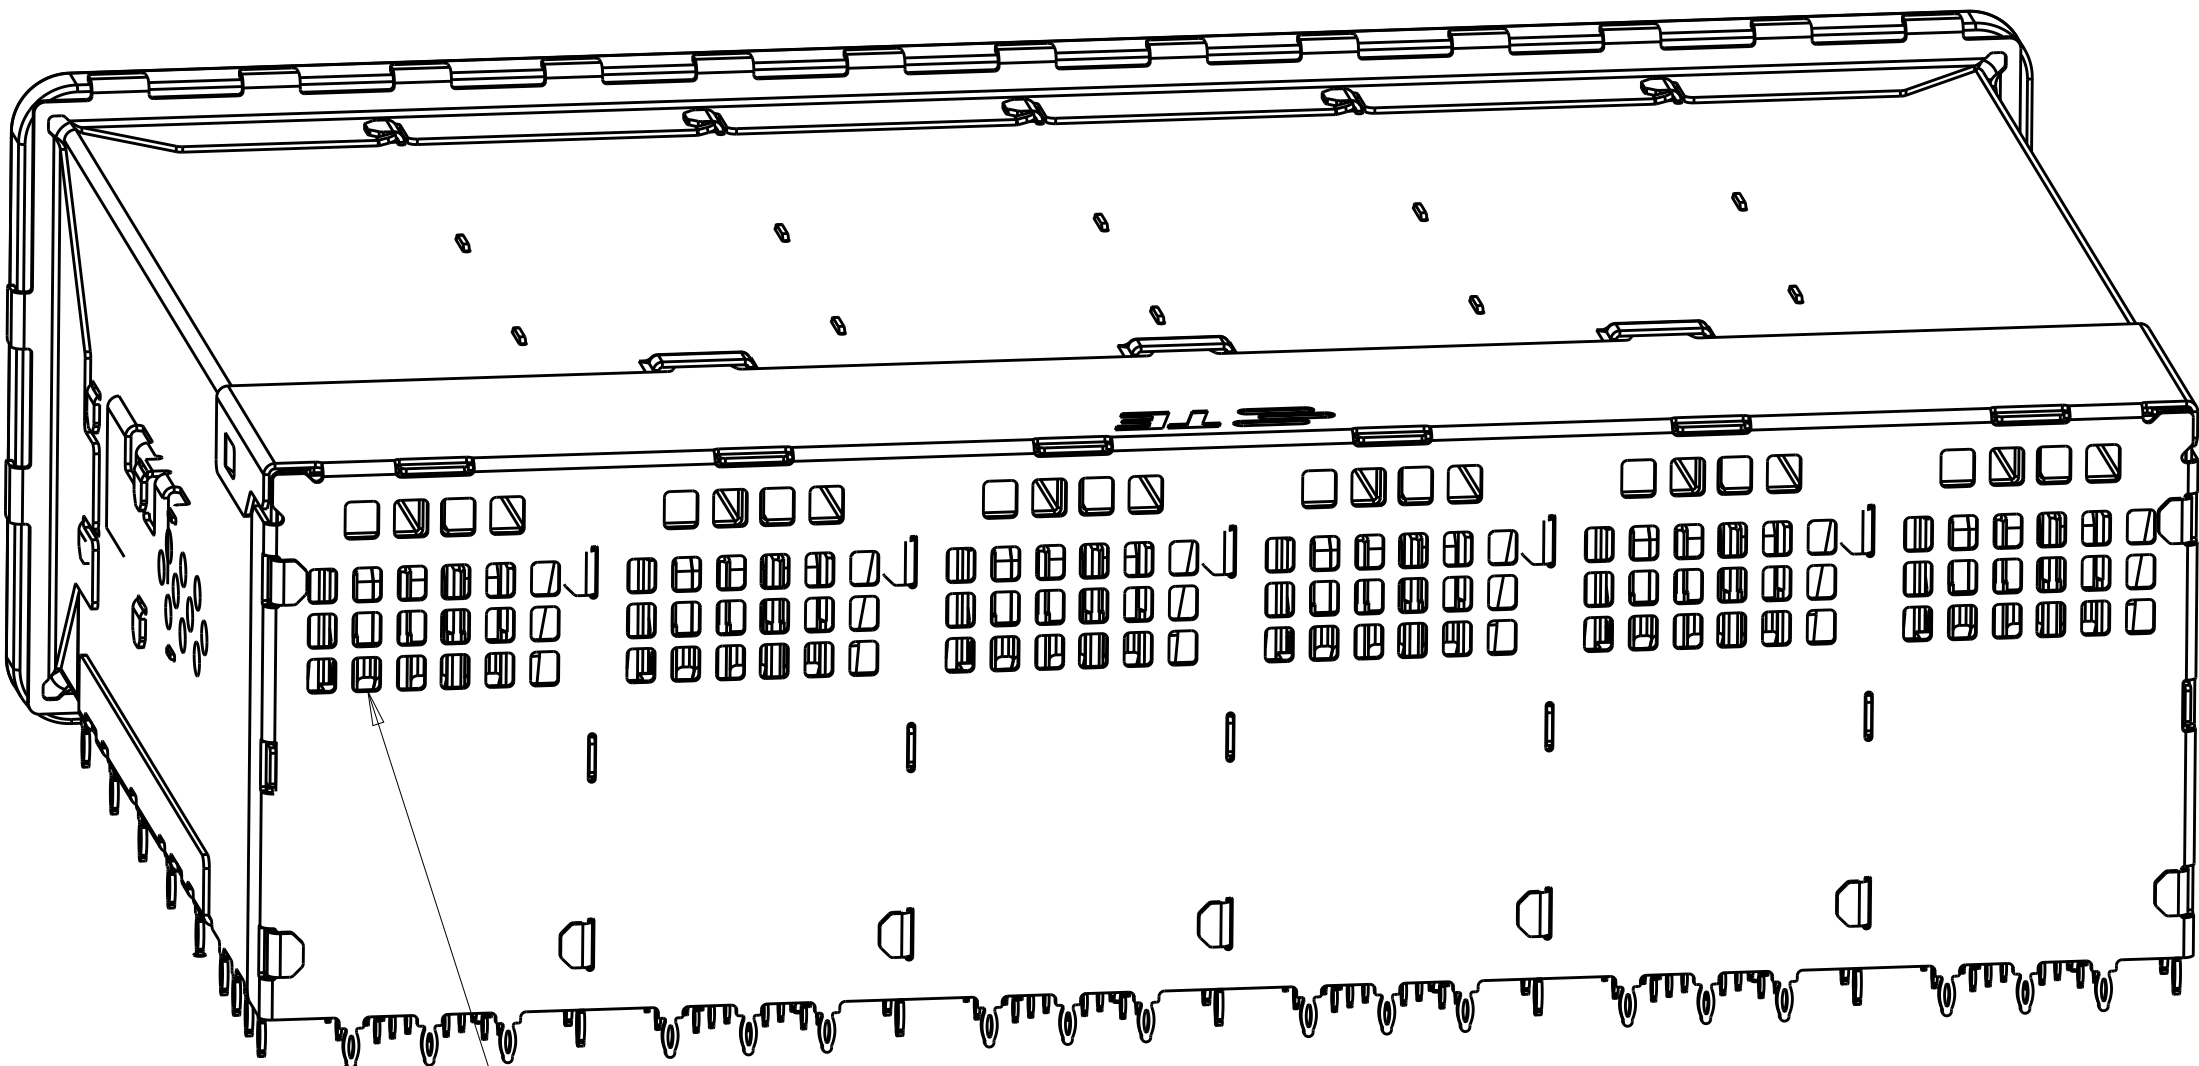

AIR VENTS

3-2347721-0
EMI GASKET TYPE


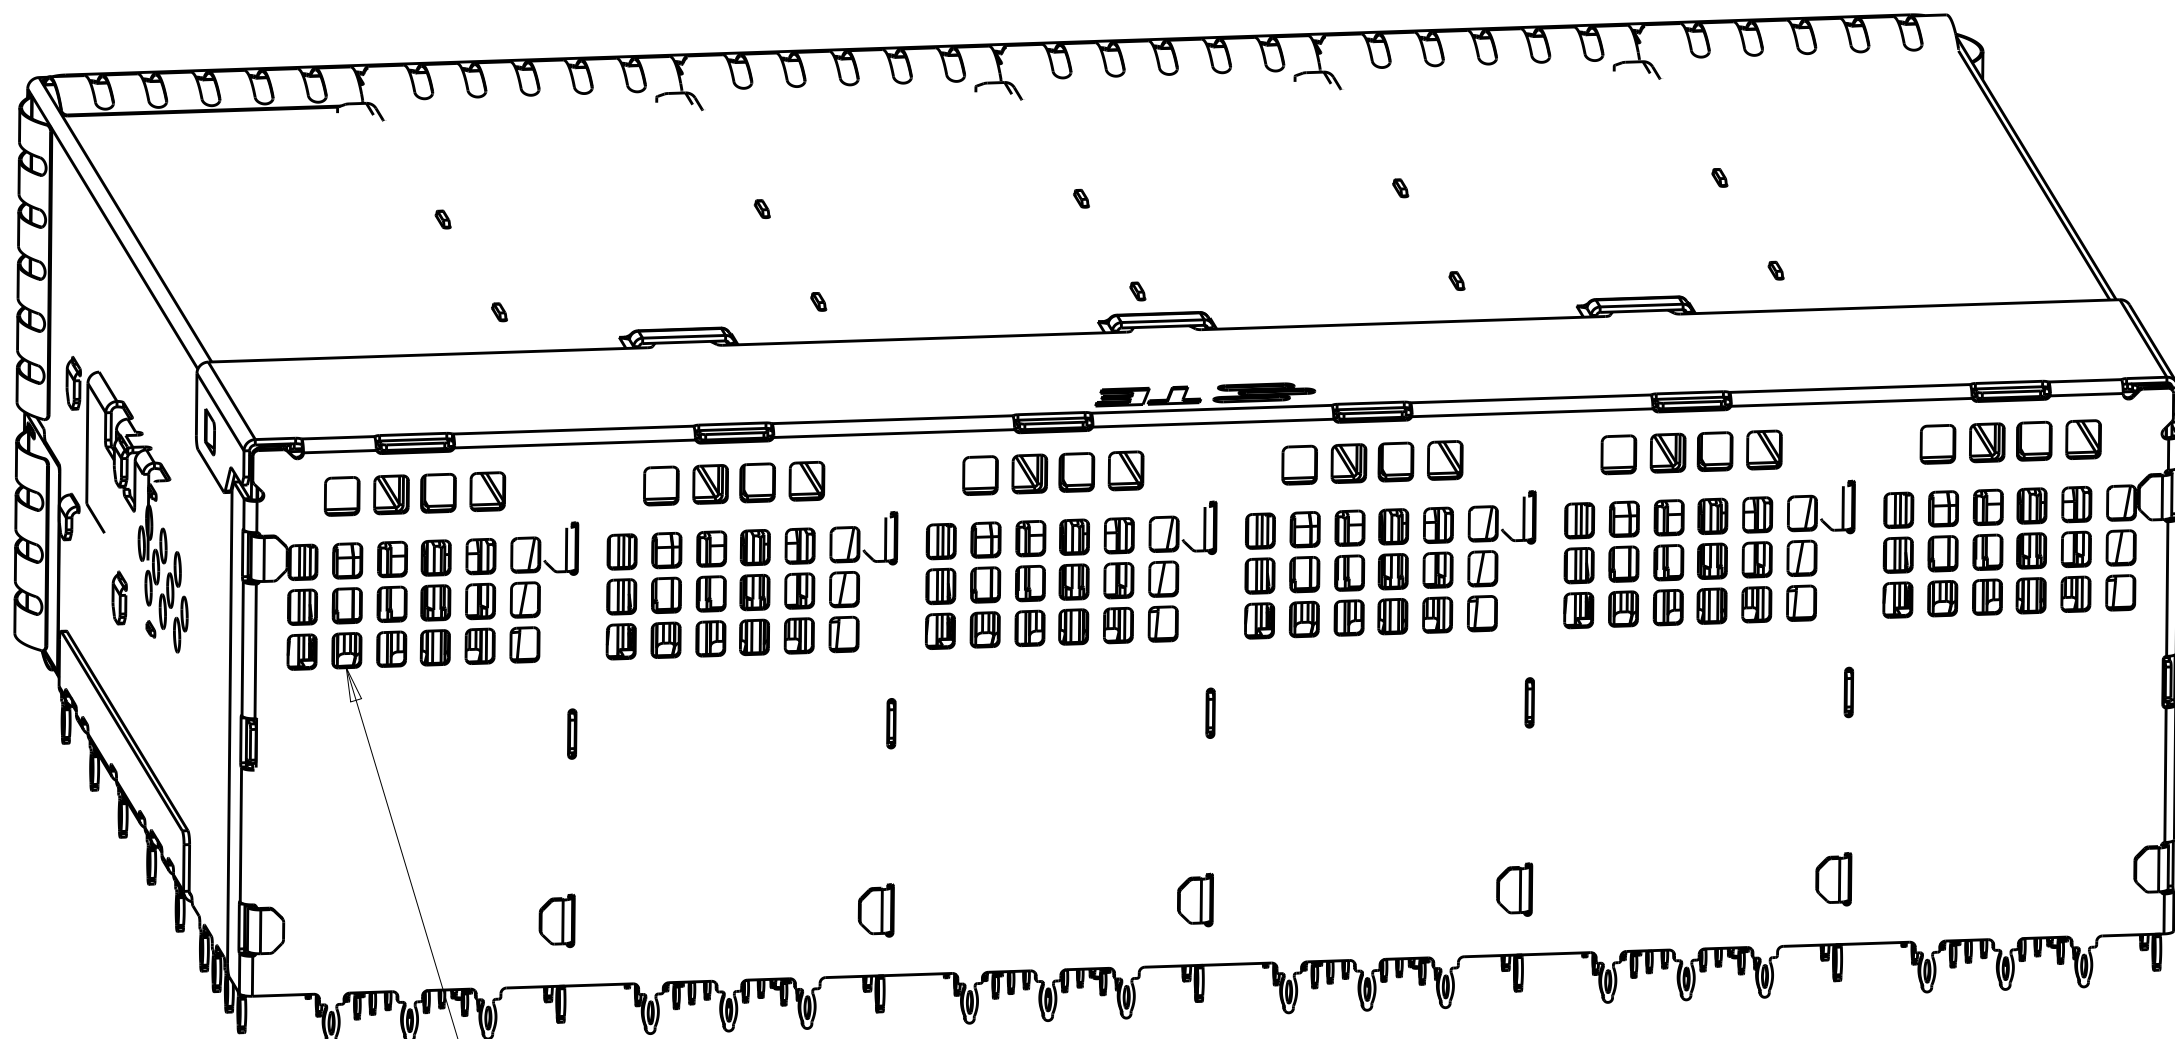


AIR VENTS



3-2347721-1
EMI SPRING TYPE

THIS DRAWING IS A CONTROLLED DOCUMENT.				OWN	J. WANG	26FEB2019	 TE Connectivity								
				CHK	S. HAN	26FEB2019									
				APVD	S. HAN	26FEB2019									
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56									
mm				PRODUCT SPEC											
		0 PLC ±0.25		108-2481											
		1 PLC ±0.25		APPLICATION SPEC											
		2 PLC ±0.25		114-13319		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO					
		3 PLC ±0.25		WEIGHT		A1		00779	C=2347721	-					
		4 PLC ±0.25		CUSTOMER DRAWING				SCALE	1:1	SHEET	2	OF	6	REV	A
		ANGLES ±°													
		FINISH													
MATERIAL		SEE NOTES													
SEE NOTES															

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-



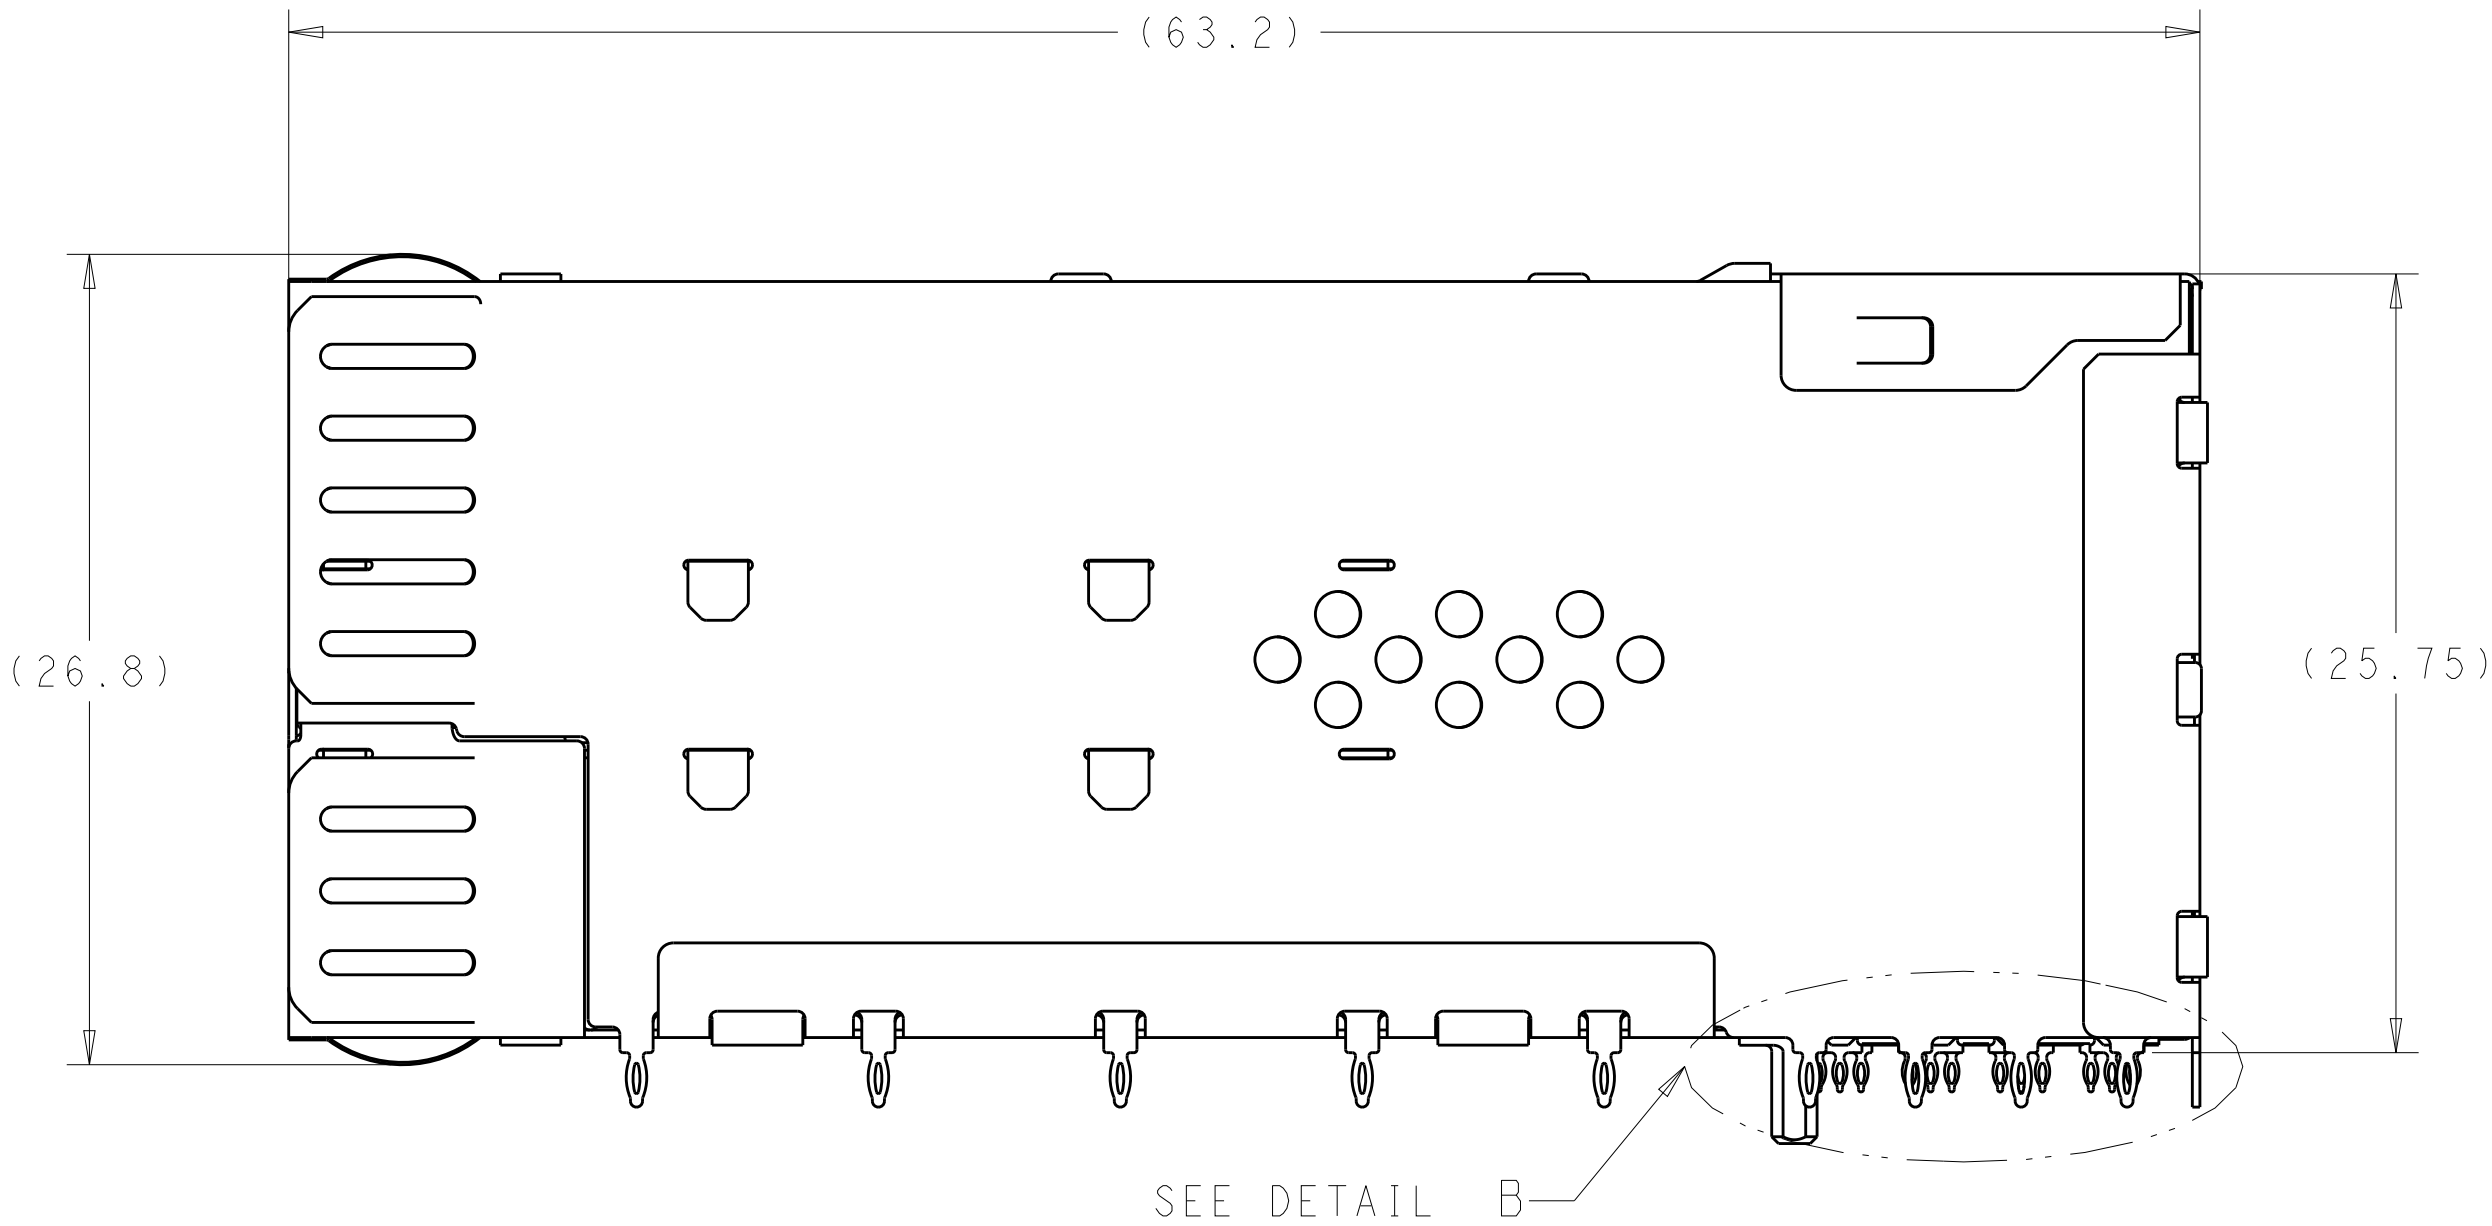
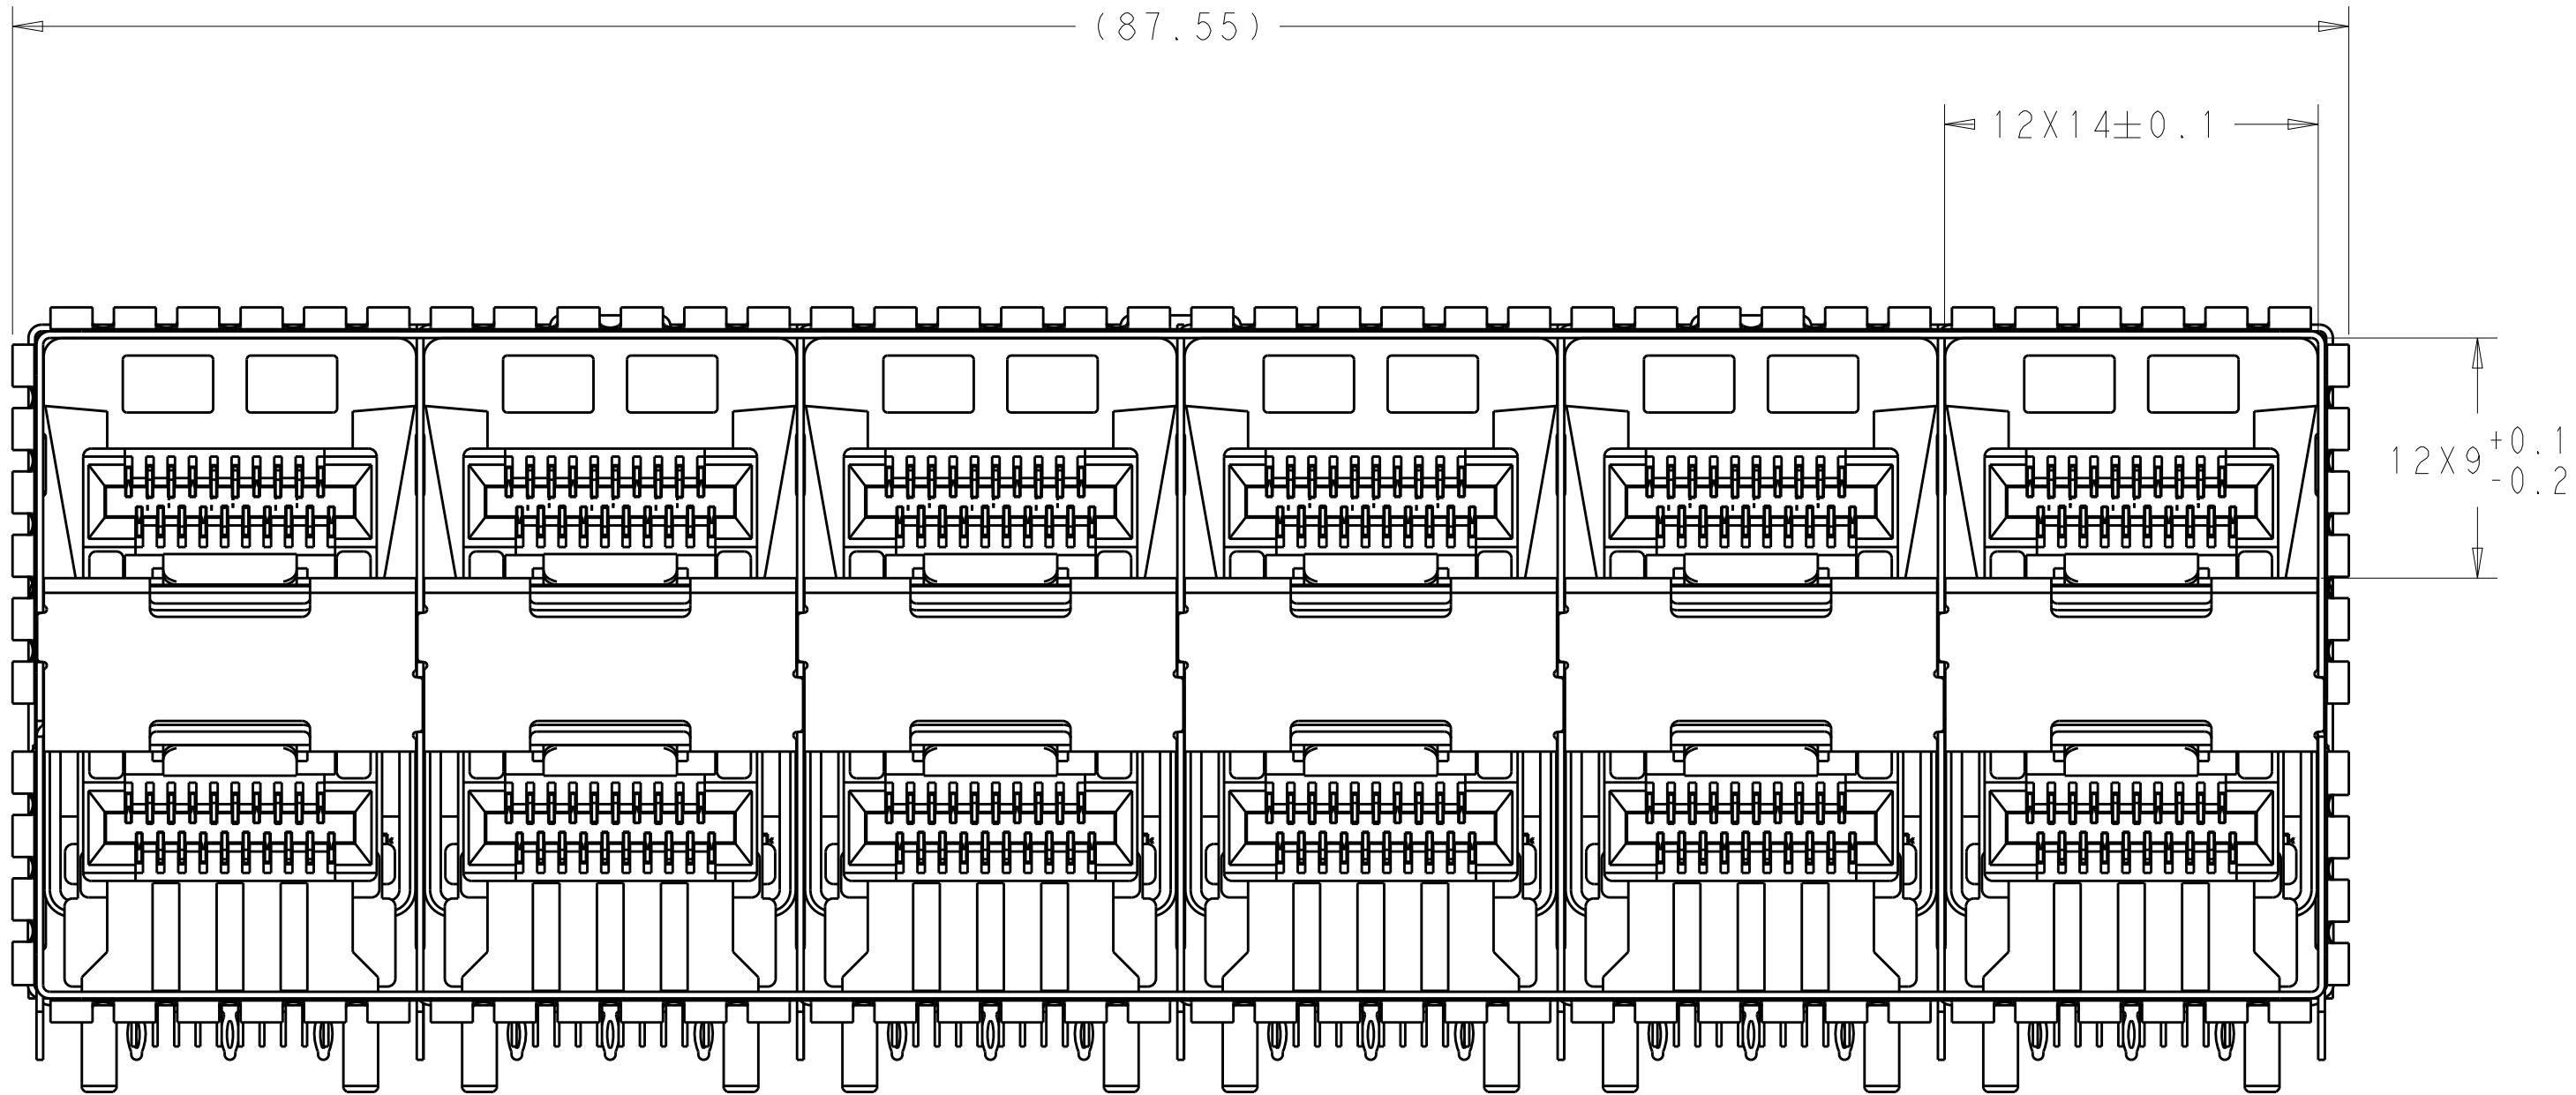


2347721-5 THRU 1-2347721-2, 1-2347721-9, 2-2347721-0, 2-2347721-1
EMI SPRINGS ONLY
SCALE 4:1

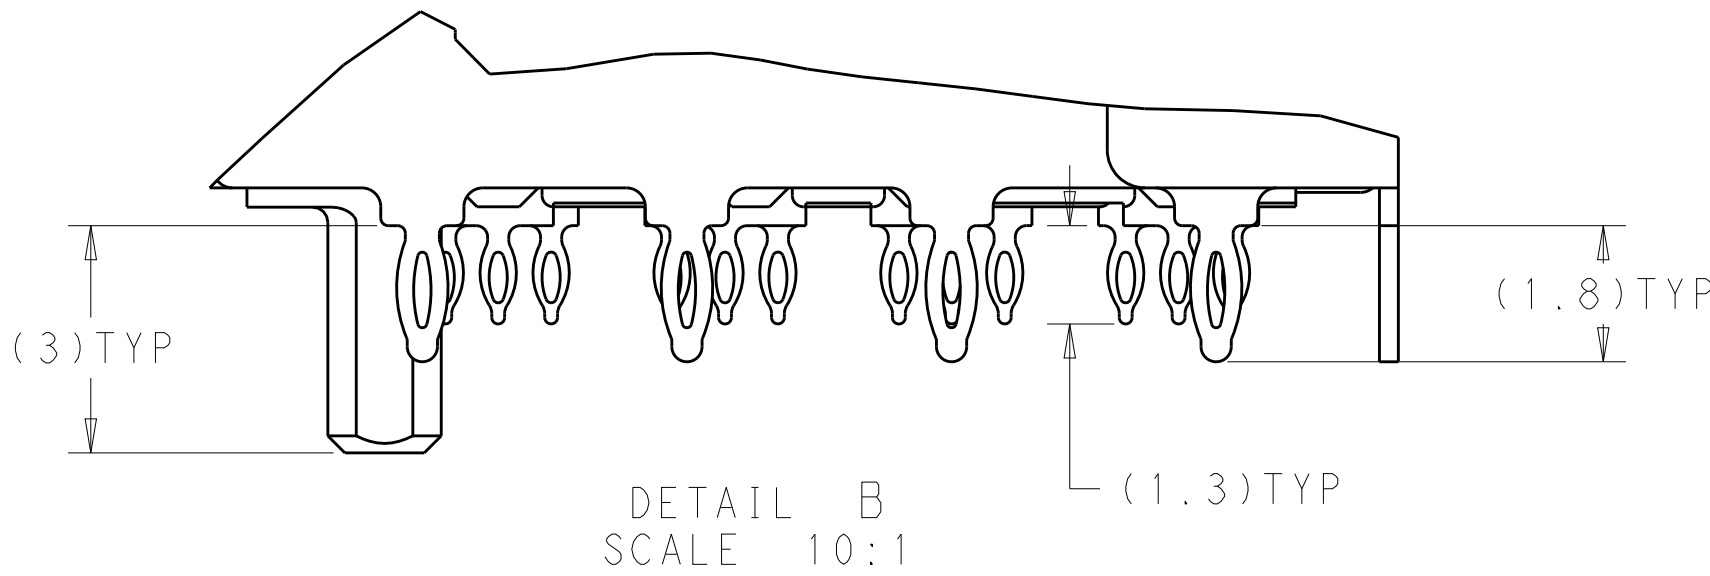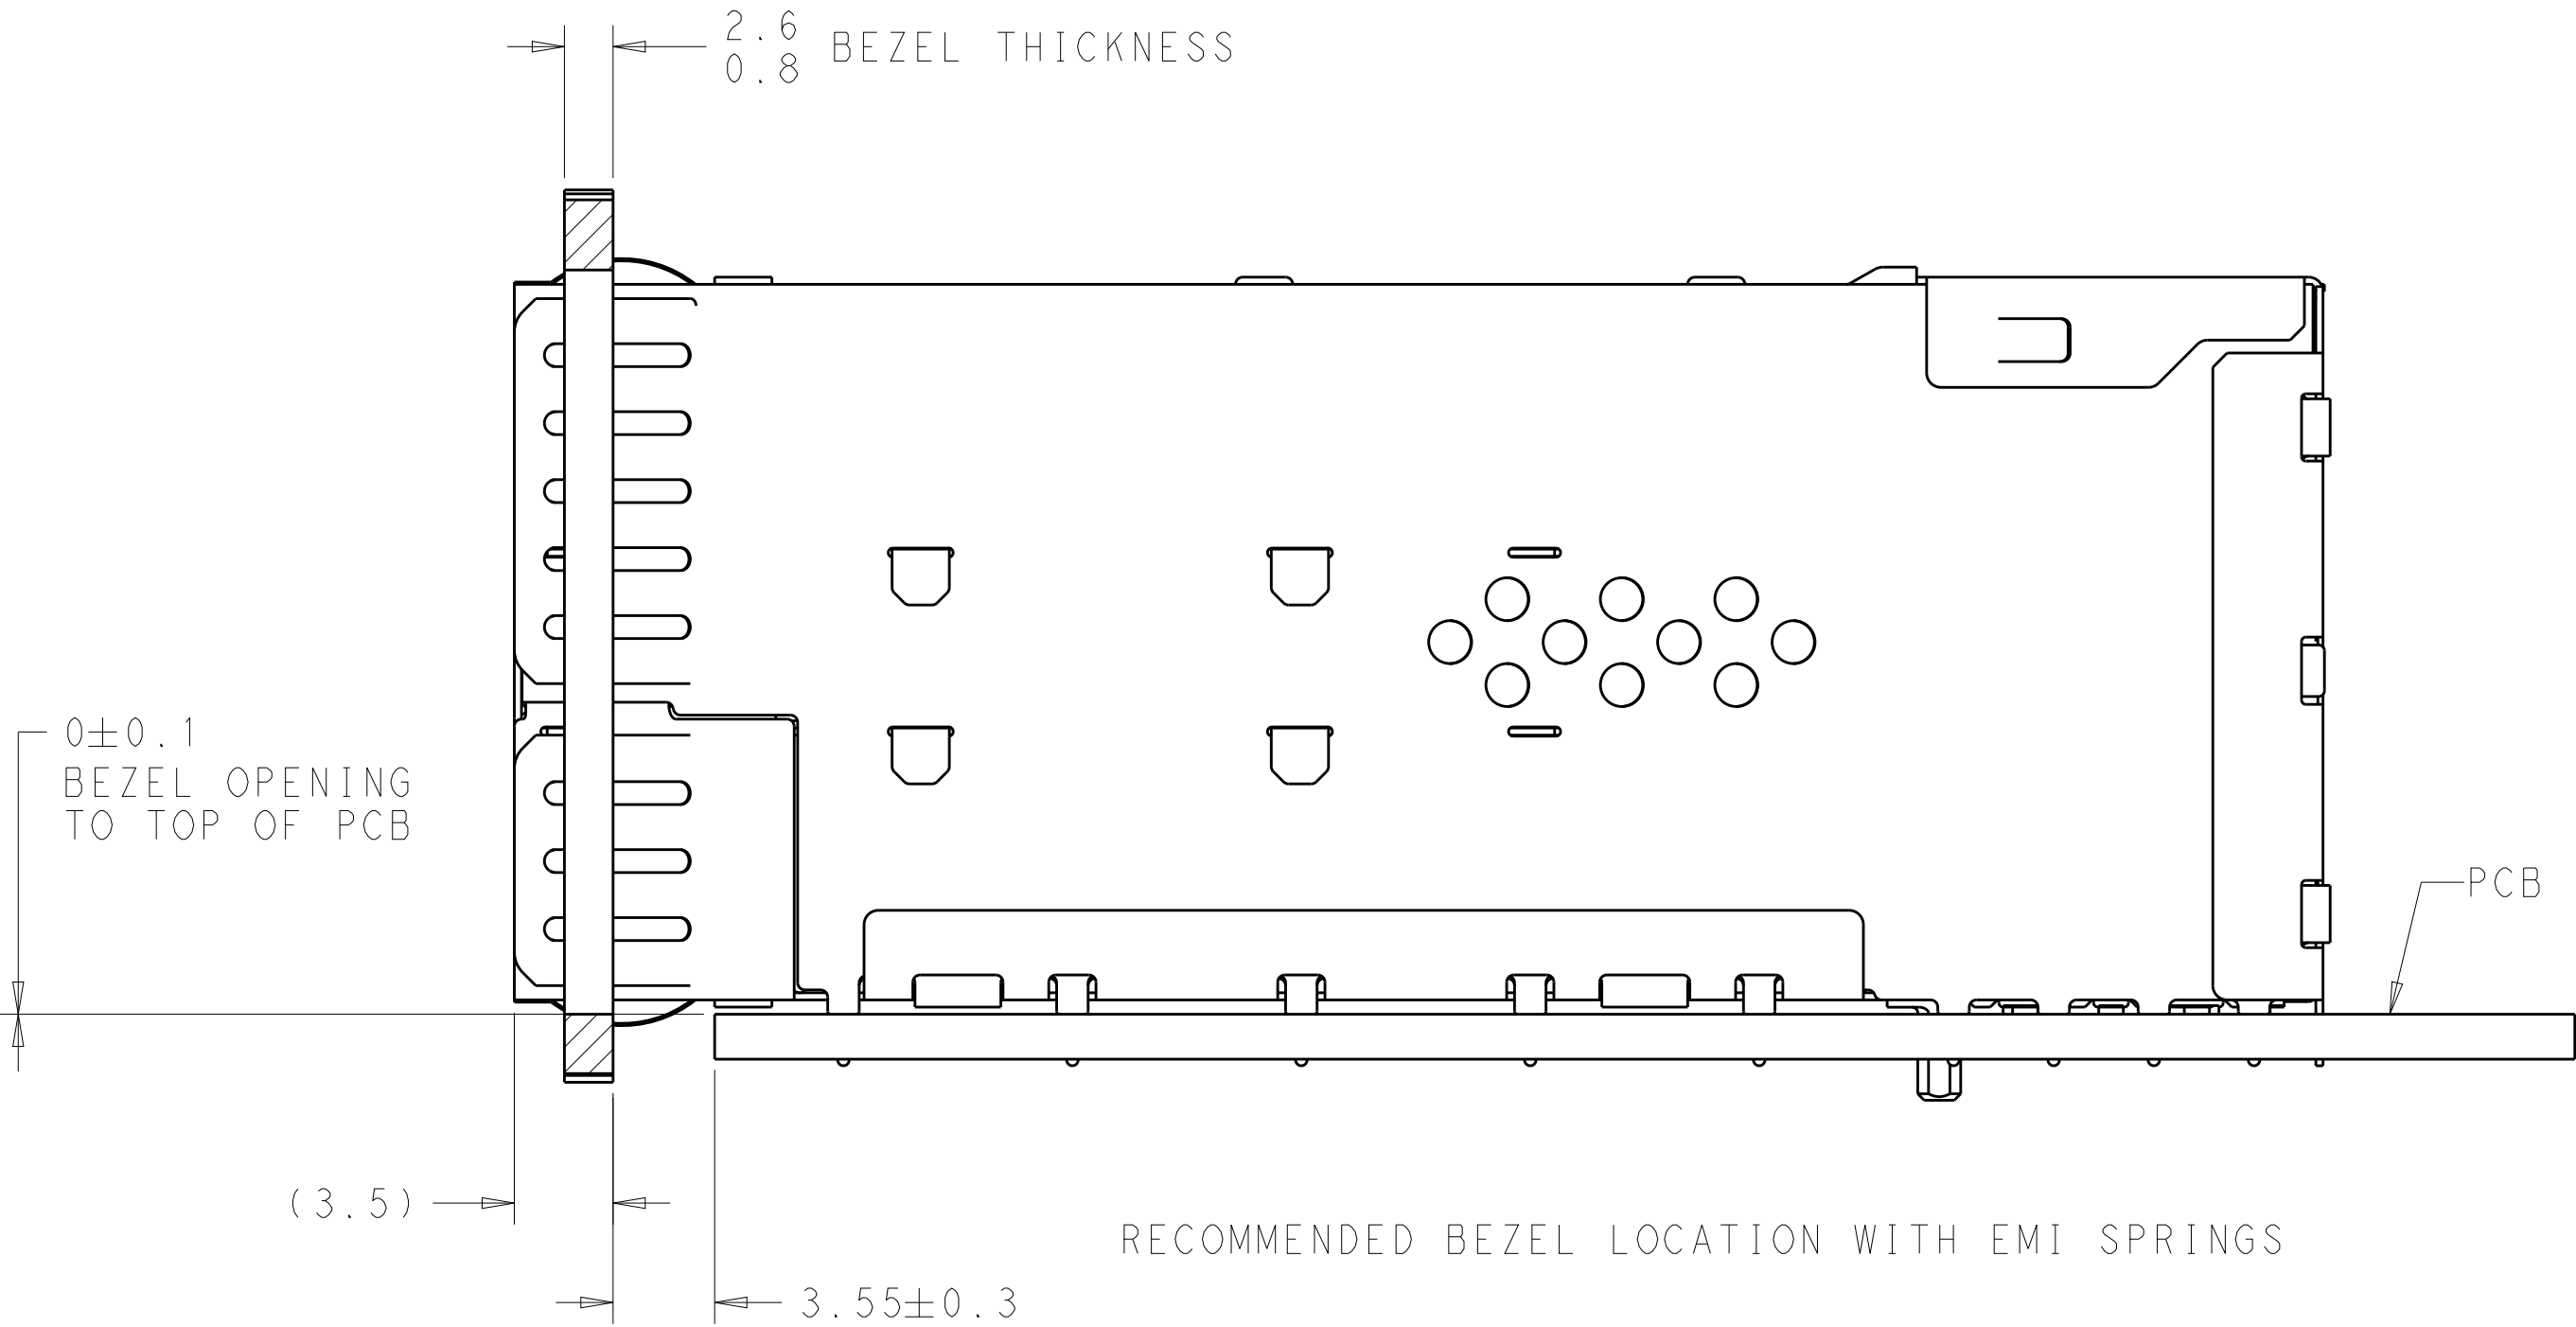


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. WANG	26FEB2019	 TE Connectivity	
		CHK	S. HAN	26FEB2019		
		APVD	S. HAN	26FEB2019	NAME	
		PRODUCT SPEC			RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56	
		APPLICATION SPEC			-	
		WEIGHT			RESTRICTED TO	
		CUSTOMER DRAWING			-	
		SCALE			SHEET	
		1:1			3 OF 6	
					REV	
					A	

LOC		DIST		REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD		
		-		SEE SHEET 1	-	-	-		

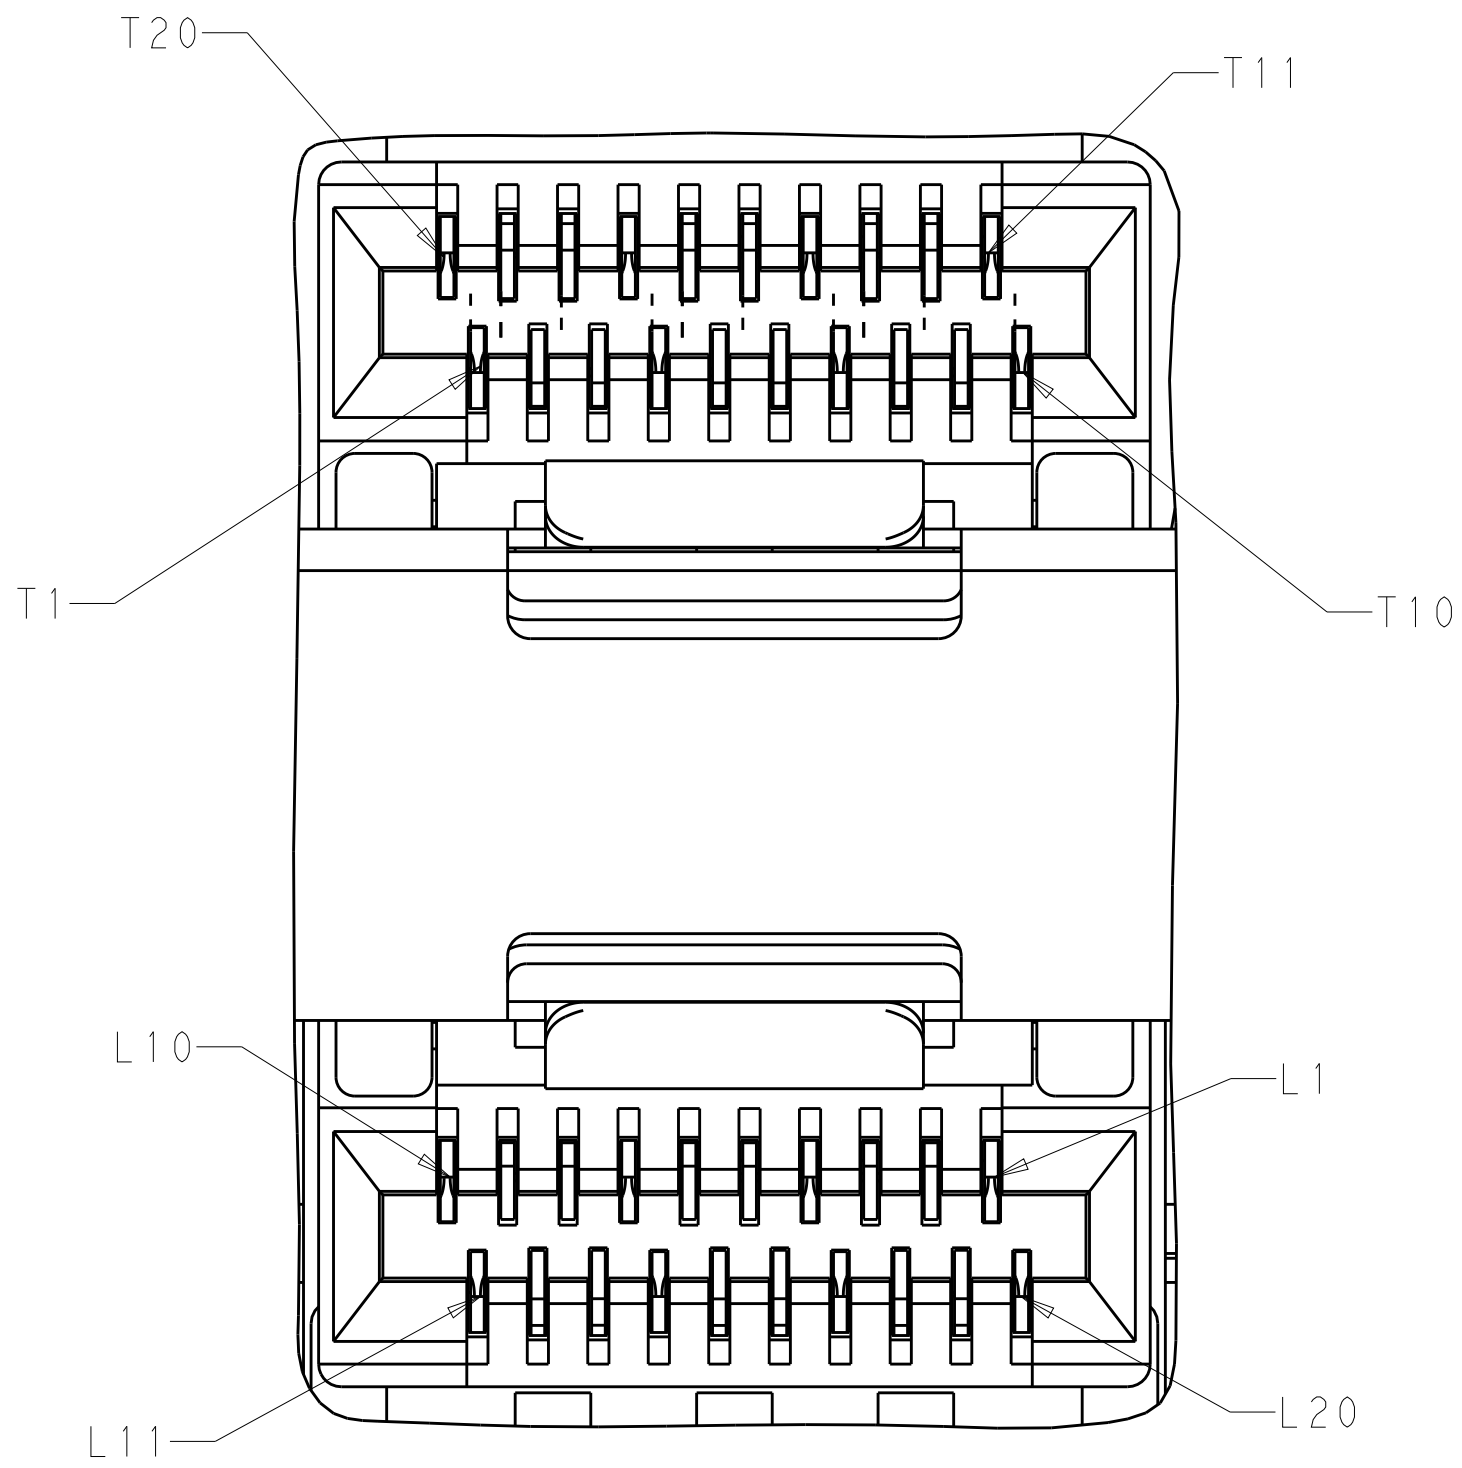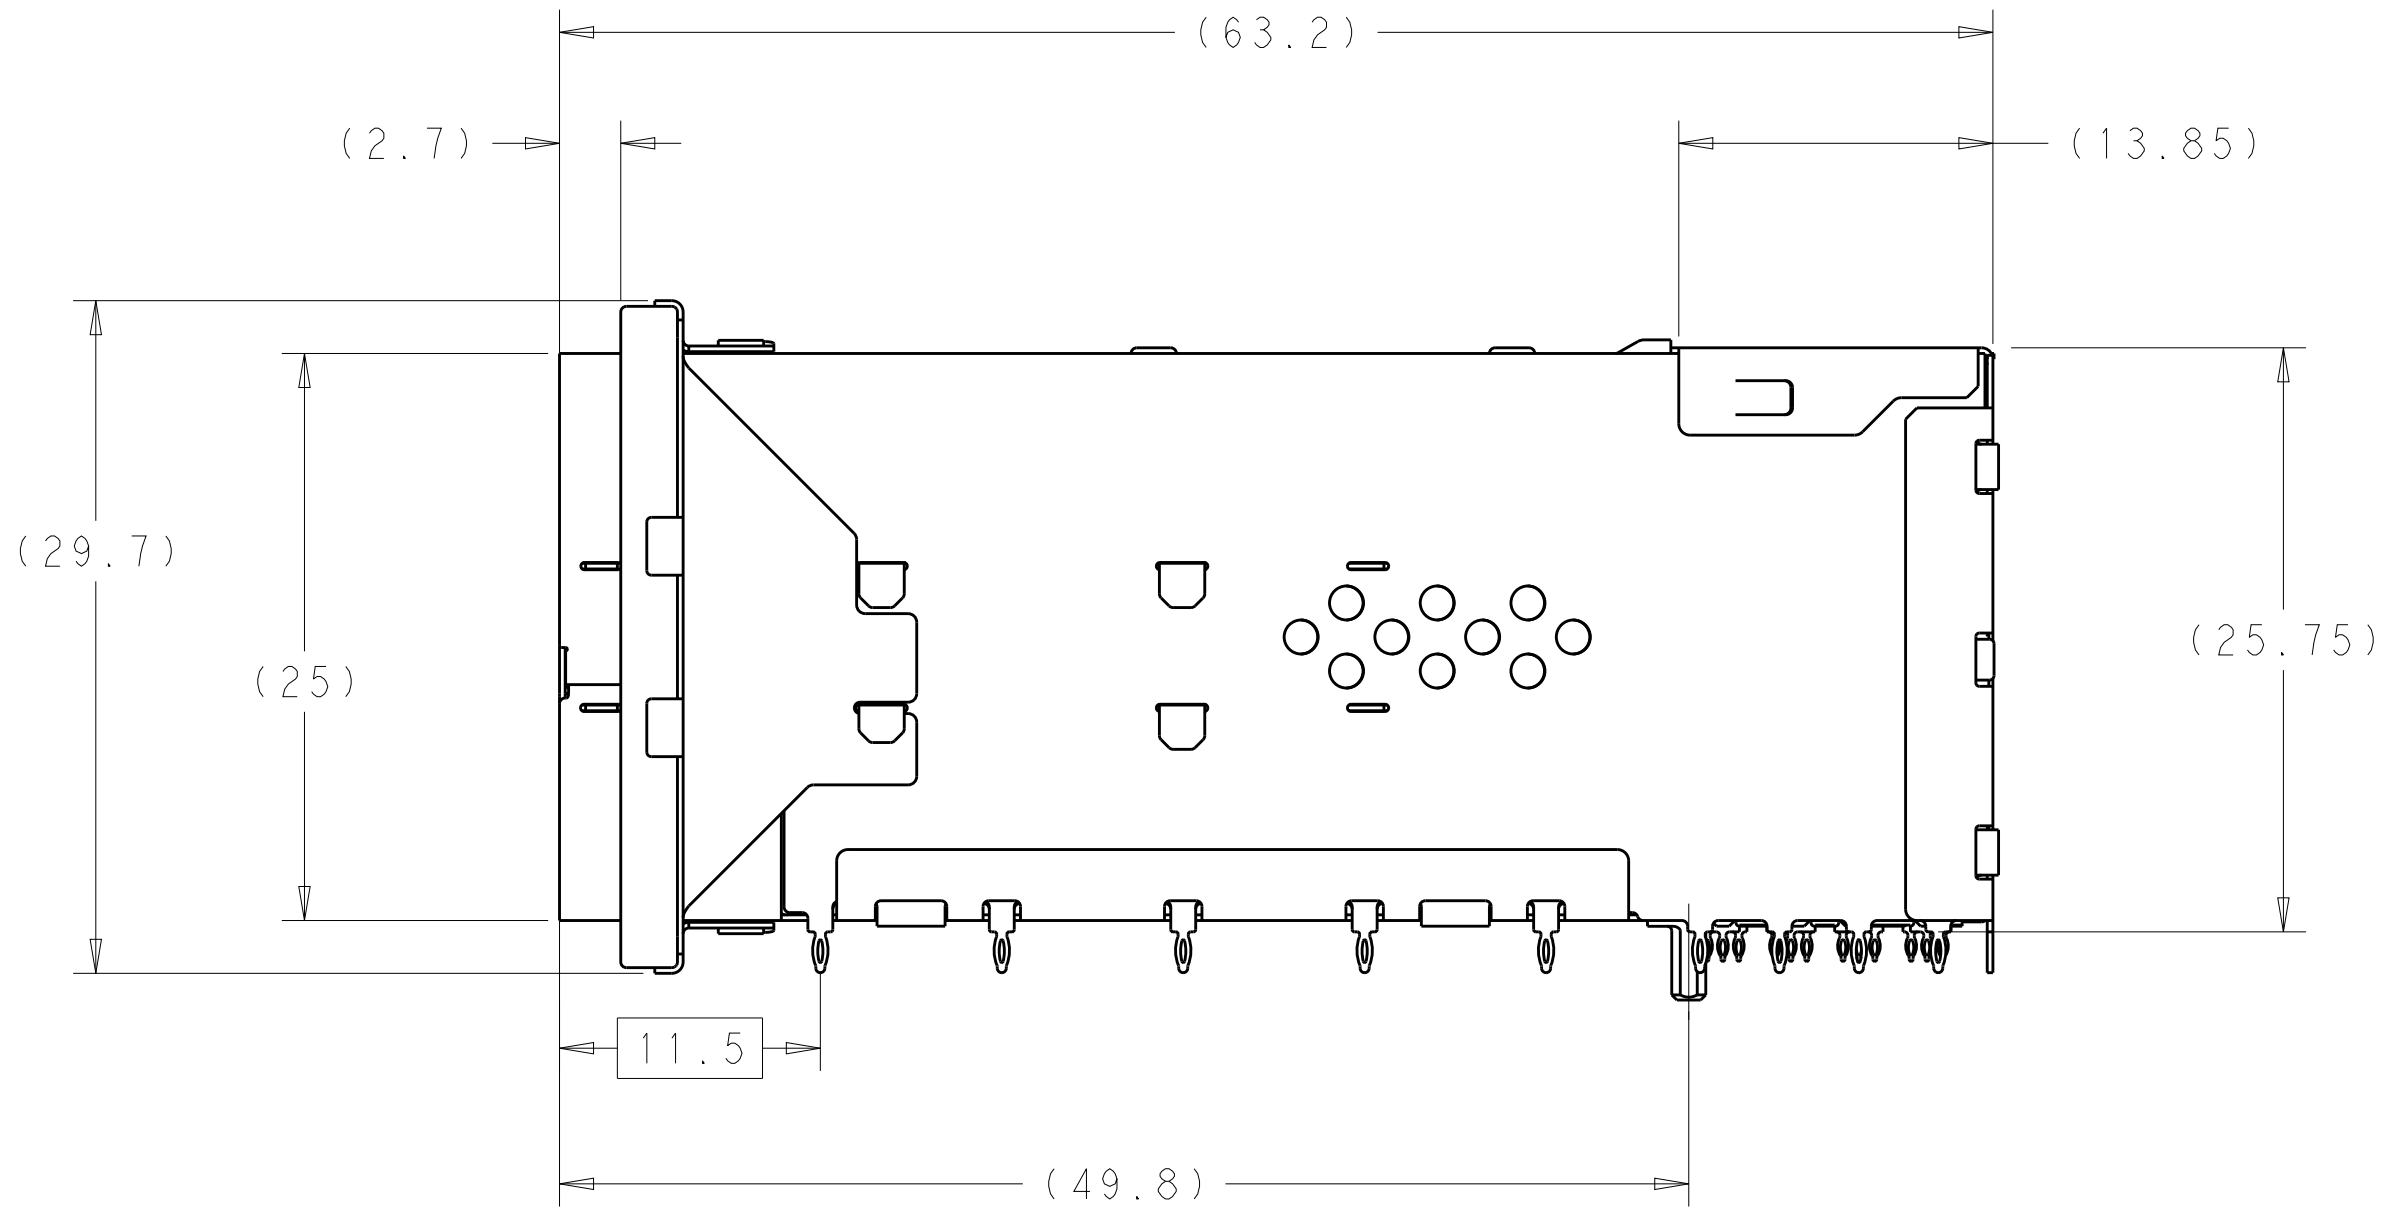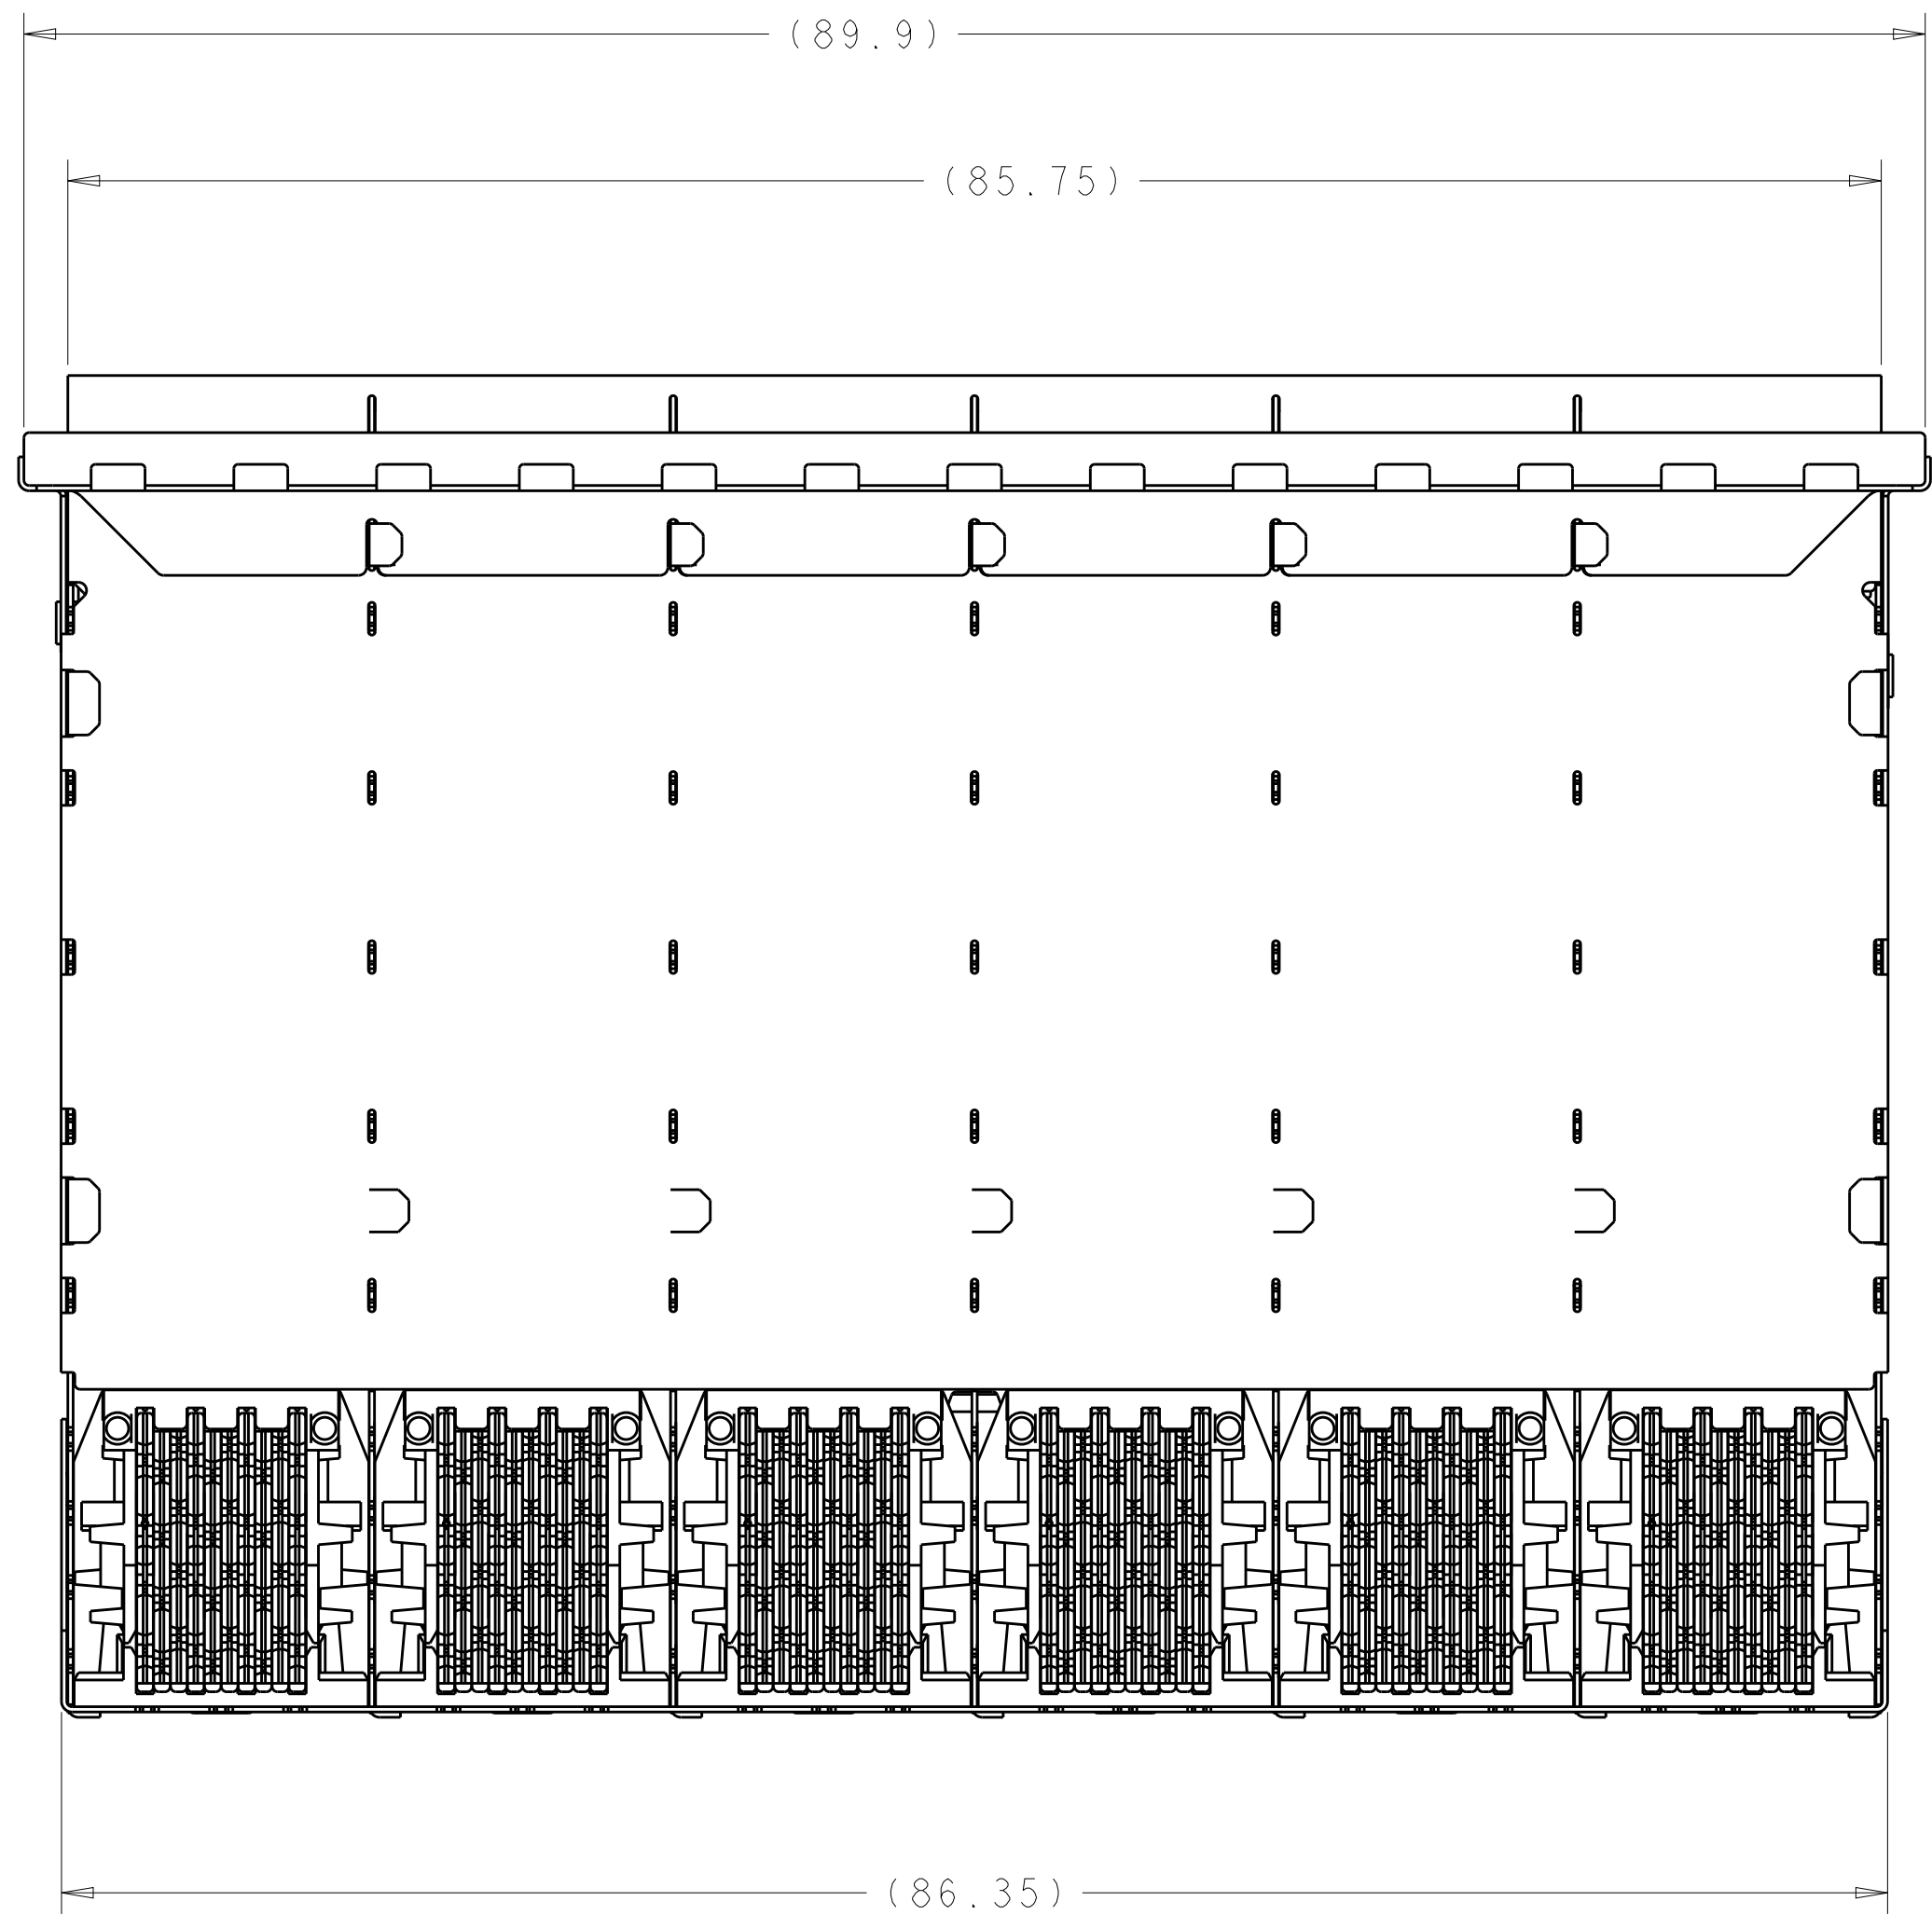
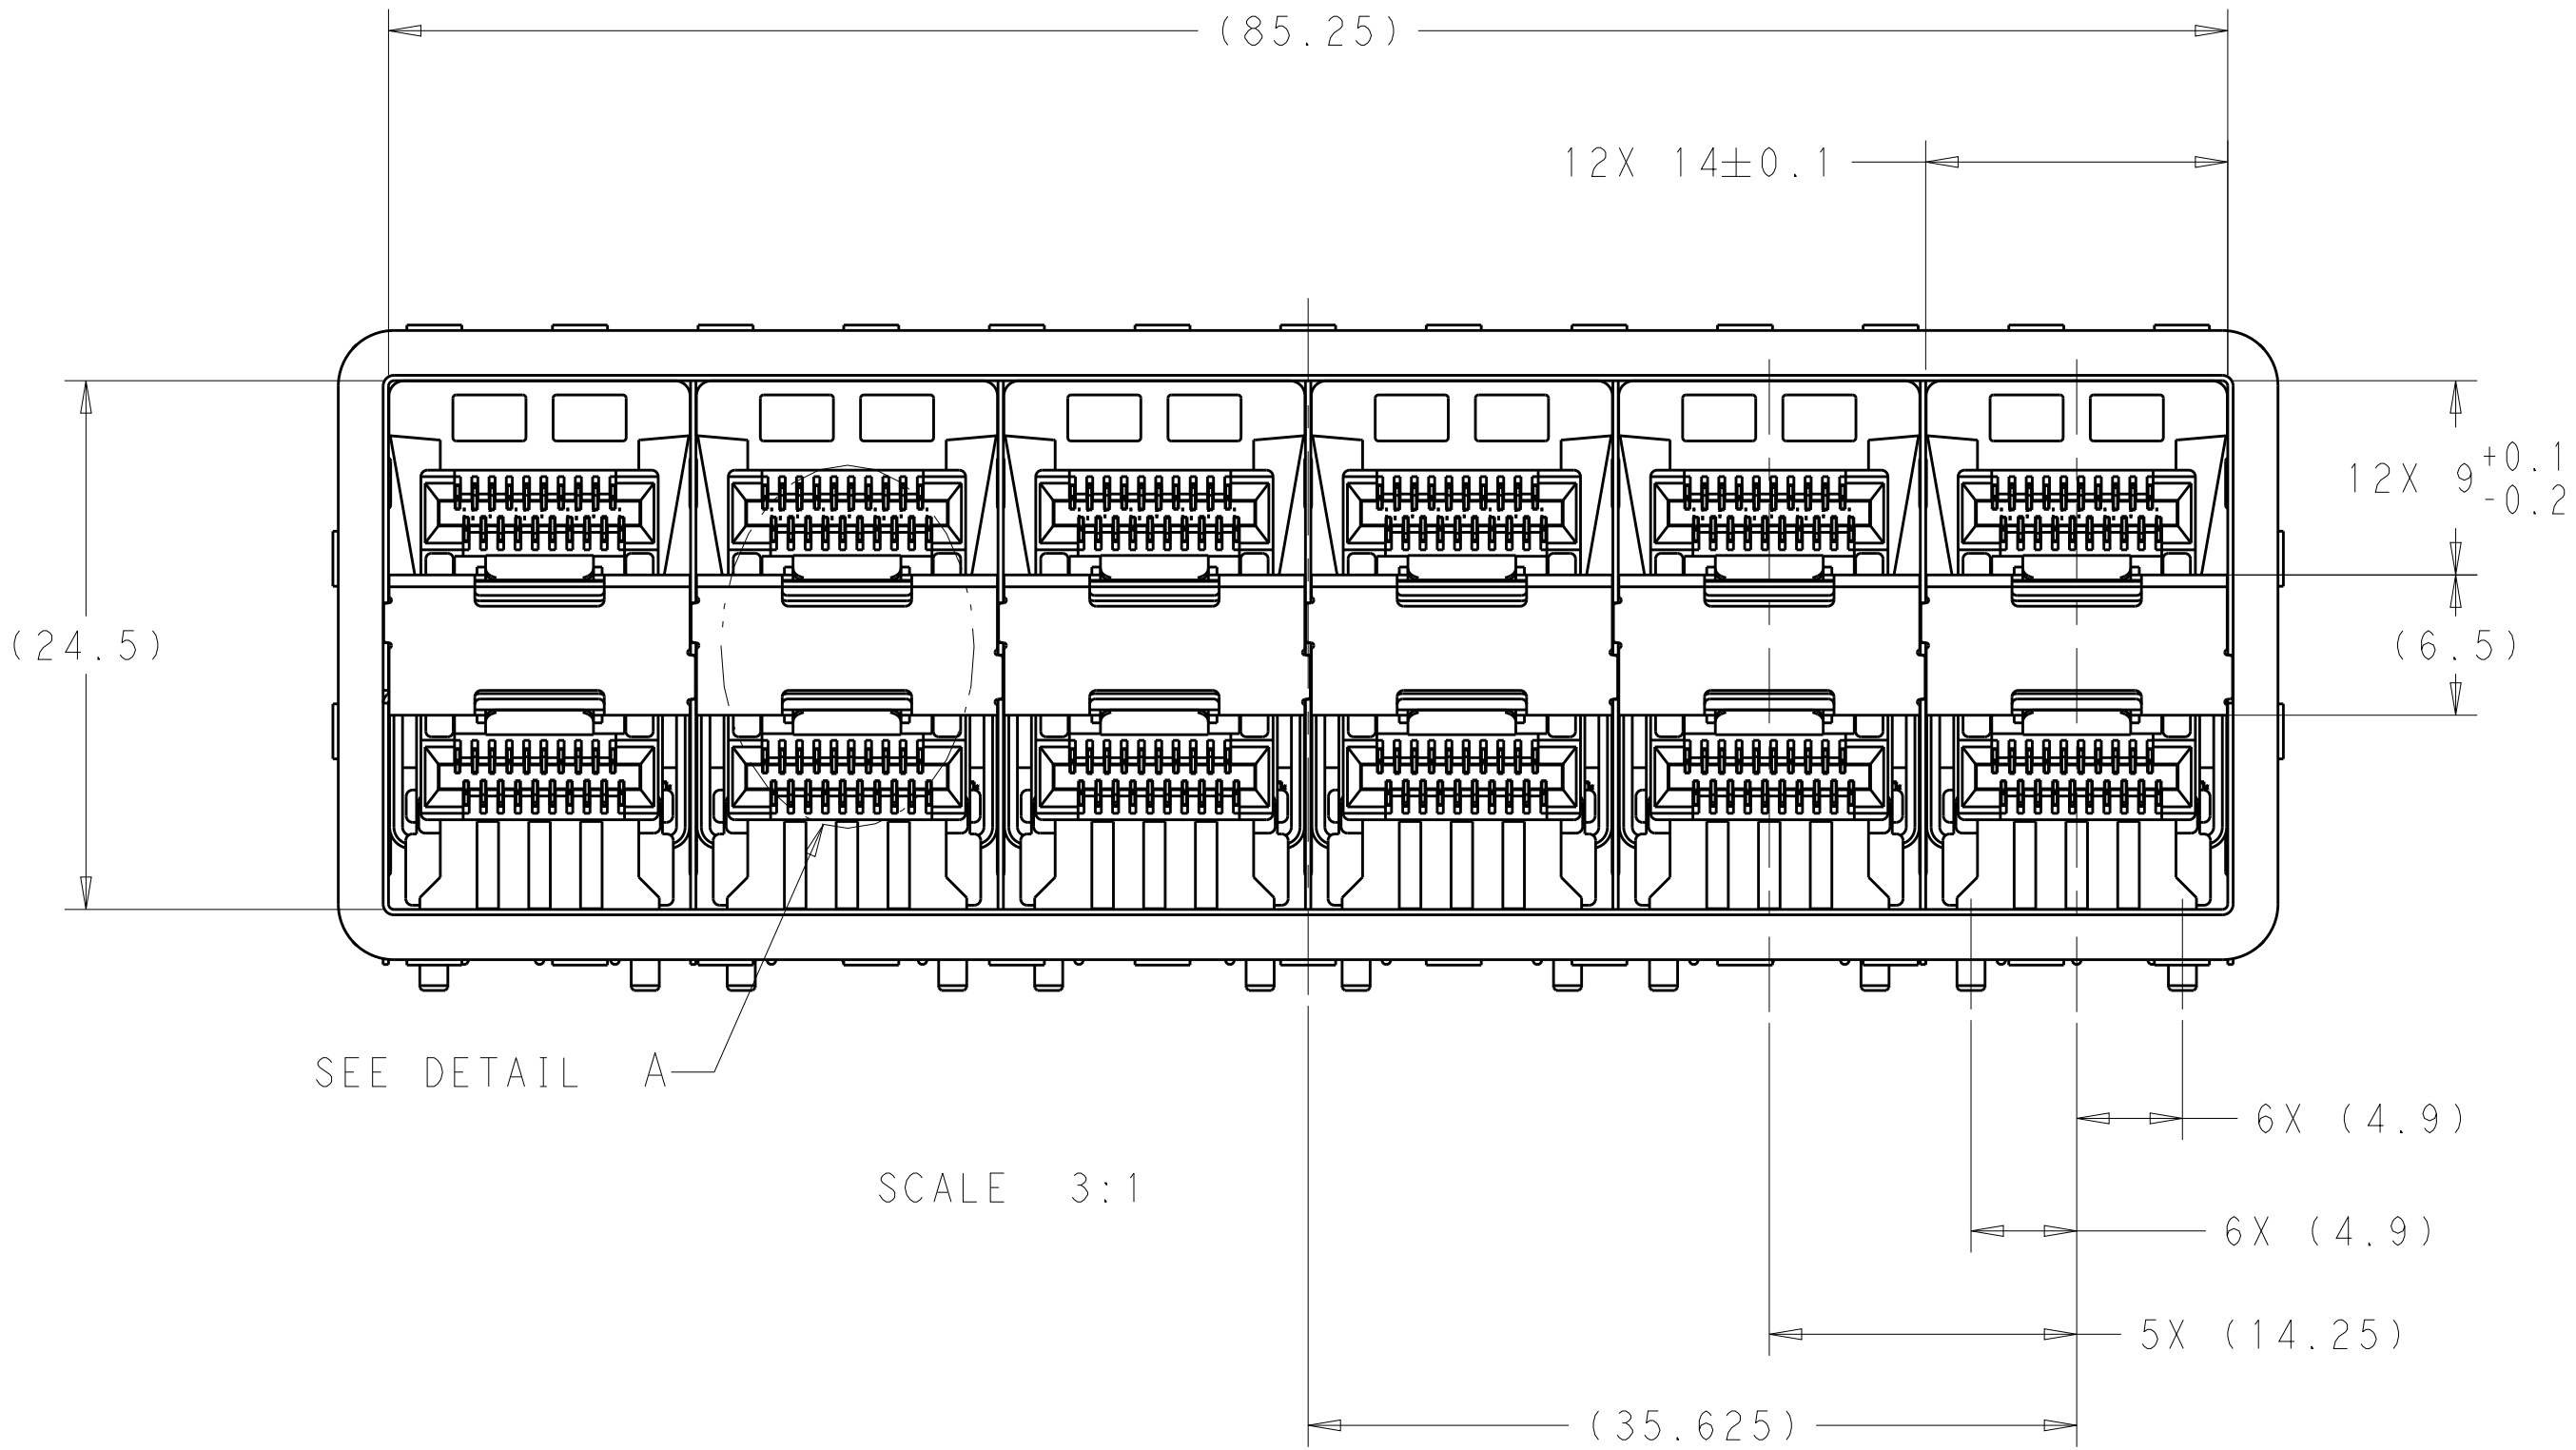


DETAIL A
6X INDIVIDUALLY
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN J. WANG 26FEB2019		 TE Connectivity			
DIMENSIONS:				CHK S. HAN 26FEB2019					
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD S. HAN 26FEB2019		NAME	
		0. P L C ±0.25				PRODUCT SPEC		RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56	
		1. P L C ±0.25				108-2481			
		2. P L C ±0.25				APPLICATION SPEC			
		3. P L C ±0.25				114-13319			
MATERIAL		ANGLES ±°				WEIGHT		RESTRICTED TO	
SEE NOTES		45°				CUSTOMER DRAWING		SCALE 4:1 SHEET 4 OF 6 REV A	

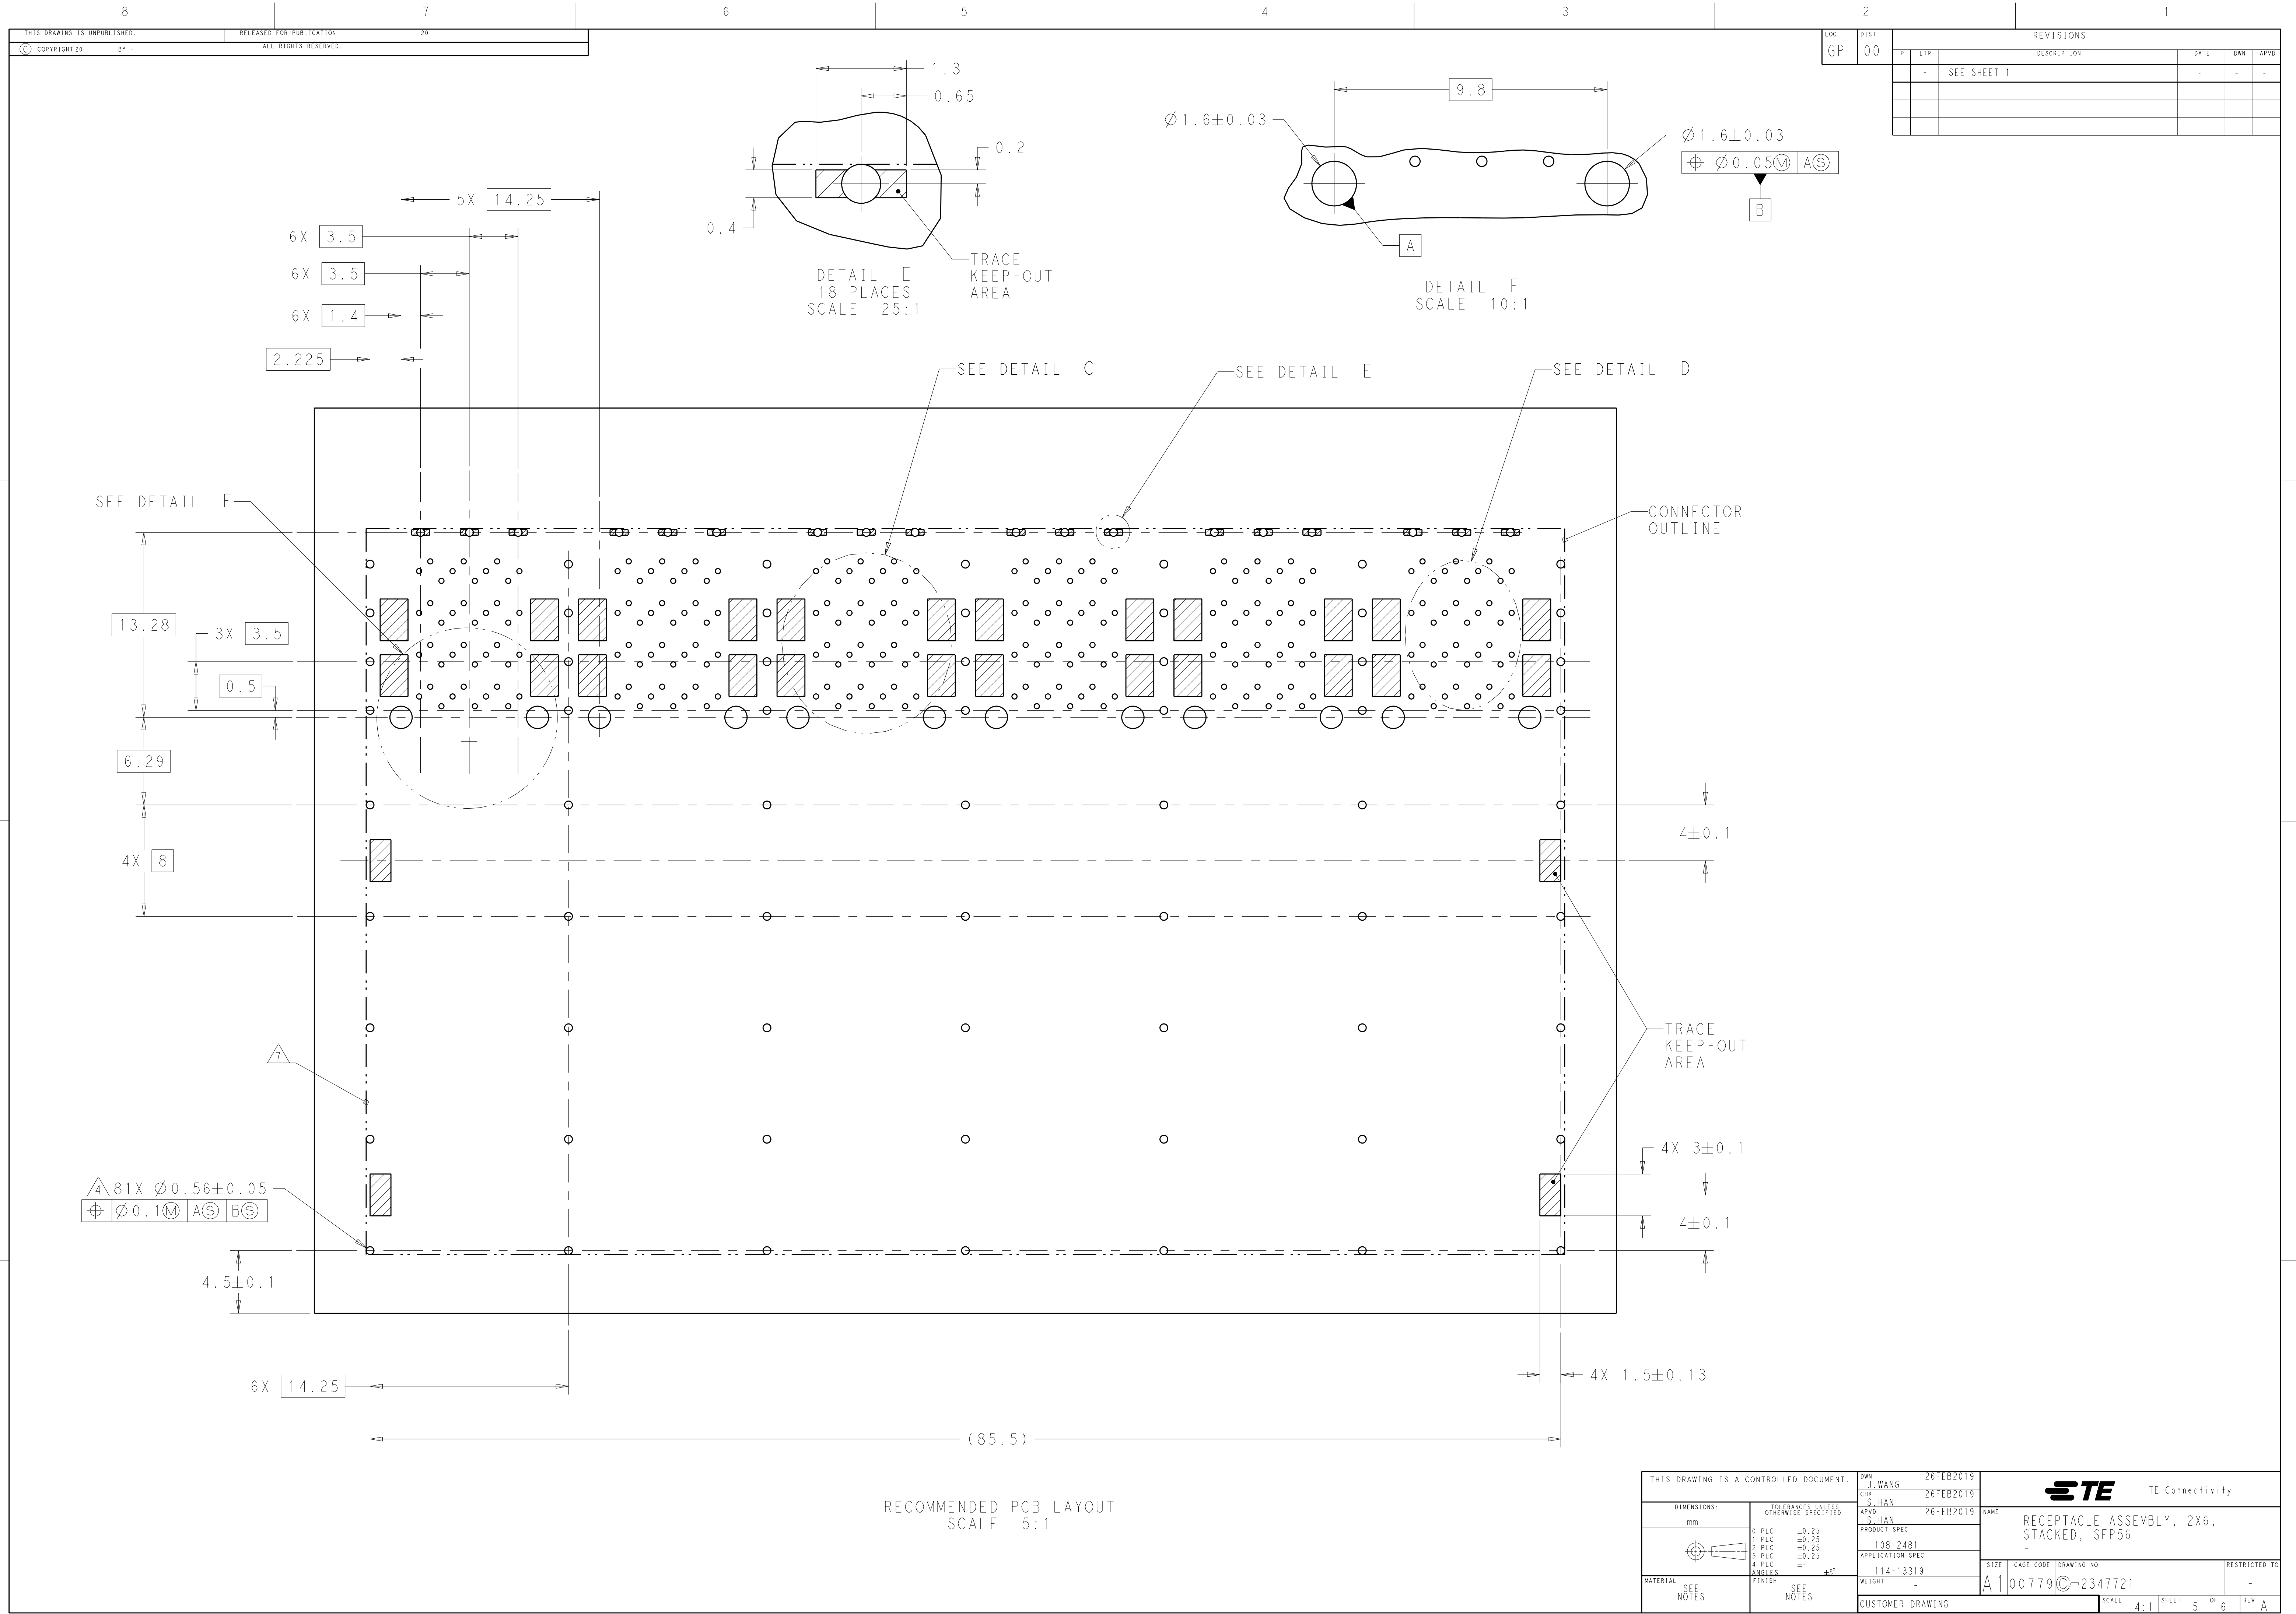


LOC		DIST		REVISONS			
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

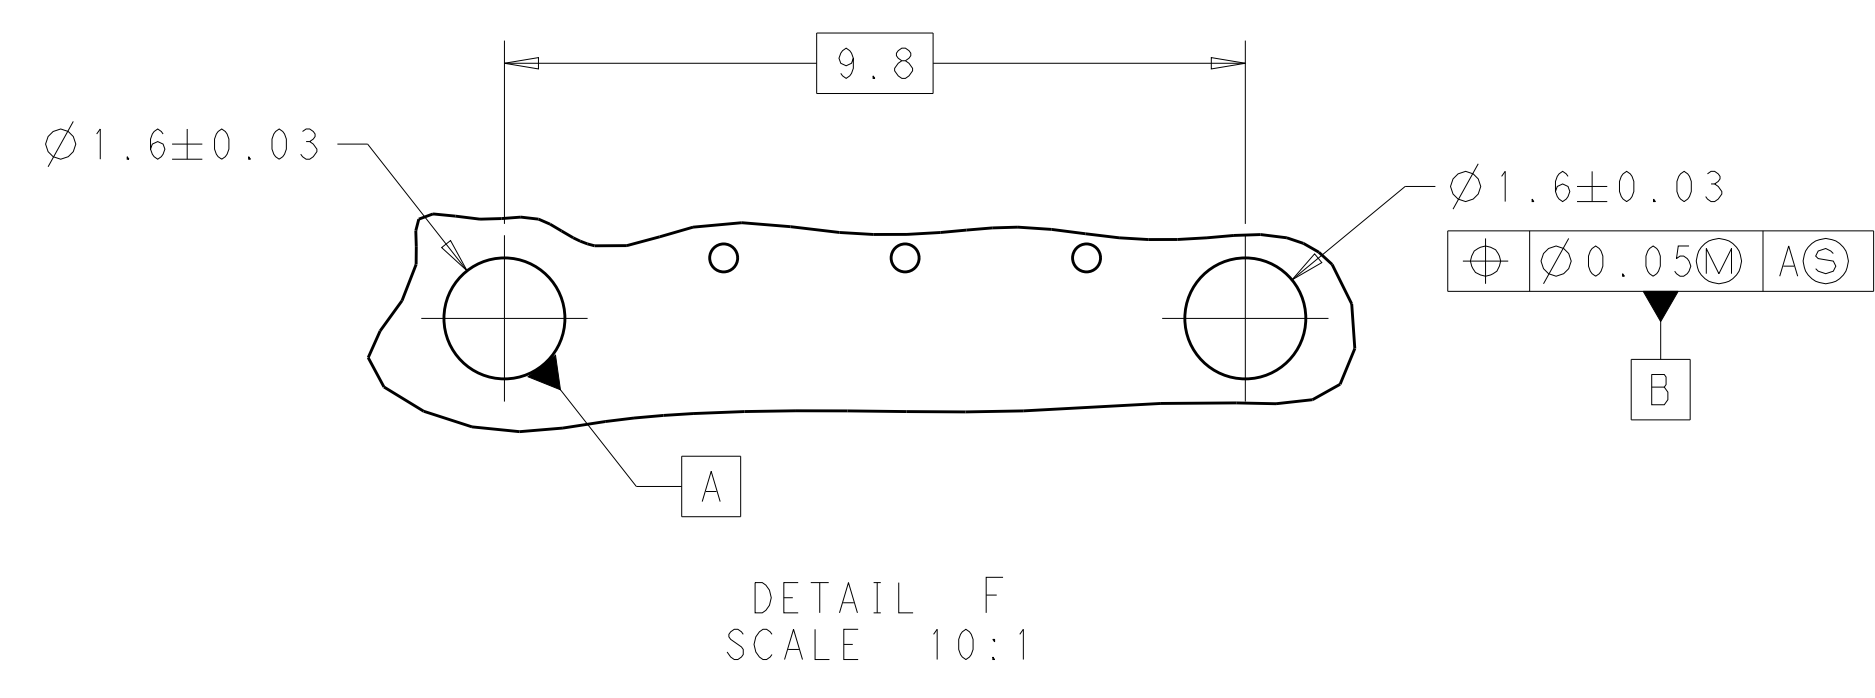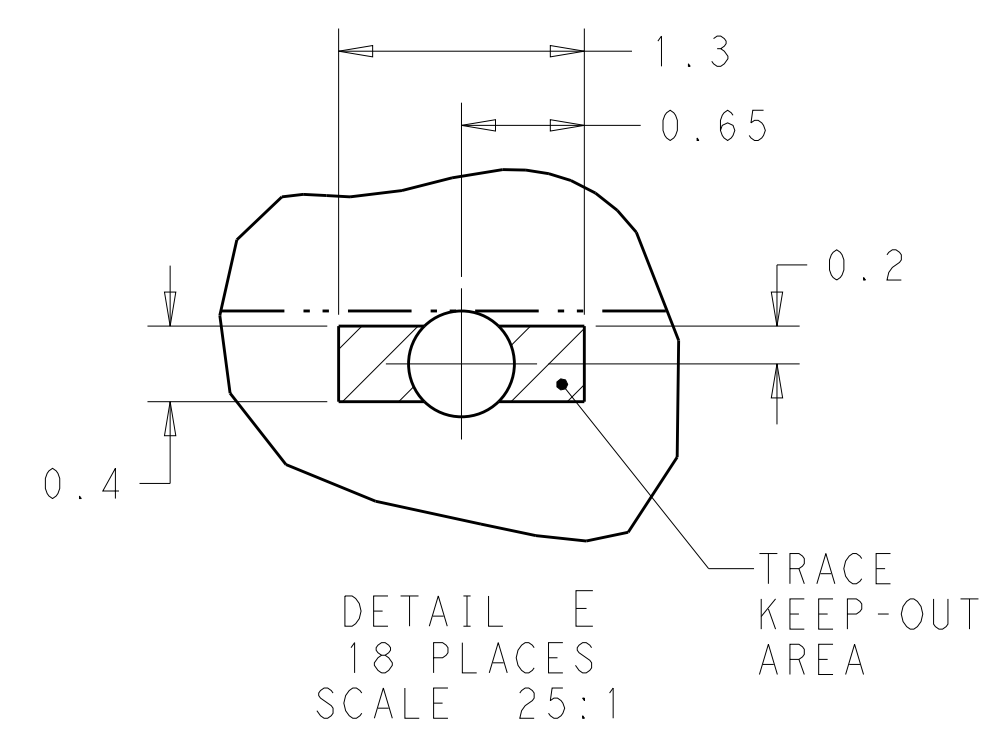


RECOMMENDED PCB LAYOUT
SCALE 5:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG 26FEB2019	TE Connectivity	
DIMENSIONS: mm		CHK S. HAN 26FEB2019		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. HAN 26FEB2019	NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56	
0 PLC ±0.25		PRODUCT SPEC	SIZE A1	
1 PLC ±0.25		108-2481	CAGE CODE 00779	
2 PLC ±0.25		APPLICATION SPEC	DRAWING NO C=2347721	
3 PLC ±0.25		114-13319	RESTRICTED TO -	
4 PLC ±		WEIGHT -	SHEET 5	
ANGLES FINISH		CUSTOMER DRAWING	OF 6	
SEE NOTES			REV A	




LOC		DIST		REVISIONS				
GP		00		P	LTR	DESCRIPTION		DATE
						SEE SHEET 1		

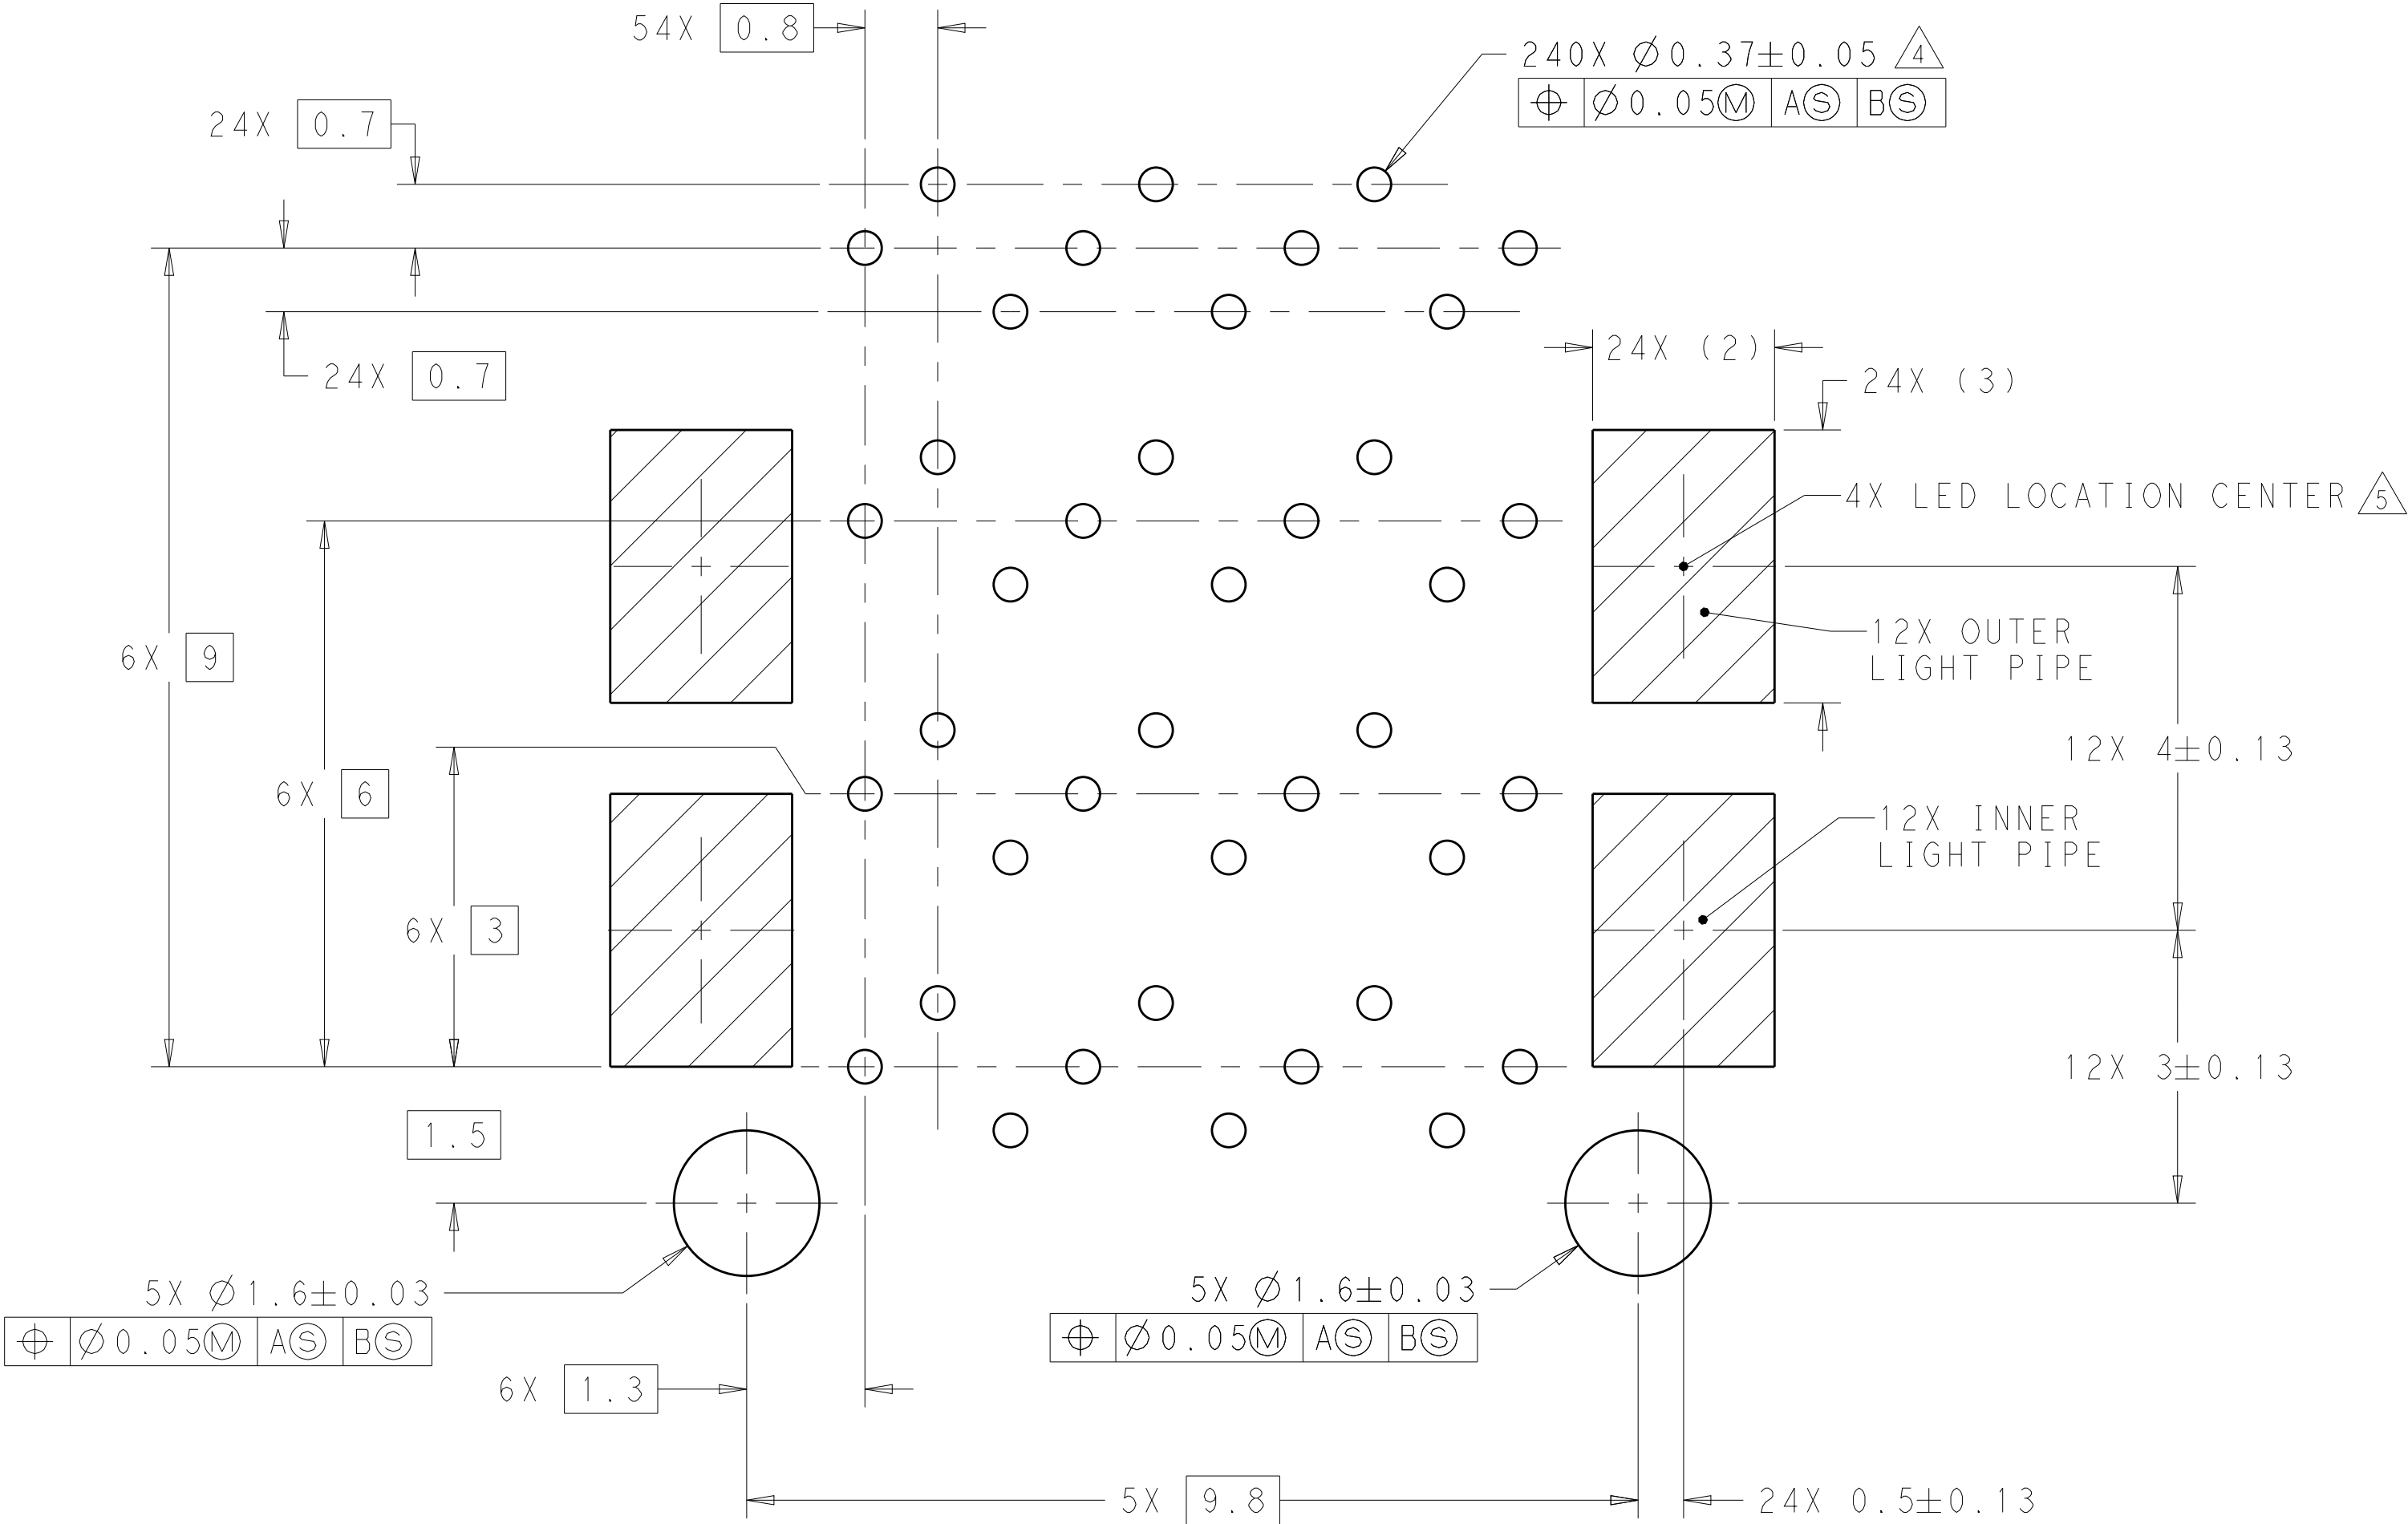


DETAIL C
RECOMMENDED PIN AND LIGHT PIPE LAYOUT
SCALE 15:1

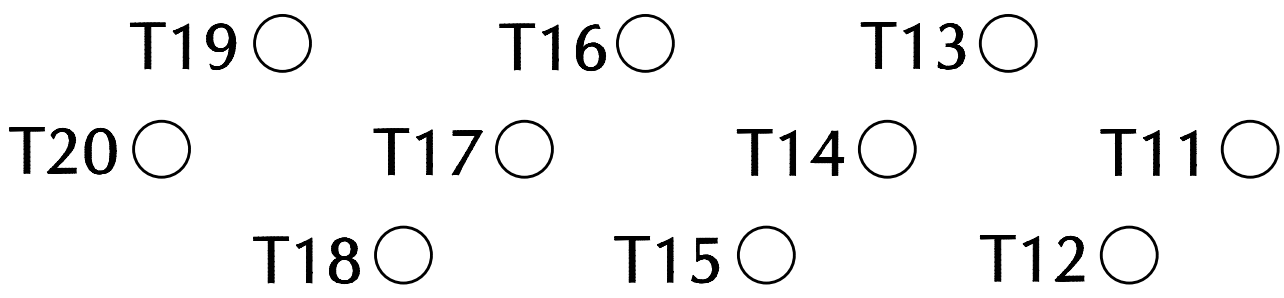


PIN MAP LEGEND	
PIN NUMBER	FUNCTION
L1/T1	VEET
L2/T2	TX-FAULT
L3/T3	TX-DISABLE
L4/T4	SDA
L5/T5	SCL
L6/T6	MOD_ABS
L7/T7	RSO
L8/T8	RX_LOS
L9/T9	RS1
L10/T10	VEER
L11/T11	VEER
L12/T12	RD-
L13/T13	RD+
L14/T14	VEER
L15/T15	VCCR
L16/T16	VCCT
L17/T17	VEET
L18/T18	TD+
L19/T19	TD-
L20/T20	VEET

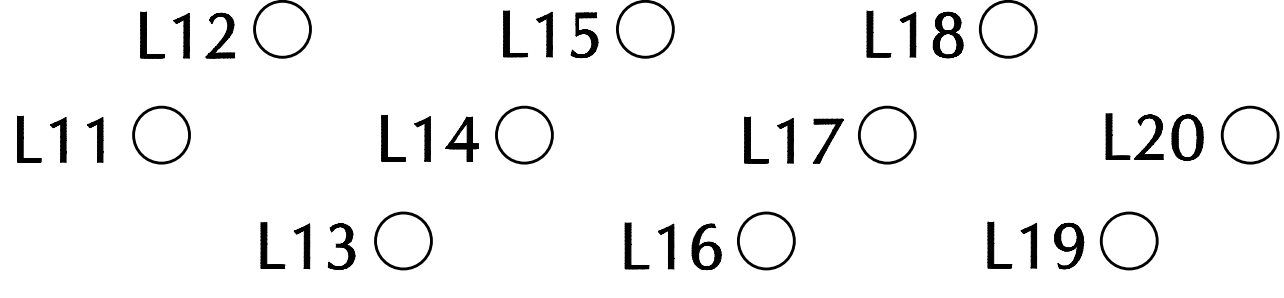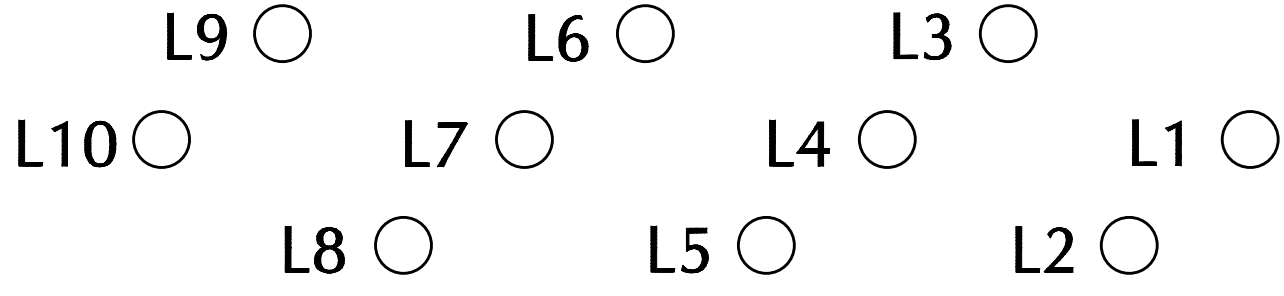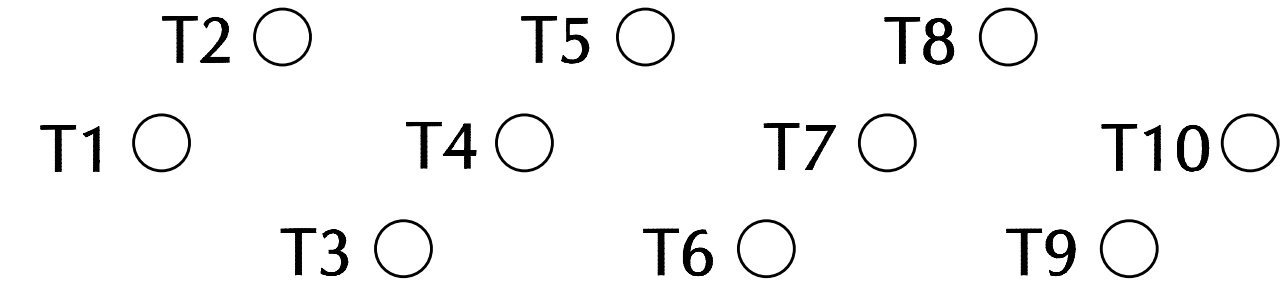

DETAIL D
PIN MAP
6 PLACES
SCALE 20:1

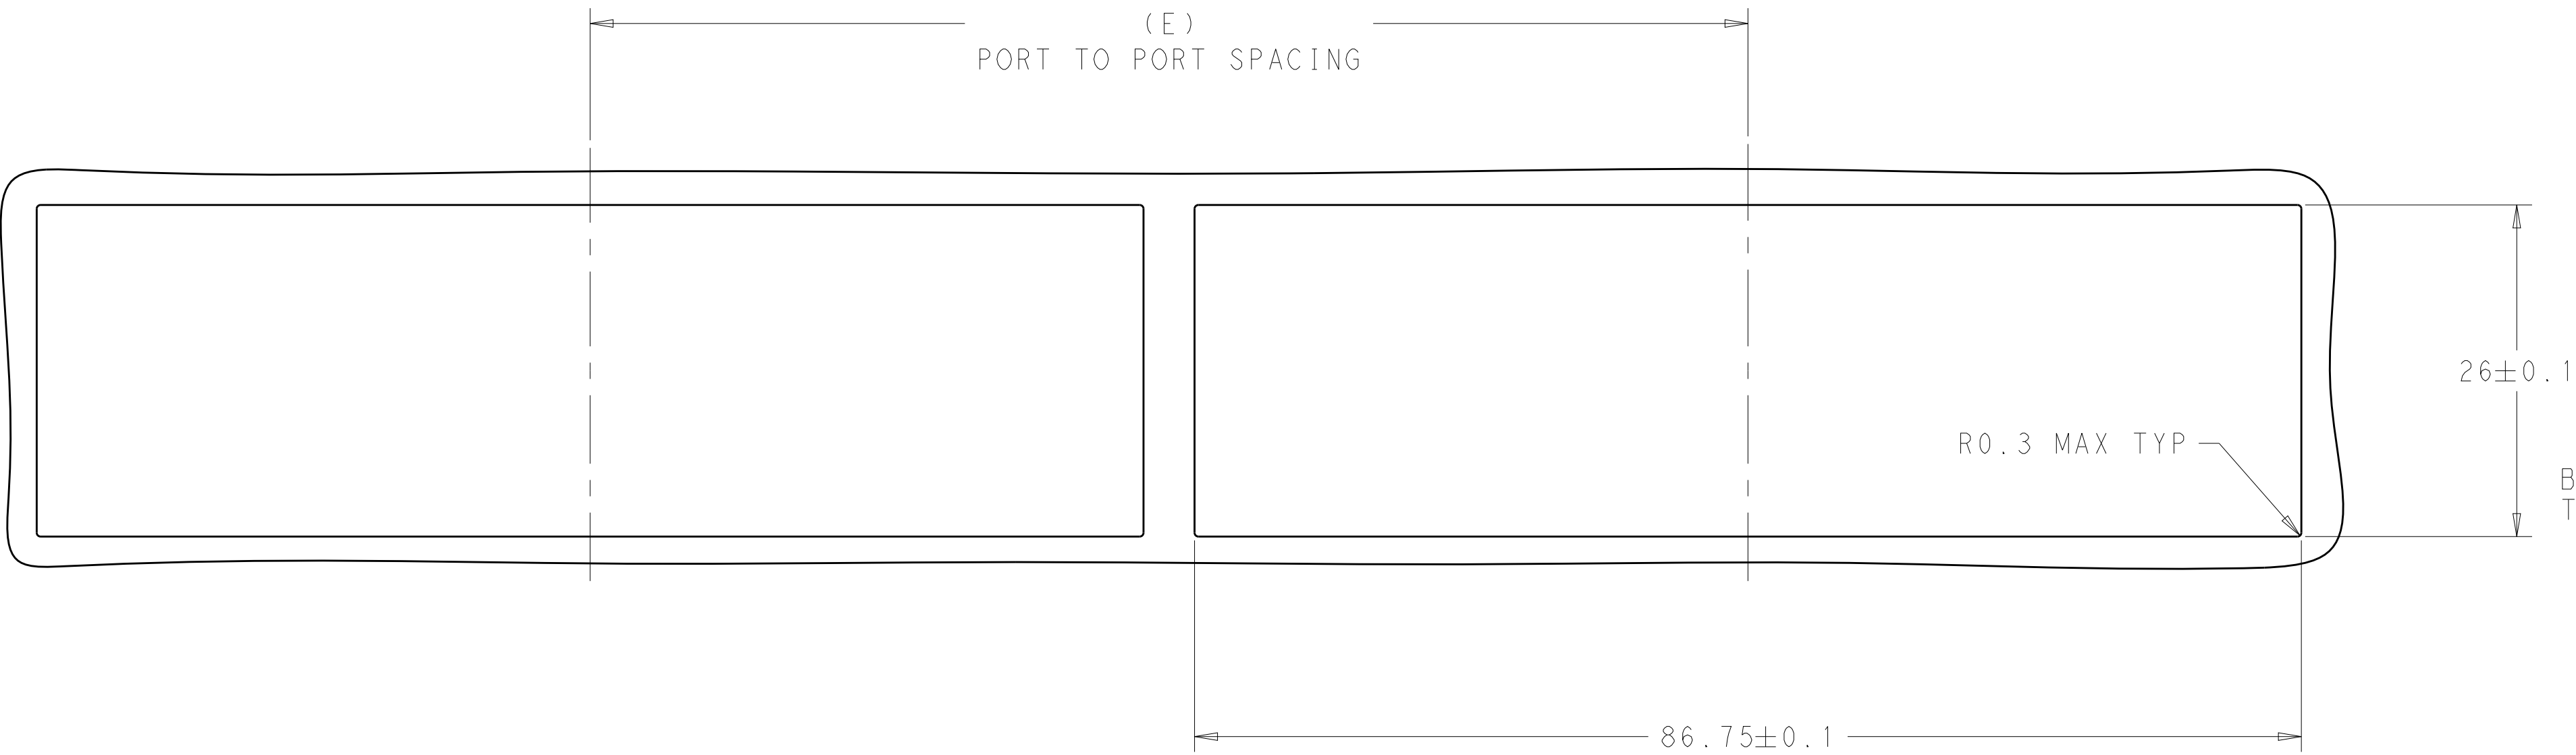

RECOMMENDED BEZEL CUT-OUT DETAIL
SCALE 5:2

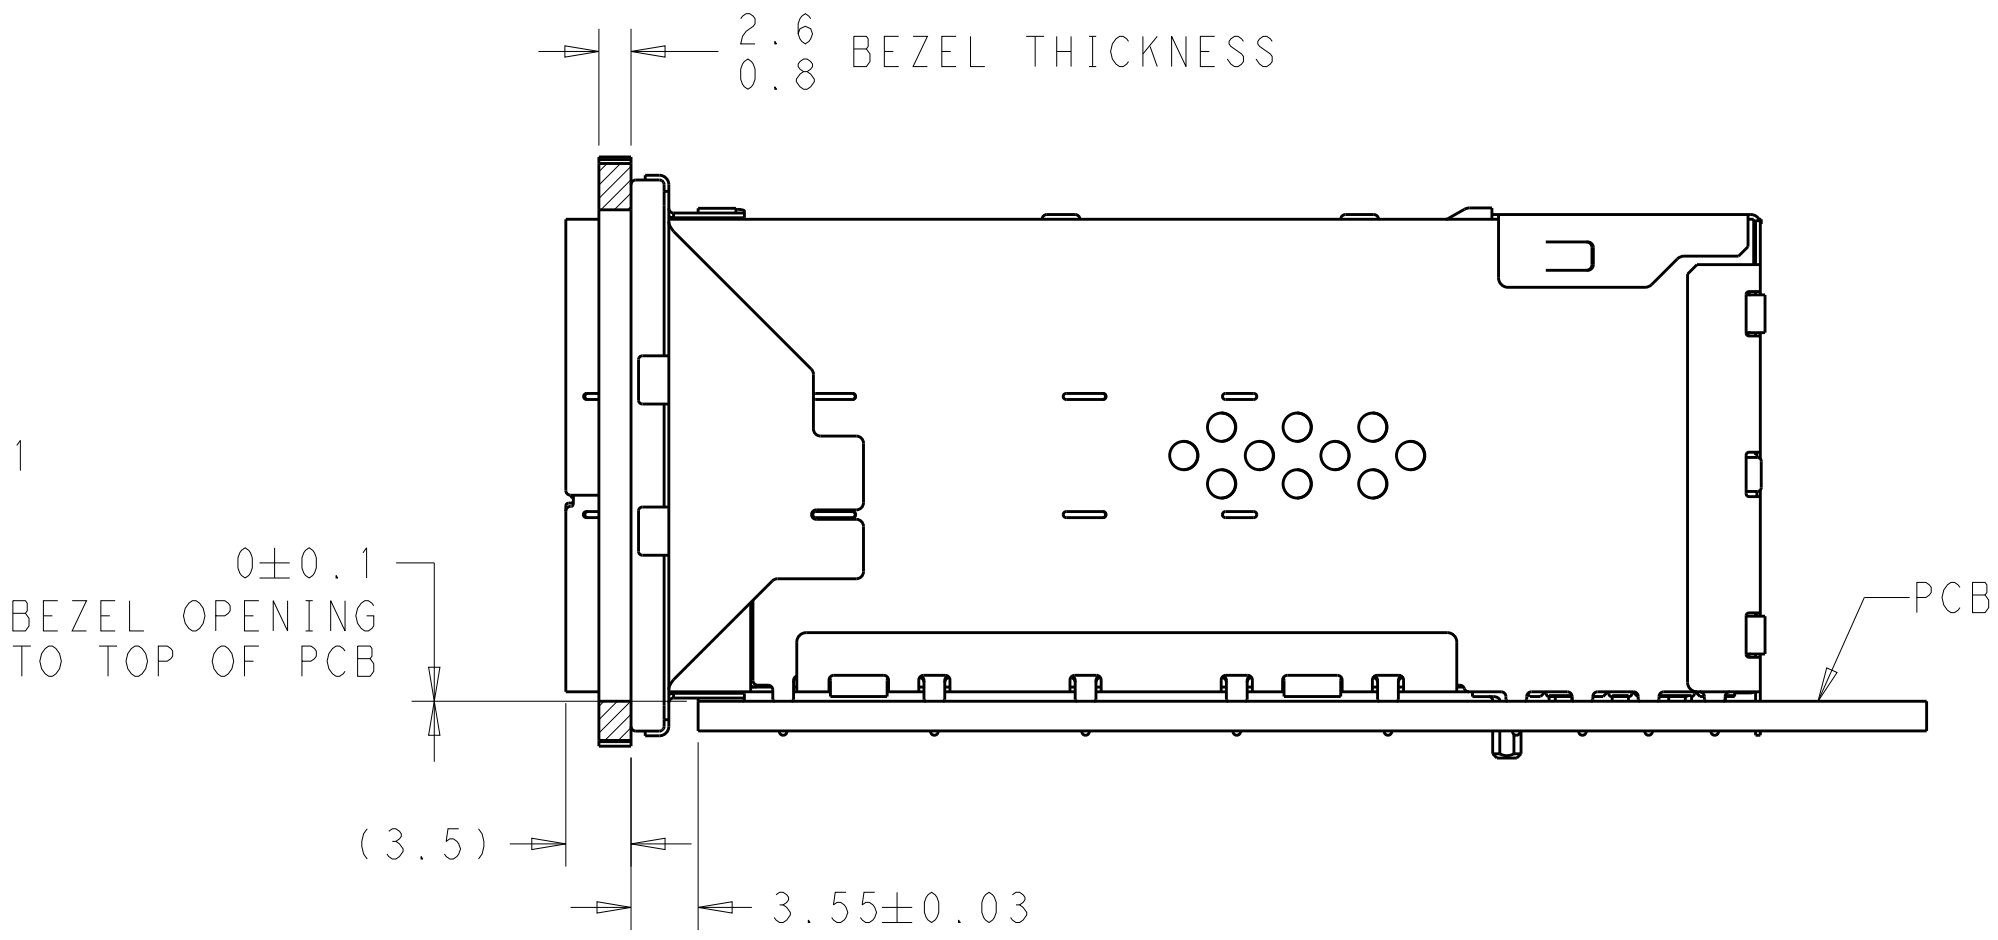

RECOMMENDED BEZEL LOCATION WITH EMI GASKET
SCALE 5:2

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN	J. WANG	26FEB2019	 TE Connectivity		
		CHK	S. HAN	26FEB2019			
DIMENSIONS:		APVD	S. HAN	26FEB2019	NAME	RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56 -	
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:					
	0 PLC	±0.25		PRODUCT SPEC			
	1 PLC	±0.25					
	2 PLC	±0.25					
	3 PLC	±0.25					
	4 PLC	±					
ANGLES		±°		APPLICATION SPEC			
MATERIAL		FINISH			114-13319		
SEE NOTES		SEE NOTES					
		WEIGHT				A	
		CUSTOMER DRAWING					00779
		SCALE		4:1			
		SHEET			6		
		REV					

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А