# 10115091 - X 0 E - X X X L F

- 8-COLUMN DIFFERENTIAL SIGNAL
- LEAD-FREE DESIGNATION ONLY WITH APPLICABLE PLATING CODES

| LETTER | PLATING (SEE NOTE 6) | |
|---|---|---|
| | APPLICATION | TYPE (REFERENCE) |
| B | TELCORDIA CO | 0.76um GOLD or GXT |
| C | TELCORDIA UE | 1.27um GOLD |
| D | TELCORDIA CO | 0.76um GOLD or GXT, LEAD-FREE |
| E | TELCORDIA UE | 1.27um GOLD, LEAD-FREE |

| NUMBER | GUIDE PIN STYLE (SEE NOTE 8) |
|---|---|
| 0 | STANDARD GUIDE PIN, MACHINED |
| 1 | STANDARD GUIDE PIN, ROLLED |

| MODULE DESCRIPTION | LETTER DESIGNATION REPRESENTED IN DASH NUMBER | | | | | | | | | | BASE MODULE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| LEFT POLARIZING GUIDANCE MODULE (SEE SHEET 6) | N | J | A | B | C | D | E | F | G | H |  |
| | NO KEY NO GUIDEPIN | |  |  |  |  |  |  |  |  | |
| RIGHT POLARIZING GUIDANCE MODULE (SEE SHEET 7) | Z | Y | P | Q | R | S | T | U | V | W |  |
| | NO KEY NO GUIDEPIN | |  |  |  |  |  |  |  |  | |
| OPEN MODULE (TWO WALL) (SEE SHEET 2) | 0 (ZERO) | | | | | | | | | |  |
| LEFT WALL MODULE (SEE SHEET 3) | L | | | | | | | | | |  |
| RIGHT WALL MODULE (SEE SHEET 4) | M | | | | | | | | | |  |
| FOUR WALL MODULE (SEE SHEET 5) | I (ONE) | | | | | | | | | |  |

| NUMBER | CONTACT MATING WIPE LENGTH | | COMPLIANT TAIL TYPE (SEE NOTE 9) |
|---|---|---|---|
| | SIGNAL | GROUND | |
| 1 | 2 MM | 4 MM | 0.55 (0.0217") DRILL |
| 2 | 3 MM | 4 MM | 0.55 (0.0217") DRILL |
| 3 | 2 MM | 4 MM | 0.45 MICRO (0.0177") DRILL |
| 4 | 3 MM | 4 MM | 0.45 MICRO (0.0177") DRILL |
| 5 | 2 MM | 3 MM | 0.55 (0.0217") DRILL |
| 6 | 3 MM | 3 MM | 0.55 (0.0217") DRILL |
| 7 | 2 MM | 3 MM | 0.45 MICRO (0.0177") DRILL |
| 8 | 3 MM | 3 MM | 0.45 MICRO (0.0177") DRILL |

FOR CUSTOM-LOADED MODULES, SEE INDIVIDUAL CUSTOM DRAWINGS WITH THE DRAWING-NUMBER FORMAT OF 10115091-XYYYY, WHERE: "X" DENOTES MODULE TYPE PER CHART ON THIS SHEET "YYYY" IS A SEQUENTIAL NUMBER BEGINNING WITH "0001".

| TABLE 1 (SEE NOTE 11) | | |
|---|---|---|
| | UNGROUNDED | GROUNDED |
| FHS | Ø2.35-Ø2.55 | Ø2.35-Ø2.55 |
| PAD | N/A | Ø5.50 |
| PLATED | NO | YES |
| DRILL(mm) | 2.44mm | 2.58mm |
| DRILL(in) | 0.096" | 0.1015" |

| TABLE 2 (SEE NOTE 12) | | |
|---|---|---|
| SCREW P/N | DESCRIPTION | BOARD THICKNESS |
| 10091790-002LF | #2-56 X 0.375" LG. PHILIPS PANHEAD W/SQ CONICAL WASHER | 1.60-5.00mm |
| 10091790-003LF | #2-56 X 0.375" LG. PHILIPS PANHEAD W/SQ CONICAL WASHER | 5.00-10.00mm |

| | | | |
|---|---|---|---|
| spec ref | - | | |
| tolerance std ISO 406 ISO 1101 | TOLERANCES UNLESS OTHERWISE SPECIFIED | | |
| surface - ISO 1302 | linear | 0.X | ±0.3 |
| | | 0.XX | ±0.10 |
| | | 0.XXX | ±0.05 |
| | angular | 0° | ±2° |

| | | | | | |
|---|---|---|---|---|---|
| dr | Collins Lu | 2011/07/27 | projection | mm | size A2 / scale 1:1 |
| eng | Sandar Soe | 2016/03/07 | | | |
| chr | - | - | | | ecn no ELX-S-17624-1 |
| appr | Chen-Hong Tan | 2016/03/17 | product family - | | rel level Released |
| Amphenol FCI | title: MODULE ASSEMBLY, XCEDE HD Veritical Header, 4 Pair 8 Column | | | dwg no 10115091 | rev E |
| www.fci.com | cat. no. - | | Product - Customer Drw | | sheet 1 of 8 |

© 2016 AFCI

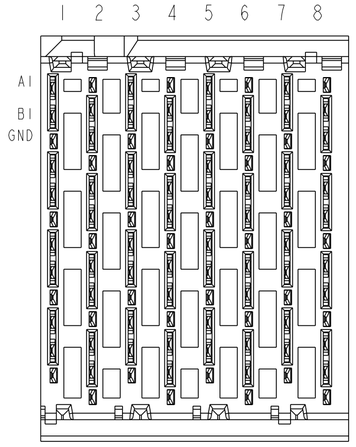


OPEN WALL MODULE

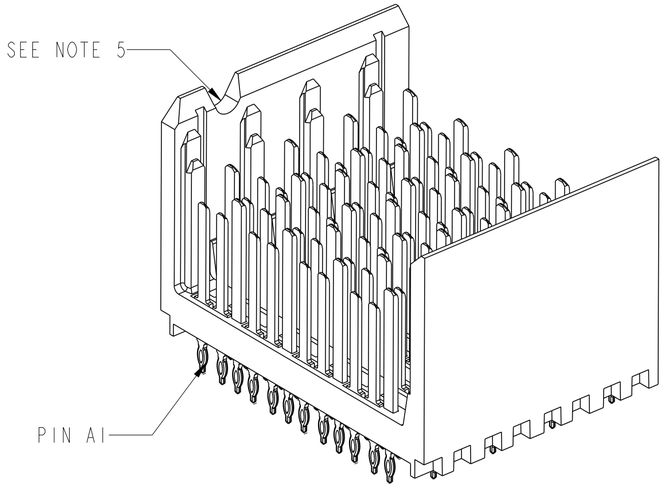


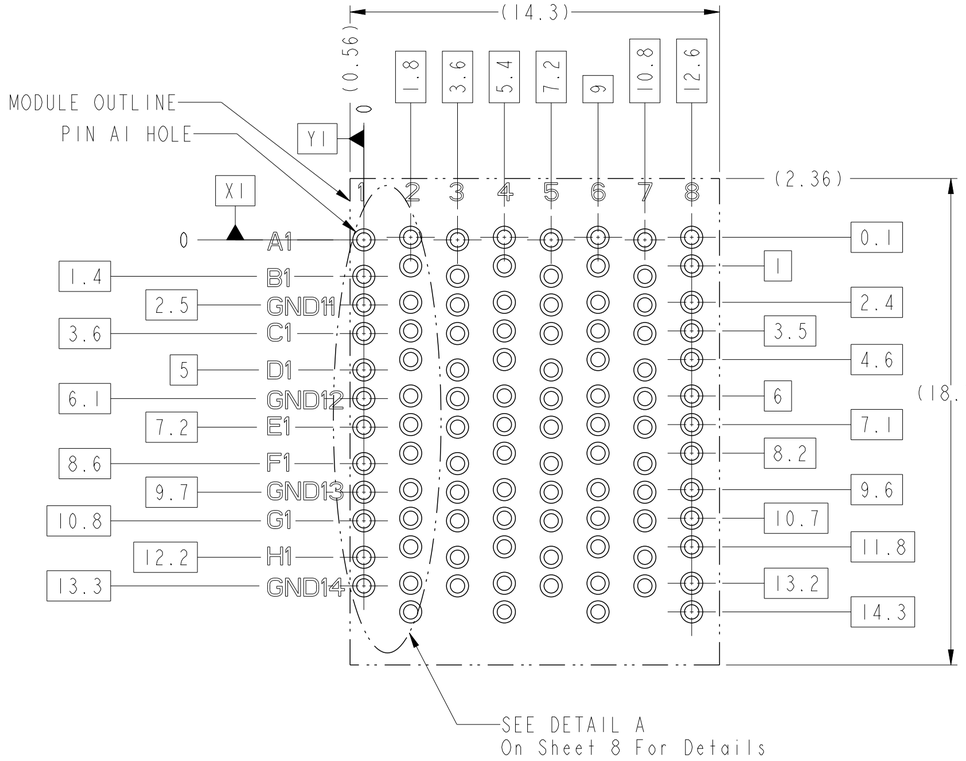


BP HOLE PATTERN COMPONENT SIDE

OPEN WALL MODULE BACKPLANE FOOTPRINT

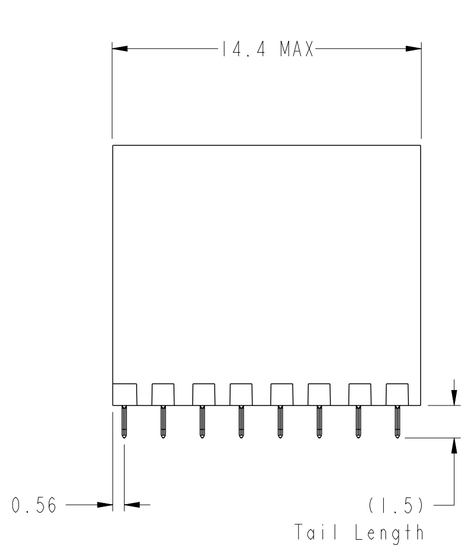


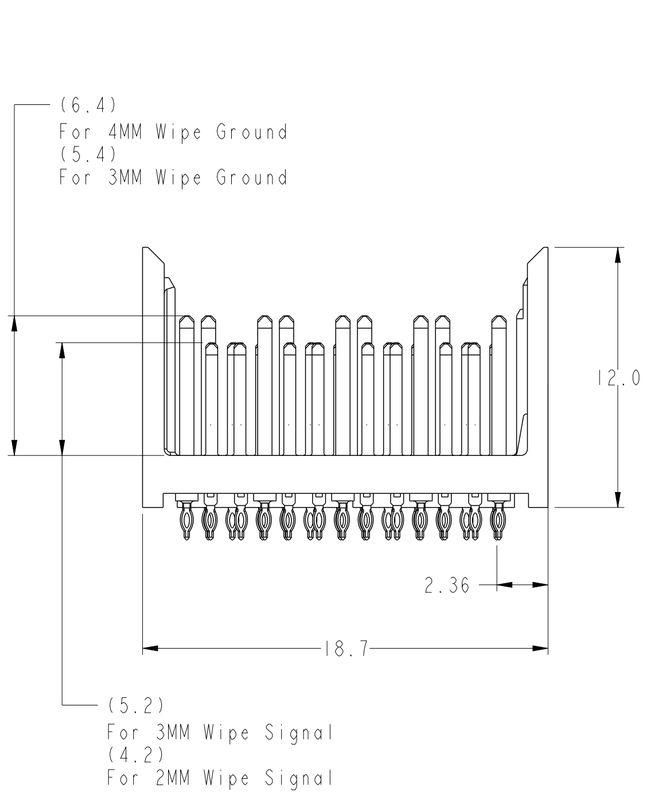




| | | | | | | | |
|---|---|---|---|---|---|---|---|
| spec ref | - | | dr | Collins Lu | 2011/07/27 | projection | mm |
| tolerance std ISO 406 ISO 1101 | TOLERANCES UNLESS OTHERWISE SPECIFIED | | eng | Sandar Soe | 2016/03/07 | | |
| | | | chr | - | - | | |
| | | | appr | Chen-Hong Tan | 2016/03/17 | product family | - |
| surface ISO 1302 | linear | 0.X ±0.3 | Amphenol FCi | title | MODULE ASSEMBLY, XCEDE HD | dwg no | 10115091 |
| | | 0.XX ±0.10 | | | Veritical Header, 4 Pair 8 Column | | |
| | | 0.XXX ±0.05 | www.fci.com | cat. no. | - | Product - Customer Drw | |
| | angular | 0° ±2° | | | | | |

| size | scale | rev |
|---|---|---|
| A2 | 1:1 | E |

ecn no ELX-S-17624-1

rel level **Released**

sheet 2 of 8

© 2016 AFCI

Creo File - REV E - 2016-02-12

PDS: Rev :E STATUS:Released Printed: Mar 17, 2016

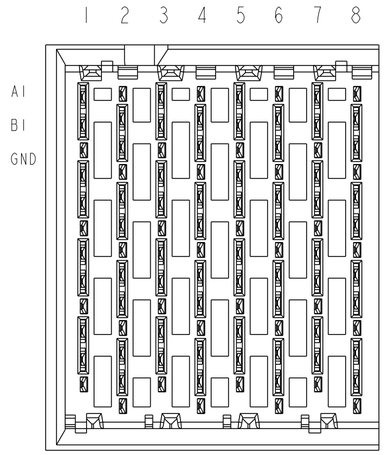


LEFT WALL MODULE

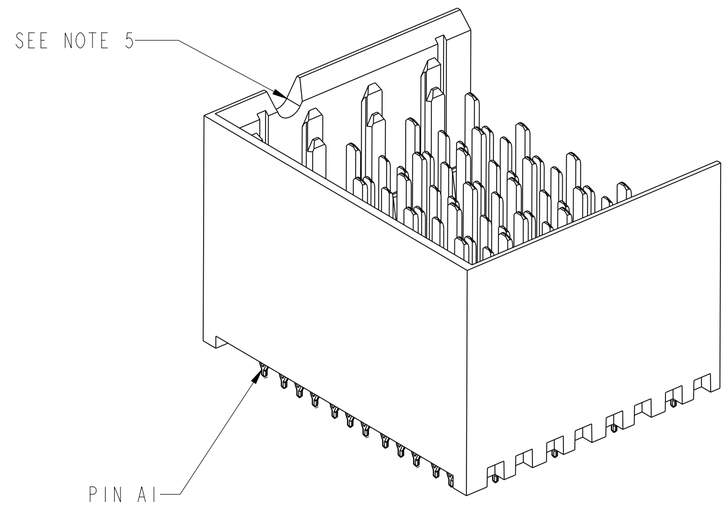


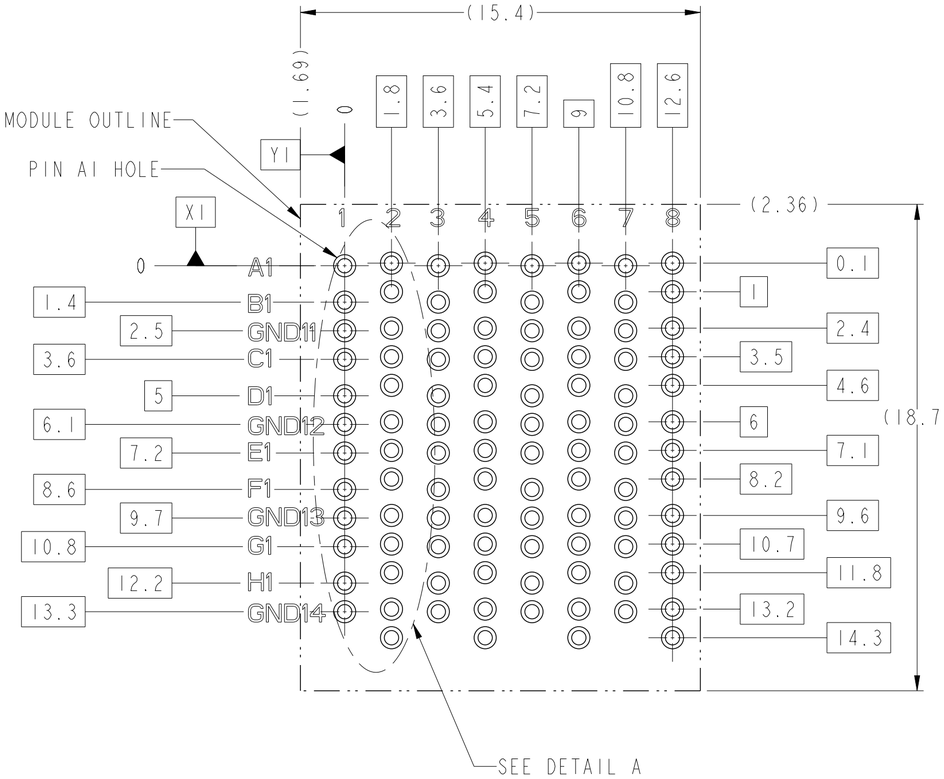


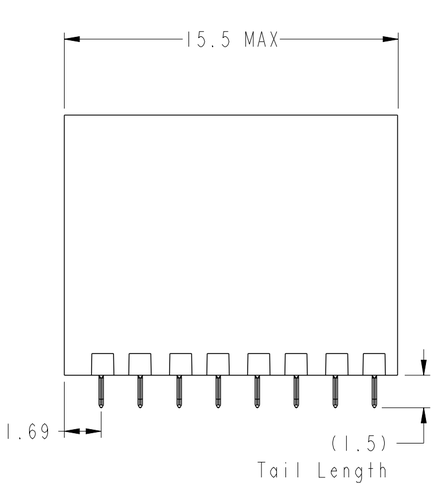


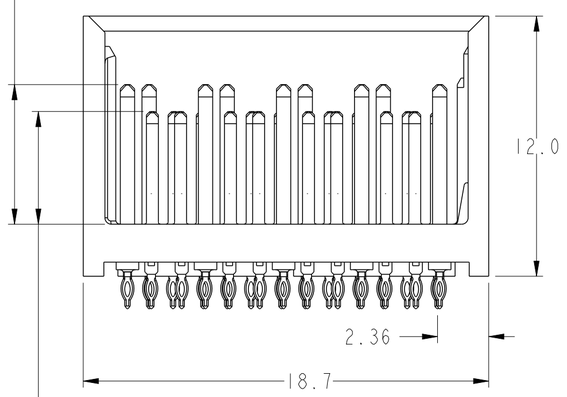


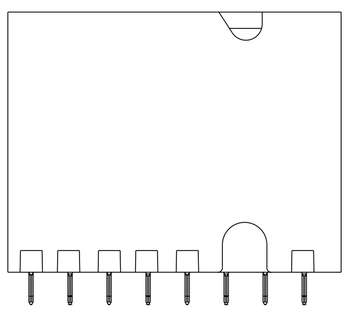

BP HOLE PATTERN COMPONENT SIDE

# LEFT WALL MODULE BACKPLANE FOOTPRINT

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| spec ref | - | | | dr | Collins Lu | 2011/07/27 | projection | mm | size A2 | scale 1:1 |
| tolerance std ISO 406 ISO 1101 | TOLERANCES UNLESS OTHERWISE SPECIFIED | | | eng | Sandar Soe | 2016/03/07 | | | | |
| | | | | chr | - | - | | | ecn no | ELX-S-17624-1 |
| | | | | appr | Chen-Hong Tan | 2016/03/17 | product family | - | rel level | Released |
| surface - ISO 1302 | linear | 0.X | ±0.3 | Amphenol FCi | title | MODULE ASSEMBLY, XCEDE HD Veritical Header, 4 Pair 8 Column | | | dwg no | 10115091 | rev | E |
| | | 0.XX | ±0.10 | | | | | | | | | |
| | | 0.XXX | ±0.05 | | | | | | | | | |
| | angular | 0° | ±2° | www.fci.com | cat. no. | - | Product - Customer Drw | | | sheet 3 of 8 | | |

© 2016 AFCI

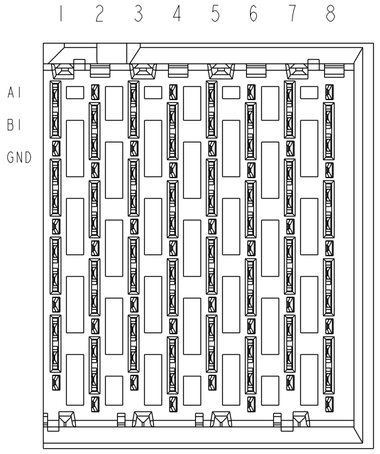


RIGHT WALL MODULE

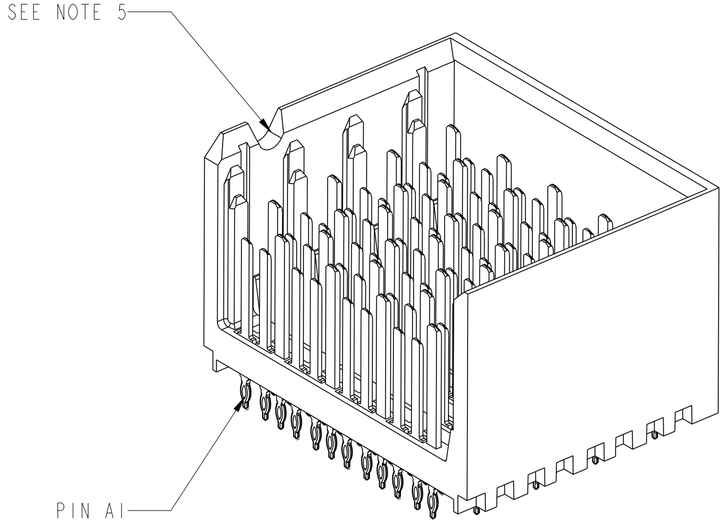


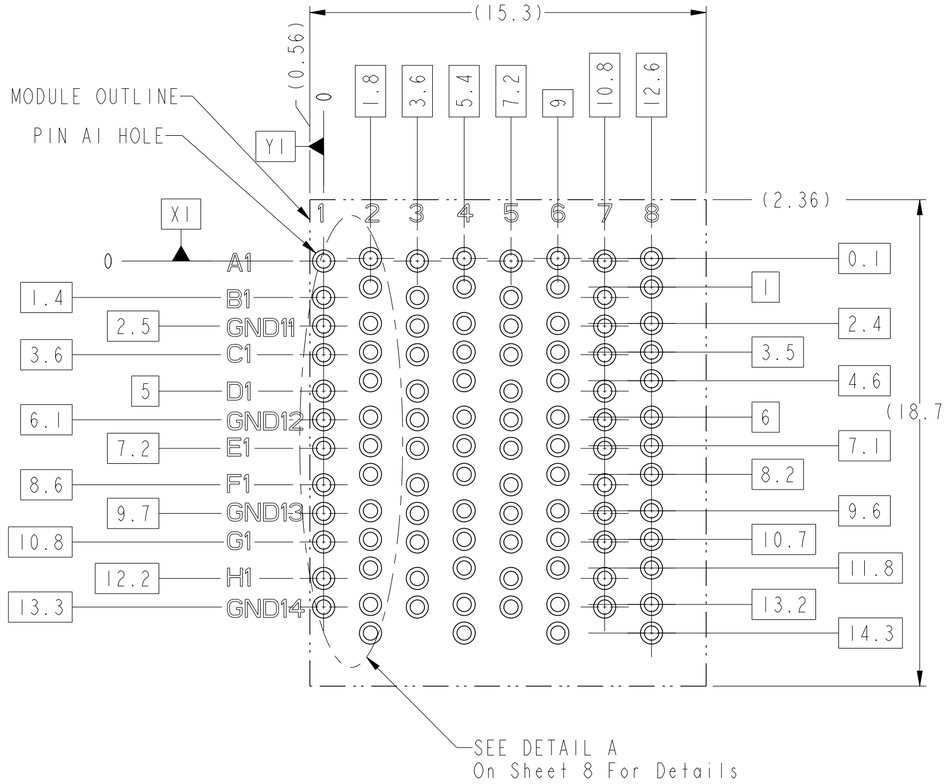


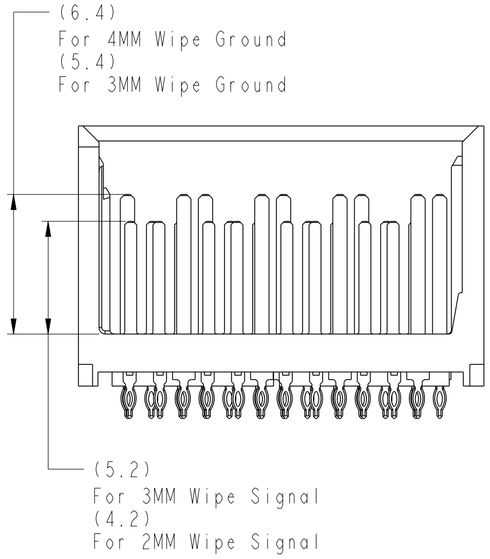


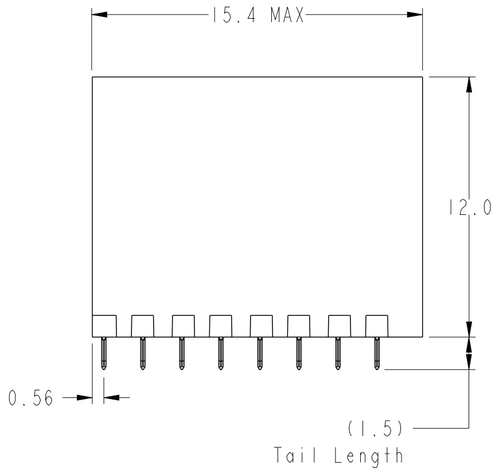


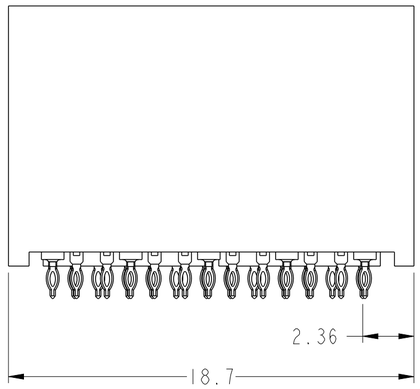


BP HOLE PATTERN COMPONENT SIDE

RIGHT WALL MODULE BACKPLANE FOOTPRINT

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| spec ref - | | | | dr | Collins Lu | 2011/07/27 | projection | mm | size A2 / scale 1:1 |
| tolerance std ISO 406 ISO 1101 | TOLERANCES UNLESS OTHERWISE SPECIFIED | | | eng | Sandar Soe | 2016/03/07 | | | ecn no ELX-S-17624-1 |
| | | | | chr | - | - | | | |
| | | | | appr | Chen-Hong Tan | 2016/03/17 | product family - | | rel level Released |
| surface - ISO 1302 | linear | 0.X | ±0.3 | Amphenol FCi | title: MODULE ASSEMBLY, XCEDE HD Veritical Header, 4 Pair 8 Column | | | dwg no 10115091 | rev E |
| | | 0.XX | ±0.10 | | | | | | |
| | | 0.XXX | ±0.05 | | | | | | |
| | angular | 0° | ±2° | www.fci.com | cat. no. - | | Product - Customer Drw | | sheet 4 of 8 |

© 2016 AFCI

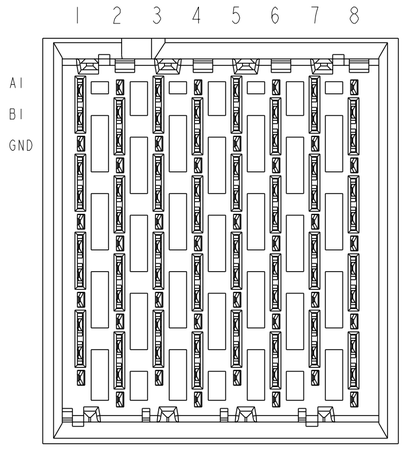


E FOUR WALL MODULE

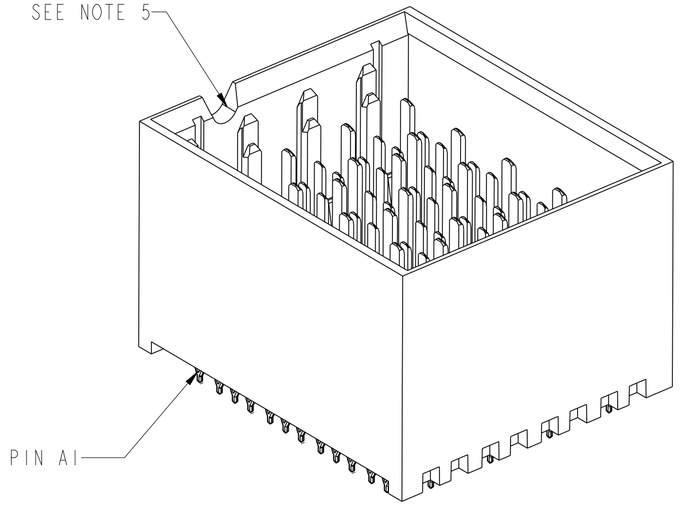


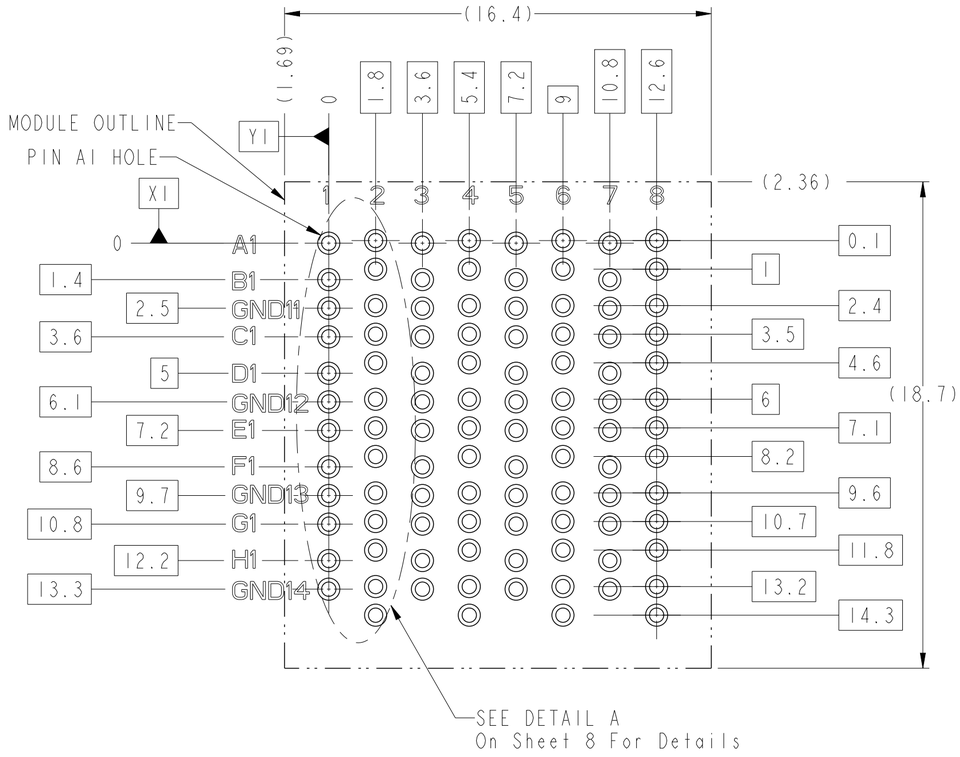


BP HOLE PATTERN COMPONENT SIDE

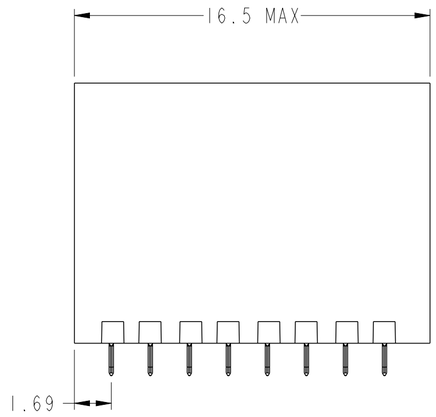


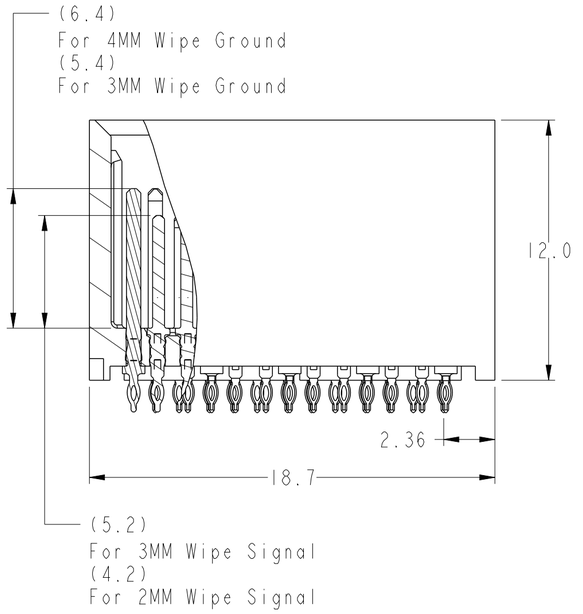


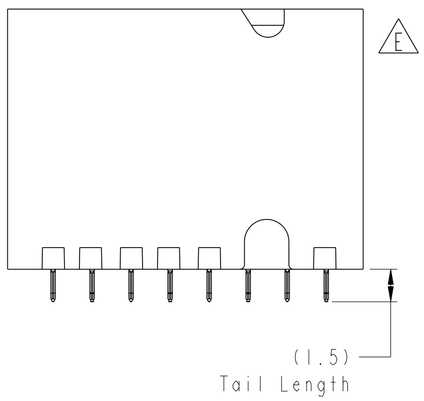


E FOUR WALL MODULE BACKPLANE FOOTPRINT

© 2016 AFCI

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| spec ref | - | | | dr | Collins Lu | 2011/07/27 | projection | mm |
| tolerance std ISO 406 ISO 1101 | TOLERANCES UNLESS OTHERWISE SPECIFIED | | | eng | Sandar Soe | 2016/03/07 | | |
| | | | | chr | - | - | | |
| | | | | appr | Chen-Hong Tan | 2016/03/17 | product family | - |
| surface ISO 1302 | linear | 0.X | ±0.3 | Amphenol FCi | title: MODULE ASSEMBLY, XCEDE HD Veritical Header, 4 Pair 8 Column | | dwg no 10115091 | rev E |
| | | 0.XX | ±0.10 | | | | | |
| | | 0.XXX | ±0.05 | | | | | |
| | angular | 0° | ±2° | www.fci.com | cat. no. - | Product - Customer Drw | | sheet 5 of 8 |

size A2 | scale 1:1 | ecn no ELX-S-17624-1 | rel level Released

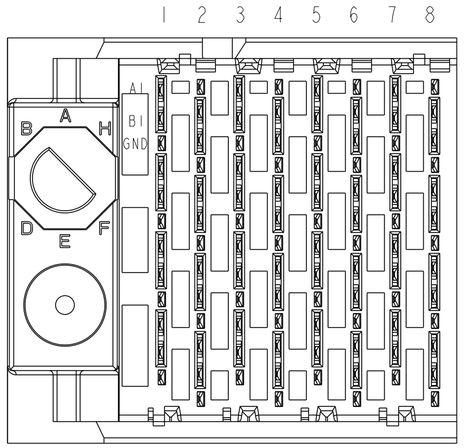


LEFT POLARIZING/GUIDE MODULE

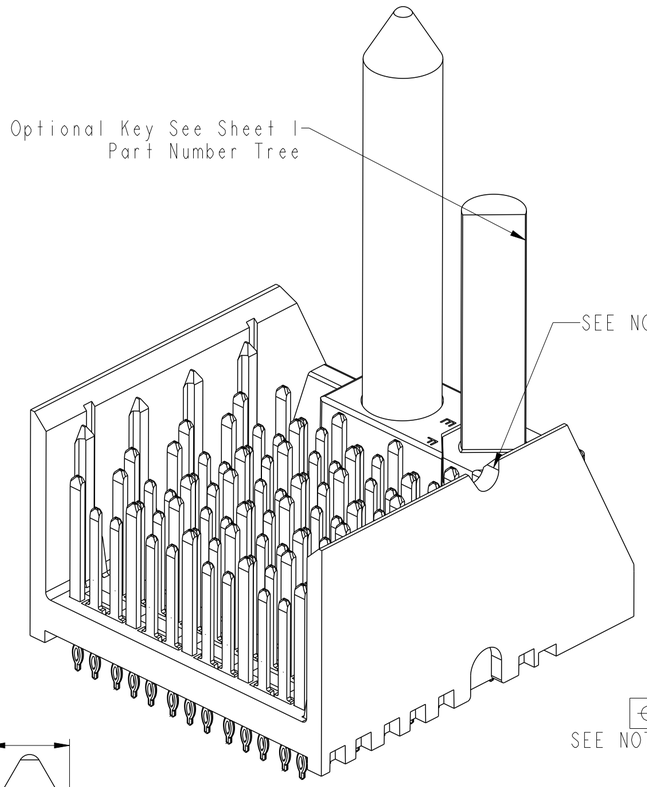


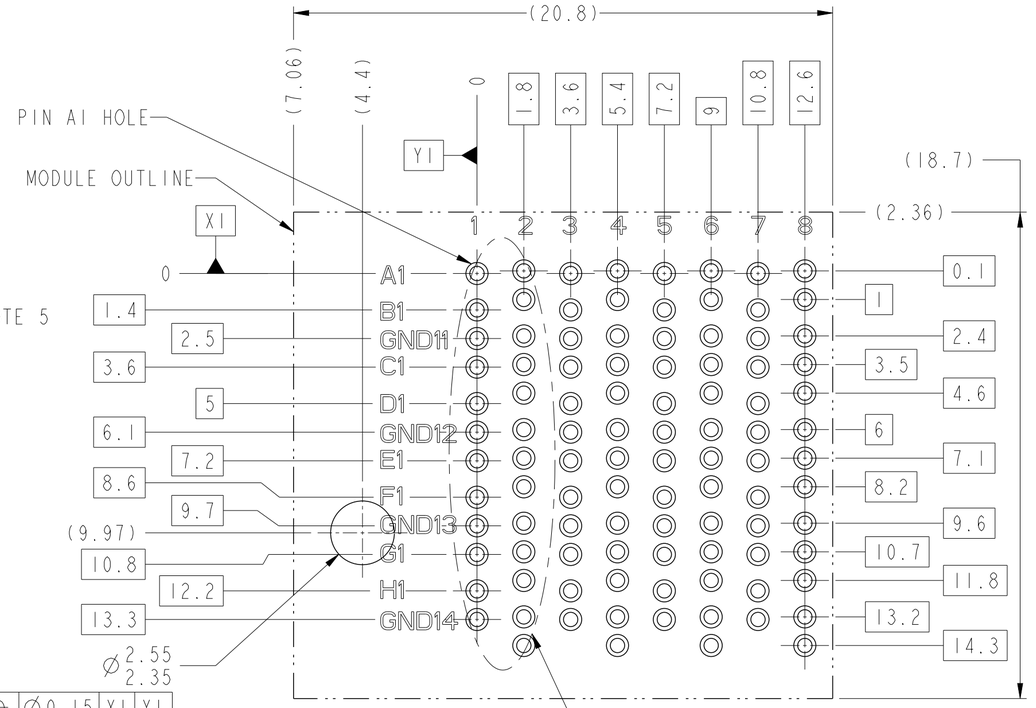


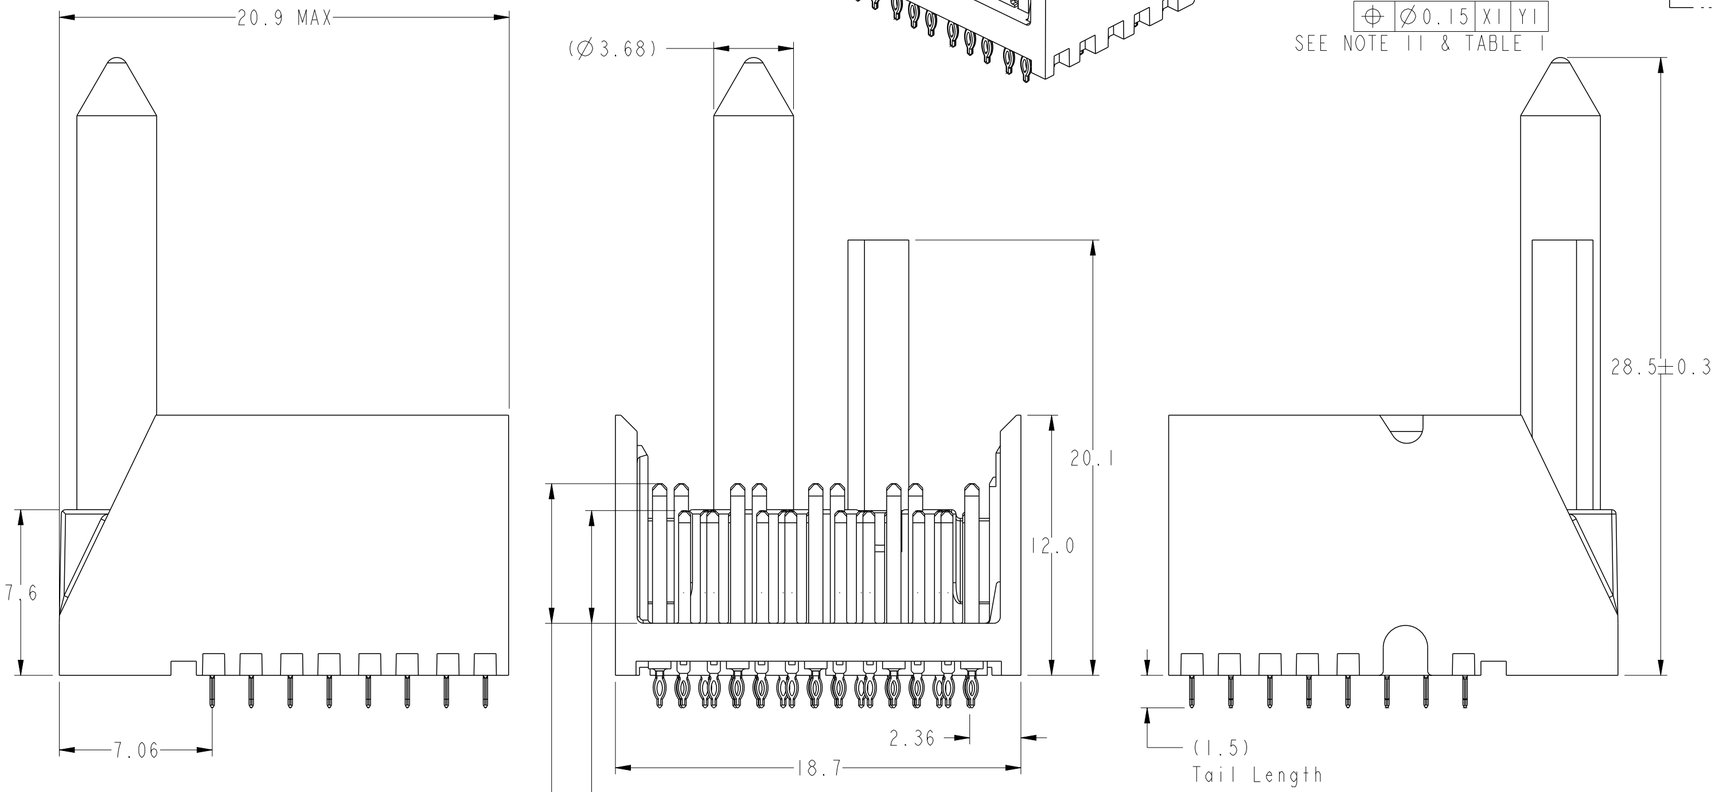


BP HOLE PATTERN COMPONENT SIDE

LEFT POLARIZING GUIDE MODULE
BACKPLANE FOOTPRINT

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| spec ref - | | | | dr | Collins Lu | 2011/07/27 | projection | mm | size A2 | scale 1:1 |
| tolerance std ISO 406 ISO 1101 | TOLERANCES UNLESS OTHERWISE SPECIFIED | | | eng | Sandar Soe | 2016/03/07 | | | ecn no ELX-S-17624-1 | |
| | | | | chr | - | - | | | | |
| | | | | appr | Chen-Hong Tan | 2016/03/17 | product family - | | rel level Released | |
| surface ISO 1302 | linear | 0.X | ±0.3 | Amphenol FCi | title: MODULE ASSEMBLY, XCEDE HD Veritical Header, 4 Pair 8 Column | | | | dwg no 10115091 | rev E |
| | | 0.XX | ±0.10 | | | | | | | |
| | | 0.XXX | ±0.05 | | | | | | | |
| | angular | 0° | ±2° | www.fci.com | cat. no. - | | Product - Customer Drw | | sheet 6 of 8 | |

© 2016 AFCI

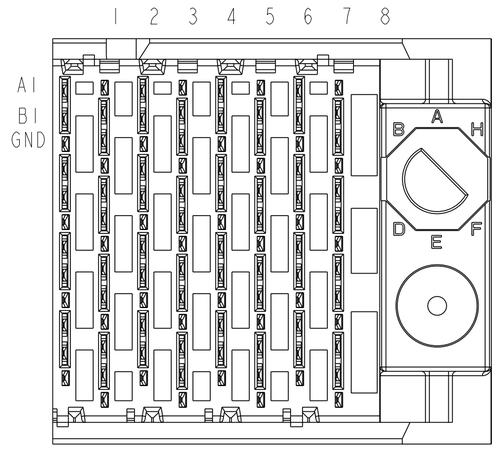


RIGHT POLARIZING/GUIDE MOUDLE

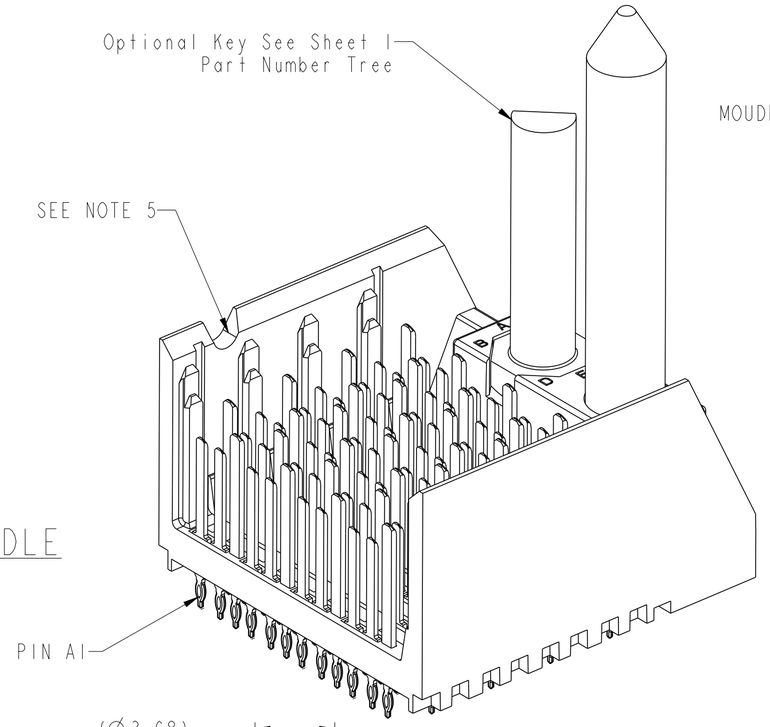


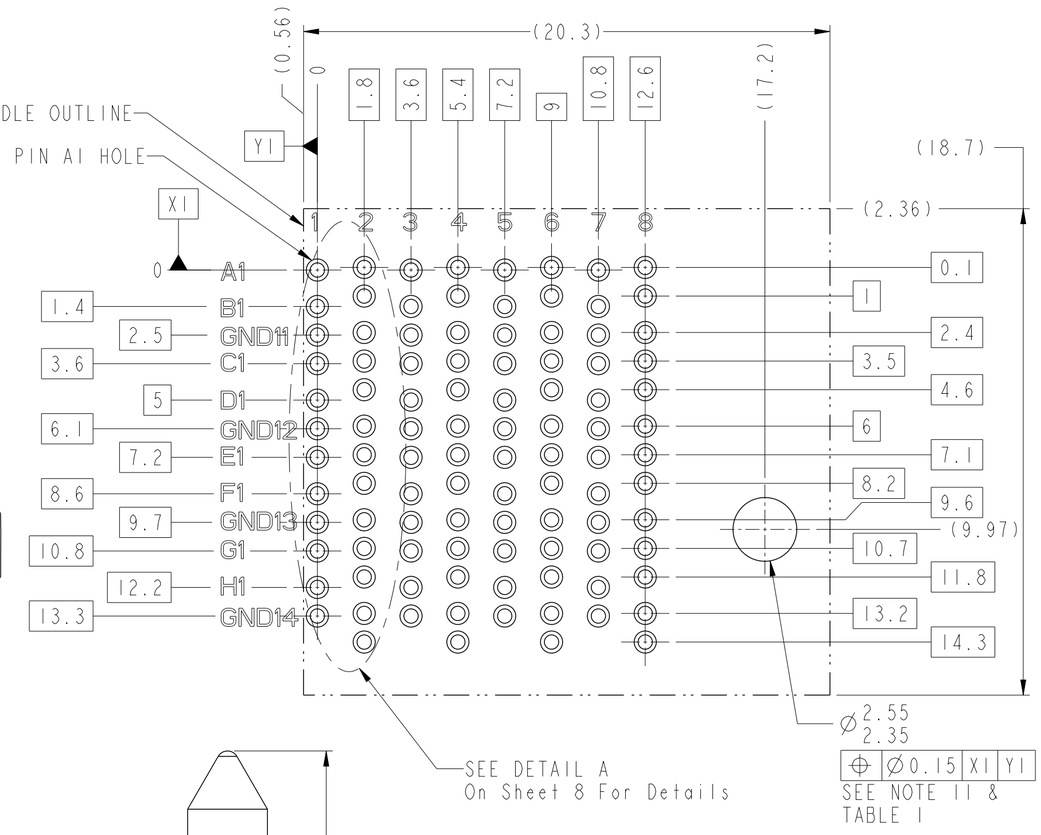


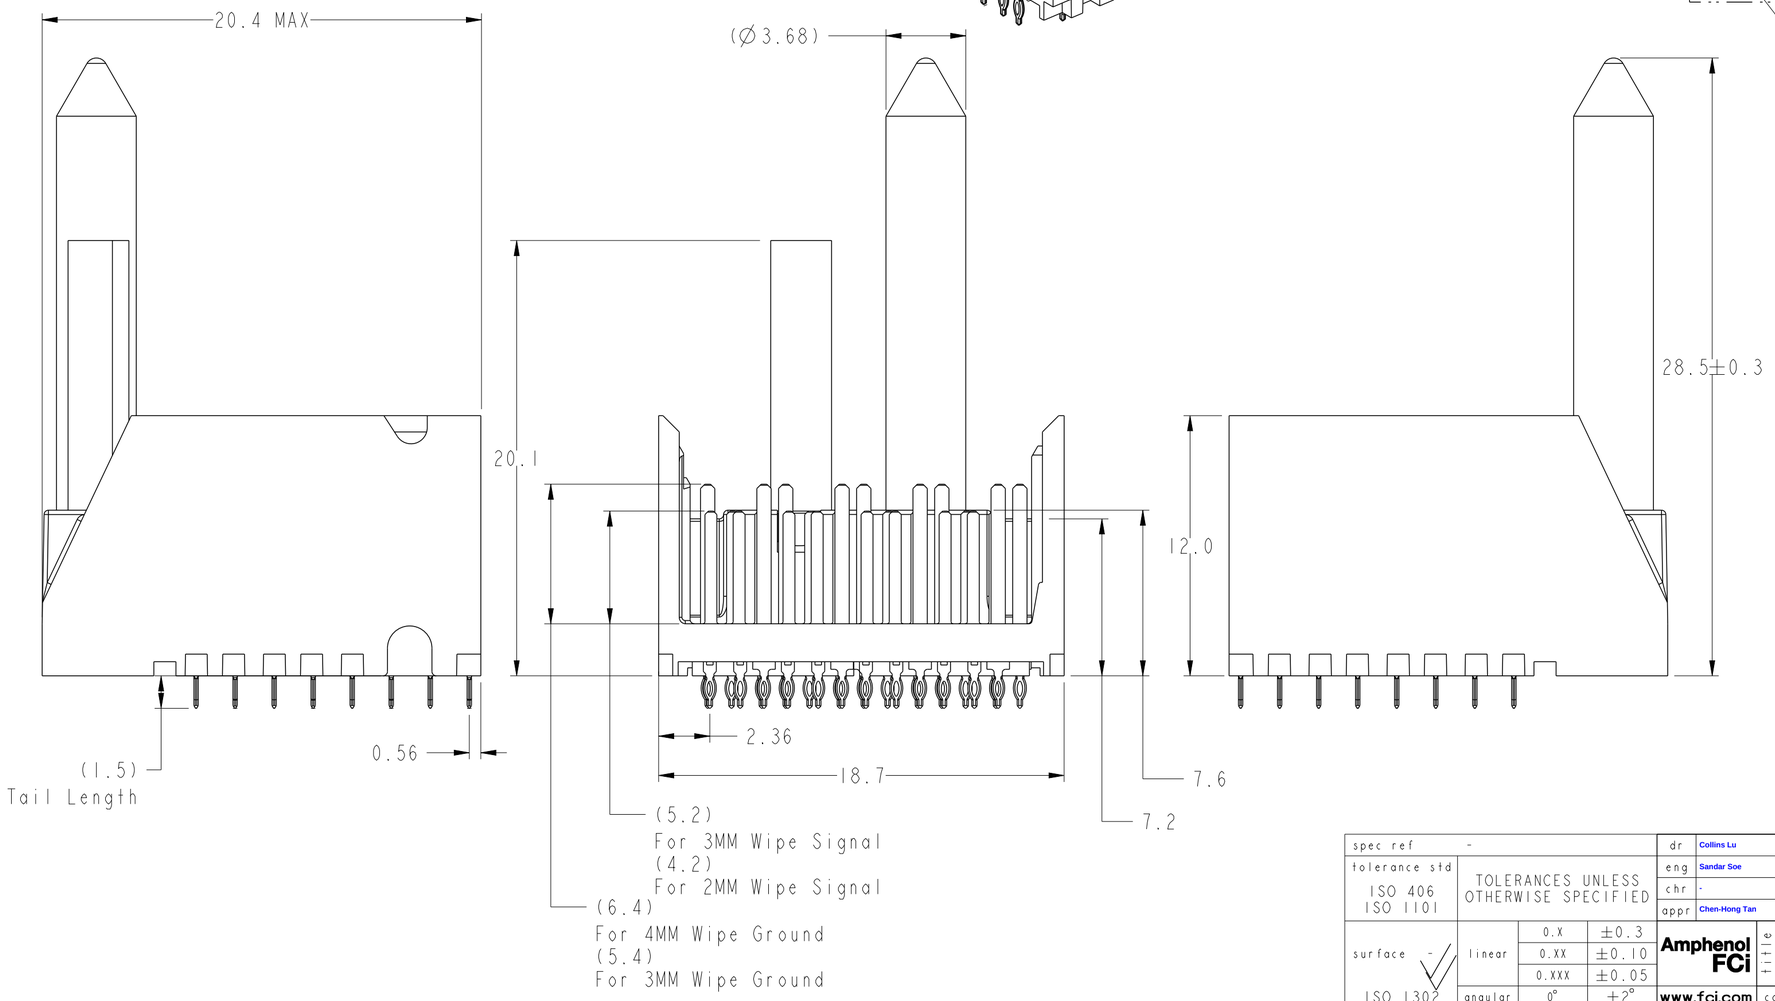


BP HOLE PATTERN COMPONENT SIDE

RIGHT POLAIZING/GUIDE MODULE
BACKPLANE FOOTPRINT

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| spec ref | - | | | dr | Collins Lu | 2011/07/27 | projection | mm | size A2 | scale 1:1 |
| tolerance std ISO 406 ISO 1101 | TOLERANCES UNLESS OTHERWISE SPECIFIED | | | eng | Sandar Soe | 2016/03/07 | | | ecn no | ELX-S-17624-1 |
| | | | | chr | - | - | | | | |
| | | | | appr | Chen-Hong Tan | 2016/03/17 | product family | - | rel level | Released |
| surface - ISO 1302 | linear | 0.X | ±0.3 | Amphenol FCi | title | MODULE ASSEMBLY, XCEDE HD Veritical Header, 4 Pair 8 Column | dwg no | 10115091 | rev | E |
| | | 0.XX | ±0.10 | | | | | | | |
| | | 0.XXX | ±0.05 | | | | | | | |
| | angular | 0° | ±2° | www.fci.com | cat. no. | - | Product - Customer Drw | | sheet 7 of 8 | |

© 2016 AFCI

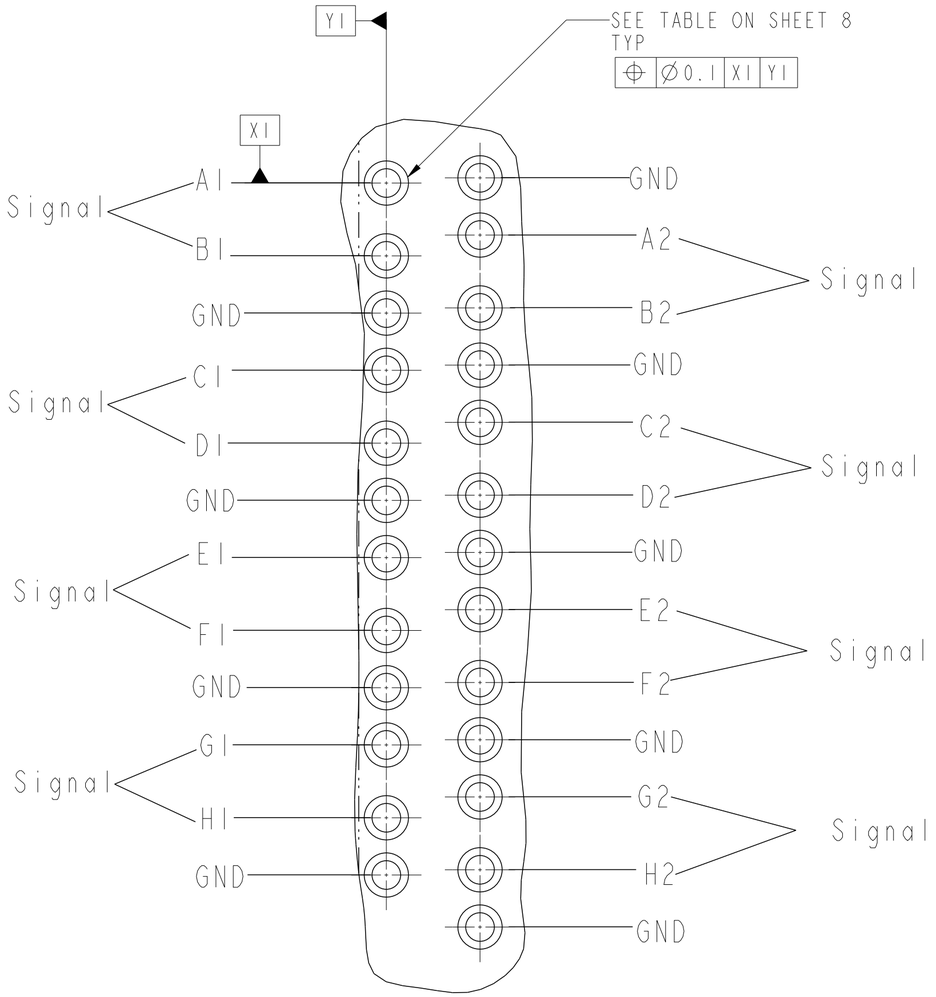


DETAIL A
SCALE 12:1

| TABLE 3 | | |
|---|---|---|
| | COMPLIANT PIN DRILL ∅0.55[0.0217"] | COMPLIANT PIN DRILL ∅0.45[0.0177"] |
| PTH | ∅0.45±0.05 | ∅0.36±0.05 |
| DRILL | ∅0.55 [0.0217"] | ∅0.45 [0.0177"] |
| PAD | ∅0.85 | ∅0.75 |

NOTES:

1. CONNECTOR MATERIALS
   SHROUD : HIGH-TEMP POLYMER, COLOR : BLACK, UL94V-0
   CONTACTS : HIGH PREFORMANCE COPPER ALLOY

2. PRODUCT SPECIFICATION : GS-12-0936

3. APPLICATION SPECIFICATION : GS-20-0348

4. PRODUCT MARKING :
   PART NUMBER (10115091-XOE-XXXLF)
   "FCI" AND DATE CODE (FCI P#######)

5. NOTCH DESIGNATES "ROW A" SIDE OF CONNECTOR. NOTCH FEATURE ON OPPOSITE FOR PRODUCT MARKING.

6. PLATING THICKNESS OF SIGNAL & GROUND CONTACT ARE DETERMINED BY PLATING CODE, REFER TO P/N TREE ON SHEET 1.

7. PACKAGING MEETS GS-14-920 LEAD-FREE LABELING SPECIFICATION.

8. GUIDE-PIN STYLE DESIGNATION ONLY APPLIES TO MODULE VERSIONS THAT REQUIRE GUIDE-PIN HARDWARE. FOR ALL NON-GUIDE-PIN VERSIONS, THE DEFAULT DASH-NUMBER DIGIT IN THAT LOCATION IS STILL '0".

9. SEE APPLICATION SPECIFICATION FOR ROUTING GUIDELINES, ADDITIONAL PTH GUIDELINES, MATED DIMENSIONS, GUIDE PIN SELECTION, ETC.

10. A △E SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE THAT HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

11. OPTIONAL HOLE LOCATION FOR GROUNDED PIN OR ADDITIONAL GUIDE-PIN SUPPORT. SEE TABLE 1 SHEET 1 FOR ADDITIONAL DETAILS.

12. SCREW IS OPTIONAL AND ENGAGES WITH BOTTOM OF GUIDE PIN FROM BENEATH THE PCB FOR ADDITIONAL GUIDE-PIN SUPPORT.

© 2016 AFCI

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| spec ref | - | | | dr | Collins Lu | 2011/07/27 | projection |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | | | eng | Sandar Soe | 2016/03/07 | mm |
| ISO 406 ISO 1101 | | | | chr | - | - | size A2 / scale 1:1 |
| | | | | appr | Chen-Hong Tan | 2016/03/17 | ecn no ELX-S-17624-1 |
| surface - | linear | 0.X | ±0.3 | Amphenol FCI | title: MODULE ASSEMBLY, XCEDE HD Veritical Header, 4 Pair 8 Column | | product family / rel level Released |
| | | 0.XX | ±0.10 | | | | dwg no 10115091 / rev E |
| | | 0.XXX | ±0.05 | | | | |
| ISO 1302 | angular | 0° | ±2° | www.fci.com | cat. no. - | Product - Customer Drw | sheet 8 of 8 |

# OCEAN CHIPS
## Океан Электроники
## Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

**«JONHON»** (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

**«FORSTAR»** (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А