




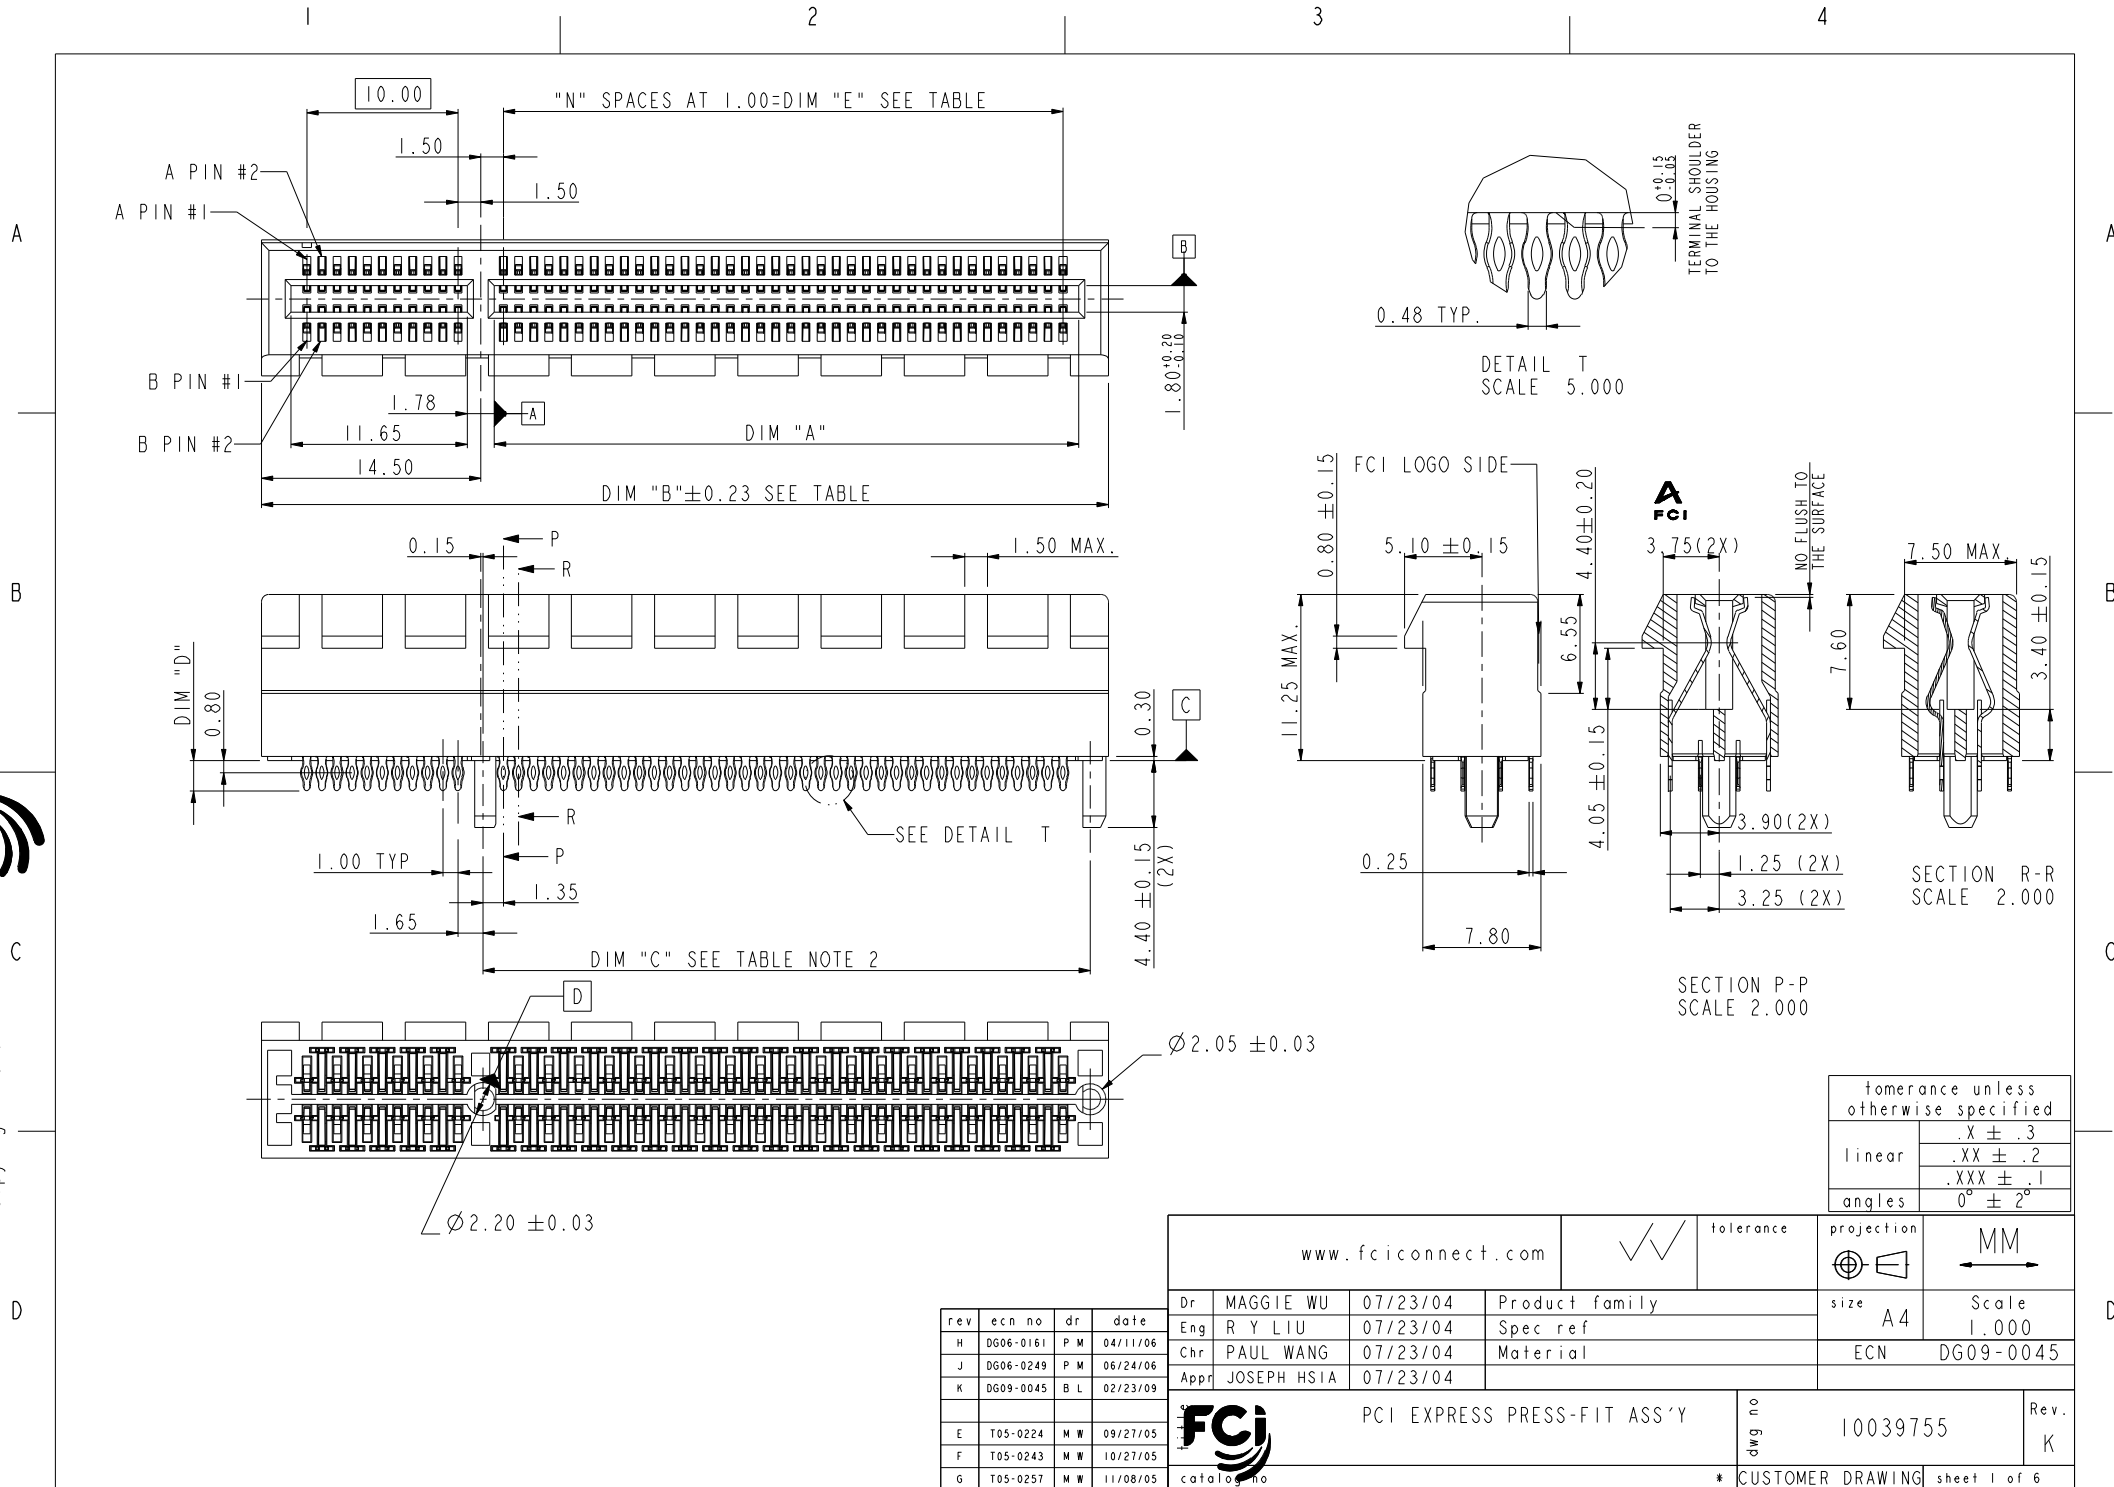

PIN #A1 IDENTIFIED BY  
SQUARE ANNULAR RING

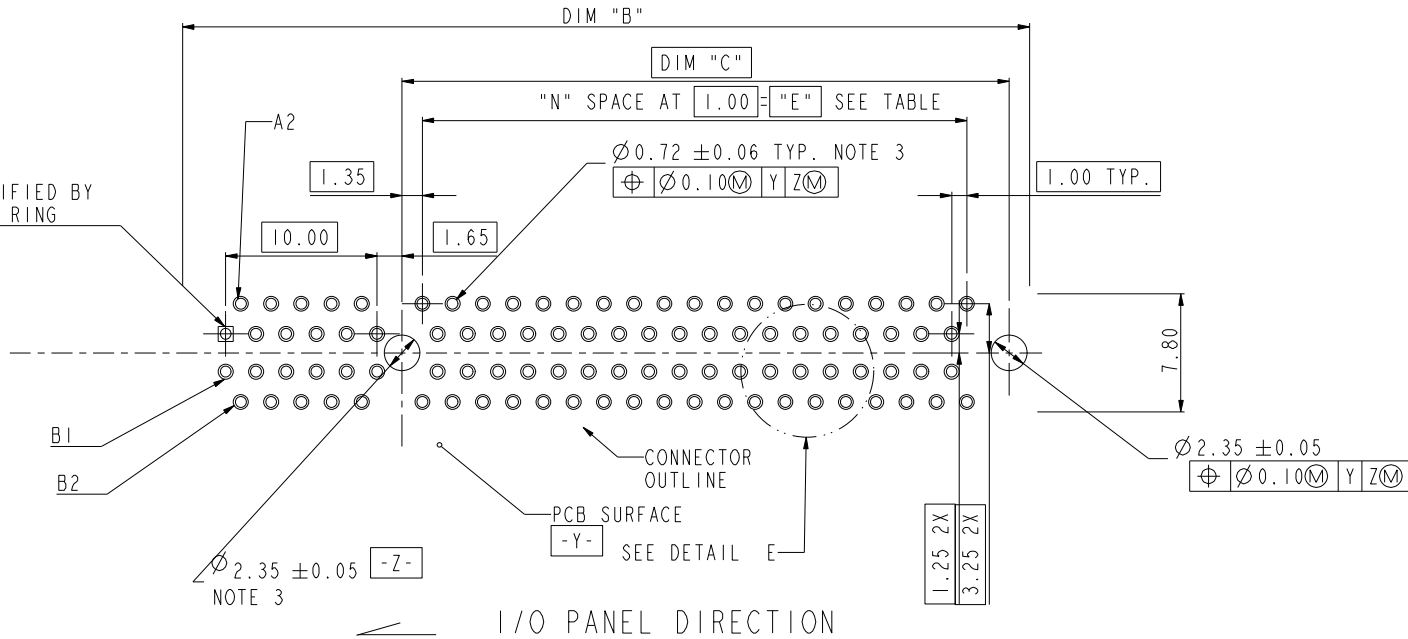

### RECOMMENDED FOOTPRINT

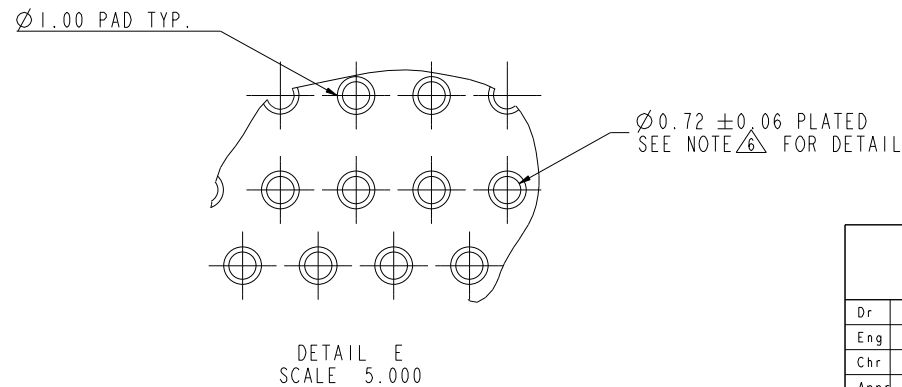

| tolerance unless<br>otherwise specified |                                  |
|-----------------------------------------|----------------------------------|
| linear                                  | .X ± .3<br>.XX ± .2<br>.XXX ± .1 |
| angles                                  | 0° ± 2°                          |

|                    |             |          |                                 |            |           |
|--------------------|-------------|----------|---------------------------------|------------|-----------|
| www.fciconnect.com |             |          | tolerance                       | projection | MM        |
| Dr                 | MAGGIE WU   | 07/23/04 | Product family                  | size       | A4        |
| Eng                | R Y LIU     | 07/23/04 | Spec ref                        | Scale      | 1.000     |
| Chr                | PAUL WANG   | 07/23/04 | Material                        | ECN        | DG09-0045 |
| Appr               | JOSEPH HSIA | 07/23/04 |                                 |            |           |
| FCI                |             |          | PCI EXPRESS PRESS-FIT ASS'Y     |            | Rev.      |
| catalog no         |             |          | dwg no                          | 10039755   | K         |
|                    |             |          | * CUSTOMER DRAWING sheet 2 of 6 |            |           |



Copyright FCI.

A

B

C




D

A

B

C

D

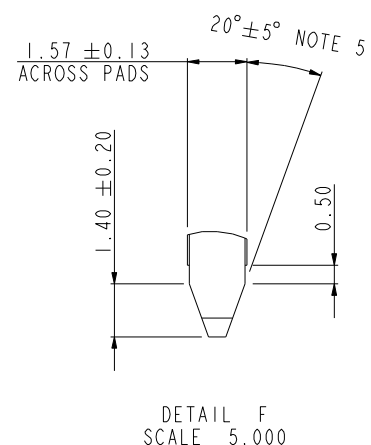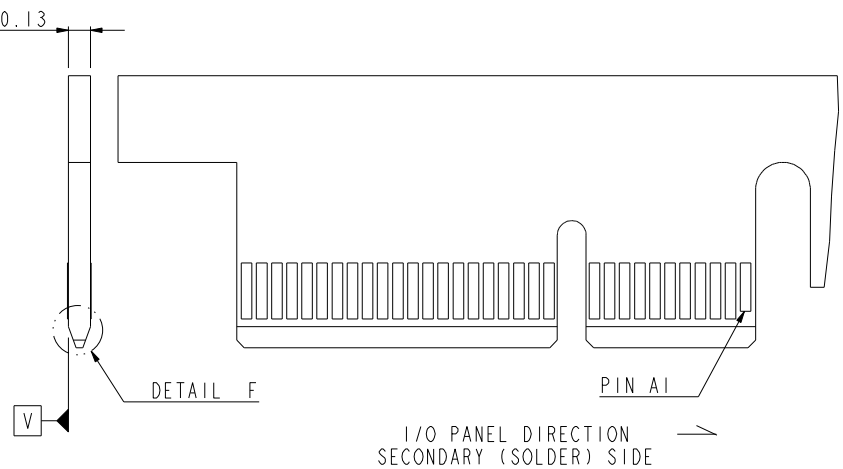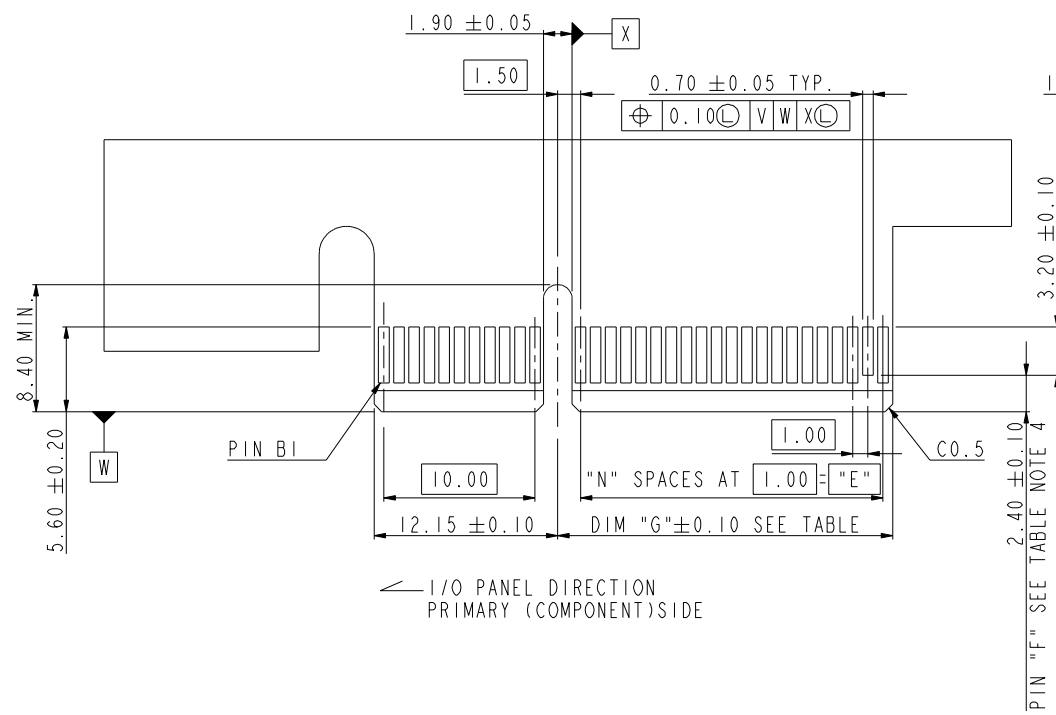


| # POS REF. | N  | DIM "G" | "F" |
|------------|----|---------|-----|
| 98         | 37 | 39.15   | B48 |
| 164        | 70 | 72.15   | B81 |

| tolerance unless otherwise specified |                                  |
|--------------------------------------|----------------------------------|
| linear                               | .X ± .3<br>.XX ± .2<br>.XXX ± .1 |
| angles                               | 0° ± 2°                          |

|                    |             |          |                             |              |           |
|--------------------|-------------|----------|-----------------------------|--------------|-----------|
| www.fciconnect.com |             |          | tolerance                   | projection   | MM        |
| Dr                 | MAGGIE WU   | 07/23/04 | Product family              | size         | A4        |
| Eng                | R Y LIU     | 07/23/04 | Spec ref                    | Scale        | 1.000     |
| Chr                | PAUL WANG   | 07/23/04 | Material                    | ECN          | DG09-0045 |
| Appr               | JOSEPH HSIA | 07/23/04 |                             |              |           |
| FCI                |             |          | PCI EXPRESS PRESS-FIT ASS'Y | dwg no       | 10039755  |
| catalog no         |             |          | * CUSTOMER DRAWING          | sheet 3 of 6 | Rev. K    |



Copyright FCI.

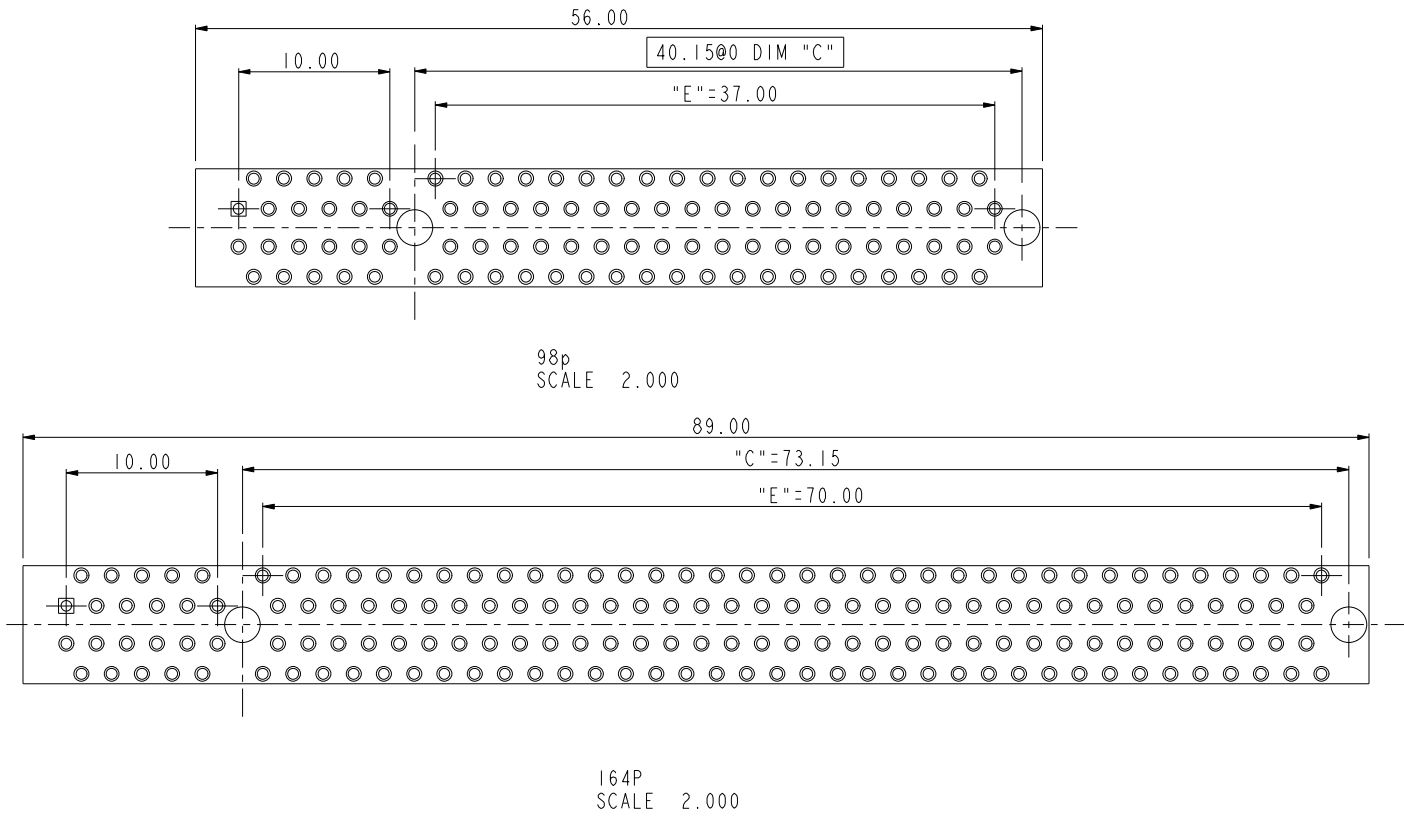

RECOMMENDED FOOTPRINT LAYOUT

|                    |             |          |                             |           |            |              |
|--------------------|-------------|----------|-----------------------------|-----------|------------|--------------|
| www.fciconnect.com |             |          | ✓                           | tolerance | projection | MM           |
| Dr                 | MAGGIE WU   | 07/23/04 | Product family              |           | 3G10       | size         |
| Eng                | R Y LIU     | 07/23/04 | Spec ref                    |           | *          | A4           |
| Chr                | PAUL WANG   | 07/23/04 | Material                    |           | *          | ECN          |
| Appr               | JOSEPH HSIA | 07/23/04 |                             |           |            | DG09-0045    |
| FCI                |             |          | PCI EXPRESS PRESS-FIT ASS'Y |           |            | Rev.         |
| catalog no         |             |          | 10039755                    |           |            | K            |
|                    |             |          | CUSTOMER                    |           |            | sheet 4 of 6 |



Copyright FCI.

#### NOTES:

##### 1. MATERIAL:

HOUSING: HIGH TEMPERATURE NYLON, GLASS FILLED UL94V-0 RATED. SUITABLE FOR REFLOW SOLDERING.

TERMINAL: COPPER ALLOY

PLATING: 50u" NICKEL UNDERPLATE ALL OVER

CONTACT AREA PLATING - SEE PRODUCT NUMBER CODE

SOLDER TAIL: TIN - 100u" MIN. OVER 50u" NICKEL OR TIN/LEAD

100u" MIN. SEE PRODUCT NUMBER CODE

##### 2. PRODUCT SPECIFICATION: GS-12-319

THE HORIZONTAL AXIS FOR THE HOLE PATTERN IS ESTABLISHED BY A LINE THROUGH THE CENTER OF THE TWO  $\varnothing 2.35$  HOLES. THE VERTICAL AXIS IS 90° TO THE HORIZONTAL AXIS, THROUGH THE CENTER OF DATUM Z.

NO TIE BAR PERMITTED FROM CARD EDGE TO LEADING EDGE OF PAD FOR PINS A1 AND PIN NUMBERS "F".

CHAMFER EDGES MUST BE FREE OF CUTTING BURRS.

ALL PTH SHOULD BE 0.76~0.83 mm DIA DRILLED AND 0.025~0.05 mm. ELECTRO-DEPOSITED COPPER THK ON THROUGH HOLE WALL.

##### 7. RoHS COMPATIBLE PRODUCT SPECIFICATIONS

###### a-PLATING:

"-LF" MEANS THE PRODUCT IS LEAD-FREE, 2um MINIMUM MATTE TIN OVER 1.27um MINIMUM NICKEL UNDERPLATE.

###### b-MANUFACTURING PROCESS COMPATIBILITY

-THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A REFLOW SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.

#### PRODUCT NUMBER CODE

10039755 - X X X X X X X X

HOUSING COLOR OPTIONS  
1-BLACK

PEGS OPTIONS  
0-PLASTIC PEGS

#### TERMINAL PLATING OPTIONS

0-50u" Ni UNDERPLATE

30u" Au CONTACT AREA

100u" TIN TAIL AREA -----COMPATIBLE RoHS

1-50u" Ni UNDERPLATE

15u" Au CONTACT AREA

100u" TIN TAIL AREA -----COMPATIBLE RoHS

2-50u" Ni UNDERPLATE

GOLD FLASH CONTACT AREA

100u" TIN TAIL AREA -----COMPATIBLE RoHS

3-50u" Ni UNDERPLATE

30u" Au CONTACT AREA

100u" TIN/LEAD TAIL AREA -----RoHS COMPLIANT EXCEPT Pb

4-50u" Ni UNDERPLATE

15u" Au CONTACT AREA

100u" TIN/LEAD TAIL AREA -----RoHS COMPLIANT EXCEPT Pb

5-50u" Ni UNDERPLATE

GOLD FLASH CONTACT AREA

100u" TIN/LEAD TAIL AREA -----RoHS COMPLIANT EXCEPT Pb

LEAD FREE OPTION

"LF" FOR TERMINAL PLATING OPTION 0,1,2  
LEAVE BLANK FOR TERMINAL PLATING 3,4,5

PACKAGING OPTIONS  
T-TRAY PACKAGING

#### POS OPTIONS

0-36

1-64


2-98

3-164

#### TAIL LENGTH OPTIONS

|   | DIM "D"   | SUGGESTED PCB THICKNESS |
|---|-----------|-------------------------|
| 0 | 2.00±0.20 | 2.36                    |
| 1 | 3.25±0.20 | 4.19                    |

| CONNECTOR | # POS REF. | N  | DIM "A" | DIM "B" | DIM "C" | DIM "E" |
|-----------|------------|----|---------|---------|---------|---------|
| 1 PORT    | 36         | 6  | 7.65    | 25.00   | 9.15    | 6.00    |
| 4 PORT    | 64         | 20 | 21.65   | 39.00   | 23.15   | 20.00   |
| 8 PORT    | 98         | 37 | 38.65   | 56.00   | 40.15   | 37.00   |
| 16 PORT   | 164        | 70 | 71.65   | 89.00   | 73.15   | 70.00   |



Date code:

"YY" means year number

"MM" means month number

"DD" means day number

"X" means manufacture location

"D" means made in Dongguan site

"Y" means shift number

If date code is 060626D1, it means this part is made by shift 1 in 2006/06/26 and manufactured in Dongguan site




Date code should be laser mark

| tolerance unless otherwise specified |                                  |
|--------------------------------------|----------------------------------|
| linear                               | .X ± .3<br>.XX ± .2<br>.XXX ± .1 |
| angles                               | 0° ± 2°                          |

|                    |             |                             |                |           |                    |              |
|--------------------|-------------|-----------------------------|----------------|-----------|--------------------|--------------|
| www.fciconnect.com |             |                             | ✓              | tolerance | projection         | MM           |
| Dr                 | MAGGIE WU   | 07/23/04                    | Product family |           | size               | A4           |
| Eng                | R Y LIU     | 07/23/04                    | Spec ref       |           | Scale              | 1.000        |
| Chr                | PAUL WANG   | 07/23/04                    | Material       |           | ECN                | DG09-0045    |
| Appr               | JOSEPH HSIA | 07/23/04                    |                |           |                    |              |
| FCI                |             | PCI EXPRESS PRESS-FIT ASS'Y |                |           | dwg no             | 10039755     |
| catalog no         |             |                             |                |           | * CUSTOMER DRAWING | sheet 5 of 6 |
|                    |             |                             |                |           | Rev.               | K            |



Copyright FCI.

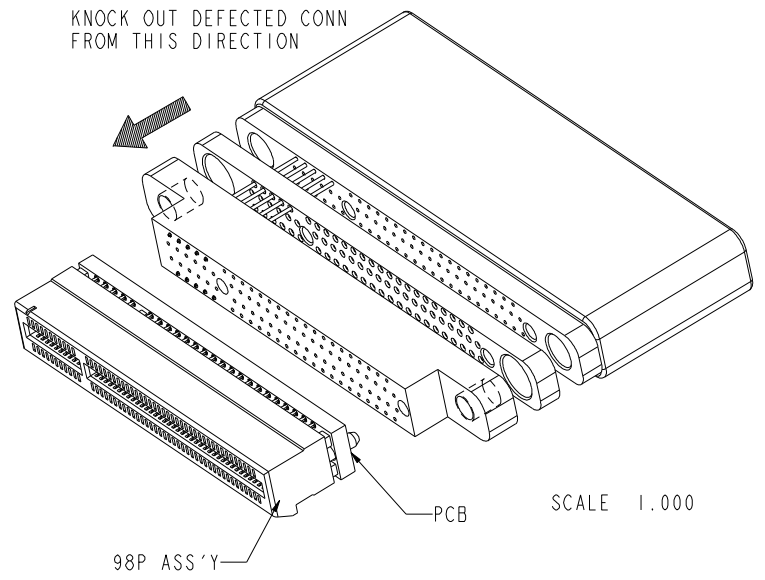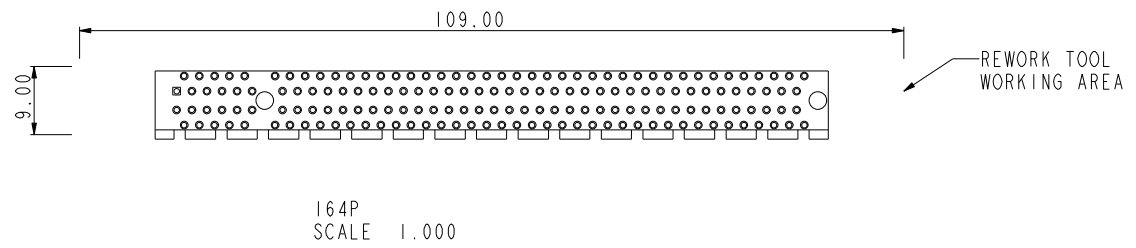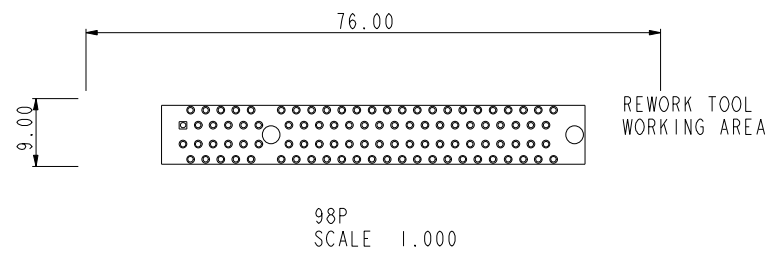

| tolerance unless otherwise specified |                                  |
|--------------------------------------|----------------------------------|
| linear                               | .X ± .3<br>.XX ± .2<br>.XXX ± .1 |
| angles                               | 0° ± 2°                          |

|                                                                                       |                             |          |                |                    |              |             |
|---------------------------------------------------------------------------------------|-----------------------------|----------|----------------|--------------------|--------------|-------------|
| www.fciconnect.com                                                                    |                             |          | ✓              | tolerance          | projection   | MM          |
| Dr                                                                                    | MAGGIE WU                   | 07/23/04 | Product family |                    | size A4      | Scale 1.000 |
| Eng                                                                                   | R Y LIU                     | 07/23/04 | Spec ref       |                    |              |             |
| Chr                                                                                   | PAUL WANG                   | 07/23/04 | Material       |                    | ECN          | DG09-0045   |
| Appr                                                                                  | JOSEPH HSIA                 | 07/23/04 |                |                    |              |             |
|  | PCI EXPRESS PRESS-FIT ASS'Y |          |                | dwg no 10039755    | Rev. K       |             |
|                                                                                       | catalog no                  |          |                |                    |              |             |
|                                                                                       |                             |          |                | * CUSTOMER DRAWING | sheet 6 of 6 |             |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А