

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

ATLANTIC VERSION
TERMINATOR
INTERFACE ADAPTER

PART
NUMBER

REVISION


DESCRIPTION

FEED TYPE

APPLICATOR STYLE CONVERSION CHART

CONVERT TO

PART NUMBERS REQUIRED

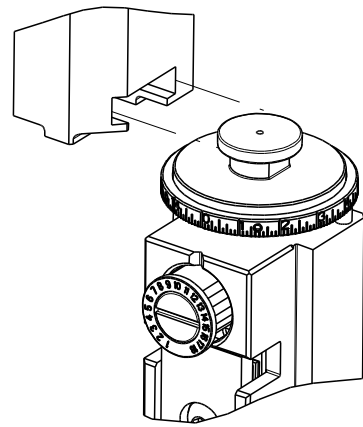

2151450-1

A

FINE CRIMP HEIGHT ADJUST

MECHANICAL

PNEUMATIC FEED

SERVO LATCH PLATE

SMART APPLICATOR

2119950-1

2119951-1

2161326-1

1338685-1

-

-

5-18022-5

8-2151450-5

8-2151450-4

2119641-1

1901094-3

-

2119799-1

-

-

2063440-1

2168400-6 (QUANTITY 2)

-

2151450-2

A

FINE CRIMP HEIGHT ADJUST

PNEUMATIC

MECHANICAL FEED

SERVO LATCH PLATE

SMART APPLICATOR

2119949-1

2119951-1

2161326-1

1338685-1

-

-

5-18022-5

8-2151450-5

8-2151450-4

2119653-1

1901094-3

-

-

-

-

-

-

-

-

2168400-6 (QUANTITY 2)

-

2151450-5

A

FINE CRIMP HEIGHT ADJUST

SERVO
LATCH PLATE⁴

MECHANICAL FEED

PNEUMATIC FEED

2119949-1

2119950-1

1338685-1

1338685-1

5-18022-5

5-18022-5

2119653-1

2119641-1

-

2119799-1

-

2063440-1

2151450-6

A

NON-CRIMP HEIGHT ADJUST

SERVO
LATCH PLATE⁴¹²

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

2151450-7

A

FINE CRIMP HEIGHT ADJUST

NONE

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

7-2151450-7

A

CRIMP TOOLING KIT

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

2.79 mm [.110]

F

INSUL

3.56 mm [.140]

OV

APPLICATOR INSTRUCTIONS

408-10389




TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: 2.8mm FASTIN FASTON TAB

WIRE STRIP LENGTH

5.00-5.60 mm [.197-.220 IN]



INSULATION DIAMETER RANGE

Ø1.80-2.90 mm [.071-.114 IN]

TERMINAL APPLICATION SPECIFICATION

114-18014

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

928781-1

928781-2

928781-4

928781-5

WIRE SIZE





CRIMP HEIGHT
mm [INCH]



CRIMP HEIGHT
REFERENCE SETTING⁹

2.50mm2

1.97+/-0.05 [.078+/- .002]

6.0

2.00mm2

1.83+/-0.05 [.072+/- .002]

7.5

1.50mm2

1.69+/-0.05 [.067+/- .002]

9.0



RECOMMENDED SPARE PARTS

GREASE BEARING SURFACES LIGHTLY

3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151450-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151450-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151450-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151450-6

5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6. APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 50.

7. GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.

8. MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9. CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10. SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

11. TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

12. WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119957-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT

2119957-2

APPLICATOR SHIM PACK

260

8-21084-0

O-RING, .676 ID, .070 DIA. MAT.

252

2119640-1

PUSH ROD, AIR FEED

250

-77

-7

-6

-5

-2

-1

PART NO

DESCRIPTION

ITEM NO

ATLANTIC VERSION

Shown on sheets 1 of 4 & 2 of 4

(Pacific version shown on sheets 3 of 4 & 4 of 4)

SET UP GAUGE

2119599-1

LOC

A

DIST

66

P

L

Y

R

DESCRIPTION

DATE

OWN

APVD

A

RELEASE

02JUL2012

L.Z

S.X

-

-

-

-

1

-

2079988-1

BUSHING, LCH5-12, MISUMI

249

-

-

-

-

1

-

2119641-1

FEED CAM, AIR FEED

248

-

1

-

1

1

1

2119798-1

DETENT PIN

247

-

1

-

1

1

1

1-22279-3

SPRING, COMPRESSION

246

-

-

1

-

-

-

2119758-1

RAM, AMP STYLE, SIDE FEED, NON-ADJ.

245

-

1

1

1

1

1

2119082-9

CAM, SNAIL, INSULATION ADJUSTMENT

244

-

1

1

1

1

1

2079764-1

WASHER, WAVE SPRING, CREST-TO-CREST

243

-

1

1

1

1

1

2119083-1

RETAINER, INSULATION DIAL

242

-

1

1

1

1

1

18023-1

SCR, SKT HD CAP M3 X 5.0

241

-

-

2

2

-

-

2168400-6

SHCS, LOW HEAD, RoHS, M5 X 16

240

-

-

-

-

-

1

2119580-1

MECHANICAL FEED ASSEMBLY

239

-

-

-

-

1

-

2063440-1

AIR FEED MODULE

238

-

-

1

1

-

-

2119740-2

TAG,IDENTIFICATION

213

-

-

1

1

-

-

1901094-3

SPACER, FEEDER

198

-

-

-

-

2

-

21045-3

RING, RETAIN, EXTERN, 3/16 CRESCENT

172

-

1

1

1

1

1

994969-1

MAGNET, RARE EARTH HIGH ENERGY

166

-

REF

REF

REF

REF

REF

994970-2

COUNTER, MAGNETIC

164

-

-

-

-

1

-

240638-1

SPRING, FEED FINGER

163

-

-

-

-

1

-

3-23627-7

PIN, RETAIN, GRVD, 3/16 X .854

137

-

-

-

-

1

-

2119799-1

HOLDER,FEED FINGER, AF

136

-

-

REF

REF

-

-

SEE NOTE 4

MEMORY CHIP, PROGRAMMED

135

-

-

1

1

-

-

1633743-1

SERVO FEED LATCH ASM

133

-

1

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

119

-

-

REF

REF

-

-

2119944-1

FEED FINGER ASSEMBLY,SF

117

-

1

1

1

1

1

455888-5

SPACER, CRIMPER

82

-

1

1

1

1

1

2119956-1

DOCUMENTATION PACKAGE

71

-

1

-

-

1

1

2119740-1

TAG,IDENTIFICATION

67

-

2

2

2

2

2

2168078-1

SCREW, DRIVE, RH, RoHS

66

-

1

-

1

1

1

2119793-1

LIMITER, ADJUSTMENT BOLT

63

-

3

-

3

3

3

992763-5

SCR, SET, SOC, CONE POINT, M3 x 4.0

62

-

1

1

1

1

1

2079383-4

SCR, BHSC, RoHS (M4 X 8)

60

-

-

-

-

1

1

5-18022-5

SCR, HEX HD CAP, M4 X 6.0

59

-

-

-

-

1

1

1338685-1

PAWL, FEED

56

-

4

4

4

4

4

2168400-1

SHCS, LOW HEAD, RoHS, M4 X 12

54

-

2

2

2

2

2

2168083-8

SCR, SKT HD CAP, RoHS, M4 X 16

53

-

1

1

1

1

1

5018030-1

NUT, HEX, REG, RoHS, M3

52

-

1

1

1

1

1

811242-5

BUMPER, HOLD DOWN

51

-

1

1

1

1

1

690753-2

SPACER, TONKER

50

-

-

-

-

1

2

18023-9

SCR, SKT HD CAP M4 X 6.0

49

-

-

-

-

-

1

2119652-1

FEED CAM, PRE FEED

48

-

-

-

-

-

1

2119653-1

FEED CAM, POST FEED

47

-

1

1

1

1

1

2119656-9

APPLICATOR BASIC ASSEMBLY, SF

46

-

1

-

1

1

1

2119370-1

RAM, AMP STYLE, SIDE FEED

44

-

1

1

1

1

1

2079383-7

SCR, BHSC, RoHS (M8 X 25)

41

-

1

-

1

1

1

2119645-1

DISC, NUMBERED FA WIRE ADJUSTMENT

40

-

1

-

1

1

1

2119957-1

APPLICATOR SHIM PACK

39

-

1

1

1

1

1

2119644-2

RAM WASHER, PRECISION

38

-

1

1

1

1

1

2119085-1

FA HEAD, ATLANTIC STYLE

37

-

1

-

1

1

1

2119092-1

BOLT, ADJUSTMENT

35

-

1

1

1

1

1

4-1752356-2

SUPPORT, TERMINAL

34

-

2

2

2

2

2

2079383-5

SCR, BHSC, RoHS (M4 X 20)

33

-

1

1

1

1

1

2161328-1

HEX HEAD, FLANGED, M5 x 8mm LONG

32

-

1

1

1

1

1

1-1320908-2

SPACER, STRIP GUIDE

30

-

1

1

1

1

1

2119959-1

ASSEMBLY, STRIP GUIDE

29

-

1

1

1

1

1

1-455888-0

SPACER, CRIMPER

28

-

1

1

1

1

1

1320928-2

STRIP GUIDE

24

-

2

2

2

2

2

18025-2

WASHER, SPRG LOCK, REG M4

22

-

1

1

1

1

1

2168083-2

SCR, SKT HD CAP, RoHS, M4 X 8.0

21

-

1

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

20

-

1

1

1

1

1

2119533-1

STRIPPER, SIDE FEED

19

-

1

1

1

1

1

2119806-1

INSERT, SHEAR

13

-

1

1

1

1

1

3-22280-3

SPRING, COMPRESSION

12

-

1

1

1

1

1

1-356885-4

STOP, SHEAR

11

-

1

1

1

1

1

2119805-1

SHEAR HOLDER, FRONT

10

-

1

1

1

1

1

462006-6

FLOATING SHEAR, FRONT

9

1

1

1

1

1

1

1-1333207-1

ANVIL, COMBINATION .110

8

-

1

1

1

1

1

1-240641-4

SPACER

7

-

-

-

-

-

-

-

-

6

-

1

1

1

1

1

2119757-8

DEPRESSOR, SHEAR

5

-

1

1

1

1

1

2-238011-2

BLOCK, CRIMPER SPACER

4

1

1

1

1

1

1

1-2119785-1

CRIMPER, INSULATION OVERLAP PREMIUM

3

-

1

1

1

1

1

1-455888-0

SPACER, CRIMPER

2

1

1

1

1

1

1

456408-6

CRIMPER, WIRE PREMIUM

1

-77

-7

-6

-5

-2

-1

PART NO

DESCRIPTION

ITEM NO

DOWN

L.ZHANG

15DEC2011

CHK

L.ZHANG

15DEC2011

APVD

S.XI

15DEC2011

NAME

TE Connectivity

Harrisburg, PA 17105-3608

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.1

1 PLC ±.01

2 PLC ±.02

3 PLC ±.005

4 PLC ±.0005

ANGLES ±.1

MATERIAL

FINISH

WEIGHT

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

CUSTOMER ACCESSIBLE PRODUCTION DRAWING

SCALE

1:1

SHEET

1

OF

4


REV

A


AMP 4805 REV 31MAR2009

SHEETS 3 & 4 ARE NOT REQUIRED FOR ATLANTIC VERSION


FEED TYPE
MECHANICAL

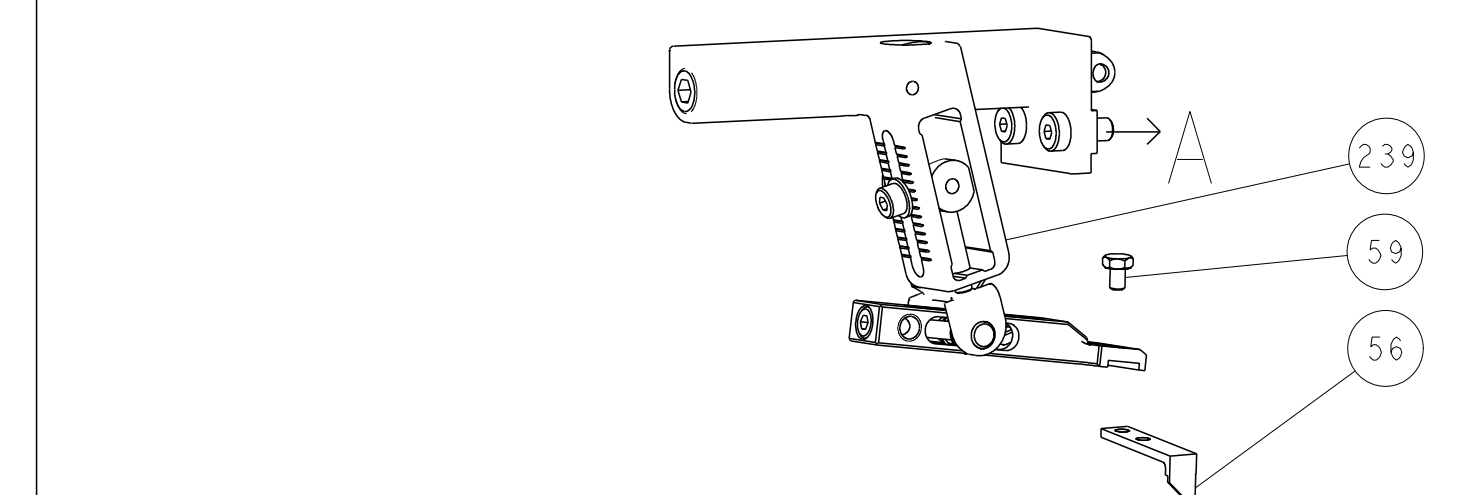


PNEUMATIC

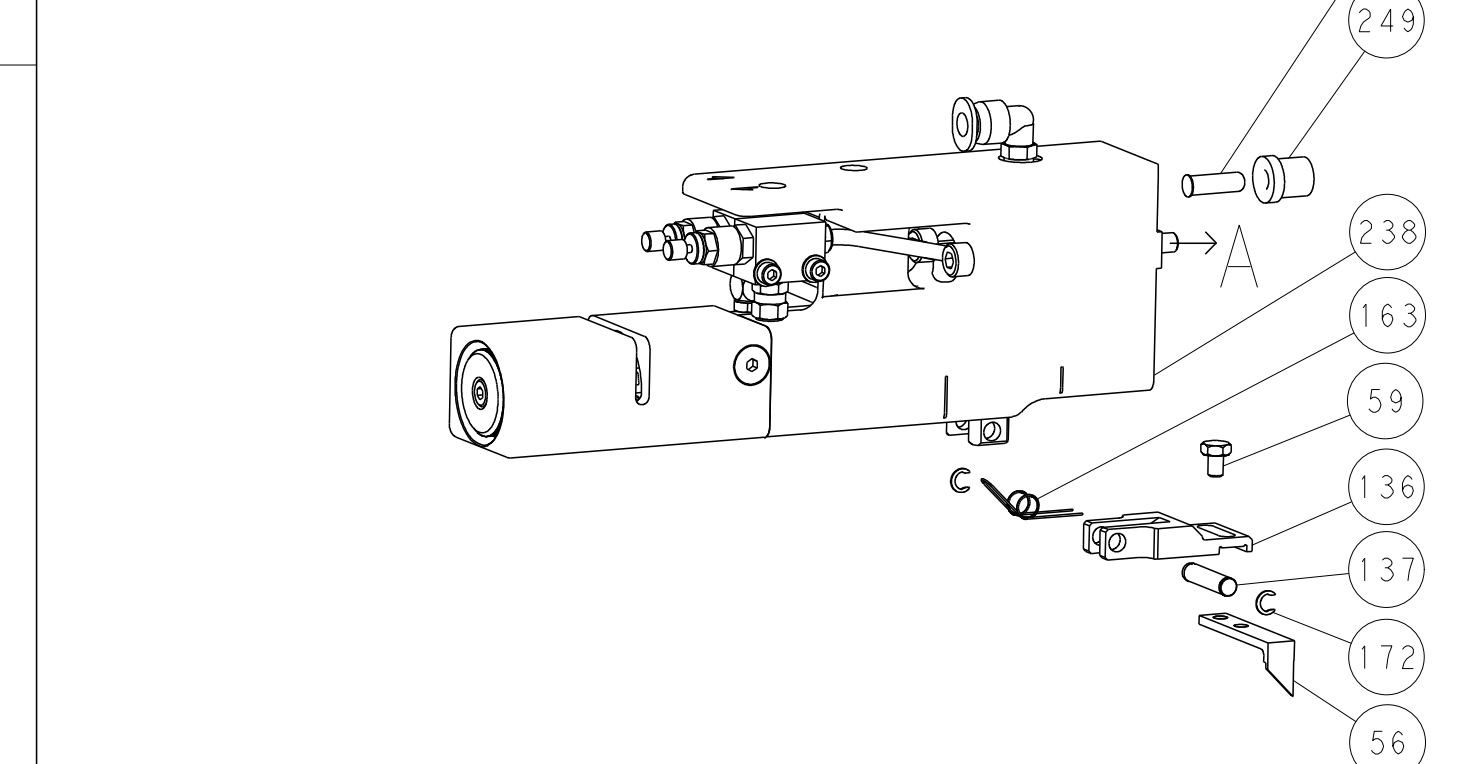




SERVO
LATCH PLATE

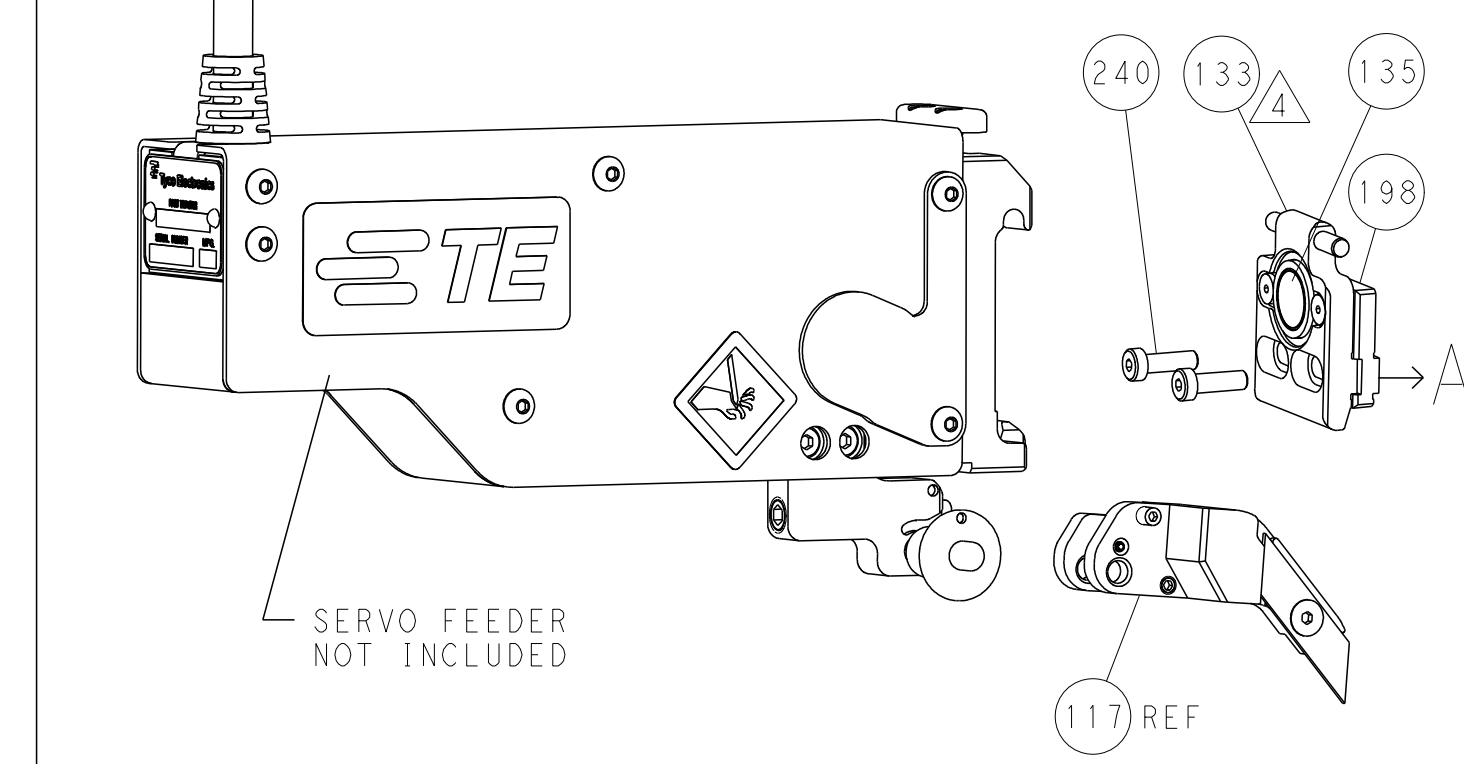

CAM POSITIONS

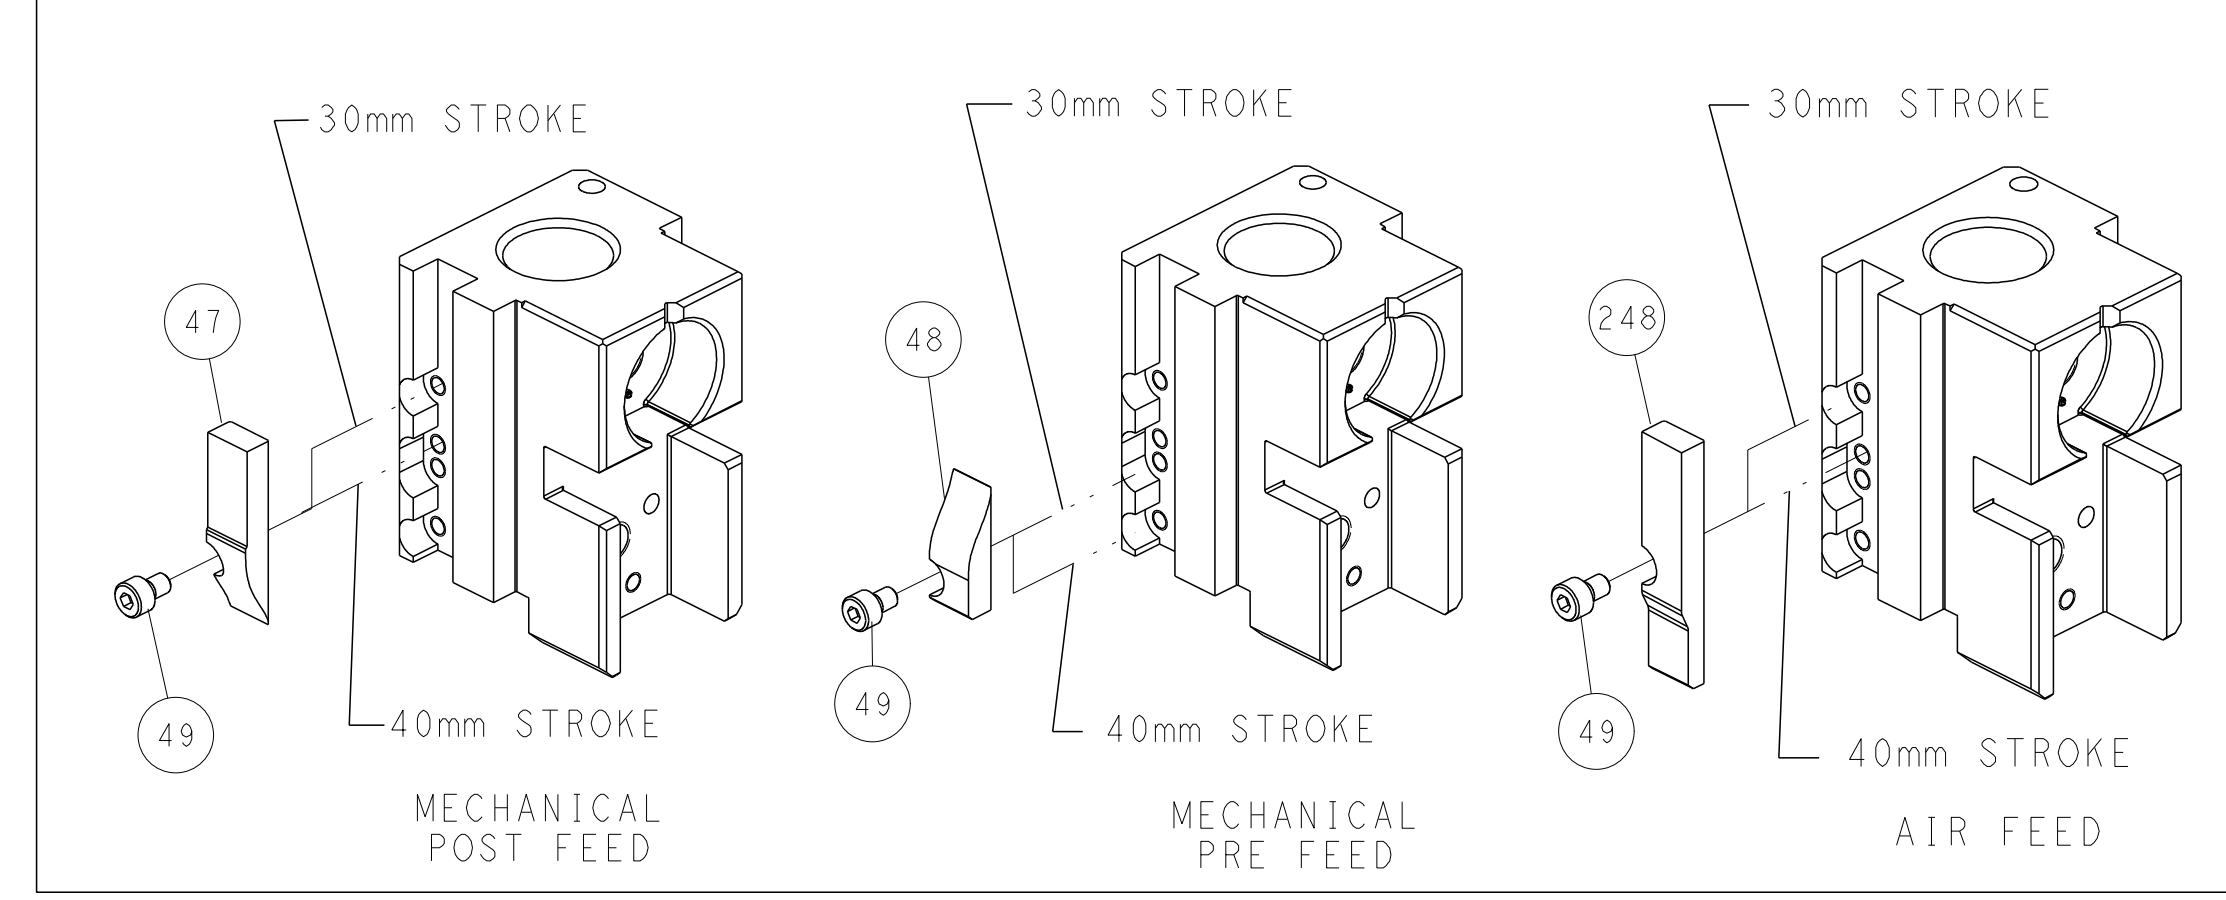

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

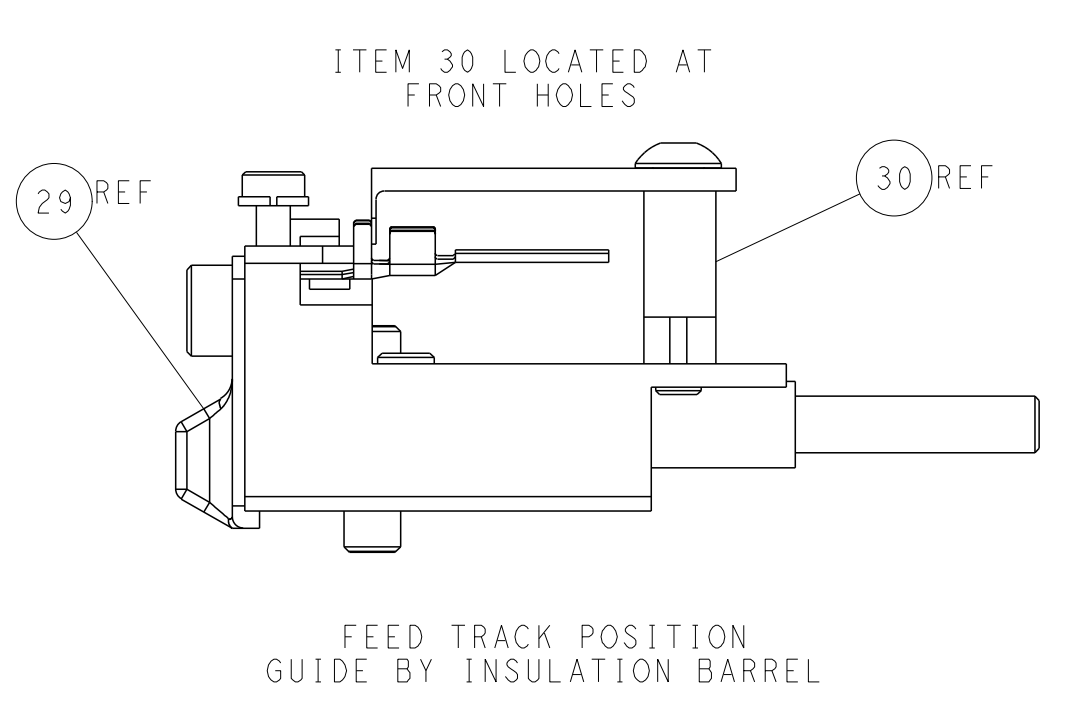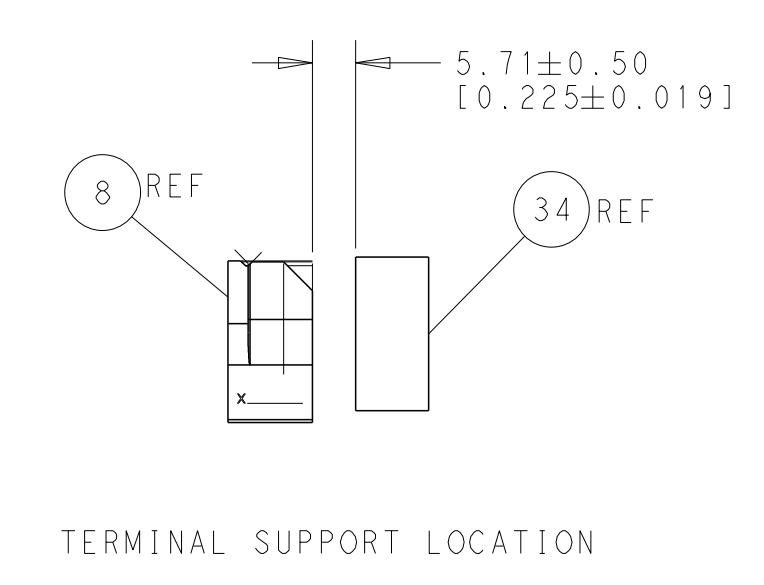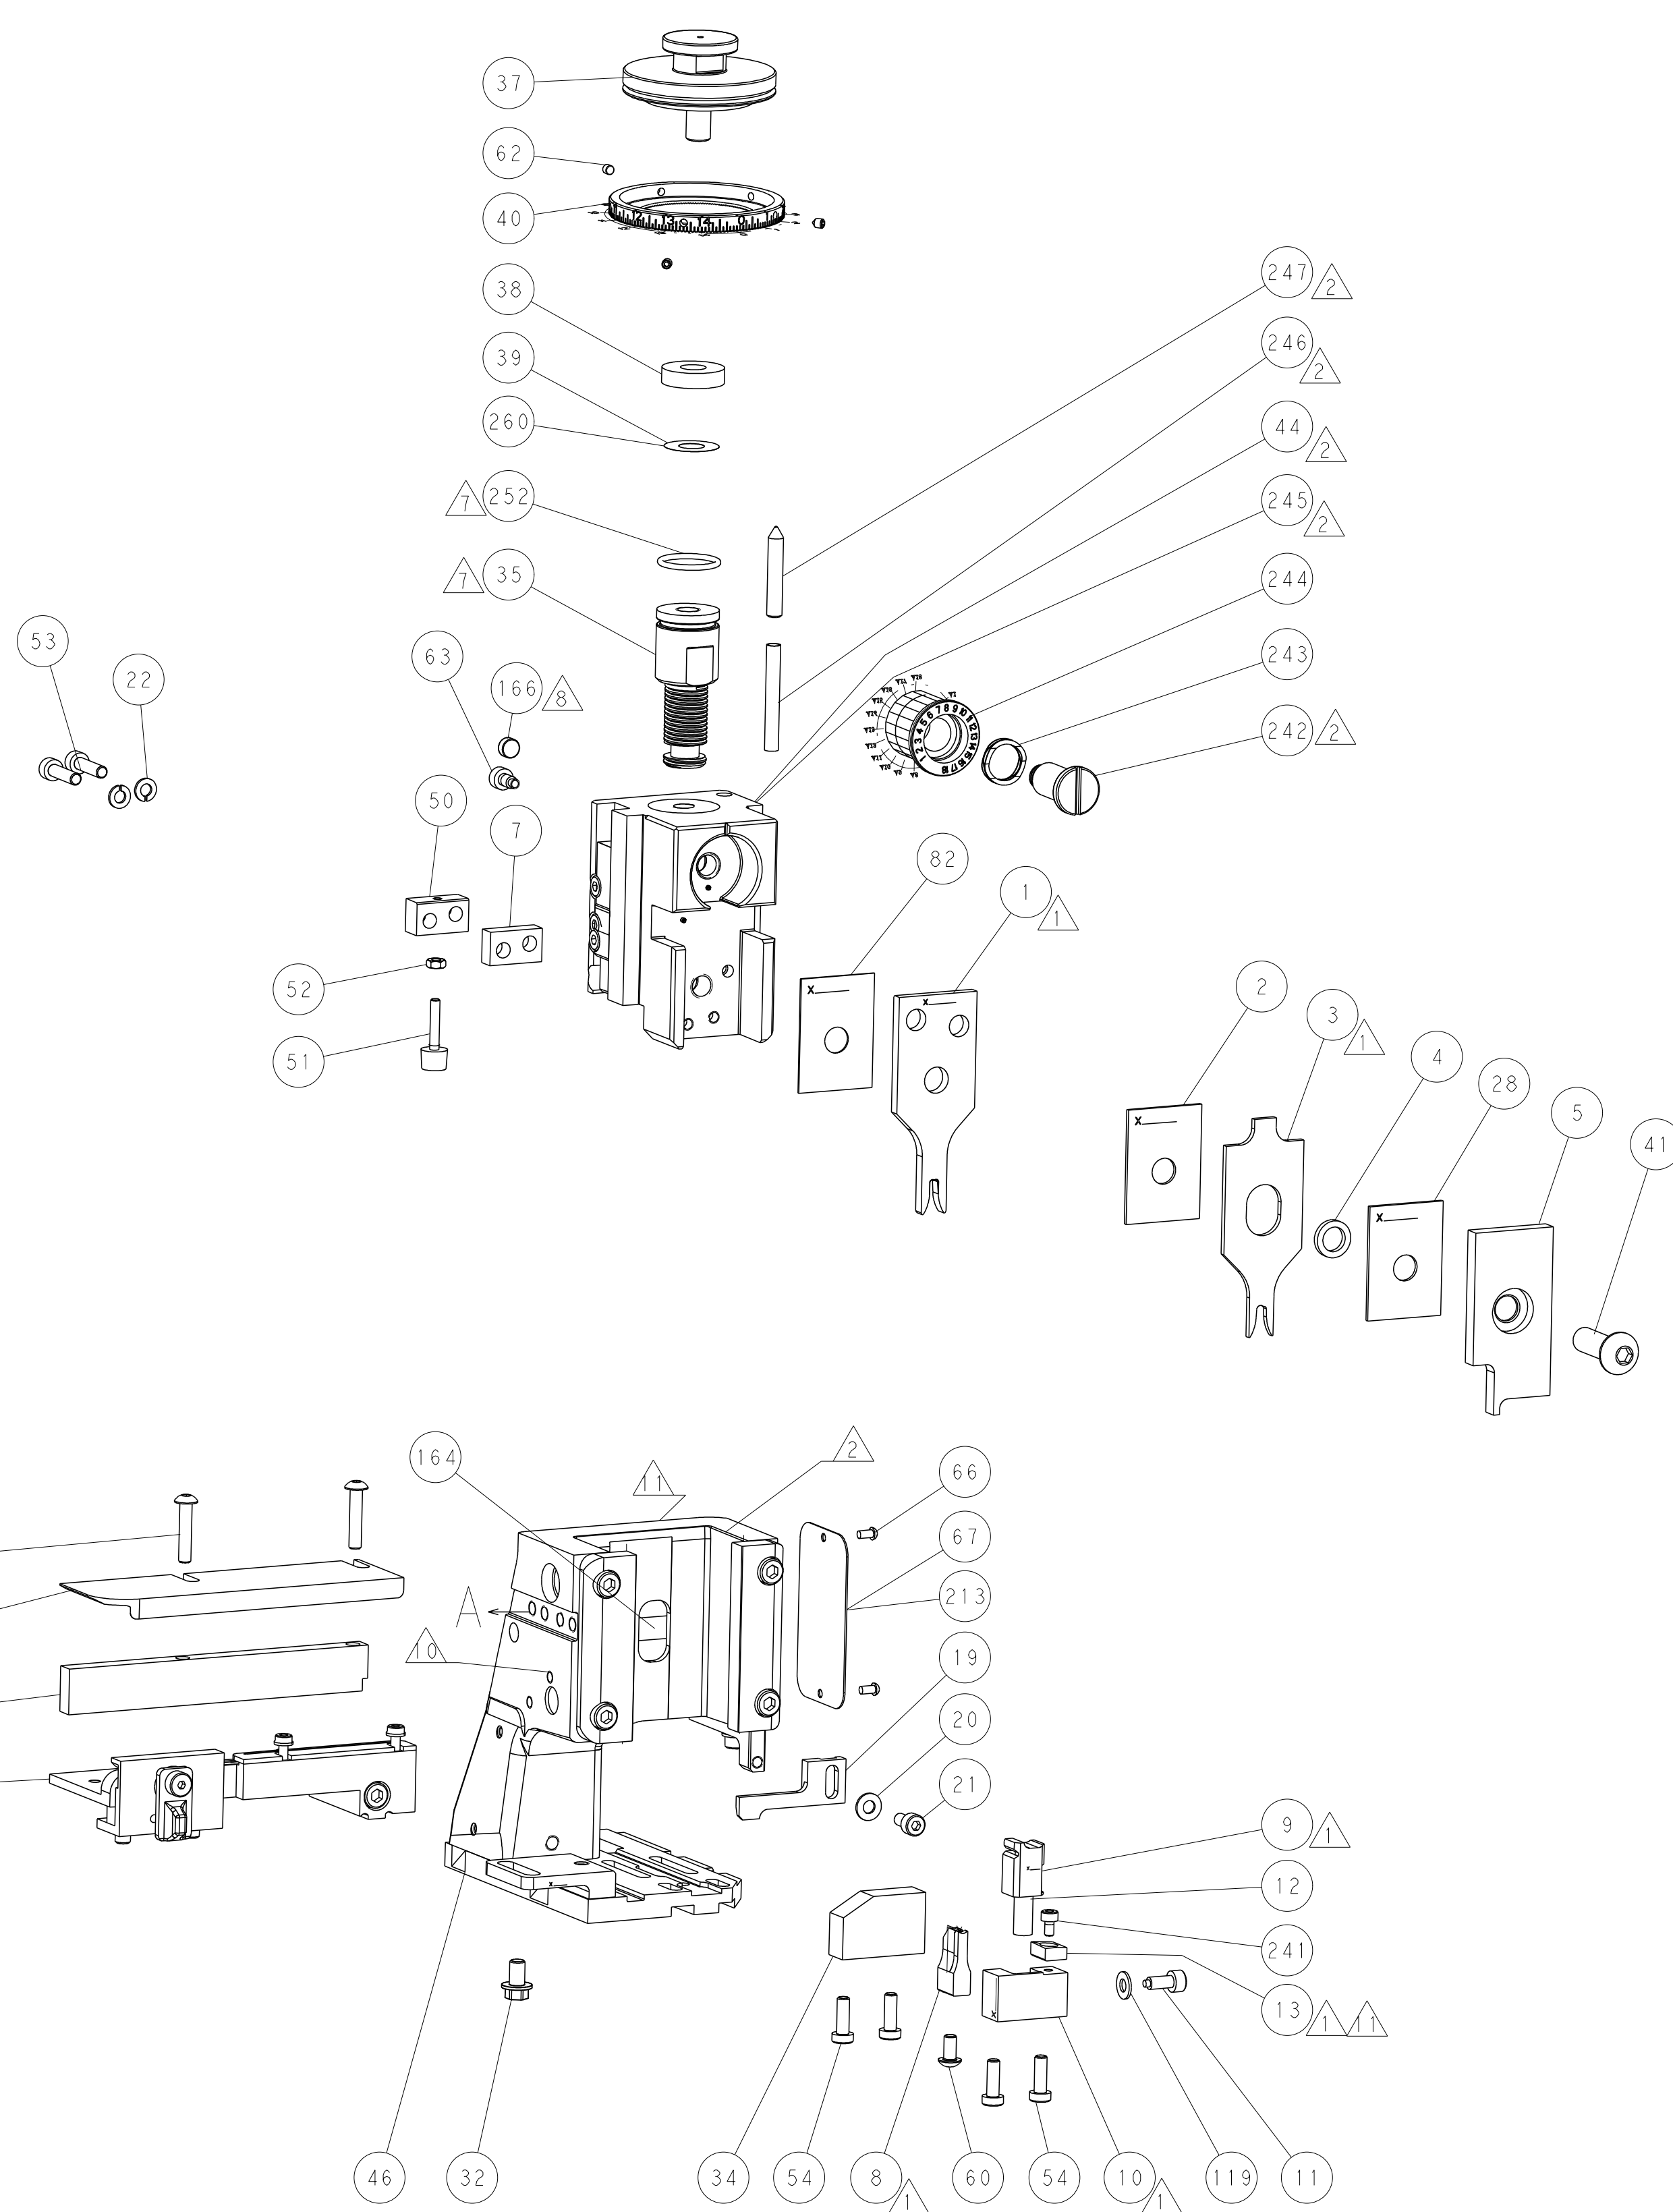

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE NOTIFIED FOR THE LATEST REVISION		OWN L. ZHANG 15DEC2011	TE Connectivity Harrisburg, PA 17105-3608	
CHK L. ZHANG 15DEC2011		NAME Ocean Side Feed Applicator	RESTRICTED TO -	
APVD S. XI PRODUCT SPEC		SIZE A	CAGE CODE 00779	DRAWING NO 2151450
APPLICATION SPEC		WEIGHT -	CUSTOMER ACCESSIBLE PRODUCTION DRAWING	
MATERIAL -		FINISH -	SCALE 1:1	SHEET 2 OF 4
		REV A		

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

PACIFIC VERSION
TERMINATOR
INTERFACE ADAPTER

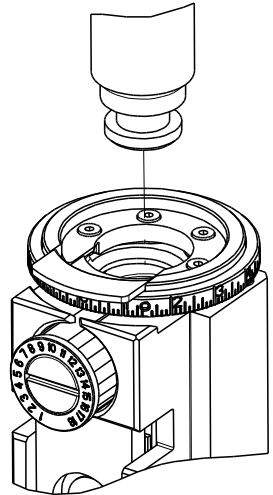

PART
NUMBER

2-2151450-1

2-2151450-2

2-2151450-5

2-2151450-7

7-2151450-7

REVISION

A

A

A

A

A

DESCRIPTION

FINE CRIMP HEIGHT ADJUST

FINE CRIMP HEIGHT ADJUST

FINE CRIMP HEIGHT ADJUST

FINE CRIMP HEIGHT ADJUST

CRIMP TOOLING KIT

FEED TYPE

MECHANICAL

PNEUMATIC

SERVO
LATCH PLATE 

NONE

-

APPLICATOR STYLE CONVERSION CHART

CONVERT TO

PNEUMATIC FEED

SERVO LATCH PLATE

SMART APPLICATOR

MECHANICAL FEED

SERVO LATCH PLATE

SMART APPLICATOR

MECHANICAL FEED

PNEUMATIC FEED

-

-

PART NUMBERS REQUIRED

2119950-1

2119951-1

2161326-1

2119949-1

2119951-1

2161326-1

2119949-1

2119950-1

1338685-1

-

-

-

-

-

-

5-18022-5

8-2151450-5

8-2151450-4

8-2151450-5

8-2151450-4

5-18022-5

5-18022-5

2119641-2

1901094-3

-

2119653-2

-

-

2119653-2

2119641-2

-

-

-

-

2119799-1

-

-

2063440-1

2168400-6 (QUANTITY 2)

-

2168400-6 (QUANTITY 2)

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

2.79 mm [.110]

F

INSUL

3.56 mm [.140]

OV

APPLICATOR INSTRUCTIONS

408-10389




TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: 2.8mm FASTIN FASTON TAB

WIRE STRIP LENGTH

5.00-5.60 mm [.197-.220 IN]



INSULATION DIAMETER RANGE

Ø1.80-2.90 mm [.071-.114 IN]

TERMINAL APPLICATION SPECIFICATION

114-18014

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

928781-1

928781-2

928781-4

928781-5

WIRE SIZE



CRIMP HEIGHT mm [INCH]



CRIMP HEIGHT REFERENCE SETTING 

2.50mm2

1.97+/-0.05 [.078+/- .002]

6.0

2.00mm2

1.83+/-0.05 [.072+/- .002]

7.5

1.50mm2

1.69+/-0.05 [.067+/- .002]

9.0



1

RECOMMENDED SPARE PARTS

2

GREASE BEARING SURFACES LIGHTLY

3.

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151450-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151450-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151450-5

5.

ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6

APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 50.

7

GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.

8

MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

0

SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

1

TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

-

1

1

1

1

2119782-1

FINE ADJUST HEAD ASM, PACIFIC STYLE

251

-77

-27

-25

-22

-21

PART NO

DESCRIPTION

ITEM NO

PACIFIC VERSION

Shown on sheets 3 of 4 & 4 of 4

(Atlantic version shown on sheets 1 of 4 & 2 of 4)

SET UP GAUGE

2119599-1

LOC

A

DIST

66

P

LTR

DESCRIPTION

DATE

OWN

APVD

-

SEE SHEET 1

-

-

-

-

-

-

1

-

2119640-1

PUSH ROD, AIR FEED

250

-

-

-

1

-

2079988-1

BUSHING, LCH5-12, MISUMI

249

-

1

1

1

1

1-22279-3

SPRING, COMPRESSION

246

-

1

1

1

1

2119082-9

CAM, SNAIL, INSULATION ADJUSTMENT

244

-

1

1

1

1

2079764-1

WASHER, WAVE SPRING, CREST-TO-CREST

243

-

1

1

1

1

2119083-1

RETAINER, INSULATION DIAL

242

-

1

1

1

1

18023-1

SCR, SKT HD CAP M3 X 5.0

241

-

-

2

-

-

2168400-6

SHCS, LOW HEAD, RoHS, M5 X 16

240

-

-

-

-

1

2119580-1

MECHANICAL FEED ASSEMBLY

239

-

-

-

1

-

2063440-1

AIR FEED MODULE

238

-

-

1

-

-

2119740-2

TAG,IDENTIFICATION

213

-

-

1

-

-

1901094-3

SPACER, FEEDER

198

-

-

-

2

-

21045-3

RING, RETAIN, EXTERN, 3/16 CRESCENT

172

-

1

1

1

1

994969-1

MAGNET, RARE EARTH HIGH ENERGY

166

-

REF

REF

REF

REF

994970-2

COUNTER, MAGNETIC

164

-

-

-

1

-

240638-1

SPRING, FEED FINGER

163

-

1

1

1

1

8-21084-1

O-RING, .801 ID, .070 DIA. MAT.

152

-

-

-

1

-

2119641-2

FEED CAM, AIR FEED

151

-

1

1

1

1

2119798-2

DETENT PIN

145

-

1

1

1

1

2079383-8

SCR, BHSC, RoHS (M4 X 16)

144

-

4

4

4

4

2168400-5

SHCS, LOW HEAD, RoHS, M4 X 20

143

-

-

-

-

1

2119653-2

FEED CAM, POST FEED

142

-

1

1

1

1

1-2119656-0

APPLICATOR BASIC ASSEMBLY, SF

141

-

1

1

1

1

2119650-1

RAM, ASIAN STYLE, SIDE FEED

140

-

1

1

1

1

2119092-2

BOLT, ADJUSTMENT

139

-

-

-

1

-

3-23627-7

PIN, RETAIN, GRVD, 3/16 X .854

137

-

-

-

1

-

2119799-1

HOLDER,FEED FINGER, AF

136

-

-

REF

-

-

SEE NOTE 4

MEMORY CHIP, PROGRAMMED

135

-

-

1

-

-

1633743-1

SERVO FEED LATCH ASM

133

-

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

119

-

-

REF

-

-

2119944-1

FEED FINGER ASSEMBLY,SF

117

-

1

1

1

1

455888-5

SPACER, CRIMPER

82

-

1

1

1

1

2119956-1

DOCUMENTATION PACKAGE

71

-

1

-

1

1

2119740-1

TAG,IDENTIFICATION

67

-

2

2

2

2

2168078-1

SCREW, DRIVE, RH, RoHS

66

-

1

1

1

1

2119793-1

LIMITER, ADJUSTMENT BOLT

63

-

3

3

3

3

992763-5

SCR, SET, SOC, CONE POINT, M3 x 4.0

62

-

-

-

1

1

5-18022-5

SCR, HEX HD CAP, M4 X 6.0

59

-

-

-

1

1

1338685-1

PAWL, FEED

56

-

2

2

2

2

2168083-8

SCR, SKT HD CAP, RoHS, M4 X 16

53

-

1

1

1

1

5018030-1

NUT, HEX, REG, RoHS, M3

52

-

1

1

1

1

811242-5

BUMPER, HOLD DOWN

51

-

1

1

1

1

690753-2

SPACER, TONKER

50

-

-

-

1

2

18023-9

SCR, SKT HD CAP M4 X 6.0

49

-

-

-

-

1

2119652-1

FEED CAM, PRE FEED

48

-

1

1

1

1

2079383-7

SCR, BHSC, RoHS (M8 X 25)

41

-

1

1

1

1

2119645-1

DISC, NUMBERED FA WIRE ADJUSTMENT

40

-

1

1

1

1

2119957-1

APPLICATOR SHIM PACK

39

-

1

1

1

1

2119644-2

RAM WASHER, PRECISION

38

-

1

1

1

1

4-1752356-2

SUPPORT, TERMINAL

34

-

2

2

2

2

2079383-5

SCR, BHSC, RoHS (M4 X 20)

33

-

1

1

1

1

2161328-1

HEX HEAD, FLANGED, M5 x 8mm LONG

32

-

1

1

1

1

1-1320908-2

SPACER, STRIP GUIDE

30

-

1

1

1

1

2119959-1

ASSEMBLY, STRIP GUIDE

29

-

1

1

1

1

1-455888-0

SPACER, CRIMPER

28

-

1

1

1

1

1320928-2

STRIP GUIDE

24

-

2

2

2

2

18025-2

WASHER, SPRG LOCK, REG M4

22

-

1

1

1

1

2168083-2

SCR, SKT HD CAP, RoHS, M4 X 8.0

21

-

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

20

-

1

1

1

1

2119533-1

STRIPPER, SIDE FEED

19

1

-

1

1

1

1

2119806-1

INSERT, SHEAR

13

-

1

1

1

1

3-22280-3

SPRING, COMPRESSION

12

-

1

1

1

1

1-356885-4

STOP, SHEAR

11

1

-

1

1

1

1

2119805-1

SHEAR HOLDER, FRONT

10

1

-

1

1

1

1

462006-6

FLOATING SHEAR, FRONT

9

1

1

1

1

1

1

1-1333207-1

ANVIL, COMBINATION .110

8

-

1

1

1

1

1

1-240641-4

SPACER

7

-

-

-

-

-

-

-

-

6

-

1

1

1

1

1

2119757-8

DEPRESSOR, SHEAR

5

-

1

1

1

1

1

2-238011-2

BLOCK, CRIMPER SPACER

4

1

1

1

1

1

1

1-2119785-1

CRIMPER, INSULATION OVERLAP PREMIUM

3

-

1

1

1

1

1

1-455888-0

SPACER, CRIMPER

2

1

1

1

1

1

1

456408-6

CRIMPER, WIRE PREMIUM

1

-77

-27

-25

-22

-21

PART NO


DESCRIPTION

ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROL-LINK ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION

DIMENSIONS:

mm



0. PLC ±.1
1. PLC ±0.1
2. PLC ±0.02
3. PLC ±0.005
4. PLC ±0.0005
ANGLES ±.1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

FINISH

MATERIAL

:

OWN

L. ZHANG

15DEC2011

CHK

L. ZHANG

15DEC2011

APVD

S. XI

15DEC2011

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER ACCESSIBLE PRODUCTION DRAWING

SCALE

1:1

SHEET

3

OF

4

REV

A

TE Connectivity

Harrisburg, PA 17105-3608

NAME

Ocean Side Feed Applicator

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A

00779

©=2151450


-

SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION


AMP 4805 REV 31MAR2009

LOC		DIST		REVISIONS					
A		66		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-


FEED TYPE
MECHANICAL

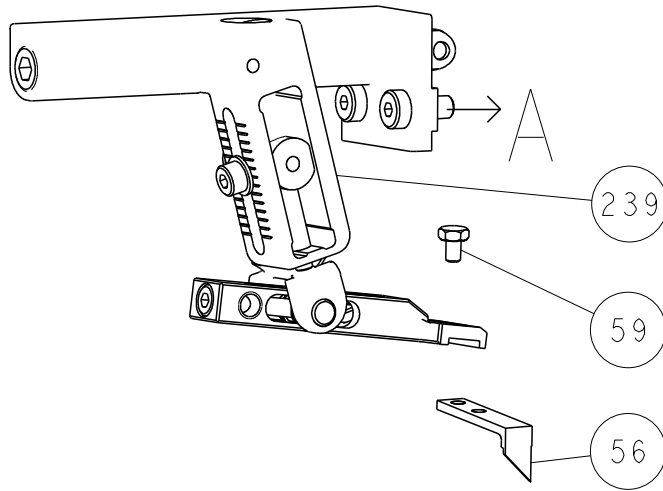






PNEUMATIC

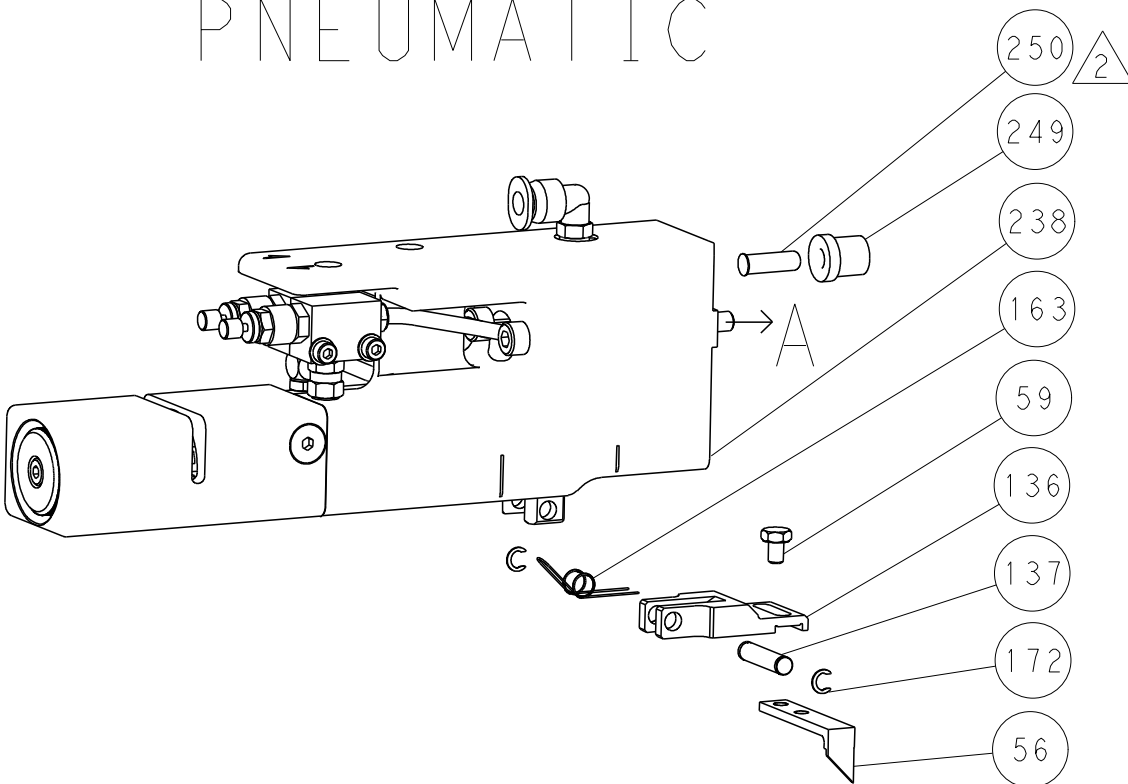


SERVO
LATCH PLATE

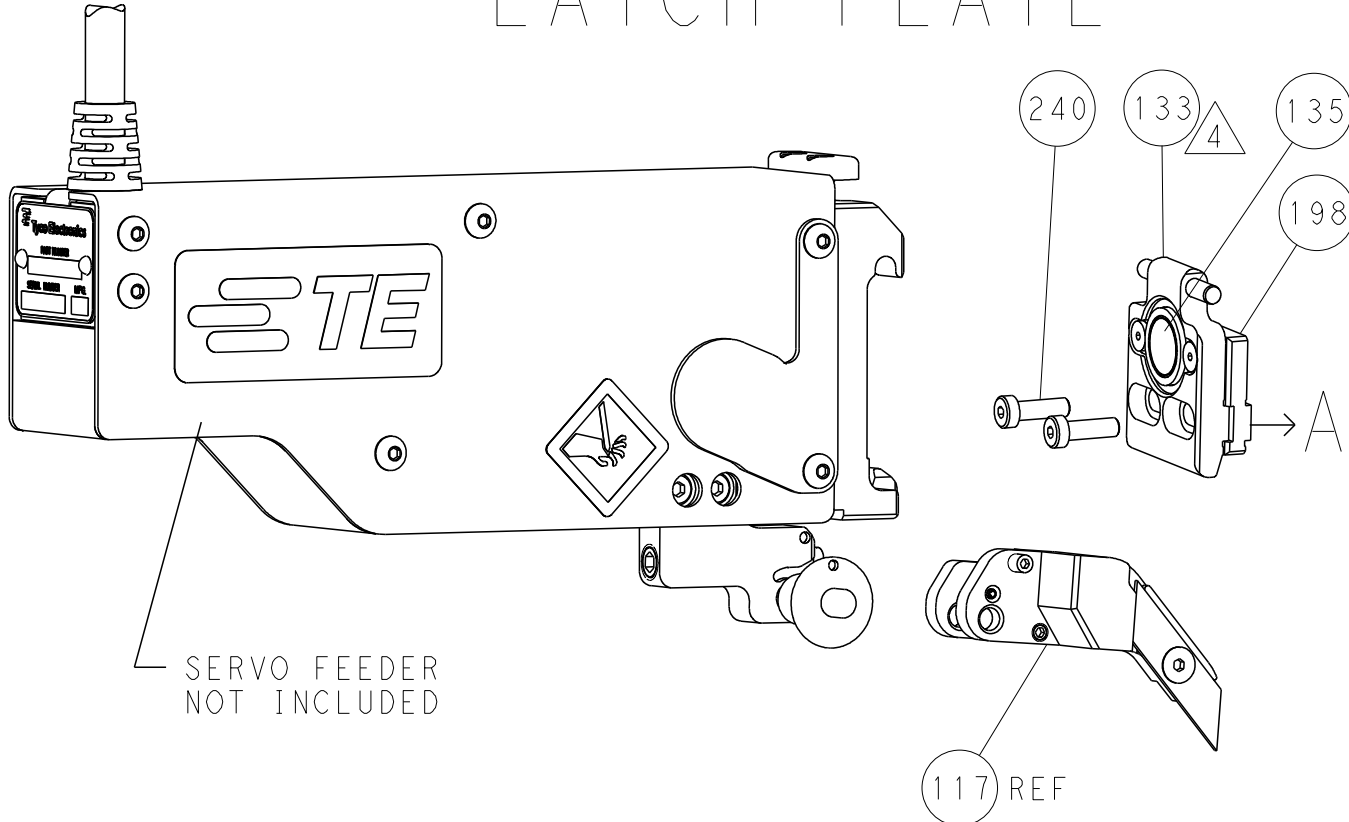

CAM POSITIONS

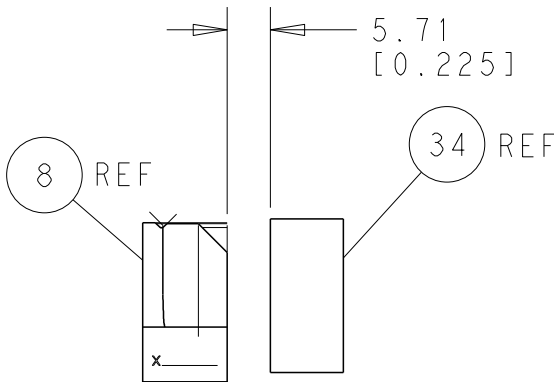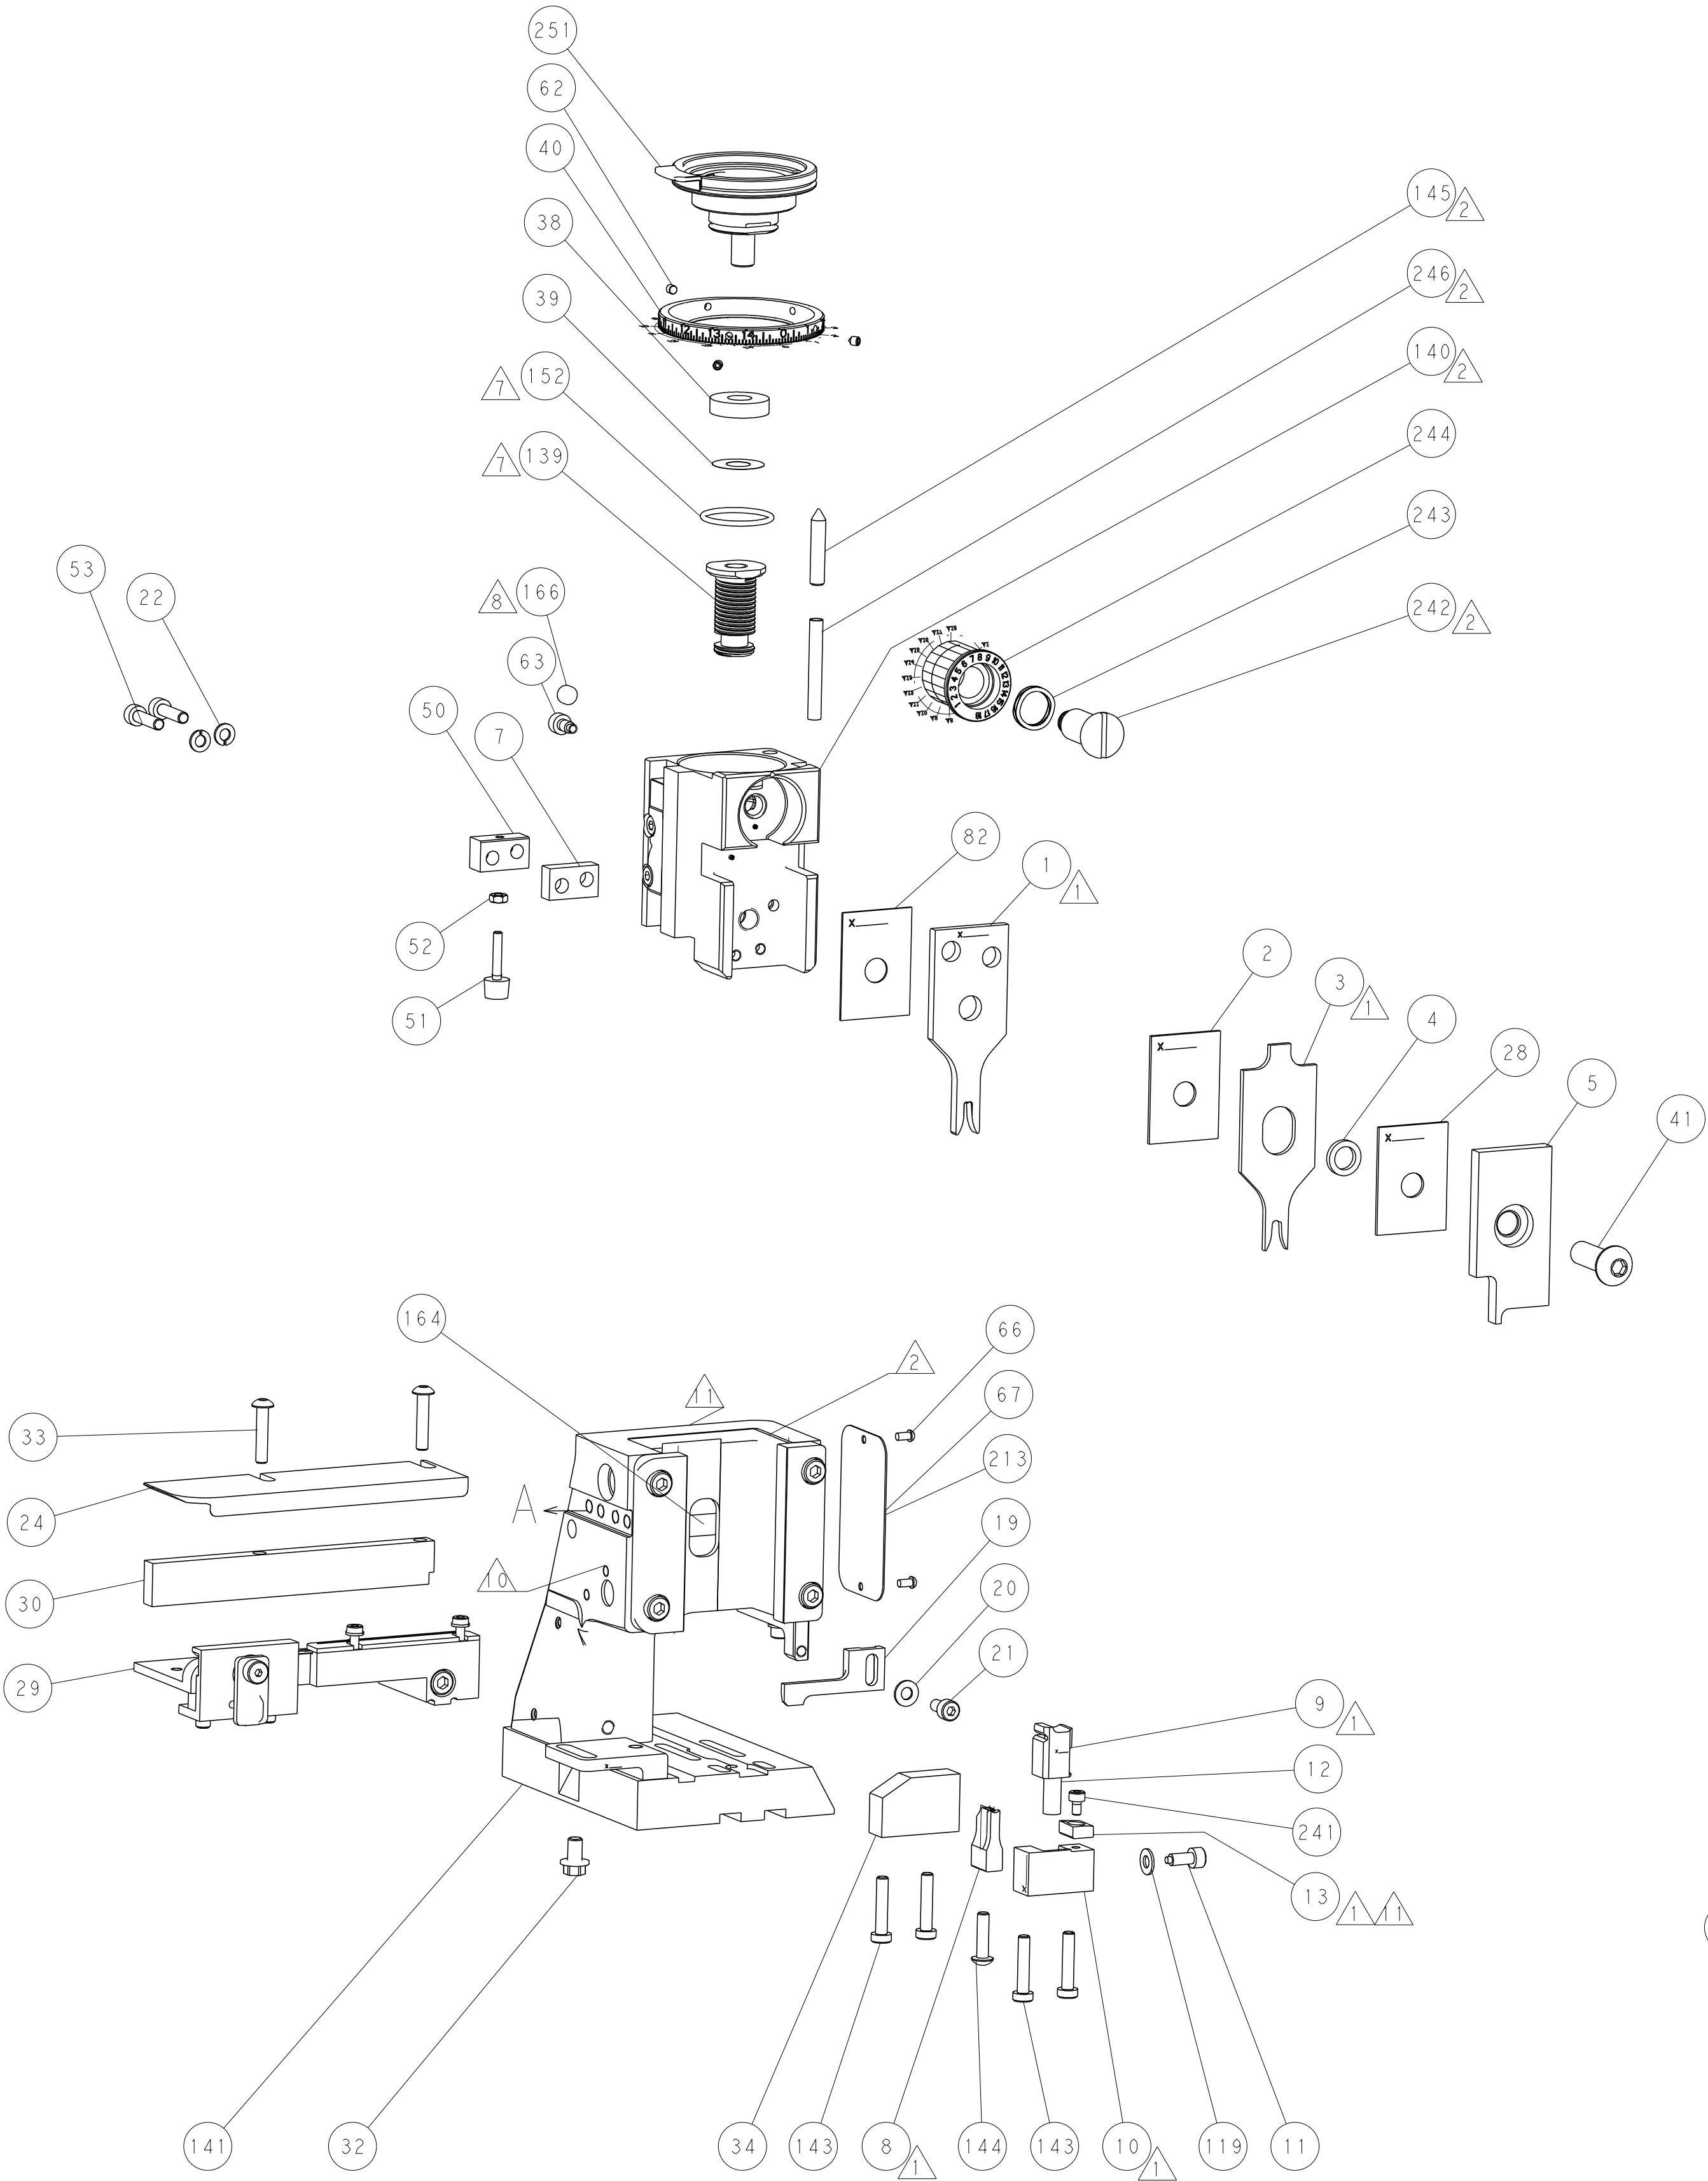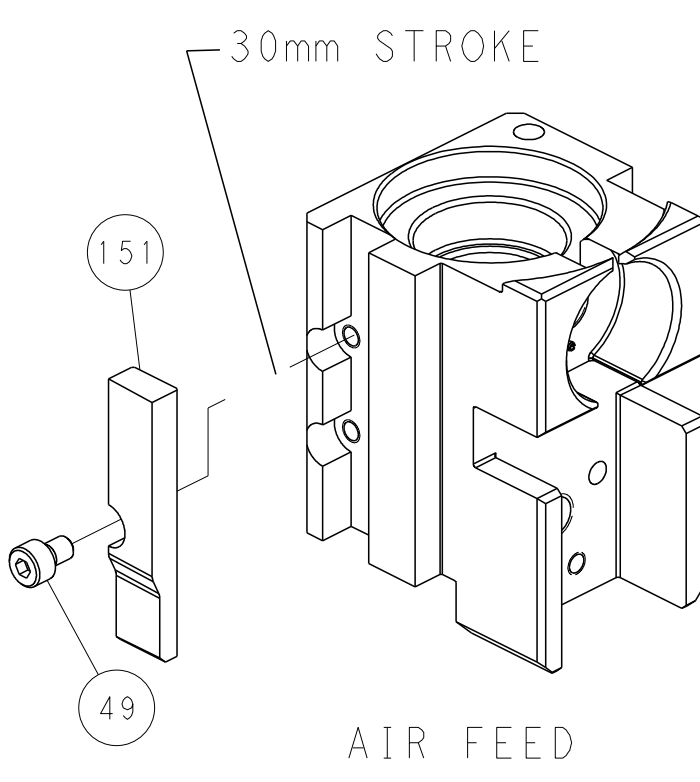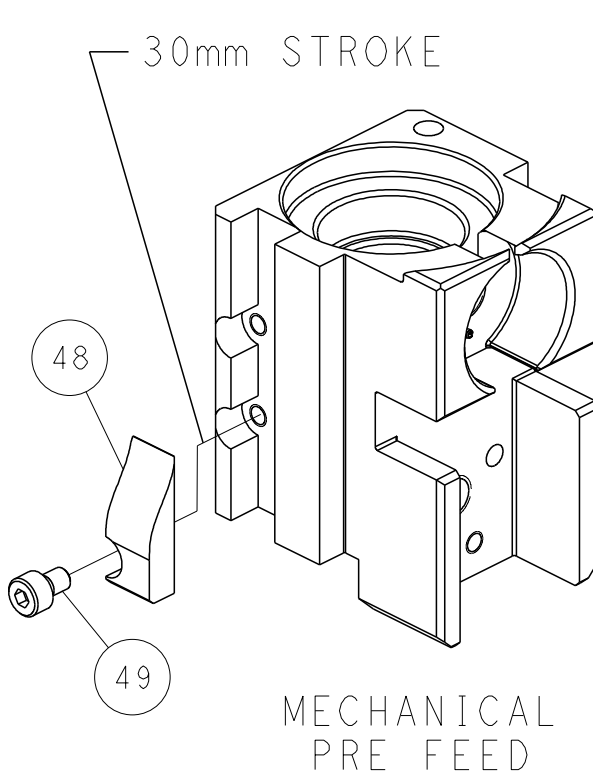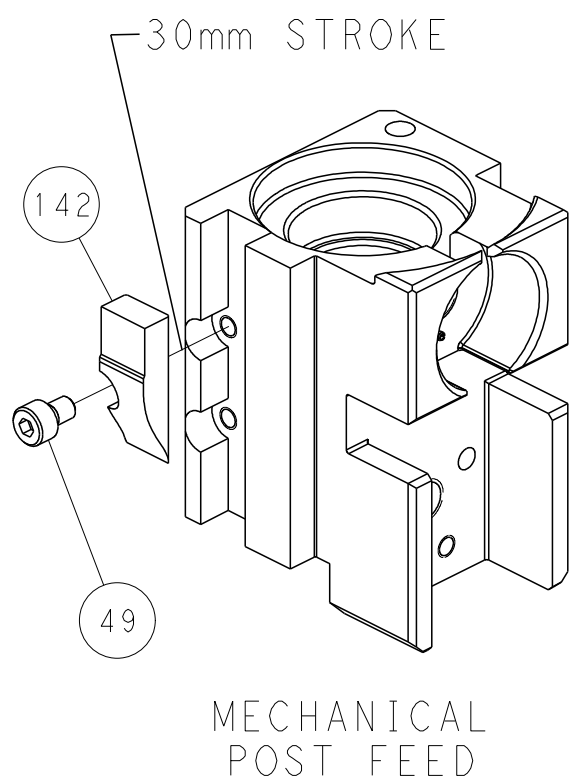


TERMINAL SUPPORT LOCATION

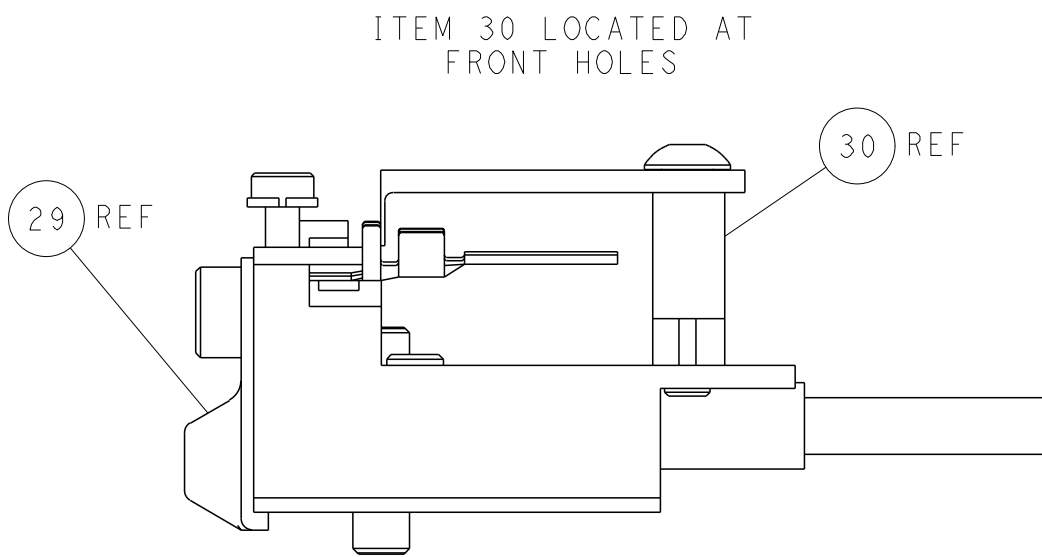

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROL-LINK ENGINEERING ORGANIZATION SHOULD BE NOTIFIED FOR THE LATEST REVISION		OWN L. ZHANG 15DEC2011	 TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK L. ZHANG 15DEC2011		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ±.1 1. PLC ±.01 2. PLC ±.02 3. PLC ±.005 4. PLC ±.0005 ANGLES ±.1		NAME S. XI PRODUCT SPEC	NAME Ocean Side Feed Applicator	
MATERIAL -		FINISH -	APPLICATION SPEC -	RESTRICTED TO -
WEIGHT -		SIZE A	CAGE CODE 00779	DRAWING NO. 2151450
CUSTOMER ACCESSIBLE PRODUCTION DRAWING		SCALE 1:1	SHEET 4	OF 4 REV A

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А