

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0010845020

Status:

Active

Overview:

mlx

Description:

6.35mm (.250) Pitch MLX™ Power Connector Header, Vertical, 2 Circuits, Polyester 94V-0, Tin (Sn) Plating, White

Documents:

3D Model

Drawing (PDF)

Product Specification PS-42022-0001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Series

Application

Comments

Overview

Product Name

PCB Headers

42002

Wire-to-Board

Solder Type

mlx

MLX™

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Glow-Wire Compliant

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Resin

Number of Rows

Orientation

PC Tail Length (in)

PC Tail Length (mm)

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Polarized to PCB

Shrouded

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

No

2

2

Natural

50

No

94V-0

No

Yes

Yes

Yes

Phosphor Bronze

Tin

Polyester

1

Vertical

0.168 In

4.27 mm

Yes

0.125 In

1.60 mm

Bag

0.250 In

6.35 mm

Yes

Fully

No

-55°C to +105°C

Through Hole

Electrical

Current - Maximum per Contact

13.5A

Solder Process Data




image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

42002Series

Mates With

42021 Plug

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260

Material Info


Old Part Number	42002-02C1A1
-----------------	--------------

Reference - Drawing Numbers

Packaging Specification	PK-43255-001
Product Specification	PS-42022-0001
Sales Drawing	SDA-42002-*****

This document was generated on 05/24/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

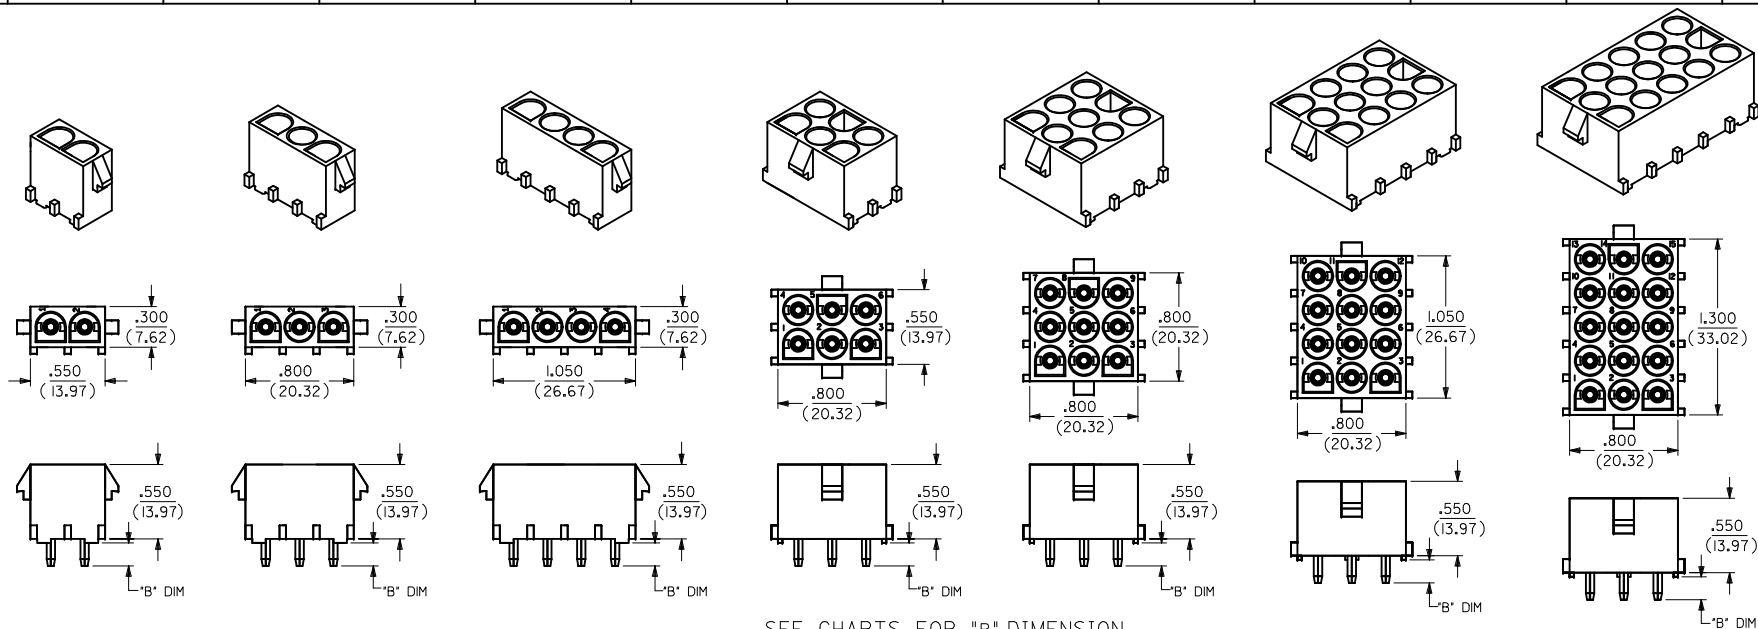


SEE CHARTS FOR "B" DIMENSION

P.C. BOARD MOUNTING DIMENSIONS

2, 3, & 4 POSITION HEADER ASSEMBLIES



6, 9, 12 & 15 POSITION HEADER ASSEMBLIES

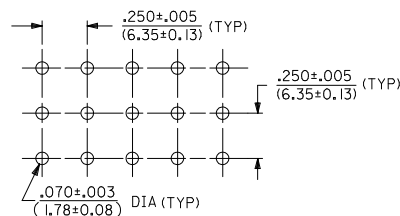

NOTES:

1) MATERIAL CODES:

A= NYLON 6/6, 94V-2, NATURAL

C= PLOYESTER, 94V-0, WHITE/NATURAL

D= NYLON V-2

COLOUR:BLACK(ZYTEL 101F)

E= NYLON V-2

COLOUR:NATURAL

GLOWWIRE COMPATIBLE WITH CTI OF 325V

2) PLATING CODES:

A = ES-88-P921

3) TERMINAL LENGTH CODES:

I= TERMINAL FOR .062/(1.57) THICK PC BOARD

4) DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE.

5) HEADER ASSEMBLY HOUSINGS MATE WITH : PLUG HOUSINGS, .084/(2.13) DIA. SERIES: (42021-***)

6) CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.

LEGEND:

A-42002-***
BASE NUMBER
CIRCUIT SIZE
MATERIAL CODE (SEE NOTE 1)
PIN (1) OR SOCKET (2) TERMINALS
TERMINAL PLATING CODE (SEE NOTE 2)
TERMINAL LENGTH CODE (SEE NOTE 3)

ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
						IN/MM		NTS	INCH		
EC NO: 12010-0067 DRWNS01 CHKO:GJLOWE APPR:KPRASAD D1		2009/11/02 2010/01/27 2010/01/27		mm		INCH		DRAWN BY	DATE	TITLE	
				4 PLACES ± --- ± ---		SSUDHIR		2004/06/08		HEADER HOUSING ASSEMBLY .084/(2.13)DIA.SERIES	
				3 PLACES ± --- ± .005		CHECKED BY		DATE			
				2 PLACES ± 0.13 ± .010		GJLOWE		2004/06/08			
				1 PLACE ± 0.25 ± ---		APPROVED BY		DATE			
				ANGULAR ± ---°		GJLOWE		2004/06/08			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
				SEE CHART		SDA-42002-*****		1 OF 2			
				SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
PART NO.	ENG. NO.	CIRCUIT SIZE	MATERIAL (SEE NOTE 1)	INSULATOR PART NO.	PLATING (SEE NOTE 2)	TERMINAL PART NO.	*B* DIM ±.015												
10-84-4020	A-42002-2A1A1	2	A	42002-2A	A	42005-P921A	.17/(4,3)												
10-84-5020	A-42002-2C1A1		C	42002-2C	A	42005-P921A													
10-84-4022	A-42002-2A2A1		A	42002-2A	A	42006-P921A													
10-84-5021	A-42002-2C2A1		C	42002-2C	A	42006-P921A													
367590101	36759-0101		D	366480042	A	42005-P921A													
367590141	36759-0141		D	366480042	A	42006-P921A													
367570101	36757-0101	3	E	367570001	A	42005-P921A													
367570141	36757-0141		E	367570001	A	42006-P921A													
10-84-4030	A-42002-3A1A1		A	42002-3A	A	42005-P921A	.17/(4,3)												
10-84-5030	A-42002-3C1A1		C	42002-3C	A	42005-P921A													
10-84-4032	A-42002-3A2A1		A	42002-3A	A	42006-P921A													
10-84-5031	A-42002-3C2A1		C	42002-3C	A	42006-P921A													
367590102	36759-0102	4	D	366480043	A	42005-P921A													
367590142	36759-0142		D	366480043	A	42006-P921A													
367570102	36757-0102		E	367570002	A	42005-P921A													
367570142	36757-0142		E	367570002	A	42006-P921A													
10-84-4040	A-42002-4A1A1		A	42002-4A	A	42005-P921A	.17/(4,3)												
10-84-5040	A-42002-4C1A1		C	42002-4C	A	42005-P921A													
10-84-4042	A-42002-4A2A1	6	A	42002-4A	A	42006-P921A													
10-84-5041	A-42002-4C2A1		C	42002-4C	A	42006-P921A													
367590103	36759-0103		D	366480044	A	42005-P921A													
367590143	36759-0143		D	366480044	A	42006-P921A													
367570103	36757-0103		E	367570003	A	42005-P921A													
367570143	36757-0143		E	367570003	A	42006-P921A													
10-84-4060	A-42002-6A1A1	9	A	42002-6A	A	42005-P921A	.17/(4,3)												
10-84-5060	A-42002-6C1A1		C	42002-6C	A	42005-P921A													
10-84-4062	A-42002-6A2A1		A	42002-6A	A	42006-P921A													
10-84-5061	A-42002-6C2A1		C	42002-6C	A	42006-P921A													
367590104	36759-0104		D	366480045	A	42005-P921A													
367590144	36759-0144		D	366480045	A	42006-P921A													
367570104	36757-0104	12	E	367570004	A	42005-P921A													
367570144	36757-0144		E	367570004	A	42006-P921A													
10-84-4090	A-42002-9A1A1		A	42002-9A	A	42005-P921A	.17/(4,3)												
10-84-5090	A-42002-9C1A1		C	42002-9C	A	42005-P921A													
10-84-4092	A-42002-9A2A1		A	42002-9A	A	42006-P921A													
10-84-5091	A-42002-9C2A1		C	42002-9C	A	42006-P921A													
367590105	36759-0105	15	D	366480046	A	42005-P921A													
367590145	36759-0145		D	366480046	A	42006-P921A													
367570105	36757-0105		E	367570005	A	42005-P921A													
367570145	36757-0145		E	367570005	A	42006-P921A													
10-84-4120	A-42002-12A1A1		12	A	42002-12A	A	42005-P921A	.17/(4,3)											
10-84-5120	A-42002-12C1A1			C	42002-12C	A	42005-P921A												
10-84-4122	A-42002-12A2A1	A		42002-12A	A	42006-P921A													
10-84-5121	A-42002-12C2A1	C		42002-12C	A	42006-P921A													
367590106	36759-0106	D		366480047	A	42005-P921A													
367590146	36759-0146	D		366480047	A	42006-P921A													
367570106	36757-0106	15	E	367570006	A	42005-P921A													
367570146	36757-0146		E	367570006	A	42006-P921A													
10-84-4150	A-42002-15A1A1		15	A	42002-15A	A	42005-P921A	.17/(4,3)											
10-84-5150	A-42002-15C1A1			C	42002-15C	A	42005-P921A												
10-84-4152	A-42002-15A2A1			A	42002-15A	A	42006-P921A												
10-84-5151	A-42002-15C2A1			C	42002-15C	A	42006-P921A												
367590107	36759-0107	D		366480057	A	42005-P921A													
367590147	36759-0147	D		366480057	A	42006-P921A													
367570107	36757-0107	15	E	367570007	A	42005-P921A													
367570147	36757-0147		E	367570007	A	42006-P921A													

ENTER DESCRIPTION EC NO.: 2000-0067 D1		2009/11/02 DRAWSN01 CHKS06/L0ME 2010/01/27 APPRA/RSAD 2010/01/27		QUALITY SYMBOLS ▽=0 ▽=0 ▽=0		GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± .005 ± .0005 3 PLACES ± .005 ± .0005 2 PLACES ± 0.13 ± 0.10 1 PLACE ± 0.25 ± .010 ANGULAR ± ---°		DIMENSION STYLE IN/MM DRAWN BY SSUDHIR DATE 2004/06/08 CHECKED BY GJLOWE DATE 2004/06/08 APPROVED BY GJLOWE DATE 2004/06/08		SCALE NTS TITLE HEADER HOUSING ASSEMBLY .084/(2.13)DIA.SERIES molex MOLEX INCORPORATED		DESIGN UNITS INCH THIRD ANGLE PROJECTION SHEET NO. 2 OF 2	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						MATERIAL NO. SEE CHART SIZE A1		DOCUMENT NO. SDA-42002-*****		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А