
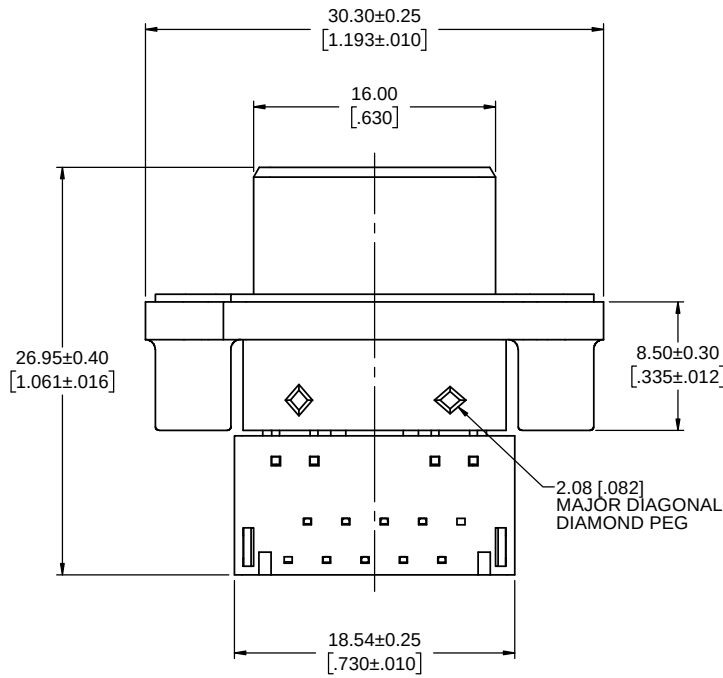

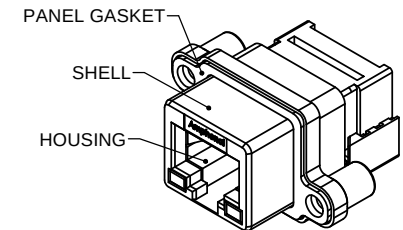
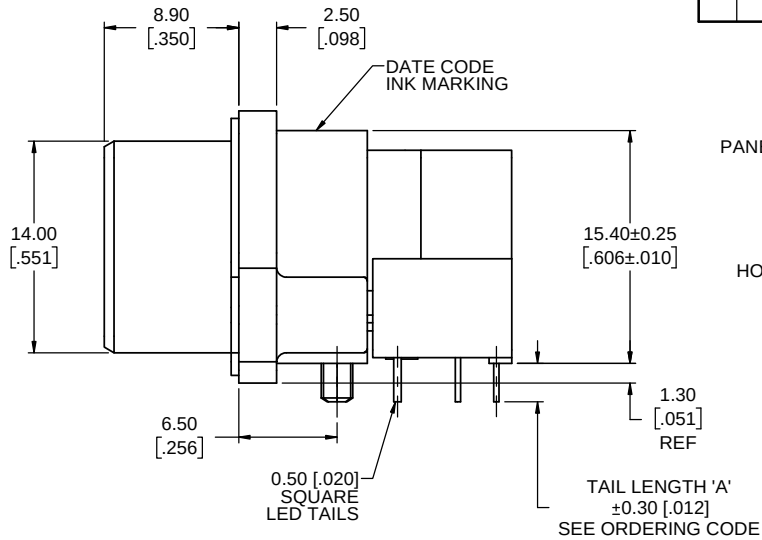


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
C	PRODUCT DRAWING (EAR 14600)	AUG31/17	K.L.

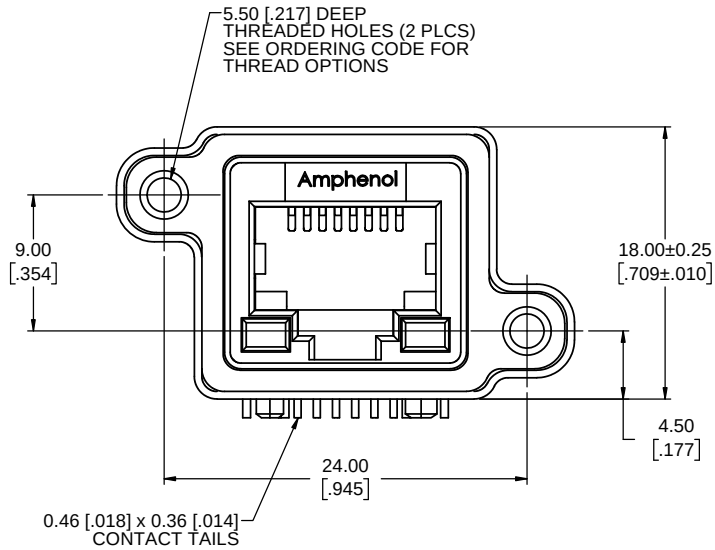

ORDERING CODE: MRJ-63XX-X1

SERIES, RUGGED RJ

FILTERED RECEPTACLE, RIGHT ANGLE, PCB TAIL

NUMBER OF CONTACTS

8 = 8 CONTACTS

A = 10 CONTACTS

LED OPTION

0 = NONE

1 = GREEN LEFT, YELLOW RIGHT

4 = YELLOW LEFT, GREEN RIGHT

5 = GREEN LEFT, GREEN RIGHT

TAIL LENGTH & MOUNTING HOLE

THREAD OPTION

0 = TAIL LENGTH 'A' = 2.54 [.100] #4-40 UNC THREAD

B = TAIL LENGTH 'A' = 3.81 [.150] #4-40 UNC THREAD

M = TAIL LENGTH 'A' = 2.54 [.100] M3 x 0.5 THREAD

P = TAIL LENGTH 'A' = 3.81 [.150] M3 x 0.5 THREAD

SINGLE PORT

NOTES:


- MATERIAL:
ALL MATERIALS ARE RoHS COMPLIANT PER EU DIRECTIVE 2011/65/EU AND AMENDMENTS
 - SHELL - DIECAST ZINC, NICKEL PLATED
 - CONTACTS - PHOSPHOR BRONZE WITH 1.27µm [50µ"] GOLD OVER 1.27µm [50µ"] MINIMUM NICKEL ON THE MATING AREA AND MATTE TIN OVER NICKEL ON THE CONTACT TAILS.
 - INSERTS - ENGINEERING THERMOPLASTIC, UL94V-0 FLAMMABILITY RATING
 - REAR INSERTS: NYLON, FRONT INSERT: CLEAR POLYCARBONATE
 - PANEL GASKET - SILICONE RUBBER
 - FERRITE - NICKEL ZINC IRON OXIDE
 - LED'S - EPOXY LENS, STEEL TAILS WITH TIN PLATING
- ENVIRONMENTAL PERFORMANCE PER IEC 60529 CODE IP67 FOR SEAL BETWEEN MATING AREA AND PCB SIDE OF CONNECTOR. GASKET PROVIDES SEAL TO INSIDE FACE OF PANEL.
- CURRENT RATING: 1.5 AMPERES
- CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM
- OPERATING TEMPERATURE: -40°C TO +105°C
- MINIMUM IMPEDANCE (FERRITE): 38 OHMS @ 25 MHz
- CUSTOMER TO VERIFY THAT ALL PROCESS CLEANERS ARE COMPATIBLE WITH POLYCARBONATE MATERIAL



UNLESS SPECIFIED OTHERWISE	DRAWN	G.LI	JAN18/08
PRIMARY UNITS MILLIMETERS	CHECKED	K.LAMBIE	JAN18/08
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE	ENG. REL. NO.	EAR 13217	
2 DECIMAL PLACES ±0.15	REF.		
3 DECIMAL PLACES	THIRD ANGLE PROJECTION		
ANGULAR DEGREES			


Amphenol Canada Corp. www.amphenolcanada.com			
MRJ SERIES RUGGED MODULAR JACK, EMI FILTERED, 8 & 10 POSITION RIGHT ANGLE, WITH LED, TAIL LENGTH & THREAD OPTIONS, RoHS COMPLIANT			
DWG. NO.		P-MRJ-63XX-X1	
CODE ID NO.	03554	DWG SIZE:	X
SCALE:	4:1	SHEET 1 OF 2	REV C

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
C	PRODUCT DRAWING (EAR 14600)	AUG31/17	K.L.

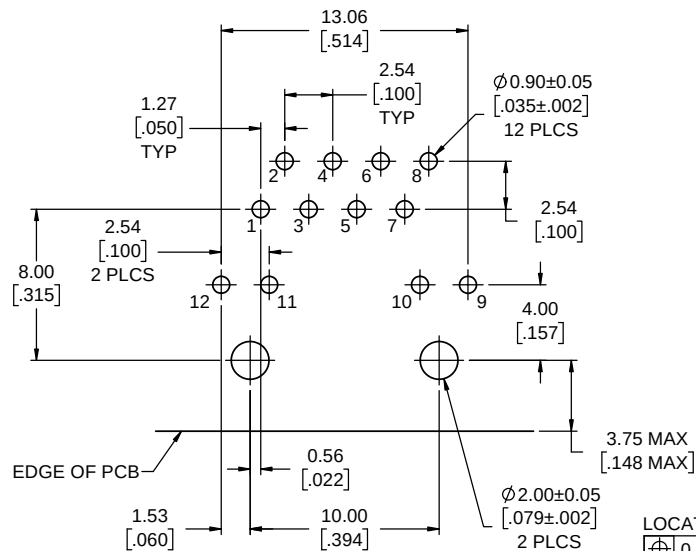


RECOMMENDED PCB LAYOUT FOR 8 POSITION
COMPONENT SIDE OF BOARD

LOCATE HOLES
 $\varnothing$ 0.13 [.005] DIA
 POSITION DIMENSIONS
 ARE BASIC




8 POSITION LED SCHEMATIC
(GREEN OR YELLOW)

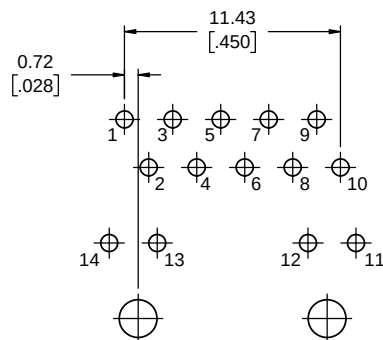


RECOMMENDED PCB LAYOUT FOR 10 POSITION
COMPONENT SIDE OF BOARD

LOCATE HOLES
 $\varnothing$ 0.13 [.005] DIA
 POSITION DIMENSIONS
 ARE BASIC



10 POSITION LED SCHEMATIC
(GREEN OR YELLOW)

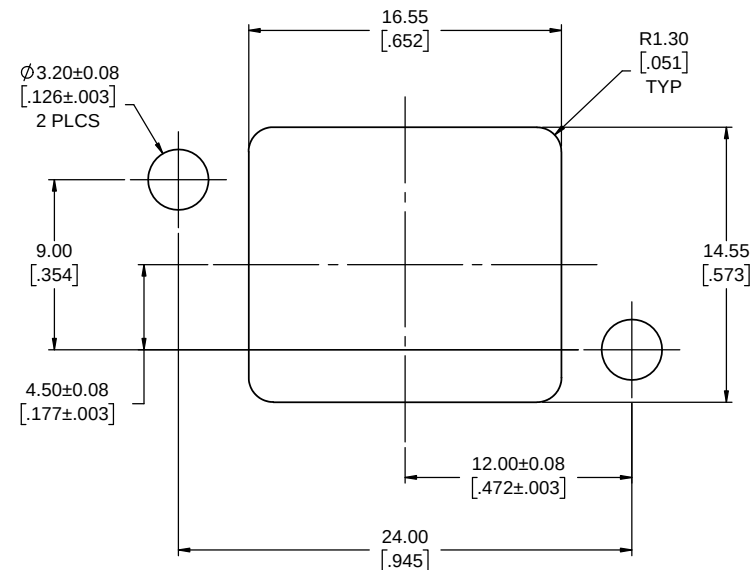

RECOMMENDED PANEL CUTOUT
OUTSIDE PANEL VIEW



UNLESS SPECIFIED OTHERWISE		DRAWN		G.LI		JAN18/08		Amphenol Canada Corp. www.amphenolcanada.com MRJ SERIES RUGGED MODULAR JACK, EMI FILTERED, 8 & 10 POSITION RIGHT ANGLE, WITH LED, TAIL LENGTH & THREAD OPTIONS, RoHS COMPLIANT			
PRIMARY UNITS MILLIMETERS		CHECKED		K.LAMBIE		JAN18/08					
SECONDARY INCHES		M.E. APP'D									
REFERENCE IN PARENTHESES		Q.A. APP'D									
GENERAL TOLERANCES		DWG APPR.									
1 DECIMAL PLACE		ENG. REL. NO.		EAR 13217		DWG. NO.		P-MRJ-63XX-X1 REV C			
2 DECIMAL PLACES ±0.15		REF.									
3 DECIMAL PLACES		THIRD ANGLE PROJECTION				DO NOT SCALE DRAWING					
ANGULAR DEGREES											
		CODE ID NO.		03554		DWG SIZE: X		SCALE: 5:1		SHEET 2 OF 2	

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А