

Square Loop Cores manufactured with cobalt-based METGLAS® amorphous alloy 2714A allow the design of mag amps that can operate at higher frequencies than previously possible. Their combination of magnetic properties enable magnetic amplifiers to provide unparalleled precision and efficiency in output regulation.

Mag amps are particularly well suited for outputs with currents of 1 amp to several tens of amps, although they are also used at lower currents where tight regulation and efficiency are extremely important.

Conventional regulated outputs are limited at higher frequencies and output currents. Linear regulators cannot handle output currents that exceed one or two amperes efficiently, and thus require heat sinking schemes, which increase the size of the power supply. Independent switched-mode sub-regulators avoid this inefficiency, but usually require circuitry which is more complex, expensive and less reliable than a mag amp.

Standard sizes are available from 9.6 mm to 34.1 mm OD and the possibility of manufacturing custom sizes also exists. Core coatings meeting UL94V-0 and temperature class F are available upon request.

Typical DC Hysteresis Loop METGLAS Alloy 2714A



METGLAS® Square Loop magnetic cores are specifically designed to exhibit an extremely square dc Hysteresis loop and high BSAT resulting in the following important benefits:

- Low saturated permeability
- Low coercive field – indicating a small reset current
- Low profile – enabling weight and volume reduction of up to 50%
- Low loss – resulting from micro-thin METGLAS® ribbon (18µm)

Physical Properties METGLAS® Alloy 2714A

| | |
|---|---------|
| Ribbon Thickness (µm) | 18 |
| Density (g/cm ³) | 7.59 |
| Thermal Expansion (ppm/°C) | 12.7 |
| Crystallization Temperature (°C) | 560 |
| Curie Temperature (°C) | 225 |
| Continuous Service Temperature (°C) | <120 |
| Tensile Strength (MN/m ²) | 1k-1.7k |
| Elastic Modulus (GN/m ²) | 100-110 |
| Vicker's Hardness (50g load) | 960 |

Magnetic Properties METGLAS® Square Loop Cores

| | |
|---|------|
| Saturation Flux Density (Tesla) | 0.57 |
| Saturation Magnetostriction (ppm) | <<1 |
| Electrical Resistivity (µ-Ω-cm) | 142 |
| Squareness Ratio (%) | >95 |

**Core Loss vs. Flux Density†
@ 25°C**



B₈₀, B_r/B₈₀ vs. Temperature§




† B₈₀ - Flux Density @ 80 A/m

**Coercive Force vs. Frequency
@ 25°C**



Coercive Force vs. Temperature††

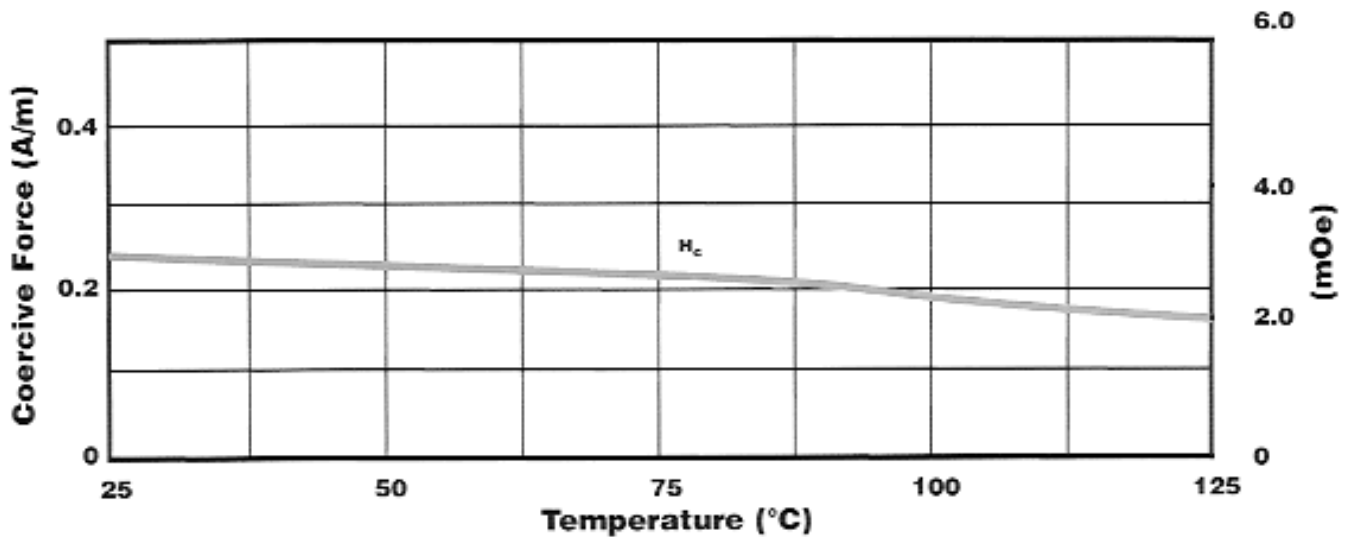

†† 1 Oe = 79.6 A/m

| MAGAMP COATED CORES | COATED CORE DIMENSIONS WITH OVALITY | | | CALCULATED SPECIFICATIONS | | | | BARE CORE | MAGNETIC SPECIFICATIONS | TEST SPECIFICATIONS | |
|------------------------|--|---------|---------|---------------------------|----------------------|------------------------------------|------------------------------------|--------------------------------------|----------------------------|---------------------|--|
| | Core Type | OD (mm) | ID (mm) | Ht (mm) | Lm ² (cm) | Ac ^β (cm ²) | Wa ^γ (cm ²) | WaAc ^x (cm ⁴) | Mass (g) | Bsat (T) | Squareness Ratio @ 5kHz / 0.5Oe, 4 Turns (Br/Bm) |
| | | (max) | (min) | (max) | (nom) | (nom) | (nom) | (nom) | (nom) | (nom) | (min) |
| MP1005M4AS | 11.37 | 5.91 | 6.12 | 2.59 | 0.06 | 0.27 | 0.02 | 1.20 | 0.57 | 84% | |
| MP1105M4AS | 12.50 | 8.76 | 6.29 | 3.24 | 0.03 | 0.60 | 0.02 | 0.77 | 0.57 | 84% | |
| MP1205M4AS | 13.30 | 7.77 | 6.29 | 3.14 | 0.06 | 0.47 | 0.03 | 1.39 | 0.57 | 84% | |
| MP1303M4AS | 14.32 | 8.76 | 4.70 | 3.50 | 0.04 | 0.60 | 0.02 | 1.12 | 0.57 | 84% | |
| MP1305M4AS | 14.07 | 8.76 | 6.29 | 3.46 | 0.06 | 0.60 | 0.03 | 1.53 | 0.57 | 84% | |
| MP1405M4AS | 15.54 | 8.76 | 6.29 | 3.67 | 0.08 | 0.60 | 0.05 | 2.35 | 0.57 | 84% | |
| MP1505M4AS | 16.87 | 8.76 | 6.29 | 3.87 | 0.11 | 0.60 | 0.06 | 3.17 | 0.57 | 84% | |
| MP1506M4AS | 16.80 | 8.76 | 7.87 | 3.86 | 0.14 | 0.60 | 0.08 | 4.18 | 0.57 | 84% | |
| MP1603M4AS | 17.58 | 11.86 | 4.70 | 4.50 | 0.04 | 1.10 | 0.05 | 1.43 | 0.57 | 84% | |
| MP1705M4AS | 18.75 | 11.86 | 6.29 | 4.66 | 0.08 | 1.10 | 0.09 | 2.95 | 0.57 | 84% | |
| MP1706M4AS | 18.73 | 11.86 | 7.87 | 4.68 | 0.11 | 1.10 | 0.12 | 4.07 | 0.57 | 84% | |
| MP1805M4AS | 20.25 | 11.86 | 6.29 | 4.88 | 0.11 | 1.10 | 0.12 | 4.10 | 0.57 | 84% | |
| MP1903M4AS | 21.24 | 11.86 | 4.70 | 5.00 | 0.08 | 1.10 | 0.09 | 3.17 | 0.57 | 84% | |
| MP1905M4AS | 20.29 | 11.86 | 6.29 | 4.92 | 0.11 | 1.10 | 0.12 | 4.29 | 0.57 | 84% | |
| MP1906M4AS | 20.97 | 11.86 | 7.87 | 4.99 | 0.16 | 1.10 | 0.18 | 6.23 | 0.57 | 84% | |
| MP2006M4AS | 21.81 | 14.33 | 7.87 | 5.54 | 0.12 | 1.61 | 0.20 | 5.20 | 0.57 | 84% | |
| MP2008M4AS | 21.86 | 11.86 | 9.91 | 5.15 | 0.25 | 1.10 | 0.27 | 9.88 | 0.57 | 84% | |
| MP2208M4AS | 23.69 | 15.57 | 9.91 | 6.01 | 0.18 | 1.90 | 0.33 | 8.16 | 0.57 | 84% | |
| MP2303M4AS | 24.91 | 15.57 | 4.70 | 6.19 | 0.08 | 1.90 | 0.15 | 3.88 | 0.57 | 84% | |
| MP2306M4AS | 25.13 | 15.57 | 7.87 | 6.23 | 0.17 | 1.90 | 0.32 | 8.16 | 0.57 | 84% | |
| MP2410M4AS | 26.30 | 18.05 | 11.05 | 6.83 | 0.21 | 2.56 | 0.53 | 10.91 | 0.57 | 84% | |
| MP2505M4AS | 27.43 | 18.05 | 6.29 | 7.01 | 0.12 | 2.56 | 0.32 | 6.75 | 0.57 | 84% | |
| MP2510M4AS | 27.47 | 18.05 | 11.05 | 7.01 | 0.25 | 2.56 | 0.64 | 13.50 | 0.57 | 84% | |
| MP2705M4AS | 29.10 | 15.57 | 6.29 | 6.89 | 0.21 | 1.90 | 0.39 | 11.03 | 0.57 | 84% | |
| MP3005M4AS | 32.01 | 18.05 | 6.29 | 7.69 | 0.21 | 2.56 | 0.53 | 12.30 | 0.57 | 84% | |
| MP3210M4AS | 34.72 | 21.14 | 11.05 | 8.58 | 0.39 | 3.51 | 1.36 | 25.78 | 0.57 | 84% | |
| MP3506M4AS | 37.43 | 24.24 | 7.87 | 9.52 | 0.25 | 4.61 | 1.15 | 18.35 | 0.57 | 84% | |

* α = Mean magnetic path length, β = Net Cross-sectional area, γ = Core Window area and x = Area product.

* All measurements are done at Room Temperature (22°C to 28°C)

* Continuous Operating Temperature : 90°C (max.).

* Ovality of 5% on outer and inner diameter is permissible.

* Powder coated core, minimum coating thickness of 0.076 mm (3 mils) is maintained on core surface.

* Powder Coating Material:-DuPont (EFB534S0) / Manufacturer UL File # E206123.

FM No. EG/FM/0023 Rev. No.: 0 Date: 12/May/15

| MAGAMP BOXED CORES | BOXED CORE DIMENSIONS | | | CALCULATED SPECIFICATIONS | | | | BARE CORE | MAGNETIC SPECIFICATIONS | TEST SPECIFICATIONS | | | | |
|-----------------------|-----------------------|---------|---------|---------------------------|------------------|-------------------------------|--------------------------------|-----------|----------------------------|-----------------------------|----------|----------|--|----------|
| | Core Type (X) | OD (mm) | ID (mm) | Ht (mm) | Lm^α (cm) | Ac^β (cm ²) | Wa^γ (cm ²) | | | $WaAc^x$ (cm ⁴) | Mass (g) | Bsat (T) | Squareness Ratio @ 5kHz / 0.5Oe, 4 Turns (Br/Bm) | |
| | | (max) | (min) | (max) | (nom) | (nom) | (nom) | | | (nom) | | | (nom) | (min) AS |
| MP1005X4AS | 11.20 | 5.30 | 6.00 | 2.59 | 0.06 | 0.25 | 0.01 | 1.20 | 0.57 | 86% | - | | | |
| MP1205X4AS | 14.10 | 6.50 | 6.90 | 3.14 | 0.06 | 0.36 | 0.02 | 1.39 | 0.57 | 86% | - | | | |
| MP1303X4AS | 15.00 | 7.60 | 5.40 | 3.50 | 0.04 | 0.49 | 0.02 | 1.12 | 0.57 | 86% | - | | | |
| MP1305X4AS | 14.70 | 7.60 | 7.00 | 3.46 | 0.06 | 0.49 | 0.03 | 1.53 | 0.57 | 86% | - | | | |
| MP1405X4AS | 16.10 | 7.60 | 7.00 | 3.67 | 0.08 | 0.49 | 0.04 | 2.35 | 0.57 | 86% | - | | | |
| MP1506X4AS / AH | 17.40 | 7.50 | 8.60 | 3.86 | 0.14 | 0.48 | 0.07 | 4.18 | 0.57 | 86% | 92% | | | |
| MP1603X4AS | 18.10 | 10.70 | 5.40 | 4.50 | 0.04 | 0.95 | 0.04 | 1.43 | 0.57 | 86% | - | | | |
| MP1805X4AS | 21.10 | 10.50 | 7.10 | 4.88 | 0.11 | 0.92 | 0.10 | 4.10 | 0.57 | 86% | - | | | |
| MP1903X4AS | 21.50 | 10.70 | 5.40 | 5.00 | 0.08 | 0.95 | 0.08 | 3.17 | 0.57 | 86% | - | | | |
| MP1906X4AS / AH | 21.50 | 10.70 | 8.60 | 4.99 | 0.16 | 0.95 | 0.15 | 6.23 | 0.57 | 86% | 92% | | | |
| MP2008X4AS / AH | 22.50 | 10.70 | 10.70 | 5.15 | 0.25 | 0.95 | 0.24 | 9.88 | 0.57 | 86% | 92% | | | |
| MP2303X4AS | 25.20 | 14.60 | 5.40 | 6.19 | 0.08 | 1.74 | 0.14 | 3.88 | 0.57 | 86% | - | | | |
| MP2410X4AS / AH | 28.10 | 17.00 | 11.80 | 6.83 | 0.21 | 2.35 | 0.48 | 10.91 | 0.57 | 86% | 92% | | | |
| MP2510X4AS / AH | 28.10 | 17.00 | 11.80 | 7.01 | 0.25 | 2.35 | 0.58 | 13.50 | 0.57 | 86% | 92% | | | |
| MP2705X4AS / AH | 29.80 | 14.50 | 7.00 | 6.89 | 0.21 | 1.72 | 0.36 | 11.03 | 0.57 | 86% | 92% | | | |
| MP3210X4AS / AH | 35.30 | 19.60 | 11.80 | 8.58 | 0.39 | 3.11 | 1.21 | 25.78 | 0.57 | 86% | 92% | | | |

* α = Mean magnetic path length, β = Net Cross-sectional area, γ = Core Window area and x = Area product.

* All measurements are done at Room Temperature (22°C to 28°C)

* Continuous Operating Temperature :90°C max. (Irrespective of type of box used).

| BOX MATERIAL | BOX DESIGNATION (X) | MATERIAL DuPont | MANUFACTURER UL FILE # | MANUFACTURER FLAMMABILITY RATING |
|--------------|---------------------------|-----------------|---------------------------|--|
| | P | ZYTEL 70G33L | E41938 | HB |
| | L | ZYTEL FR50 | E41938 | 94 V0 |
| | V | RYNITE FR530L | E69578 | 94 V0 |

Contact Information:

AMERICAS

Hitachi Metals America LLC.

85 W. Algonquin Rd., Ste. 400
Arlington Heights, IL
60005-4142

Tel: (847) 364-7200 ext. 8219

Fax: (847) 364-7279 Fax

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А