

Advantages of a Full Featured 700 Series Relay

Since the launch of the 700 series relays in 2000, this product line has continuously evolved both functionally and visually. The 700 series product line has the perfect mix of historical Magnecraft relay quality combined with a dynamic arsenal of options. When mated with the Magnecraft sockets and accessories, these RoHs compliant relays provide a complete modular system that will meet all your plug-in relay requirements in a package that is both visually appealing and functionally outstanding.

- Offers a “one stop solution” for your power management system.
- Several Contact configurations and materials to meet your individual needs.
- Plug-In switching capabilities from 10 mA to 20 Amps.
- Several Feature Code and Operation combinations available for all budgets.
- Ejector clips, ribbed relay housings and space-saving sockets allow for easy removal from crowded DIN rails.
- Color and appearance designed for high visibility in all environments.
- Wiring diagrams include NEMA and IEC standards.
- Engineering availability allows for customized relay solutions.



Removable Lock-Down Door

When Activated, Locks Push Button and Contacts in the Powered Position.

Color-Coded Push Button

Allows Manual Operation of Relay.
AC Coils Red or DC Coils Blue.

Finger Grip Cover

Easy Removal of Relay from Socket.

Gold Flashed Contacts

Prevents Premature Oxidation and Increases Shelf-life.



Contact Viewing Window

Shows Position of Contacts.

Isolated Input and Output Terminals

Separates Control Circuits from Load Circuits.



Slim Design

Minimizes Space on DIN Rail.

Module Compatible


Allows for Optional Protection or LED Modules to be Used With Sockets.



2-Way Side or DIN Rail Mounting System

Retrofits Existing Panel Mounting and 35mm DIN Rail.

The Complete System Solution!

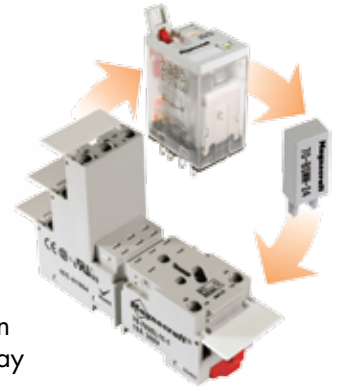

Flag Indicator
Shows Relay Status in Manual or Powered Condition.



Bi-Polar LED Status Lamp
Shows Coil "ON" or "OFF" Status.

I.D. Tag/Write-On Plastic Label
Used for Identification of Relays in Multi-Relay Circuits.

Mating Hold-Down Clip Available
Safely Secures Relay to Socket.



Finger-Safe
Protects Operators from Live Circuits.

I.D. Tag/Write-On Plastic Label
Used to Match Wire Identification Tags with Socket Connections.

Internal Coil Bus Jumper System
Allows Connection to Adjacent Sockets Without Additional Wiring.



Advantages of a Plain Cover 700 Series Relay

The Plain Cover Super Series relays support budget minded applications with premium performance. Maintaining the same ratings and internal components as the Full Feature Series; the Plain Cover Series perform as well as premium relays while maintaining low costs by offering several option configurations.

- Offers a “one stop solution” for your power management system.
- Several Contact configurations and materials to meet your individual needs.
- Plug-In switching capabilities from 10 mA to 20 Amps.
- Several Feature Code and Operation combinations available for all budgets.
- Ejector clips, ribbed relay housings and space-saving sockets allow for easy removal from crowded DIN rails.
- Color and appearance designed for high visibility in all environments.
- Wiring diagrams include NEMA and IEC standards.
- Engineering availability allows for customized relay solutions.



Contact Viewing Window
Shows Position of Contacts.

Gold Flashed Contacts
Prevents Premature Oxidation and Increases Shelf-life.

Isolated Input and Output Terminals
Separates Control Circuits from Load Circuits.



Slim Design
Minimizes Space on DIN Rail.

Module Compatible
Allows for Optional Protection or LED Modules to be Used With Sockets.



2-Way Side or DIN Rail Mounting System
Retrofits Existing Panel Mounting and 35mm DIN Rail.

Finger Grip Cover
Easy Removal of Relay from Socket.

The Complete System Solution!


Flag Indicator
Shows Relay Status in Manual or Powered Condition.




Optional Bi-Polar LED Status Lamp
Shows Coil "ON" or "OFF" Status.

I.D. Tag/Write-On Plastic Label
Used for Identification of Relays in Multi-Relay Circuits.



Mating Hold-Down Clip Available
Safely Secures Relay to Socket.

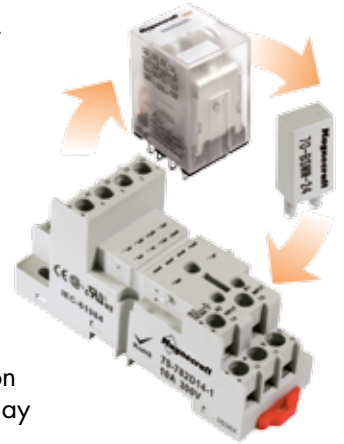

Finger-Safe
Protects Operators from Live Circuits.

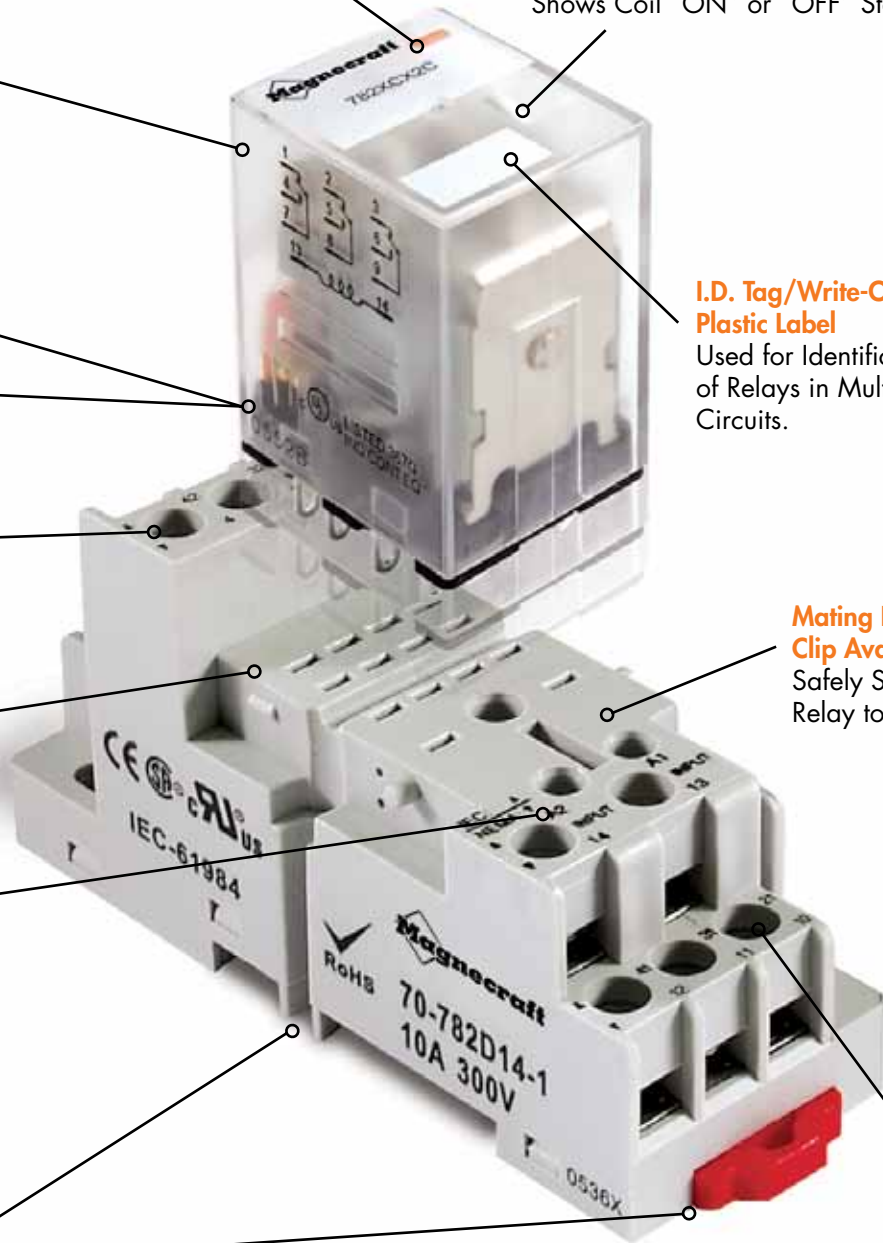



782 Ice Cube Relays/SPDT & DPDT, 15-20 Amp Rating

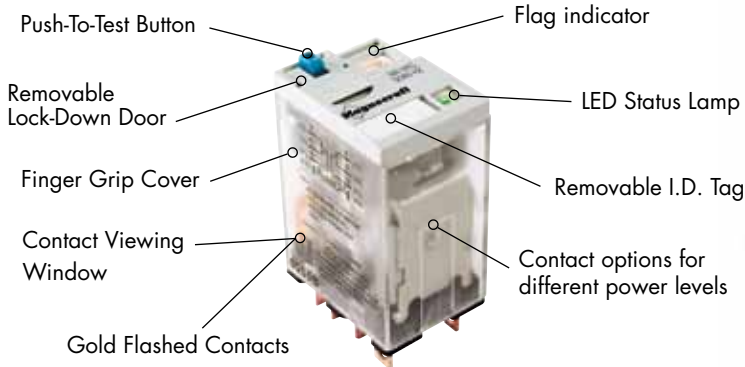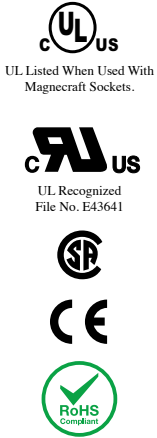

General Specifications


(UL 508)

Contact Characteristics	Units	782XAX	782XBX
Number and type of Contacts		SPDT	DPDT
Contact materials		Silver Alloy	Silver Alloy
Thermal (Carrying) Current	A	20	15
Maximum Switching Voltage	V	300	300
Switching Current @ Voltage	~ Resistive	20A @ 120V 50/60Hz	15A @ 120V 50/60Hz
	~ Resistive	20A @ 277V 50/60Hz	12A @ 277V 50/60Hz
	⋮ Resistive	20A @ 28V	12A @ 28V
	HP	1/2 @ 120VAC	1/2 @ 120VAC
	HP	1 @ 250 VAC	1 @ 250 VAC
	Pilot Duty	B300	B300
Minimum Switching Requirement	mA	100 @ 5VDC (.5W)	100 @ 5VDC (.5W)
Coil Characteristics			
Voltage Range	~ V	6...240	6...240
	⋮ V	6...125	6...125
Operating Range	% of Nominal	~ 85% to 110%	~ 85% to 110%
	⋮	80% to 110%	80% to 110%
Average consumption	~ VA	1.2	1.2
	⋮ W	0.9	0.9
Drop-out voltage threshold	~ %	15%	15%
	⋮	10%	10%
Performance Characteristics			
Electrical Life (UL508)	Operations @ Rated Current	(Resistive) 100,000	100,000
Mechanical Life	Unpowered	10,000,000	10,000,000
Operating time (response time)		ms 20	20
Dielectric strength	Between coil and contact	~ V(rms) 2500	2500
	Between poles	~ V(rms) 1500	1500
	Between contacts	~ V(rms) 1500	1500
Environment			
Product certifications	Standard version	UL, CSA, CE	UL, CSA, CE
Ambient air temperature around the device	Storage	°C -40...+85	-40...+85
	Operation	°C -40...+55	-40...+55
Vibration resistance	Operational	g-n 3, 10 - 55 Hz	3, 10 - 55 Hz
Shock resistance		g-n 10	10
Degree of protection		IP 40	IP 40
Weight	grams	36	36

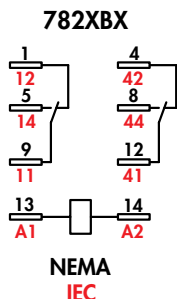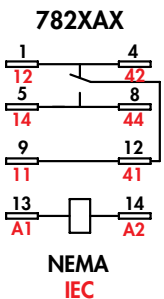



Wiring Diagram Bottom View

Full Featured Dimensions

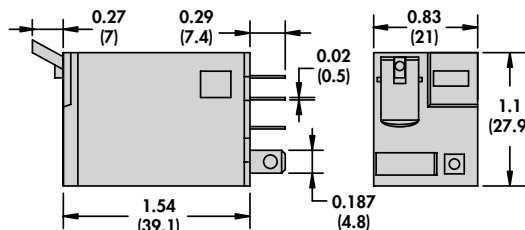

Plain Cover Dimensions

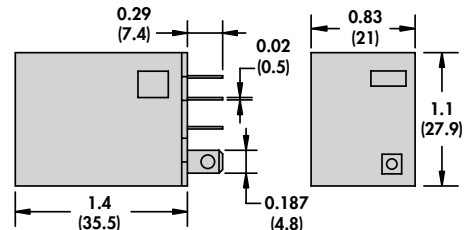

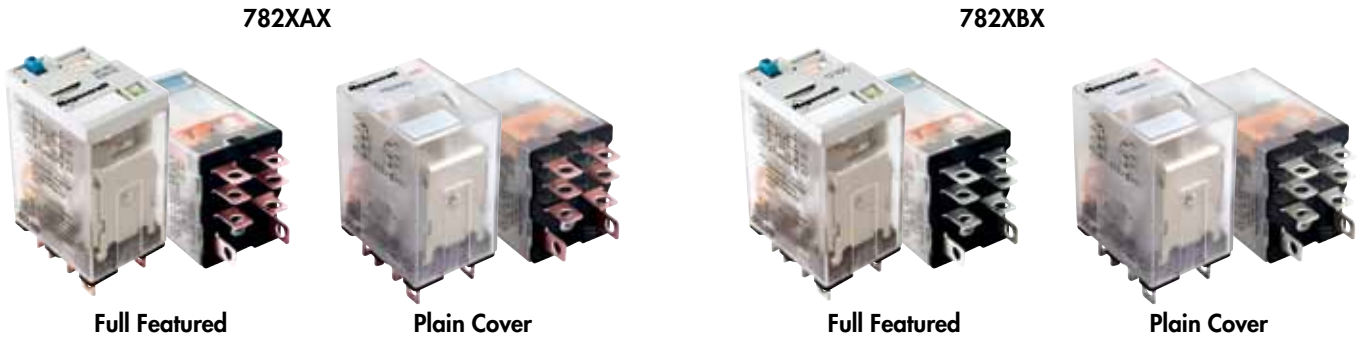

Standard Part Numbers


BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

Nominal Voltage	Coil Resistance	SPDT Part Number (Full Feature) 20 Amp	SPDT Part Number (Plain Cover) 20 Amp	DPDT Part Number (Full Feature) 20 Amp	DPDT Part Number (Plain Cover) 20 Amp
AC Operated					
6 VAC 50/60 Hz	9.6 Ohms	782XAXM4L-6A	782XAXC-6A	782XBXM4L-6A	782XBXC-6A
12 VAC 50/60 Hz	46 Ohms	782XAXM4L-12A	782XAXC-12A	782XBXM4L-12A	782XBXC-12A
24 VAC 50/60 Hz	180 Ohms	782XAXM4L-24A	782XAXC-24A	782XBXM4L-24A	782XBXC-24A
120 VAC 50/60 Hz	4430 Ohms	782XAXM4L-120A	782XAXC-120A	782XBXM4L-120A	782XBXC-120A
220-230 VAC 50/60 Hz	15000 Ohms	782XAXM4L-220/230A	782XAXC-220/230A	782XBXM4L-220/230A	782XBXC-220/230A
240 VAC 50/60 Hz	15720 Ohms	782XAXM4L-240A	782XAXC-240A	782XBXM4L-240A	782XBXC-240A
DC Operated					
6 VDC	40 Ohms	782XAXM4L-6D	782XAXC-6D	782XBXM4L-6D	782XBXC-6D
12 VDC	160 Ohms	782XAXM4L-12D	782XAXC-12D	782XBXM4L-12D	782XBXC-12D
24 VDC	650 Ohms	782XAXM4L-24D	782XAXC-24D	782XBXM4L-24D	782XBXC-24D
48 VDC	2600 Ohms	782XAXM4L-48D	782XAXC-48D	782XBXM4L-48D	782XBXC-48D
110-125 VDC	11000 Ohms	782XAXM4L-110/125D	782XAXC-110/125D	782XBXM4L-110/125D	782XBXC-110/125D

Custom Relay Part Number Builder

Series	Contact Configuration	Cover Options	Terminal Style	Feature Options	Coil Voltage
782	XAX = SPDT XBX = DPDT	Full Feature = No Code Plain Cover = C	Plug In = No Code PC terminal = T	Side Push Button = M Locking Push Button = M4 Bi-Polar LED = L	VAC = 6 - 240A VDC = 6 - 125D

For other mating sockets, see Section 2: 70-459-1, 70-401-1, 70-402-1

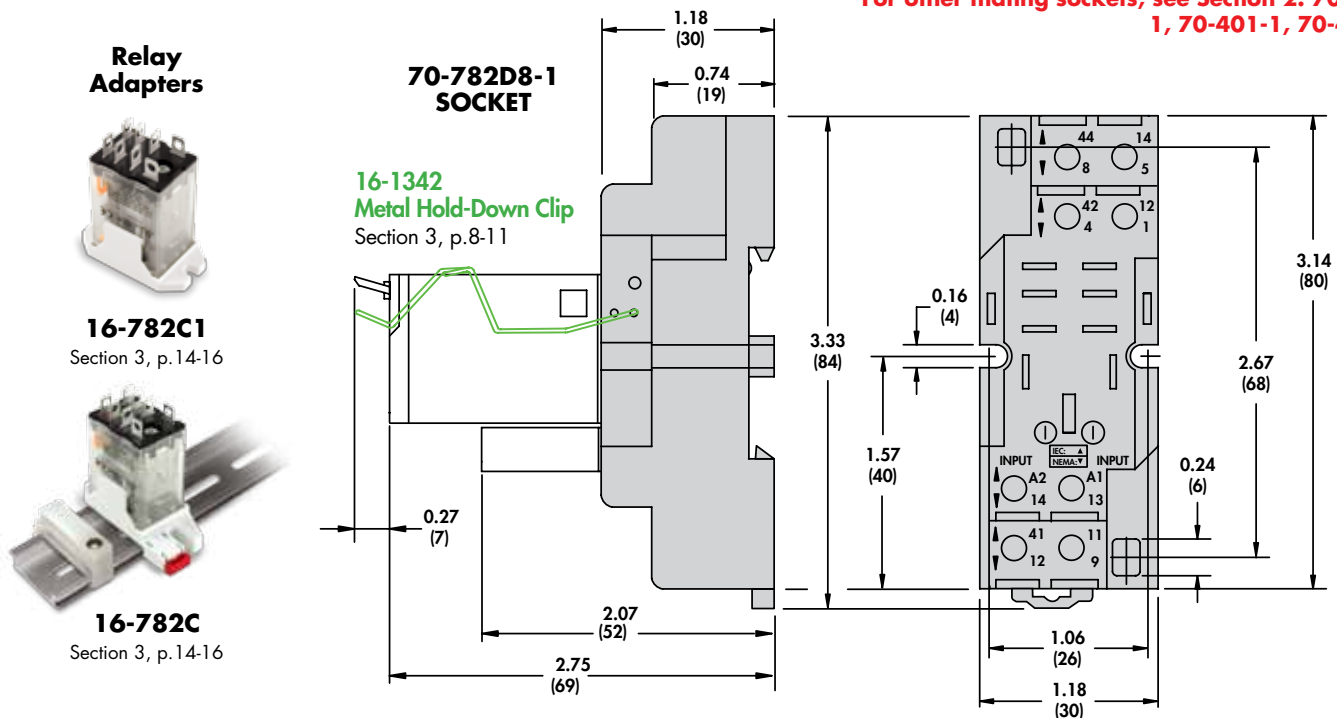

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А