

Inolux Surface Mount High Power Ultraviolet LED IN-K2PUV

Official Product	Product: IN-K2PUV			Data Sheet No.
Tentative Product	*****			IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		April 19, 2014	Version of 1.0	Page 1/12

DISCLAIMER.....	3
LABEL SPECIFICATIONS.....	4
RADIOMETRIC POWER AND FORWARD VOLTAGE	5
PRODUCT CHARACTERISTICS.....	6
ABSOLUTE MAXIMUM RATINGS.....	6
ELECTRO-OPTICAL CHARACTERISTICS	6
PACKAGE OUTLINE DIMENSION	7
RECOMMENDED SOLDERING PATTERN FOR REFLOW SOLDERING	7
CHARACTERISTIC CURVES	8
THERMAL DESIGN.....	9
PACKING INFORMATION	11
REVISION HISTORY	12

Official Product	Product: IN-K2PUV			Data Sheet No.
Tentative Product	*****			IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		April 19, 2014	Version of 1.0	Page 2/12

DISCLAIMER

INOLUX reserves the right to make changes without further notice to any products herein to improve reliability, function or design. INOLUX does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

INOLUX's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of INOLUX or INOLUX Technologies. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Official Product	Product: IN-K2PUV			Data Sheet No.
Tentative Product	*****			IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		April 19, 2014	Version of 1.0	Page 3/12

Label Specifications
INOLUX P/N:
I N - K 2 P U V - X X X X

Series Name	Substrate / Emitting Color	Customer Code
IN-K2 Inolux K2 package	K2 UV@390-420nm	XXXX Customer Product Code

Lot No.:

1	2	3	4	5	6	7	8	9	10
E	1	A	1	A	2	2	L	1	2
Code 1 2		Code 3	Code 4	Code 5	Code 6	Code 7	Code 8	Code 9	Code 10
		Mfg. Year	Mfg. Month	Mfg. Date	Consecutive number		Special code		
Internal Tracing Code		2010-A	1:Jan.	1:A	01~ZZ		000~ZZZ		
		2011-B	2:Feb.	2:B					
		2012-C		3:C					
		2013-D	A:Oct.	26:Z					
		.	B:Nov.	27:7					
		.	C:Dec.	28:8					
				29:9					
				30:3					
				31:4					

Official Product	Product: IN-K2PUV			Data Sheet No.
Tentative Product	*****			IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		April 19, 2014	Version of 1.0	Page 4/12

Radiometric Power and Forward Voltage

(T_j = 25 °C)

Part Number	Color	Performance at Test Current 700mA			
		Min. Radiometric Power (mW)		V _f	
		Min	Max	Min	Max
IN-K2PUV	UV	340	440	3.0	4.3

Part Number	Color	Performance at Test Current 350mA			
		Min. Radiometric Power (mW)		V _f	
		Min	Max	Min	Max
IN-K2PUV	UV	200	260	2.8	4.0

Note:

1. Radiometric Power is measured with an accuracy of ±10%
2. The forward voltage is measured with an accuracy of ±0.1V

Official Product	Product: IN-K2PUV			Data Sheet No.
Tentative Product	*****			IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		April 19, 2014	Version of 1.0	Page 5/12

Product Characteristics

Absolute Maximum Ratings

(T_j = 25 °C)

Parameter	Rating
DC Forward Current (mA)	350~700mA
LED Junction Temperature	150°C
LED Operating Temperature	-40°C ~ 110°C
Storage Temperature	-40°C ~ 110°C
Soldering Temperature	Max. 260°C / Max. 10 sec. (JEDEC 020c)
ESD Sensitivity	2,000V HBM (JESD-22A-114-B)
Preconditioning	Acc. to JEDEC Level 2

Notes:

1. Never operate the LEDs in reverse bias.
2. Do not drive at rated current for more than 5 seconds without proper thermal management.
3. When the LEDs are illuminating, operating current should be decided after considering the packages maximum temperature.
4. Caution: These devices emit high intensity UV/NUV light. Necessary precautions must be taken during operation. Do not look directly into the light or look through the optical system when in operation. Protective eyewear should be worn at all times during operation.
5. Lens discoloration may occur with prolonged exposure to UV/NUV light. Lens material will need to be tested for UV/NUV light compatibility and durability.

Electro-Optical Characteristics

(T_j 25 °C)

Part Number	Color	Peak Wavelength (λ _p)		2θ _{1/2}	Temperature Coefficient of V _f (mV/°C)	Thermal Resistance Junction to Pad
		Min	Max		ΔV _f / ΔT _J	(°C/W) R _{θJ-L}
IN-K2PUV	UV	390	420	120	-3	10

Notes:



1. The peak/dominant wavelength is measured with an accuracy of ±1nm.

Official Product	Product: IN-K2PUV			Data Sheet No.
Tentative Product	*****			IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		April 19, 2014	Version of 1.0	Page 6/12

Package Outline Dimension

Recommended Soldering Pattern for Reflow Soldering

Unit: mm Tolerance: +/-0.13

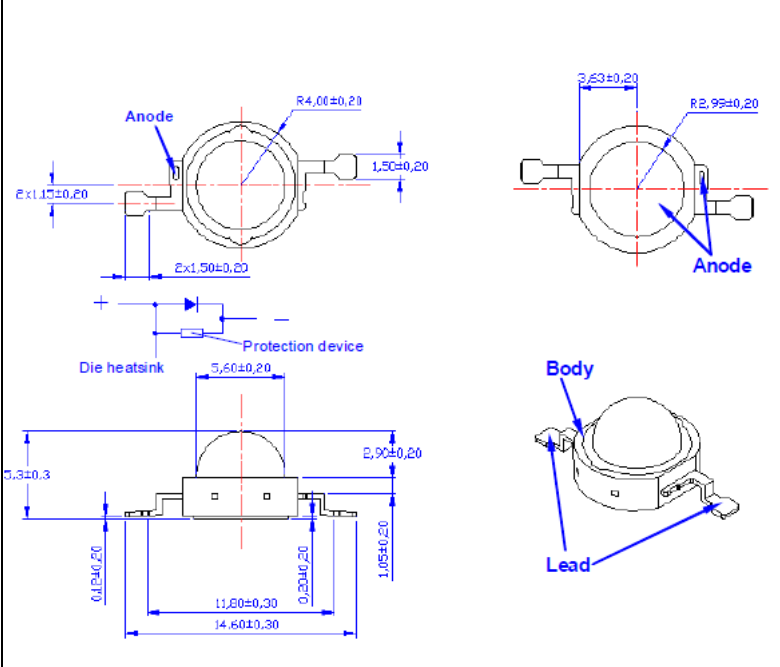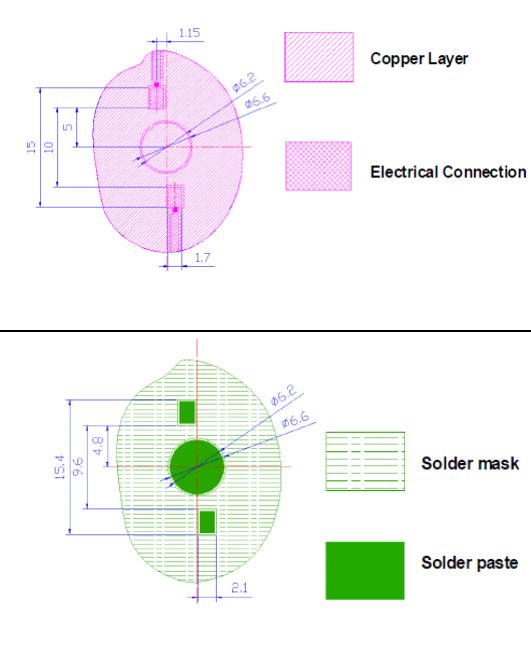
Outline Dimension	Solder Pattern
 Technical drawings showing the package outline dimensions and soldering patterns. The top left drawing shows the top view with dimensions: Anode, R4.00±0.20, 1.50±0.20, 2x1.15±0.20, 2x1.50±0.20, Die heatsink, Protection device, 5.60±0.20, 2.90±0.20, 5.3±0.3, 0.12±0.20, 11.80±0.30, 0.20±0.20, 14.60±0.30, 1.05±0.20. The top right drawing shows the side view with dimensions: 3.63±0.20, R2.93±0.20, Anode. The bottom drawing shows the bottom view with dimensions: Body, Lead. The soldering pattern diagrams show the top and bottom views of the soldering pattern with dimensions: 1.15, 1.5, 10, 5, 1.7, 15.4, 9.6, 4.8, 2.1, 0.6, 0.2, 0.6. The top view shows the Copper Layer and Electrical Connection. The bottom view shows the Solder mask and Solder paste.	 Technical drawings showing the soldering patterns. The top drawing shows the top view of the soldering pattern with dimensions: 1.15, 1.5, 10, 5, 1.7, 15.4, 9.6, 4.8, 2.1, 0.6, 0.2, 0.6. The bottom drawing shows the bottom view of the soldering pattern with dimensions: 1.15, 1.5, 10, 5, 1.7, 15.4, 9.6, 4.8, 2.1, 0.6, 0.2, 0.6. The top view shows the Copper Layer and Electrical Connection. The bottom view shows the Solder mask and Solder paste.
Soldering terminals may shift in the x, y direction.	Unit: mm

Official Product	Product: IN-K2PUV	Data Sheet No.
Tentative Product	*****	IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	April 19, 2014	Version of 1.0 Page 7/12

Characteristic Curves


Relative Spectral Power Distribution, $T_a=25^\circ\text{C}$

UV

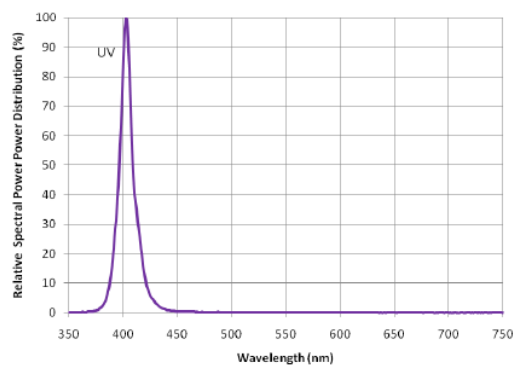


Typical Forward L-I Characteristics

UV

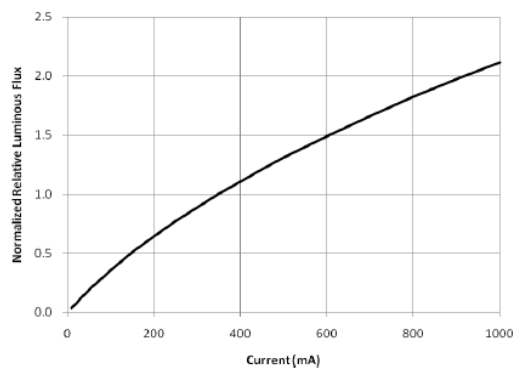

Typical Forward I-V Characteristics


UV

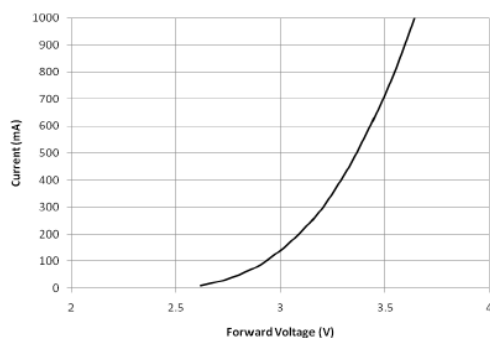

Official Product	Product: IN-K2PUV	Data Sheet No.
Tentative Product	*****	IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	April 19, 2014	Version of 1.0
		Page 8/12

Thermal Design

Thermal design of the end product is important. The thermal resistance between the junction and the solder point ($R_{\theta J-S}$) and the end product should be designed to minimize the thermal resistance from the solder point to ambient in order to optimize the emitter life and optical characteristics. The maximum operation current is determined by the plot of Allowable Forward Current vs. Ambient Temperature.

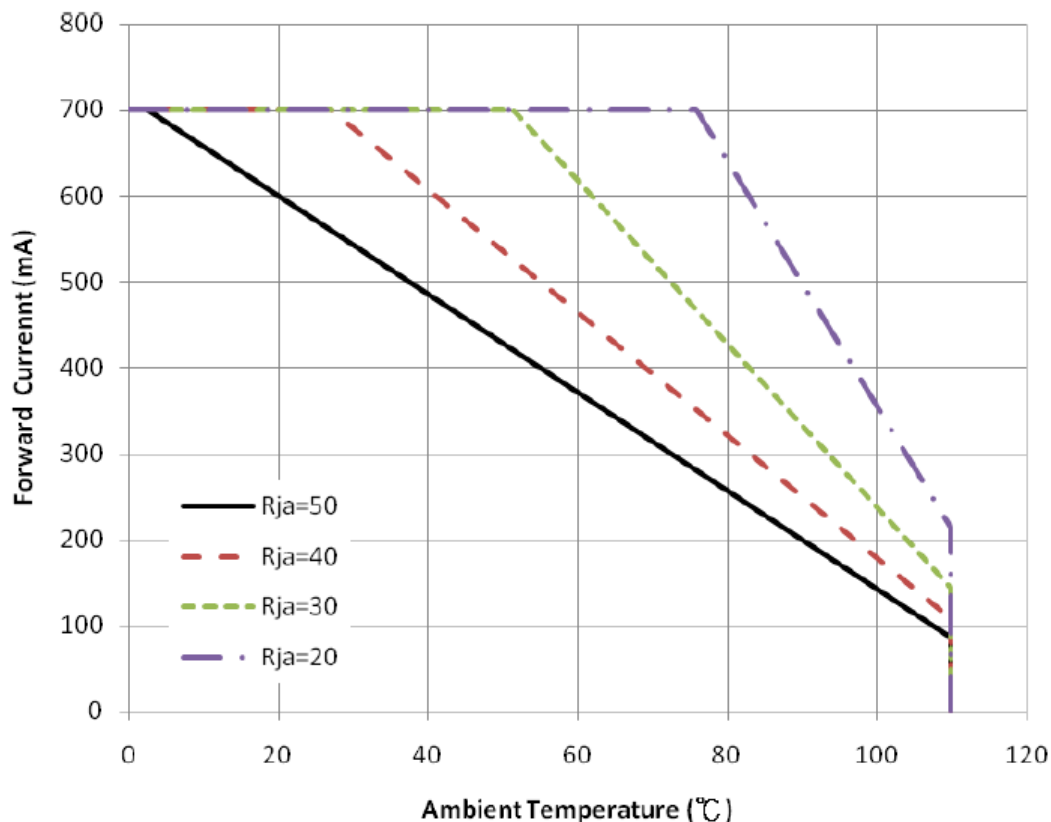

The junction temperature can be correlated to the thermal resistance between the junction and ambient (R_{ja}) by the following equation.

$$T_j = T_a + R_{ja} * W$$

T_j : LED junction temperature

T_a : Ambient temperature


R_{ja} : Thermal resistance between the junction and ambient

W : Input power ($I_F * V_F$)

Official Product	Product: IN-K2PUV	Data Sheet No.
Tentative Product	*****	IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	April 19, 2014	Version of 1.0
		Page 9/12

Reflow Soldering

The LEDs can be soldered using the parameter listed below. As a general guideline, the users are suggested to follow the recommended soldering profile provided by the manufacturer of the solder paste. Although the recommended soldering conditions are specified in the list, reflow soldering at the lowest possible temperature is preferred for the LEDs.

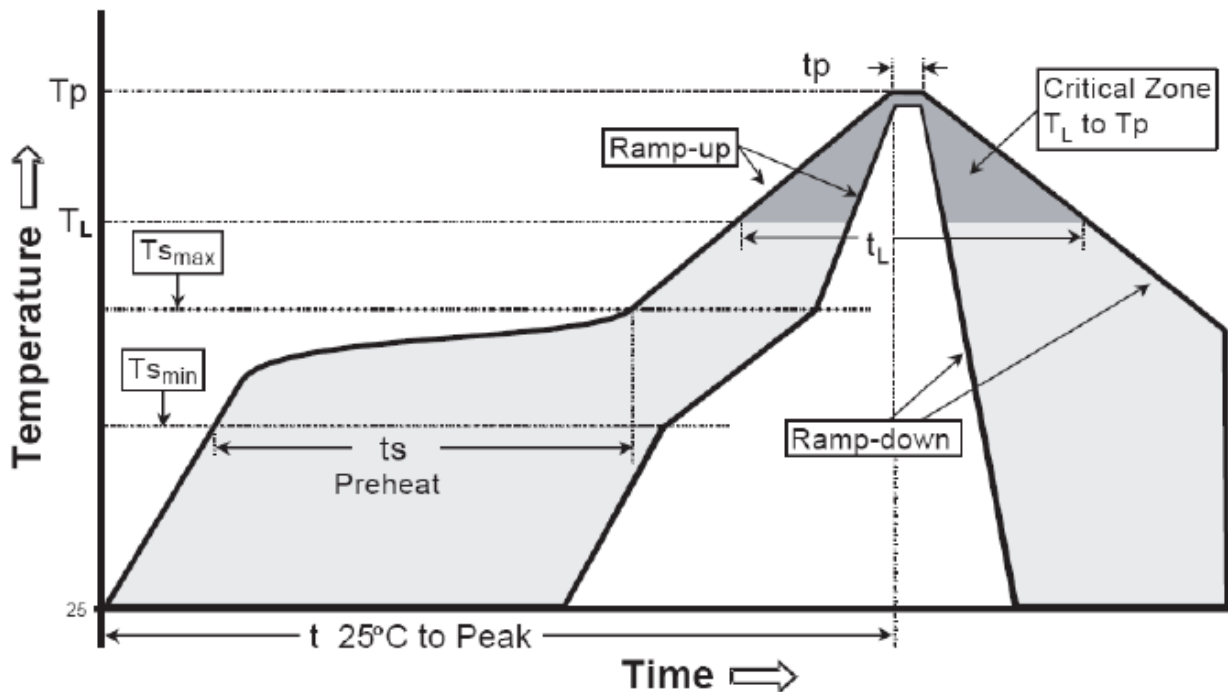


Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average Ramp-up Rate (Tsmax to Tp)	3°C/second max.	3°C/second max.
Preheat		
- Temperature Min(Tsmin)	100°C	150°C
- Temperature Max(Tsmax)	150°C	200°C
- Time(tsmin to tsmax)	60-120 seconds	60-180 seconds
Time maintained above:		
- Temperature(Tl)	183°C	217°C
- Time(tl)	60-150 seconds	60-150 seconds
Peak/classification Temperature(Tp)	215°C	240°C
Time within 5°C of actual Peak Temperature(tp)	10-30 seconds	20-40 seconds
Ramp-Down Rate	6°C/second max.	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

Official Product	Product: IN-K2PUV	Data Sheet No.
Tentative Product	*****	IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	April 19, 2014	Version of 1.0
		Page 10/12

Packing Information

The carrier tape is conformal to EIA-481D

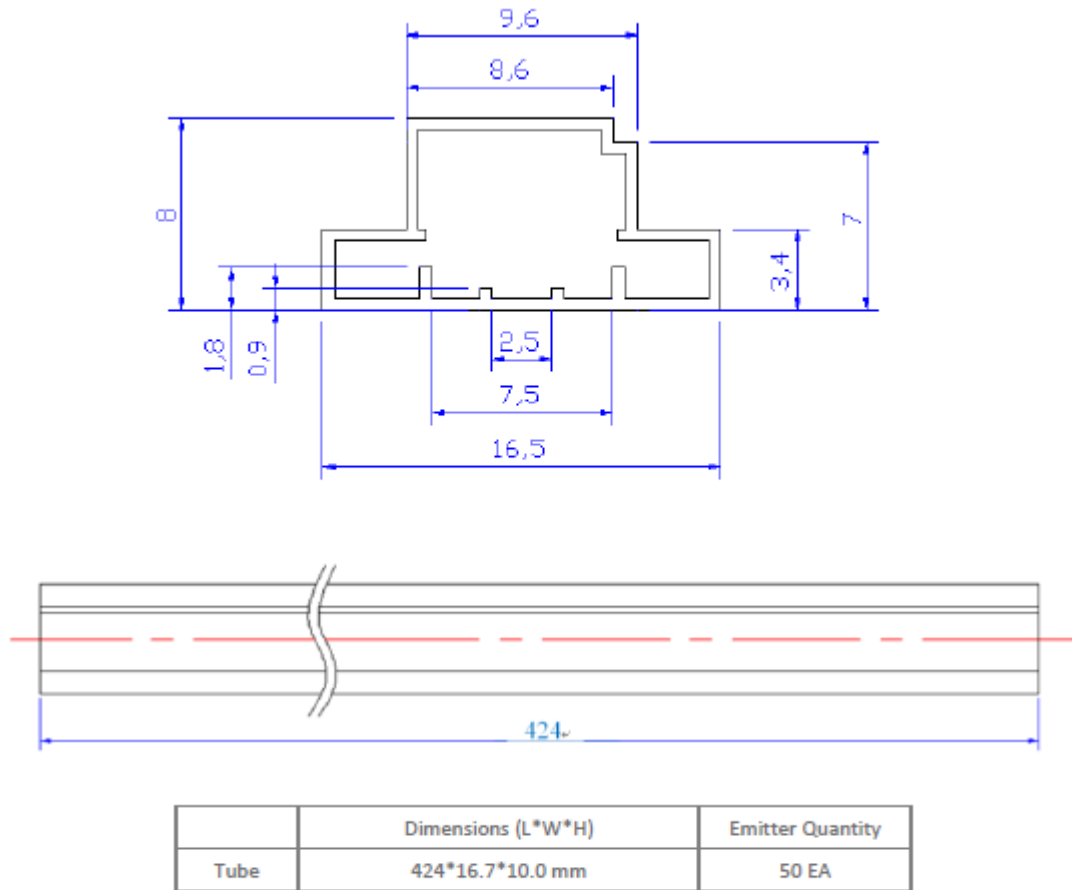

Note : All Dimensions are in millimeter

Official Product	Product: IN-K2PUV	Data Sheet No.
Tentative Product	*****	IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	April 19, 2014	Version of 1.0
		Page 11/12

Revision History

Changes since last revision	Page	Version No.	Revision Date
Initial release		1.0	04-19-2014

Official Product	Product: IN-K2PUV		Data Sheet No.
Tentative Product	*****		IN-K2PUV
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	April 19, 2014	Version of 1.0	Page 12/12

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А