

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0758380105

Status:

Active

Overview:

gbx_backplane_connector_system

Description:

1.85mm by 1.85mm (.073 by .073") Pitch 4-Pair GbX® Backplane Connector System, Open Header, 80 Circuits, Lead Free, Pin Length 5.55mm (.219")

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-75221-999 (PDF)

Agency Certification

UL

E29179

General

Product Family

Backplane Connectors

Series

75838

Application

Backplane

Application Tooling Documents

Tooling Manual

Comments

Open Header

Component Type

PCB Header

Overview

gbx_backplane_connector_system

Product Name

GbX®

Style

N/A

Physical

Circuits (Loaded)

80

Circuits (maximum)

80

Color - Resin

Gray

Durability (mating cycles max)

200

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

No

Keying to Mating Part

None

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Number of Columns

10

Number of Pairs

4

Number of Rows

8

Orientation

Vertical

PC Tail Length (in)

0.091 In

PC Tail Length (mm)

2.30 mm

PCB Locator

No

PCB Retention

Yes

PCB Thickness Recommended (in)

0.063 In

PCB Thickness Recommended (mm)

1.60 mm

Packaging Type

Tube

Pitch - Mating Interface (in)

0.073 In

Pitch - Mating Interface (mm)

1.85 mm

Pitch - Term. Interface (in)

0.073 In

Pitch - Term. Interface (mm)

1.85 mm

Plating min: Mating (µin)


30

Plating min: Mating (µm)

0.76

Plating min: Termination (µin)

30

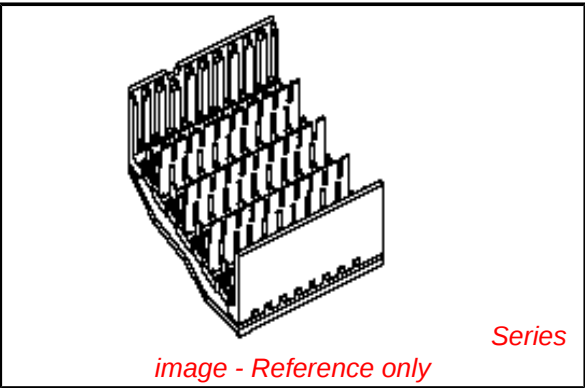

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

75838Series

Mates With

75878 Daughtercard Assembly

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Insertion Tool, GbX® 0622022000

4 pair by 10 wide

Plating min: Termination (μm)	0.76
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	1A
Data Rate	8.0 Gbps
Real Signals (per 25mm)	149
Shield Type	Ground Plane Shield
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC

Material Info

Reference - Drawing Numbers



Packaging Specification	PK-70873-563
Product Specification	PS-75221-999
Sales Drawing	SD-75838-010

GbX is a registered trademark of Amphenol Corporation.

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

20 19 18 17 16 15 14 13 12 11 75838 9 8 7 6 5 4 3 2 1

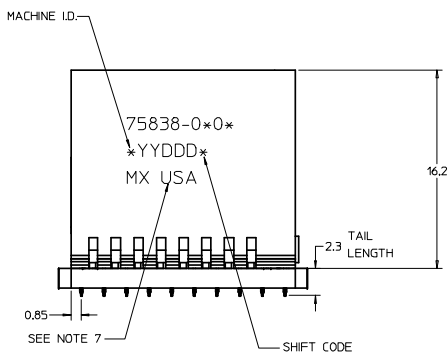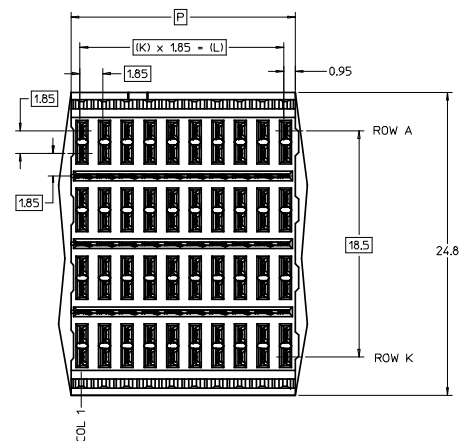

75838- 0 * 0 *

MODULE ORIENTATION
OPEN = 0

COLUMN
1 = 10 COL
2 = 25 COL
5 = 5 COL
7 = 7 COL



PIN LENGTH
DIM "M"
3=3.55 mm
4=4.55 mm
5=5.55 mm

KEYING ORIENTATION
0 = OPEN


NOTES:

1. MATERIAL: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL 94V-0, COLOR - GRAY. SIGNAL CONTACT AND GROUND BLADE - HIGH PERFORMANCE COPPER ALLOY.
2. FINISHES: SELECTIVE GOLD (Au) ON CONTACT AREA. SELECTIVE MATTE TIN (Sn) ON PCB TAILS, NICKEL (Ni) OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-75221-999.
4. FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY. CONTACT PAIRS MUST BE THE SAME LENGTH.
5. FOR SPECIFIC PART NUMBER AND MATING INFORMATION PLEASE REFER TO CHART.
6. PACKAGE PER PK-70873-563.
7. EITHER MARK PART NUMBER AND DATE CODE APPROXIMATELY WHERE SHOWN OR PLACE A LABEL ON THE TUBE.
8. THESE PARTS CONFORM TO MOLEX COSMETIC SPECIFICATION PS-45499-002 CLASS B.

DAUGHTERCARD
WAFER
(REFERENCE)

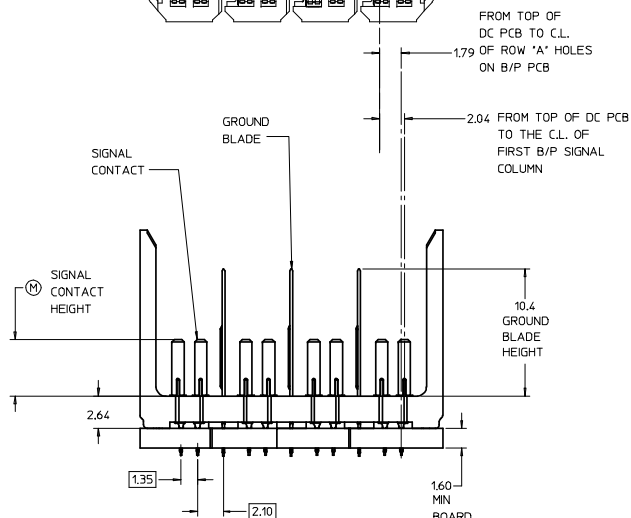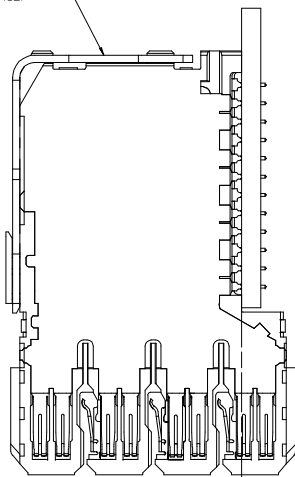

PART NUMBER TABLE				
ASSY PART NO.	K	L	P	TOTAL NO. OF DIFFERENTIAL PAIRS
75838-010*	9	16.65	18.35	40
75838-020*	24	44.40	46.10	100
75838-050*	4	7.40	9.10	20
75838-070*	6	11.10	12.80	28

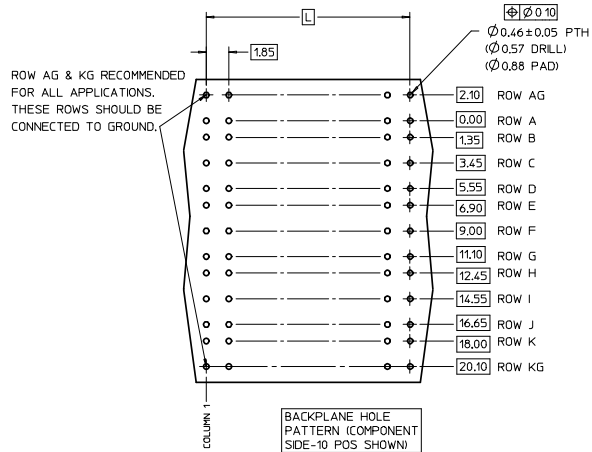


ROW AG & KG RECOMMENDED FOR ALL APPLICATIONS. THESE ROWS SHOULD BE CONNECTED TO GROUND.

MATING SIDE OF SHIELD (OPPOSITE RIB SIDE OF CONTACT)

MATING SIDE OF SIGNAL (RIB SIDE OF CONTACT)


DETAIL SCALE 10:1

LEAD-FREE PLATING ON SIGNALS, & GROUNDS.

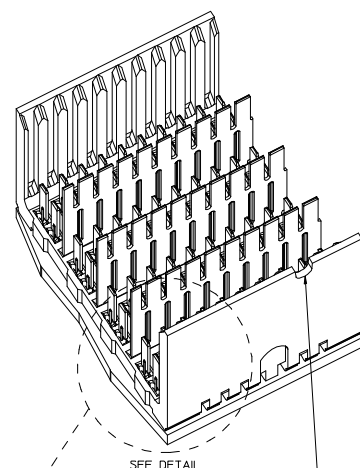

SEE DETAIL

NOTCH DESIGNATES POSITION A1 ARCH AND NOTCH ON OPPOSITE SIDE OF PART MARKING

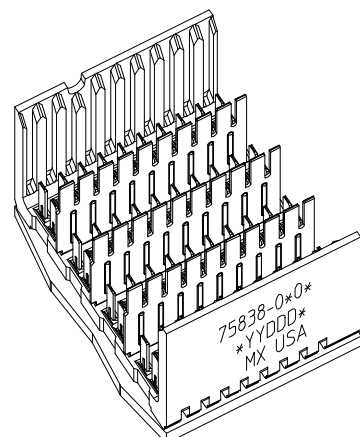

ADD 5 & 7 COLUMN PARTS EC NO: UCP2008-2605 DRAWN: JBINGHAM 2008/04/24 CHKD: 2008/04/23 APPR: JLAUREX 2008/04/28 REV	QUALITY SYMBOLS ▽ = 0 ▽ = 0 DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± ---° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
			DIMENSION STYLE MM ONLY		TITLE GBX 4-PAIR OPEN END BACKPLANE ASSEMBLY LEAD-FREE SALES DRAWING	
			DRAWN BY CTHOMAS		DATE 2006/01/03	
			CHECKED BY KMULVEY		DATE 2006/01/04	
			APPROVED BY JBINGHAM		DATE 2006/01/05	
			MATERIAL NO. SEE CHART		DOCUMENT NO. SD-75838-010	
			SHEET NO. 1 OF 1			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						D

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А