


Fusible Carbon Film MELF Resistors



FEATURES

- Fusible resistor for constant voltage designed for overload protection
- Specially spiralled to provide the fusing characteristic
- Flame retardant coating
- Pure tin termination on nickel barrier, plated on press fit steel caps
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



STANDARD ELECTRICAL SPECIFICATIONS					
MODEL	POWER RATING ⁽¹⁾ P_{70} W	TEMPERATURE COEFFICIENT ppm/K	TOLERANCE %	RESISTANCE RANGE Ω	E-SERIES
LCM0207SI	0.25	+300 / -250	± 5	1 to 9.1	24

Note


- ⁽¹⁾ Permissible dissipation depends on the maximum temperature at the solder joint, the component placement density PCB layout and the substrate material.

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	LCM0207SI
Power rating P_{70}	W	0.25
Minimum overload to fuse $\geq 1R0$	W	4
Time to fuse	s	≤ 15
Insulation resistance	Ω	$\geq 10^{10}$
Insulation voltage (1 min), DC or AC_{PEAK}	V	500
Category temperature range	$^{\circ}C$	-55 to +125
Failure rate: FIT _{observed}		$\leq 0.1 \times 10^{-9}/h$

Notes

- The applicable dissipation depends on the temperature at the solder joint, on the component placement density, on the circuit board layout and material.
- The specification of this product is based on a test board according to EN 140400, providing a thermal resistance of approximately 220 K/W.


DIMENSIONS

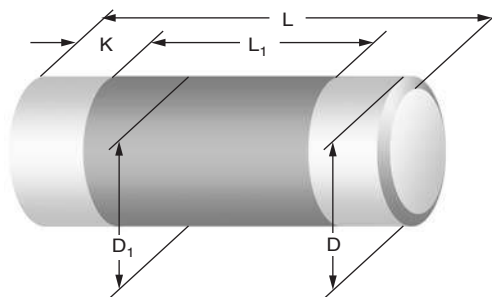

DIMENSIONS AND MASS						
TYPE	L (mm)	$D_{MAX.}$ (mm)	L_1 MIN. (mm)	D_1 (mm)	K (mm)	MASS (mg)
LCM0207SI	$5.8 + 0/- 0.3$	2.2	2.6	$D + 0/- 0.2$	1.25 ± 0.2	77

Note

- Color code marking is applied according to IEC 60062 in four bands. Each color band appears as a single solid line, voids are permissible if at least 2/3 of the band is visible from each radial angle of view. The last color band for tolerance is approximately 50 % wider than the other bands. An additional 5th yellow band identifies the special fusible type.

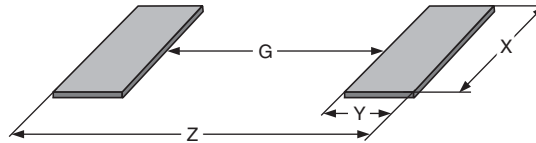PATTERN STYLES FOR MELF RESISTORS


RECOMMENDED SOLDER PAD DIMENSIONS								
TYPE	WAVE SOLDERING				REFLOW SOLDERING			
	G (mm)	Y (mm)	X (mm)	Z (mm)	G (mm)	Y (mm)	X (mm)	Z (mm)
LCM0207SI	2.4	2.3	2.6	7.0	2.6	2.0	2.4	6.6

Note



- The given solder pad dimensions reflect the considerations for board design and assembly as outlined e.g. in standards IEC 61188-5-x, or in publication IPC-7351. They do not guarantee any supposed thermal properties, however, they will be found adequate for most general applications.

PART NUMBER AND PRODUCT DESCRIPTION																	
Part Number: LCM02070B01008JBP00																	
L	C	M	0	2	0	7	B	0	1	0	0	8	J	B	P	0	0
MODEL LCM0207		VERSION B = Si; Fusible			TCR 0 = Neutral See datasheet for TC value			VALUE 3 digit value 1 digit multiplier Multiplier 8 = 10^{-2}			TOLERANCE J = $\pm 5\%$		PACKAGING BP BS				
Product Description: LCM0207SI 1R0 5% BP																	
LCM0207SI		1R0			5%			BP									
MODEL LCM0207SI		RESISTANCE VALUE 1R0 = 1 Ω			TOLERANCE $\pm 5\%$			PACKAGING BP BS									

Note


- Products can be ordered using either the PART NUMBER or the PRODUCT DESCRIPTION.

PACKAGING						
TYPE	CODE	QUANTITY	CARRIER TAPE	WIDTH	PITCH	REEL DIAMETER
LCM0207SI	BP	1500	Blister tape acc. IEC 60286-3 Type 2a	12 mm	4 mm	180 mm/7"
	BS	7500				330 mm/13"

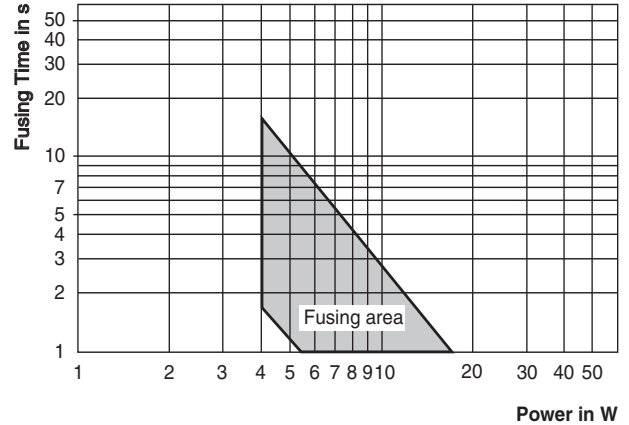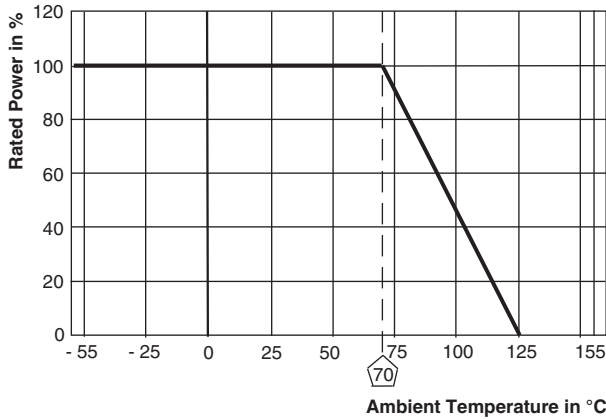

Derating

Fusing Performance

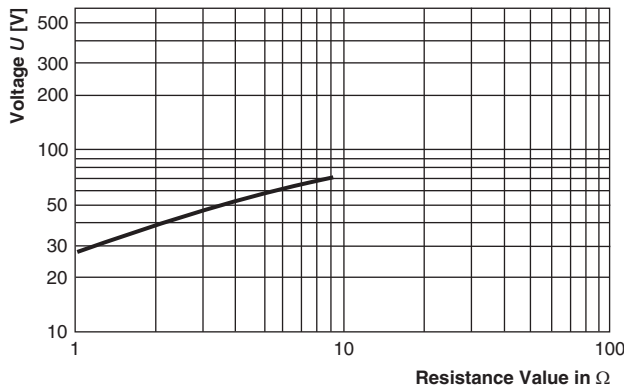

U_{max.} before Fusing and max. Pulse Voltage

SOLDERING INFORMATION	
<ul style="list-style-type: none"> • For reflow soldering only. • Board has to be thoroughly cleaned after soldering. All flux materials must be completely removed to ensure fusing performance. 	

TEST PROCEDURES AND REQUIREMENTS		
TEST	CONDITIONS OF TEST	REQUIREMENTS PERMISSIBLE CHANGE (ΔR)
Endurance test at 70 °C IEC 60115-1, 4.25.1	1000 h at 70 °C, 1.5 h "ON", 0.5 h "OFF"	± 2 % R
Endurance at UCT IEC 60115-1, 4.25.3	1000 h at 125 °C without load	± 2 % R
Thermal shock IEC 60115-1, 4.19 and IEC 60068-2-14	Rapid change between upper and lower category temperature, 5 cycles	± 0.5 % R
Damp heat steady state IEC 60115-1, 4.24 and IEC 60068-2-78	56 days at 40 °C and 93 % relative humidity	± 2 % R
Resistance to soldering heat IEC 60115-1, 4.18 and IEC 60068-2-58	10 s at 260 °C solder bath temperature	± 0.25 % R

APPLICABLE STANDARDS
<ul style="list-style-type: none"> • EN 60115-1



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А