


Type CRG Series

Key Features

- Thick film resistors with a high power to size ratio, ideally suited to industrial and general purpose use. A range from 1 ohm to 10M and tolerances of 1% and 5%. Also including zero ohm links.
- Suitable for most applications, including high frequency operation, owing to the short lead structure and low capacitance.
- Seven Package Sizes
- Terminal finish: Matte Sn

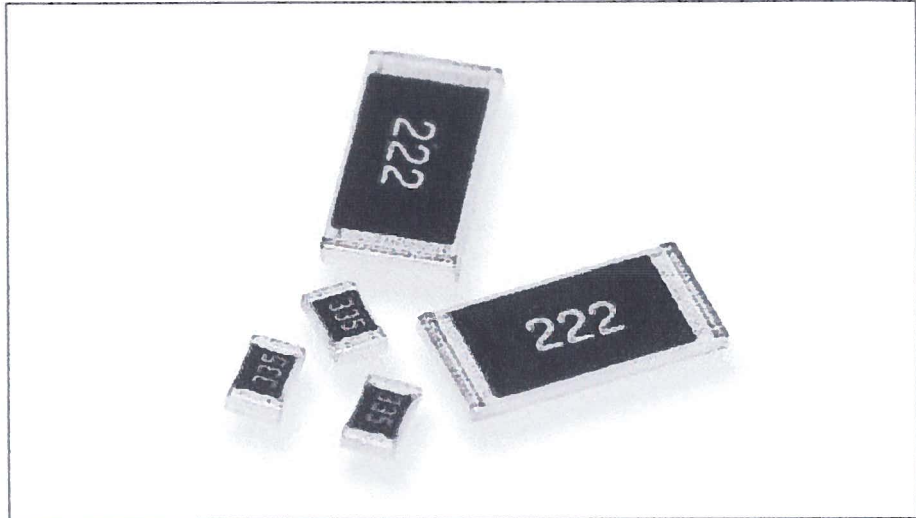

Precious metal terminations are screen printed onto a ceramic base and fired. The resistive element is screen printed and fired and the passivation layer added. Each resistor is trimmed to tolerance by laser. The pre-scribed tile is broken into strips, the end plating is fired on and the strips broken into individual components. Final termination is made by electroplating.

Characteristics – Electrical

| | 0201 | | | 0402 | | | 0603 | | | 0805 | | | | | |
|----------------------------|------|------|------|-------|------|------|------|------|------|-------|------|------|------|------|-----|
| Rated Power @ 70 °C (W) | 0.05 | | | 0.063 | | | 0.1 | | | 0.125 | | | | | |
| Resistance Range (Ohms) | Min | 10 | 1 | 11 | 10 | 1 | 11 | 1 | 101 | 1 | 11 | 1 | 101 | 1 | 11 |
| | Max | 1M0 | 10 | 1M0 | 2M0 | 10 | 3M3 | 100 | 1M0 | 10 | 10M | 100 | 1M0 | 10 | 10M |
| Tolerance (%) | 1 | 5 | 5 | 1 | 5 | 5 | 1 | 1 | 5 | 5 | 1 | 1 | 5 | 5 | |
| Code letter | F | J | J | F | J | J | F | F | J | J | F | F | J | J | |
| Selection Series | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | |
| | E96 | | | E96 | | | | E96 | | | | E96 | | | |
| Temp. Coefficient (ppm/°C) | ±200 | ±400 | ±200 | ±100 | ±400 | ±200 | ±200 | ±100 | ±200 | ±200 | ±200 | ±100 | ±400 | ±200 | |

| | 1206 | | | | 2010 | | | | 2512 | | | | |
|----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| Rated Power @ 70 °C (W) | 0.25 | | | | 0.5 | | | | 1 | | | | |
| Resistance Range (Ohms) | Min | 1 | 101 | 1 | 11 | 1 | 101 | 1 | 11 | 1 | 101 | 1 | 11 |
| | Max | 100 | 1M0 | 10 | 10M | 100 | 1M0 | 10 | 10M | 100 | 1M0 | 10 | 10M |
| Tolerance (%) | 1 | 1 | 5 | 5 | 1 | 1 | 5 | 5 | 1 | 1 | 5 | 5 | |
| Code letter | F | F | J | J | F | F | J | J | F | F | J | J | |
| Selection Series | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | E24 | |
| | E96 | | | | E96 | | | | E96 | | | | |
| Temp. Coefficient (ppm/°C) | ±200 | ±100 | ±400 | ±200 | ±200 | ±100 | ±400 | ±200 | ±200 | ±100 | ±400 | ±200 | |

| | 0201 | 0402 | 0603 | 0805 | 1206 | 2010 | 2512 |
|---------------------------------------|-------------------------|------|------|------|------|------|------|
| Working Voltage (V) | 25 | 50 | 50 | 150 | 200 | 200 | 200 |
| Max. Overload Voltage (V) | 50 | 100 | 100 | 300 | 400 | 400 | 400 |
| Operating Temp. Range (°C) | -55 to +125 | | | | | | |
| Climatic Category (°C) | 55/125/56 | | | | | | |
| Insulation Resistance Dry Min (Mohms) | 1000 | | | | | | |
| Stability (%) | 3 | | | | | | |
| Zerohm (A) Current Max | 0.5 | 1 | 1 | 2 | 2 | 2 | 2 |
| | Resistance Max <50 mOhm | | | | | | |

Type CRG Series

Dimensions



| Style | L | W | t | a | b |
|-------|-----------|------------|------------|------------|------------|
| 0201 | 0.6 ±0.03 | 0.3 ±0.03 | 0.23 ±0.03 | 0.10 ±0.05 | 0.15 ±0.05 |
| 0402 | 1.0 ±0.1 | 0.5 ±0.05 | 0.35 ±0.05 | 0.2 ±0.1 | 0.25 ±0.1 |
| 0603 | 1.6 ±0.1 | 0.8 ±0.15 | 0.45 ±0.1 | 0.3 ±0.2 | 0.3 ±0.1 |
| 0805 | 2.0 ±0.15 | 1.25 ±0.15 | 0.55 ±0.1 | 0.4 ±0.2 | 0.4 ±0.2 |
| 1206 | 3.1 ±0.15 | 1.55 ±0.15 | 0.55 ±0.1 | 0.45 ±0.2 | 0.45 ±0.2 |
| 2010 | 5.0 ±0.1 | 2.5 ±0.15 | 0.55 ±0.1 | 0.6 ±0.25 | 0.5 ±0.2 |
| 2512 | 6.35 ±0.1 | 3.2 ±0.15 | 0.55 ±0.1 | 0.6 ±0.25 | 0.5 ±0.2 |

Marking Codes - Case Sizes 0805 to 2512

IEC 4 Digit Marking

| Resistance | 100Ω | 2.2KΩ | 10KΩ | 49.9KΩ | 100KΩ |
|--------------|------|-------|------|--------|-------|
| Marking Code | 1000 | 2201 | 1002 | 4992 | 1003 |

Case Sizes 0603

E24 3 Digit Marking - Example: 101=100Ω 102=1KΩ

| E24 | 10 | 11 | 12 | 13 | 15 | 16 | 18 | 20 | 22 | 24 | 27 | 30 |
|-----|----|----|----|----|----|----|----|----|----|----|----|----|
| | 33 | 36 | 39 | 43 | 47 | 51 | 56 | 62 | 68 | 75 | 82 | 91 |

E96 3 Digit Marking - Examples: 14C=13K7Ω, 13C=13K3Ω, 68B=4K99Ω, 68X=49.9Ω



0603 E96 Marking Code Table

| Code | E96 | Code | E96 | Code | E96 | Code | E96 | | | | |
|------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|-----------------|
| 01 | 100 | 25 | 178 | 49 | 316 | 73 | 562 | | | | |
| 02 | 102 | 26 | 182 | 50 | 324 | 74 | 576 | | | | |
| 03 | 105 | 27 | 187 | 51 | 332 | 75 | 590 | | | | |
| 04 | 107 | 28 | 191 | 52 | 340 | 76 | 604 | | | | |
| 05 | 110 | 29 | 196 | 53 | 348 | 77 | 619 | | | | |
| 06 | 113 | 30 | 200 | 54 | 357 | 78 | 634 | | | | |
| 07 | 115 | 31 | 205 | 55 | 365 | 79 | 649 | | | | |
| 08 | 118 | 32 | 210 | 56 | 374 | 80 | 665 | | | | |
| 09 | 121 | 33 | 215 | 57 | 383 | 81 | 681 | | | | |
| 10 | 124 | 34 | 221 | 58 | 392 | 82 | 698 | | | | |
| 11 | 127 | 35 | 226 | 59 | 402 | 83 | 715 | | | | |
| 12 | 130 | 36 | 232 | 60 | 412 | 84 | 732 | | | | |
| 13 | 133 | 37 | 237 | 61 | 422 | 85 | 750 | | | | |
| 14 | 137 | 38 | 243 | 62 | 432 | 86 | 768 | | | | |
| 15 | 140 | 39 | 249 | 63 | 442 | 87 | 787 | | | | |
| 16 | 143 | 40 | 255 | 64 | 453 | 88 | 806 | | | | |
| 17 | 147 | 41 | 261 | 65 | 464 | 89 | 825 | | | | |
| 18 | 150 | 42 | 267 | 66 | 475 | 90 | 845 | | | | |
| 19 | 154 | 43 | 274 | 67 | 487 | 91 | 866 | | | | |
| 20 | 158 | 44 | 280 | 68 | 499 | 92 | 887 | | | | |
| 21 | 162 | 45 | 287 | 69 | 511 | 93 | 909 | | | | |
| 22 | 165 | 46 | 294 | 70 | 523 | 94 | 931 | | | | |
| 23 | 169 | 47 | 301 | 71 | 536 | 95 | 953 | | | | |
| 24 | 174 | 48 | 309 | 72 | 549 | 96 | 976 | | | | |
| Code | A | B | C | D | E | F | G | H | X | Y | Z |
| Multiplier | 10 ⁰ | 10 ¹ | 10 ² | 10 ³ | 10 ⁴ | 10 ⁵ | 10 ⁶ | 10 ⁷ | 10 ⁻¹ | 10 ⁻² | 10 ⁰ |

Type CRG Series

Derating Curve



Mounting

The resistors are suitable for processing on automatic insertion equipment.

Marking

CRG0805, CRG1206, CRG2010, CRG2512

E24 series resistors are marked with a three digit code.

E96 series resistors are marked with a four digit code.

Zerohm components are marked '0'.

CRG0603

E24 5% series are marked with a three digit code.

E24 1% series are marked with a three digit code.

E96 series are marked with the international alphanumeric three character code (available on request).

EXCEPT 10, 11, 13, 15, 20 & 75 decades which are marked as the E24 series.

CRG0201 & CRG0402 series unmarked.

Performance Characteristics

The evaluation of the performance characteristics is carried out with reference to IECQ specifications QC 400 000 and QC 400 100.

| TEST REF | Long Term Tests $\pm(3\% + 0.1 \text{ ohm})$ |
|----------|--|
| 4.23 | Climatic sequence |
| 4.24 | Damp heat, steady state |
| 4.25.1 | Endurance at 70 °C |
| 4.25.3 | Endurance at 125 °C |
| TEST REF | Short Term Tests $\pm(1\% + 0.05 \text{ ohm})$ |
| 4.13 | Overload |
| 4.32 | Adhesion |
| 4.33 | Bond strength of end face plating |
| 4.19 | Rapid change of temperature |
| 4.18 | Resistance to soldering heat |

Storage

Unopened reels should be stored within a temperature range of +5 °C to +25 °C, separated from any dust, chemicals and solvent based materials. Non-adherence to this procedure could effect the solderability of this product.

How to Order

| CRG | 0603 | J | 1K0 |
|--------------------------------|--|--------------------------------|---|
| Common Part | Size | Tolerance | Resistance Value |
| CRG - Thick Film Chip Resistor | 0201 0402 0603 0805 1206 2512 | F - $\pm 1\%$ J - $\pm 5\%$ | 1 ohm (1 ohm) 1R0 1K ohm (1000 ohms) 1K 100K ohm (100000 ohms) 100K 1M ohm (1000000 ohms) 1M |

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.
Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А