


Description: 824-2170MHz SMD Antenna

PART NUMBER: W3544X

Series: Domino

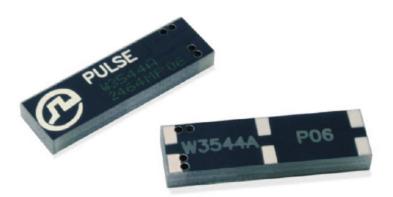

Features:

- Frequency
 - 824-960/1710-2170MHz
- Impedance 50 Ohm
- Efficiency average
 - 40%/55% for W3544A
 - 55%/57% for W3544B
- Size 7.65 x 26 x 3 mm
- SMD Compliant
- A and B variants for different mounting positions on PCB

Applications:

- 2G/3G Cellular antenna
- GPRS
- Nb-loT, LTE Cat M1

All dimensions are in mm

Issue: 1922

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: 824-2170MHz SMD Antenna

PART NUMBER: W3544X

Series: Domino

ELECTRICAL SPECIFICATIONS*

Frequency 824-960/1710-2170MHz

Nominal Impedance 50Ω

Return Loss <-3dB/-4dB for W3544A

<-4dB/-4dB for W3544B

Average Radiation Efficiency 40%/55% for W3544A

55%/57% for W3544B

Average Peak Gain -0.9dBi/1.5dBi for W3544A

1.9dBi/1dBi for W3544B

3W Maximum power input

MECHANICAL SPECIFICATIONS

Overall Length 7.65 x 26 x 3 mm

Weight 1.11 g Antenna Color Black **SMD** Mounting

Moisture Sensitivity Level MSL3

ENVIRONMENTAL SPECIFICATIONS

-45 ~ 85° C **Operating Temperature** -45 ~ 85° C Storage Temperature

RoHS Compliant Yes

(*) All RF parameters measured on Pulse reference test PCB






Description: 824-2170MHz SMD Antenna

PART NUMBER: W3544X

Series: Domino

MECHANICAL DRAWING

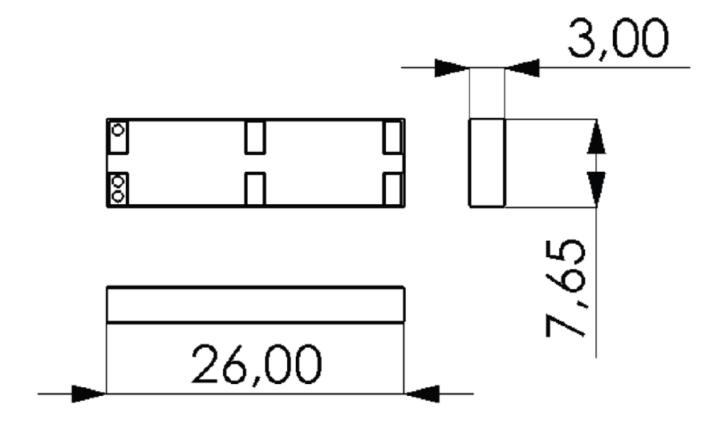





Series: Domino

PART NUMBER: W3544X

Recommendation for reflow soldering process

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection					
1	Average temperature gradient in preheating	2.5 °C/s					
2	Soak time	2-3 minutes					
3	Max temperature gradient in reflow	3 °C/s					
4	Time above 217 °C	Max 30 sec					
5	Peak temperature in reflow 230 °C for 10 seconds						
6	Temperature gradient in cooling Max -5 °C/s						

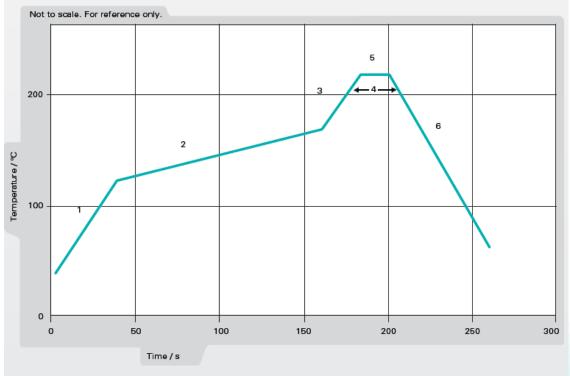


Figure 1. Minimum temperature profile recommendation for reflow soldering process





Series: Domino

PART NUMBER: W3544X

Recommendation for reflow soldering process

	Method of heat transfer	Controlled hot air convection					
1	Average temperature gradient in preheating	2.5 °C/s					
2 Soak time 2-3 minutes							
3	Max temperature gradient in reflow	3 °C/s					
4	Time above 217 °C	Max 60 sec					
5	Time above 230 °C	Max 50 sec					
6	Time above 250 °C	Max 10 sec					
7	Peak temperature in reflow	260 °C for 5 seconds					
8	Temperature gradient in cooling	Max -5 °C/s					

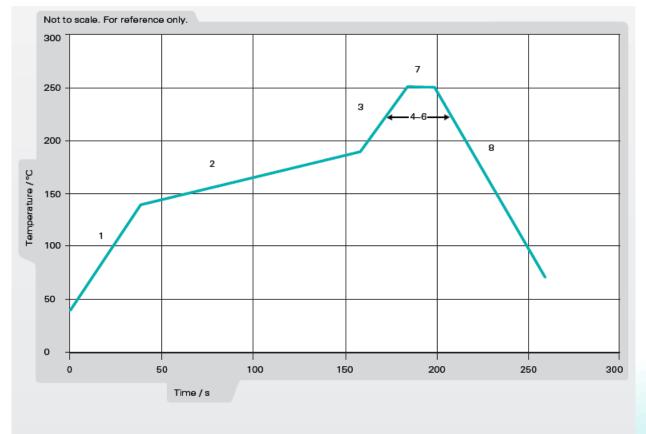


Figure 2. Maximum temperature profile recommendation for reflow soldering process





PART NUMBER: W3544X

Series: Domino


TEST SETUP


Test Setup for Electrical Measurements


Recommended test board layout for electrical characteristic measurement. Test board outline size 110 mm x 50 mm. Ground cleared under antenna.

NOTE: All measurements are in mm.

W3544A - Antenna positioned vertically on PWB corner

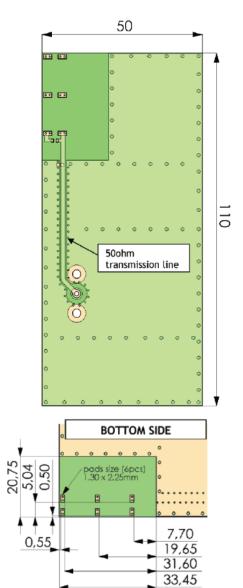







In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION








Series: Domino


PART NUMBER: W3544X

W3544B - Antenna positioned horizontally on PWB corner

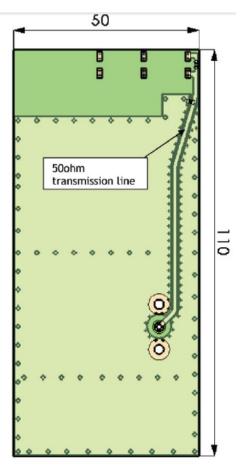



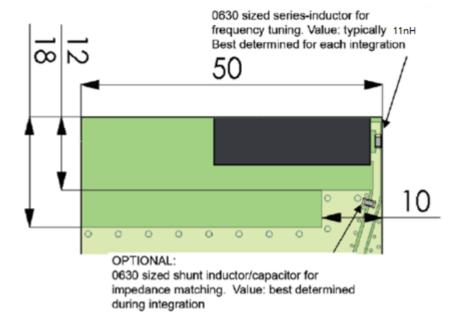

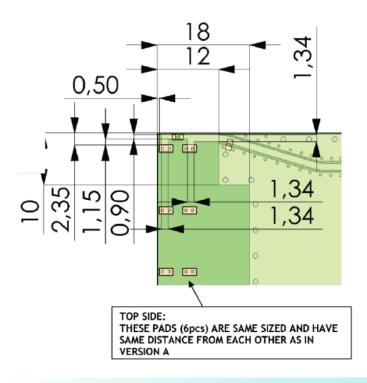

Issue: 1922

RóHS






Description: 824-2170MHz SMD Antenna


PART NUMBER: W3544X

CHARTS

Return loss of W3544A

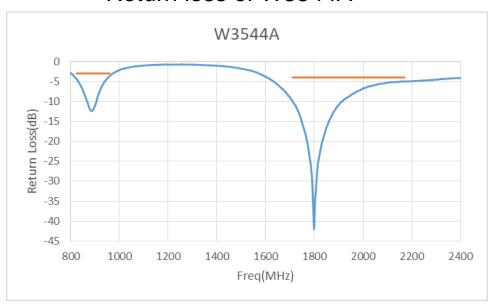

Radiation Efficiency of W3544A

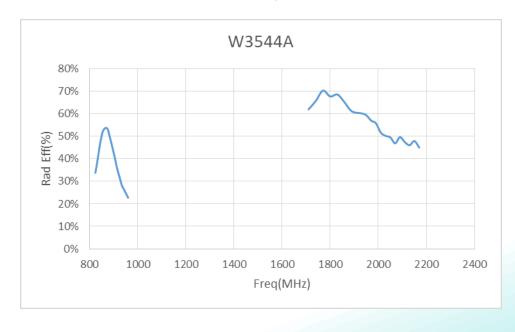






PART NUMBER: W3544X


Series: Domino

CHARTS

Peak Gain of W3544A

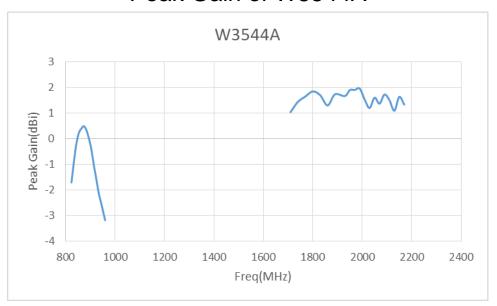

Low band Radiation pattern at Vertical plane, front view of W3544A

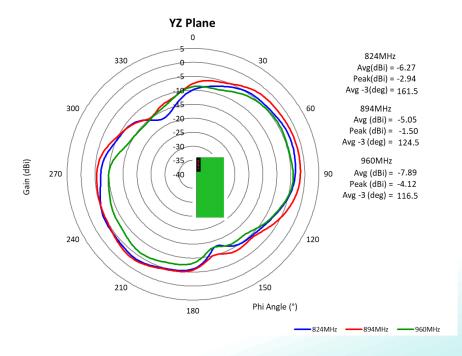








Description: 824-2170MHz SMD Antenna


PART NUMBER: W3544X

CHARTS

Low band Radiation pattern at Vertical plane, side view of W3544A

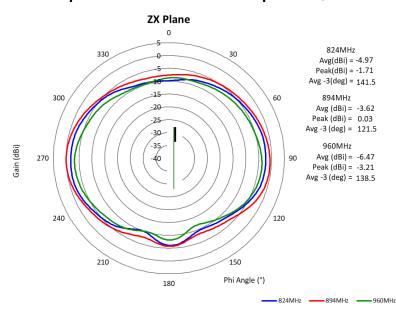

Low band Radiation pattern at horizontal plane of W3544A

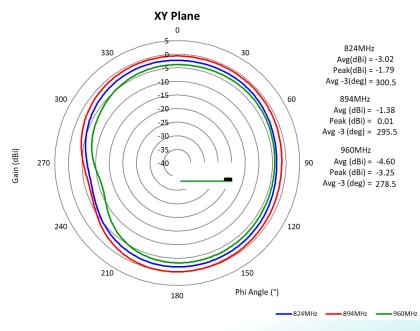






Description: 824-2170MHz SMD Antenna


PART NUMBER: W3544X

CHARTS

High band Radiation pattern at Vertical plane, front view of W3544A

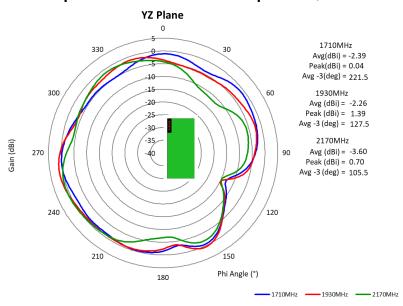

High band Radiation pattern at Vertical plane, side view of W3544A

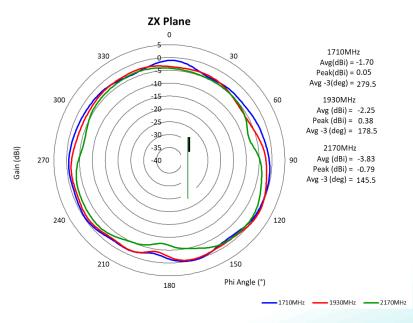






Description: 824-2170MHz SMD Antenna

PART NUMBER: W3544X

CHARTS

High band Radiation pattern at Horizontal plane of W3544A

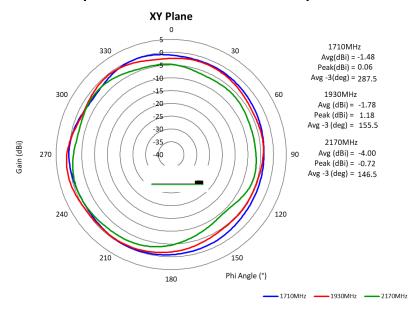






Description: 824-2170MHz SMD Antenna


PART NUMBER: W3544X

CHARTS

Return loss of W3544B

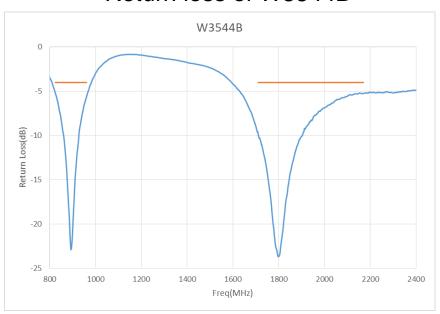

Radiation Efficiency of W3544B

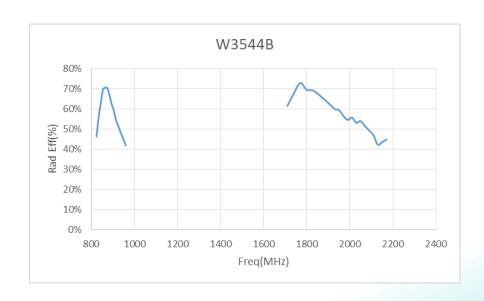






Description: 824-2170MHz SMD Antenna


PART NUMBER: W3544X

CHARTS

Peak Gain of W3544B

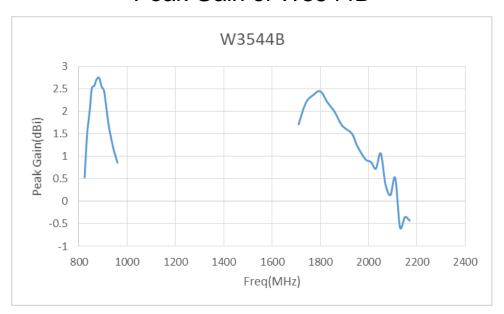

Low band Radiation pattern at Vertical plane, front view of W3544B

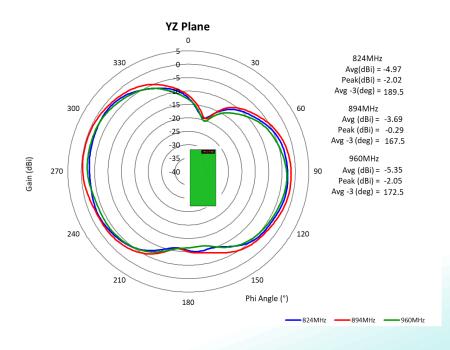






Description: 824-2170MHz SMD Antenna


PART NUMBER: W3544X

CHARTS

Low band Radiation pattern at Vertical plane, side view of W3544B

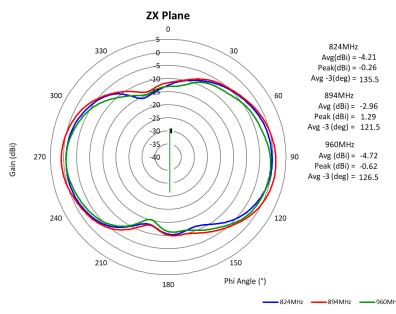

Low band Radiation pattern at horizontal plane of W3544B

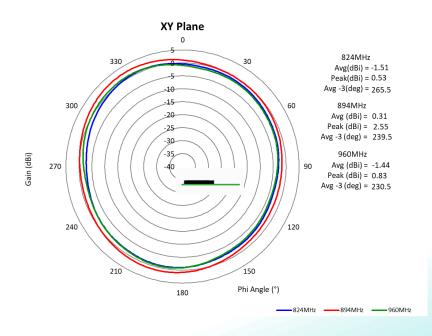






Description: 824-2170MHz SMD Antenna


PART NUMBER: W3544X

CHARTS

High band Radiation pattern at Vertical plane, front view of W3544B

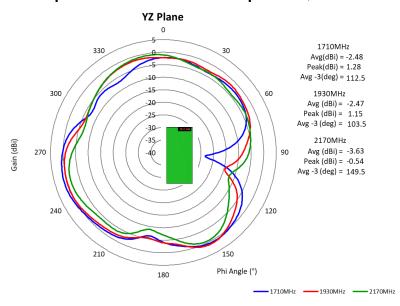

High band Radiation pattern at Vertical plane, side view of W3544B

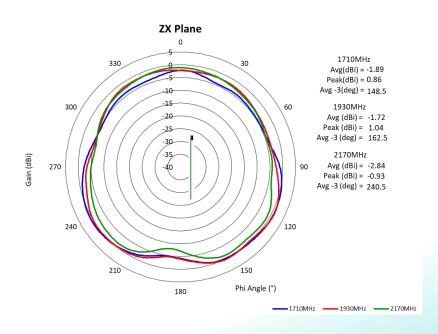






Description: 824-2170MHz SMD Antenna

PART NUMBER: W3544X

CHARTS

High band Radiation pattern at Horizontal plane of W3544B

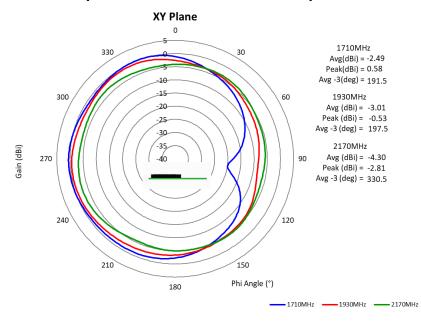



Description: 824-2170MHz SMD Antenna


PART NUMBER: W3544X

Series: Domino

PACKAGING

140pcs Antennas Per 1pcs 7" Tape & Reel 10 pcs 7" Tape & Reel (total 1,400 pcs Antennas) per 1 box

ITEM	W	A0	B0	К0	Р	F	E	D	D1	P0	P2	t	7	7"	
DIM	16.0	26.7	8.35	3.3	32.0	7.5	1.75	1.50	1.50	4.00	2.00	0.3	LENGTH /	UNITS / REEL	
TOLE	+0.30 -0.30	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.00	+0.10 -0.00	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05	4.7M/R	130PCS	

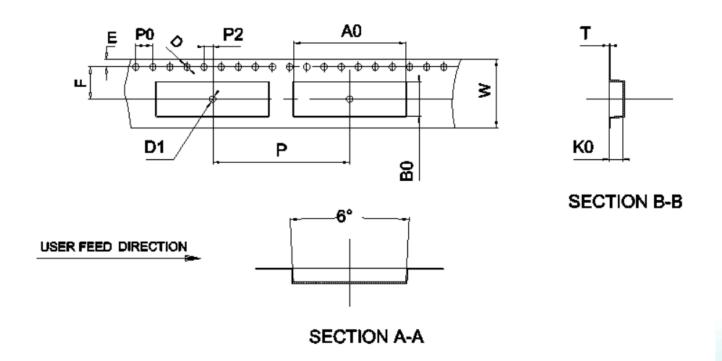

According to MSL3 packing requirement, MBB-Moisture Barrel Bag, Desiccant, HIC-Humidity Indicator Card, MSID Label, Caution Label are required.



Description: 824-2170MHz SMD Antenna

PART NUMBER: W3544X

Series: Domino

ASSEMBLY

Part Number	Positioning				
W3544A	Vertically mounted at board edge				
W3544B	Horizontally mounted at board edge				



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: http://oceanchips.ru/

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А