

# STK581U3C2DGEVB

## STK581U3C2D-E Evaluation Board User's Manual




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)


### Introduction

By using this board, STK581U3C2D-E (SIP3 / 1 shunt) can be evaluated.

### EVAL BOARD USER'S MANUAL

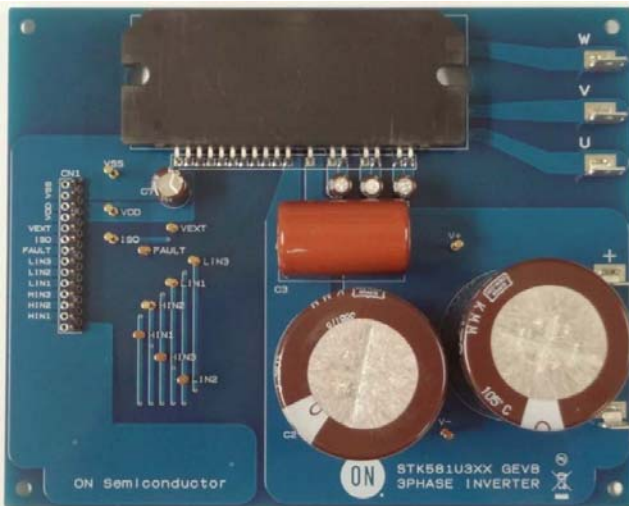

Surface

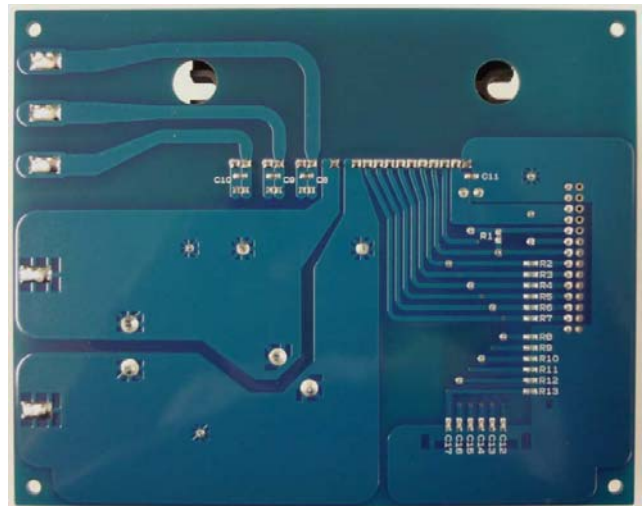

Back side

Figure 1. Evaluation Board Photos

Table 1.

ONPN of Evaluation Board	ONPN of IPM	Io
STK581U3C2DGEVB	STK581U3C2D-E	30 A

# STK581U3C2DGEVB

## CIRCUIT DIAGRAM

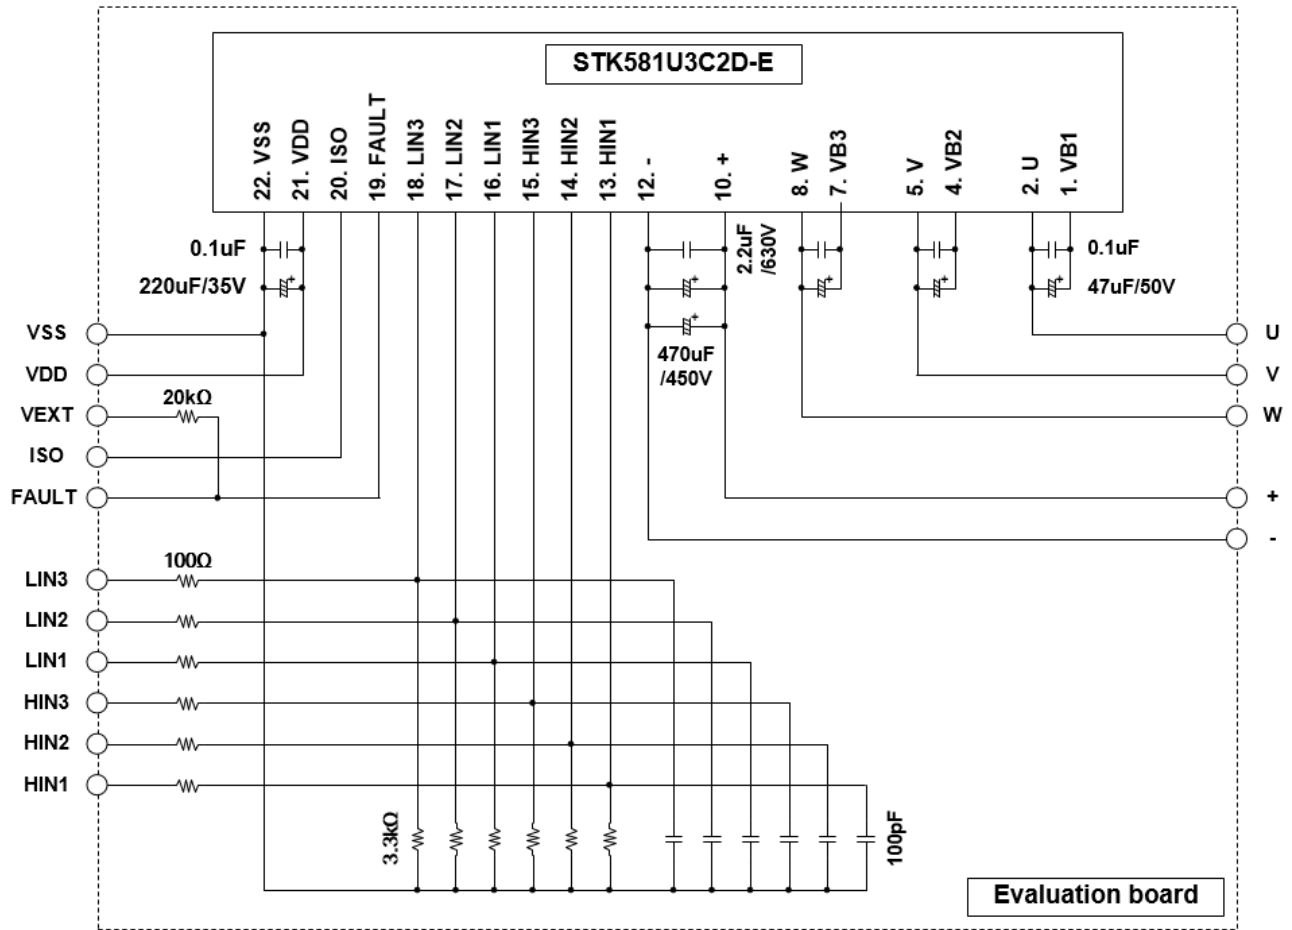


Figure 2. Circuit Diagram

# STK581U3C2DGEVB

## PIN DESCRIPTION

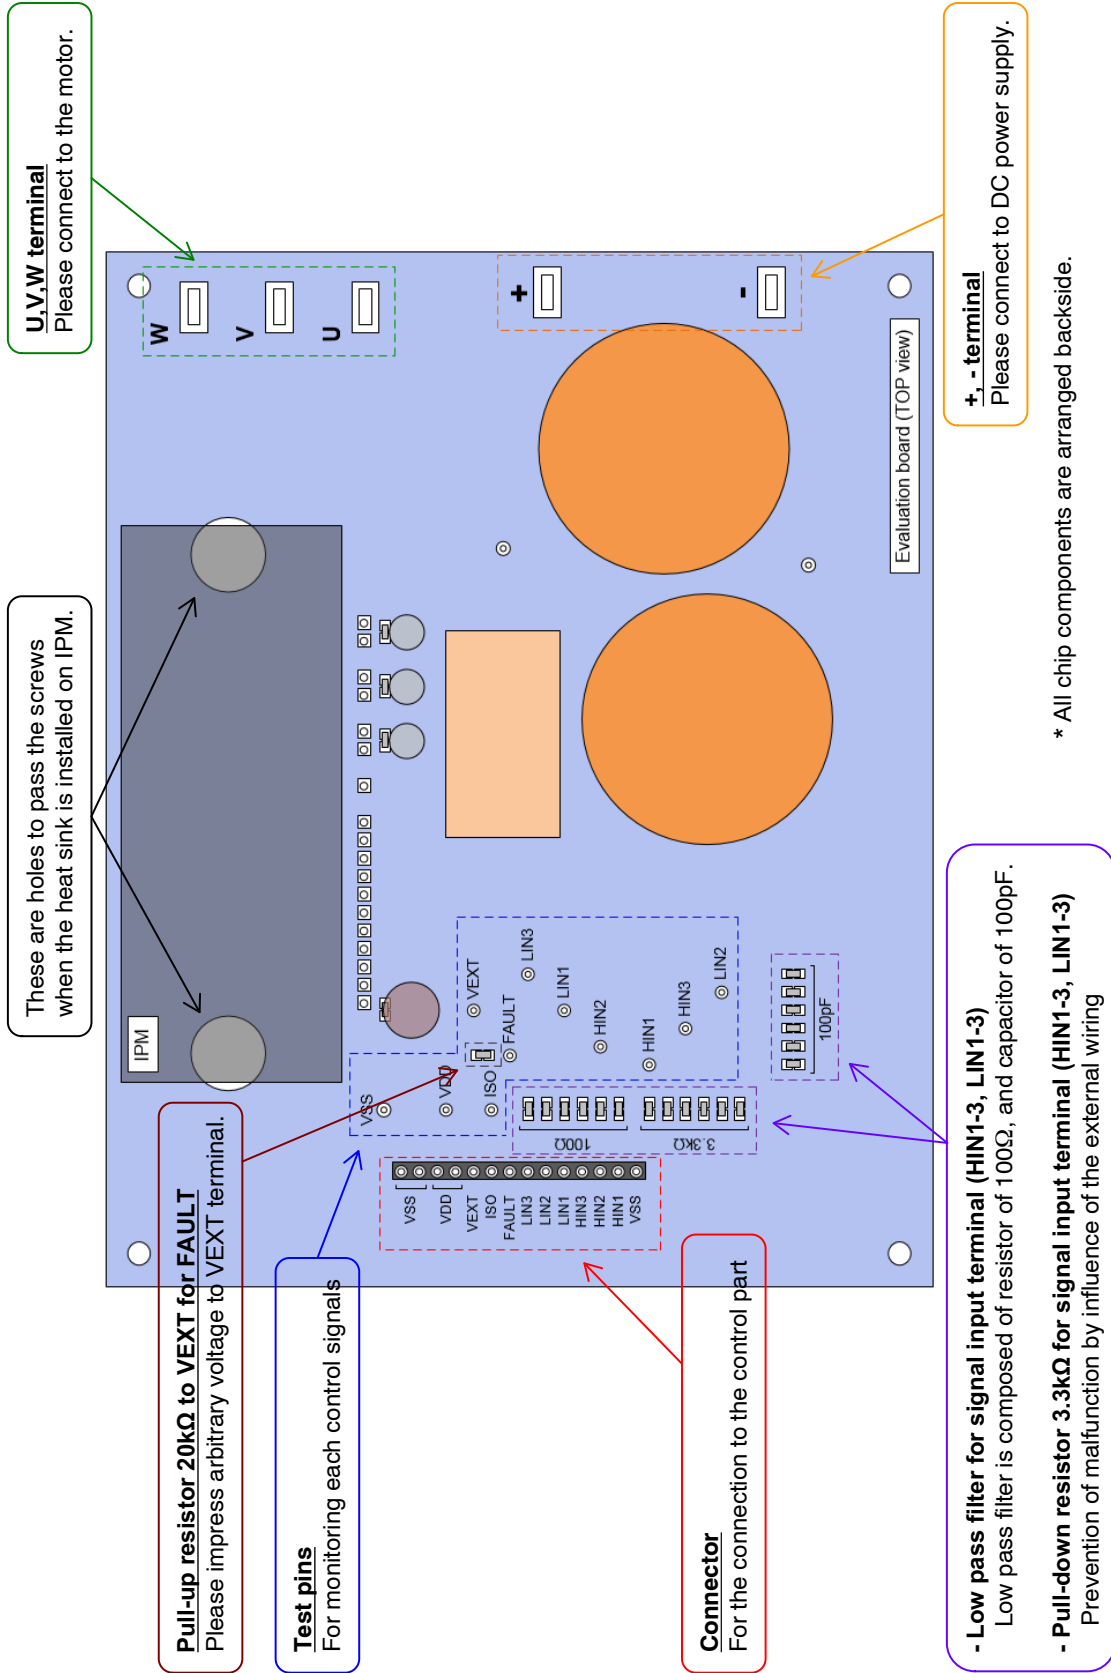


Figure 3. Description of Each Pin

# STK581U3C2DGEVB

## OPERATION PROCEDURE

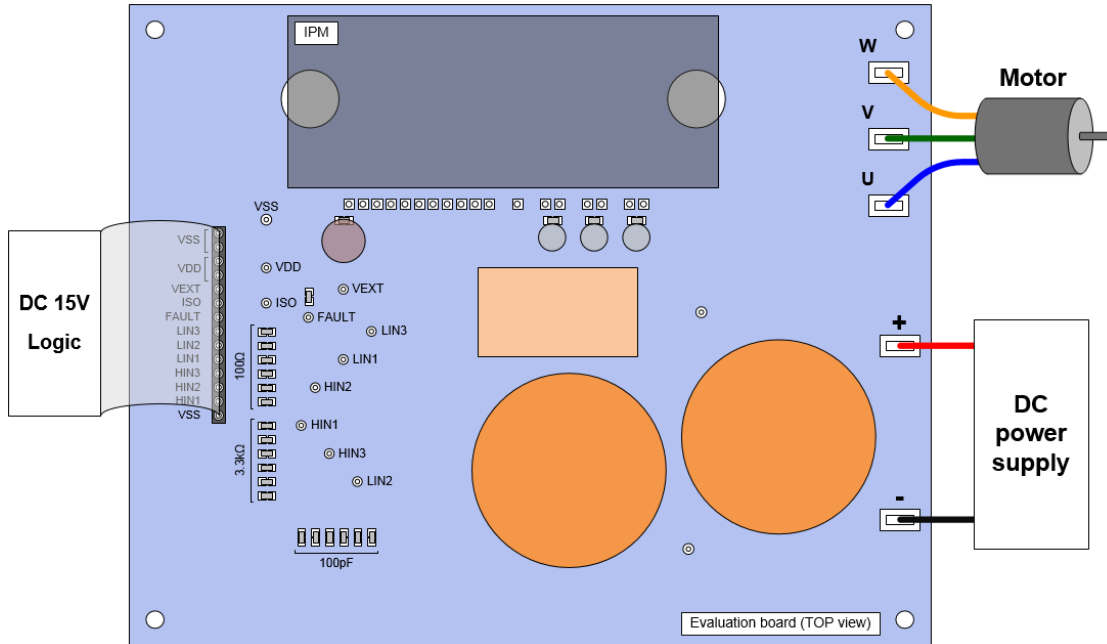


Figure 4.

**Step 1:** Please connect IPM, each power supply, logic parts, and the motor to the evaluation board, and confirm that each power supply is OFF at this time.

**Step 2:** Please impress the power supply of DC 15 V.

**Step 3:** Please perform a voltage setup according to specifications, and impress the power supply between the “+” and the “-” terminal.

**Step 4:** By inputting signal to the logic part, IPM control is started. (Therefore, please set electric charge to the boot-strap capacitor of upper side to turn on lower side IGBT before running.)

**NOTE:** When turning off the power supply part and the logic part, please carry out in the reverse order to above steps.

# STK581U3C2DGEVB

## LAYOUT

Length: 116 mm  
Side: 145 mm  
Thickness: 1.6 mm

Rigid double-sided substrate (Material: FR-4)  
Both sides resist coating  
Copper foil thickness: 70  $\mu\text{m}$

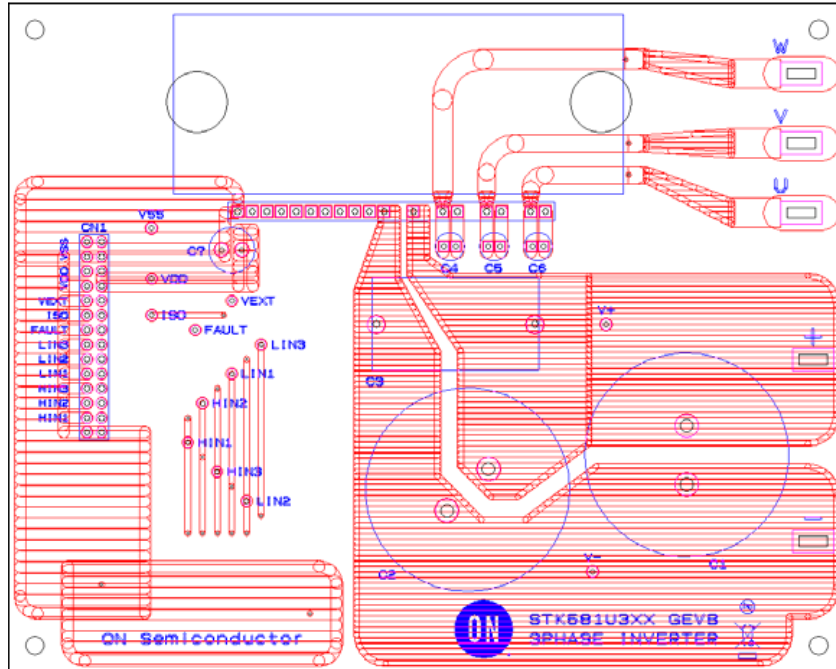


Figure 5. Layout (Top View) – Surface

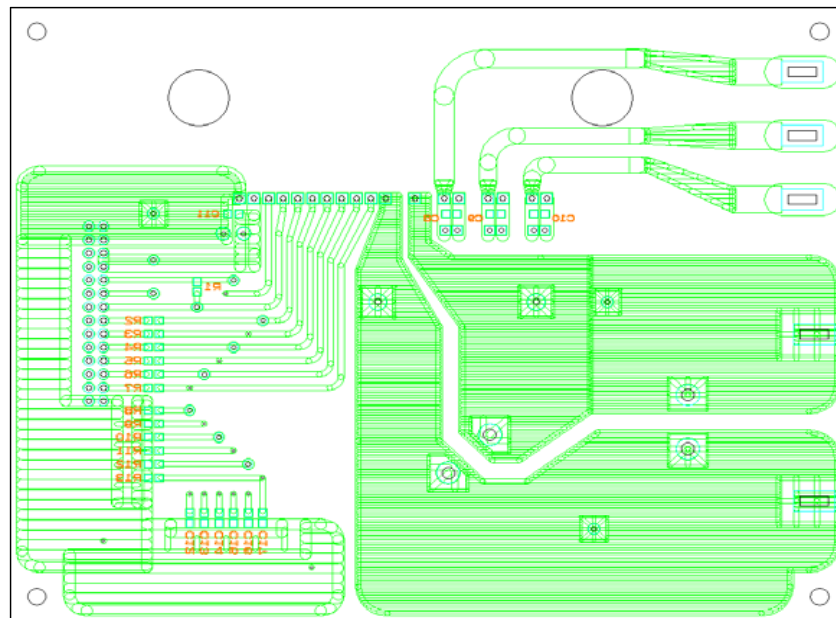


Figure 6. Layout (Top View) – Back Side

# STK581U3C2DGEVB

## BILL OF MATERIALS

**Table 2. EVALUATION BOARD BILL OF MATERIALS**

Components	Symbol	SMD	DIP	Manufacturer	Part Number	Specification	Supplement	
Resistor	R1	1		KOA	RK73H1JTDD2002F	20 k $\Omega$ / 0.1 W / $\pm$ 1%	Chip (1608 size)	Fault pull-up
	R2 - R7	6		KOA	RK73H1JTDD1000F	100 $\Omega$ / 0.1 W / $\pm$ 1%	Chip (1608 size)	Signal input low pass filter
	R8 - R13	6		KOA	RK73H1JTDD3301F	3.3 k $\Omega$ / 0.1 W / $\pm$ 1%	Chip (1608 size)	Signal input pull-down
Capacitor	C1, C2		2	Nippon Chemi-Con	EKMM451VSN471MA50S	470 $\mu$ F / 450 V / $\pm$ 20%	Aluminum electrolytic capacitor	Plus-Minus
	C3		1	PANASONIC	ECQE6225JT	2.2 $\mu$ F / 630 V / $\pm$ 5%	Film capacitor	Plus-Minus, Snubber
	C4-C6		3	Nippon Chemi-Con	EKMG350ELL470ME11D	47 $\mu$ F / 35 V / $\pm$ 20%	Aluminum electrolytic capacitor	VBx - VSx
	C7		1	Nippon Chemi-Con	EKMG350ELL221MHB5D	220 $\mu$ F / 35 V / $\pm$ 20%	Aluminum electrolytic capacitor	VDD-VSS
	C8 - C11	4		MURATA	GRM188B31H104K	0.1 $\mu$ F / 50 V / $\pm$ 10%	Chip (1608 size)	VBx - Vsx, VDD-VSS
	C12 - C17	6		MURATA	GRM1882C1H101J	100 pF / 50 V / $\pm$ 5%	Chip (1608 size)	Signal input low pass filter
Connector	CN1		1	HIROSE ELECTRIC	A2-14PA-2.54DSA(71)	14 pin / 2.54 pitch		
Pin (S)	VSS, VDD, VEXT, ISO, FAULT, HIN1-3, LIN1-3, V+, V-		13	Mac8	ST-1-3			
Pin (L)	U, V, W, +, -		5				Faston terminal (Tab)	
IC	IC1		1	ON Semiconductor	STK581U3C2D-E	SIP3 / 1shunt		
	Total	23	27					

# STK581U3C2DGEVB

## Heat Sink Mounting

NOTE: When mounting the heat sink on IPM, first, tighten the screws roughly by temporary maintaining the balance of left and right. Next, tighten both screws gradually alternately until the end.

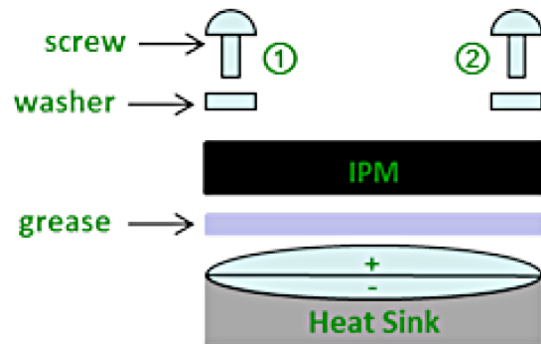


Figure 7. Mount HIC on a Heat Sink

Table 3.

Item	Recommended Condition
Pitch	70.0 ± 0.1 mm (Please refer to Package Outline Diagram)
Screw	Diameter: M4 Bind machine screw, Truss machine screw, Pan machine screw
Washer	Plane washer The size is D = 9 mm, d = 4.2 mm and t = 0.8 mm (Figure 8) JIS B 1256
Heat Sink	Material: copper or Aluminum Warpage (the surface that contacts IPM): -50 ~ 100 μm Screw holes must be countersunk. No contamination on the heat sink surface that contacts IPM.
Torque	Final tightening: 0.79 ~ 1.17 Nm Temporary tightening: 20 ~ 30% of final tightening
Grease	Silicon grease Thickness: 100 ~ 200 μm Uniformly apply silicon grease to whole back. (Figure 9)

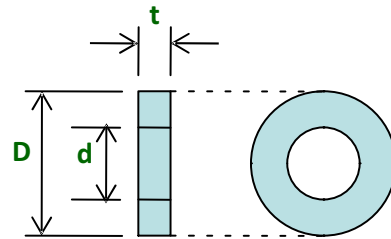


Figure 8. Size of Washer

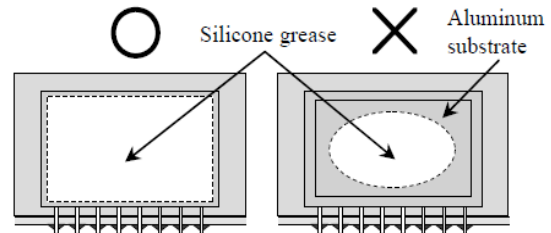



Figure 9. About Uniformly Application

ON Semiconductor and the  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А