

# Amphenol<sup>®</sup> Heavy Duty Cylindrical Connectors

12-052-9



**MIL-C-22992**  
**Class L, QWLD**

---

**Amphenol**

---

Inside Cover is Blank

| <b>Table of Contents</b>   | <b>Page</b> |
|--|-------------|
| Amphenol® Heavy Duty Cylindrical Connectors, MIL-C-22992/Proprietary       |             |
| Design Characteristics, Environmental Testing                              | 1           |
| Heavy Duty Cylindrical Connectors  |             |
| MIL-C-22992, Class L   |             |
| General Information, Design Features                                       | 2, 3        |
| How to Order   | 4           |
| Contact Arrangements   | 5, 6        |
| Alternate Insert Rotations   | 7           |
| MS90555 Wall Mount Receptacle (power source)                               | 8           |
| MS90556 Straight Plug  | 9           |
| MS90557 Cable Connecting Receptacle without coupling ring                  | 10          |
| MS90558 Wall Mount Plug with coupling ring (equipment end)                 | 11          |
| Accessories - Contacts   | 12          |
| Accessories - Contact Bushing/Removal Tool                                 | 13          |
| Accessories - Cable Strain Relief/Cable Sealing Gland                      | 14          |
| Accessories - Protective Covers  | 15          |
| Installation Instructions  | 16-19       |
| Heavy Duty Cylindrical Connectors  |             |
| MIL-C-22992, QWLD  |             |
| General Information, Design Features                                       | 21          |
| How to Order   | 22          |
| MIL-C-22992, QWLD Insert Arrangement Charts                                | 23, 24      |
| QWLD Special Insert Arrangement Chart                                      | 25          |
| Alternate Insert Rotations   | 26          |
| MIL-C-22992, QWLD Contact Arrangements                                     | 27-38       |
| QWLD Special Contact Arrangements  | 39-47       |
| QWLD Thermocouple Contact Arrangements                                     | 48-52       |
| MS17343 or 10-1940XX Wall Mount Receptacle                                 | 53          |
| MS17345 or 10-1941XX Cable Connecting Plug                                 | 54          |
| MS17346 or 10-1942XX Box Mount Receptacle                                  | 55          |
| MS17347 or 10-1943XX Jam Nut Receptacle (Wall Mount)                       | 56          |
| 10-1944XX Thru-Bulkhead Receptacle   | 57          |
| MS17344 or 10-1946XX Straight Plug   | 58          |
| MS17348 or 10-1949XX Jam Nut Receptacle (Box Mount)                        | 59          |
| Accessories - M85049/X or 10-522958 Cable Sealing Adapters (Plug)          | 60-63       |
| Accessories - M85049/X or 10-524959 Cable Sealing Adapters (Receptacle)    | 64-67       |
| Accessories - Cable Clamp, Adapter   | 68, 69      |
| Accessories - Protective Covers  | 70, 71      |
| Accessories - Sealing Gaskets  | 72          |
| Accessories - Encapsulation Adapter  | 73          |
| Accessories - Encapsulation End Bell                                       | 74          |
| MS Solder Contacts   | 75          |
| Solderless Crimp Contacts  | 76          |
| Application Tools (Crimp Type)   | 77          |
| Heavy Duty Cylindrical Connectors  |             |
| Proprietary, QWL Series  |             |
| General Information, Design Features, (References Amphenol Catalog 12-053) | 78          |
| Sales Office Listing   |             |

Amphenol Aerospace is a Certified ISO 9001 Manufacturer

This catalog covers Amphenol® Heavy Duty/ Power Connectors covered by MIL-C-22992.

The first section covers Class L Power Connectors, complete with insert arrangements, accessories and assembly instructions.

The second part covers our QWLD Heavy Duty Connectors. This second part is made up of 3 sections, including QWLD insert arrangements, connector shell styles and accessories.

If more information is needed concerning our Heavy Duty/Power Connectors, please contact:

Amphenol Corporation  
Amphenol Aerospace  
40-60 Delaware Avenue  
Sidney, New York 13838-1395  
Telephone: 607-563-5011  
Fax: 607-563-5157

This catalog and other product literature from Amphenol Aerospace and Amphenol Industrial Operations can be viewed, saved, and down-loaded from our website: [www.amphenol-aerospace.com](http://www.amphenol-aerospace.com).

Due to space limitations, metric equivalents of dimensional data in this catalog have not been included. All dimensions given may be converted to the metric system by the standard formula; Dimension (inches) x 25.40 = dimension (millimeters).

# Amphenol® Heavy Duty Cylindrical Connectors MIL-C-22992/Proprietary

- High Current Capacity
- Rugged Construction
- Safety
- Serviceability

Amphenol meets the demands for heavy duty connectors by providing three cylindrical connector series, each with unique design characteristics for reliable operation in specific industrial environments.

**Class “L”** – for the heaviest electrical loads (Pages 2 – 19)

- Current range from 40 to 200 amperes
- Direct current or single/three phase, 60/400 Hertz alternating current
- Automatic grounding for safety
- MIL-C-22992 qualification

**QWLD** – for most power and control circuits (Pages 21 – 77)

- Military (MIL-C-22992) qualified connectors and industrial equivalents available
- Increased shell size for greater durability than similar standard connectors

**QWL** – a more compact heavy duty design for industrial power and control applications (Page 78, references Amphenol Catalog 12-053)

These three series share the following common characteristics which are critical to reliable heavy duty connectors:

- Resistance to the operating environment. Refer to environmental data, below.
- Double stub coupling threads for faster connections; no cross threading, easy cleaning.
- Left hand accessory threads to minimize cable twisting, wire breakage, accidental connector disassembly.
- Gaskets or O-rings at appropriate surfaces for perfect weathertight connections.

Amphenol® heavy duty connectors have been exposed to the following environmental conditions, without compromise of mechanical integrity or degradation of electrical performance.



| Condition                                      | Configuration     | Description   | Reference                                   |
|--|-------------------|---|---|
| Thermal Shock                                  | Unmated           | Five complete one hour temperature cycles of -55°C to +125°C  | MIL-STD-1344, method 1003, test condition A |
| Moisture Resistance (Cable mounted connectors) | Mated             | Ten complete 24 hour cycles of +25°C to +65°C temperature at 90% to 98% humidity                              | MIL-STD-202, method 106                     |
| Durability                                     | Mated             | 500 complete mating/unmating cycles   | MIL-C-22992                                 |
| Salt Spray (Corrosion)                         | Unmated           | 48 hour exposure to atomized 5% saline solution at +35°C  | MIL-STD-1344, method 1001                   |
| Vibration                                      | Mated             | 10 to 55 Hz, .06 inch total excursion in 1 minute cycles for 6 hours, 55 to 2000 Hz, 10G peak amplitude sweep | MIL-STD-1344, method 2005                   |
| High Impact                                    | Mated             | Nine hammer blows from 1, 3 and 5 feet, three each in three axes on mounting panel                            | MIL-STD-202, method 207                     |
| Heat Rise (Class L only)                       | Mated             | Maximum rated DC current for four hours at +25°C in still air   | MIL-C-22992                                 |
| Fluid Immersion                                | Unmated           | 20 hours immersion in hydraulic fluid and lubricating oil   | MIL-C-22992                                 |
| Water Immersion                                | Mated and Unmated | 4 hours immersion at 1 atmosphere pressure differential   | MIL-C-22992                                 |

# Amphenol® Heavy Duty Cylindrical Connectors

## MIL-C-22992, Class L



The Amphenol® Class L\* heavy duty connectors are the largest size cylindricals, highly suitable for industrial or military applications, and designed to meet the demands of heavy power interconnections.

The design features of this connector series provide:

- **Greatest Capacity** - current ranges 40 to 200 amps, conductor sizes 6 to 4/0
- **Safety** - complete protection of personnel and equipment if connectors are inadvertently disconnected under load
- **Foolproof Mating** - design incorporates specific voltage, current, frequency, phase and grounding requirements
- **Standardization** - MIL-C-22992 Class L insert arrangements specify connector/cable combinations for maximum reliability
- **Serviceable Contacts** - contacts are normally crimped to the cable before connector assembly. No insertion tools required. Bushings are available to adapt smaller diameter wires to larger contacts

\* Amphenol design is covered by one or more of the following U. S. Patent Numbers: 3,023,396; 3,221,292.

# Amphenol® Heavy Duty Cylindrical Connectors MIL-C-22992, Class L

Class L connectors are available only in the specific configurations prescribed by MIL-C-22992 for either military or industrial applications. This rigid configuration control assures correct interconnection of electrical circuits for maximum safety and reliability. Controlled parameters include:

**Connector shell style and contact type** - wall mount and cable connecting receptacles are supplied with socket contacts only and always lead from the power source. Plugs (with coupling rings) have pin contacts only and always lead to the equipment end.

**Shell size** - the direct relationship of shell size to current carrying capability reduces the possibility of inadequate wiring for heavy electrical loads.†

| Shell Size | Current Rating (Amperes) | Contact Size |
|------------|--------------------------|--------------|
| 28         | 40                       | 6            |
| 32         | 60                       | 4            |
| 44         | 100                      | 1/0          |
| 52         | 200                      | 4/0          |

**Keyway position** - four positions of the main keyway are used to discriminate between the following power sources:

- two wire D.C
- two wire single phase A.C.
- three wire single phase A.C.
- four wire three phase A.C.

**Insert rotation** - when carrying alternating current (A.C), different angular rotations of the insert within the connector shell are used to distinguish between 60 Hertz and 400 Hertz circuits.

## Other outstanding design features:

**Arc quenching design** - recessed socket contacts within the insert create an arc suppressing chamber which protects the user when connectors are separated under load.

**Programmed coupling sequence** - grounding and neutral contacts engage before power contacts.

**Waterproof design** - a unique combination of grommets and seals provides waterproofing in any condition - mated or unmated, capped or uncapped.

**Rugged construction** - machined from high strength aluminum. Straight-line attachment of accessories eliminates possibility of cable twisting or misalignment.

**Accessories** - supplied with all Class L connectors as indicated on the individual connector descriptions. Replacement accessories may be ordered separately. See pages 12 through 15.

† MIL-C-22992 includes shell size 48, rated at 150 amperes. Consult your local Amphenol sales representative or Amphenol, Sidney, NY for availability.

# MIL-C-22992, Class L

## how to order

Connectors are supplied with removable contacts unassembled and applicable accessories as listed in the individual connector style descriptions, pages 8 through 11. Additional/replacement contacts or accessories may be ordered by their MS designations.

Connectors are ordered by MS designation. To illustrate the ordering procedure, part number MS90555 C32412SY is shown as follows:

PART NUMBER  
MS90555   C   32   4   12   S   Y  
 1            2    3    4    5    6    7

**1. MS Number -**

- MS90555 designates wall mount receptacle (*power source*)
- MS90556 designates straight plug
- MS90557 designates cable connecting receptacle without coupling ring
- MS90558 designates wall mount plug with coupling ring (*equipment end*)

**2. Shell Finish - C** (conductive) for AC or N (nonconductive) for DC circuits.

**Grounding Assemblies: Finish C**

| Shell Size | Current Rating Amps | Shell Master Key/Keyway Position |             |             |             |             |             |          |
|------------|---------------------|----------------------------------|-------------|-------------|-------------|-------------|-------------|----------|
|            |                     | 60Hz & 400Hz                     |             |             |             |             |             |          |
|            |                     | 1 Phase                          |             | 3 Phase     |             |             |             |          |
|            |                     | 2 Wire                           |             | 3 Wire      | 4 Wire      |             |             |          |
|            | 120 VAC             | 240 VAC                          | 120/240 VAC | 450/480 VAC | 120/208 VAC | 240/416 VAC | 277/480 VAC |          |
| 28         | 40                  | 4 (120°)                         | 5 (135°)    | 4 (120°)    | ---         | 4 (120°)    | 5 (135°)    | 6 (150°) |
| 32         | 60                  | 4 (120°)                         | 5 (135°)    | 4 (120°)    | ---         | 4 (120°)    | 5 (135°)    | 6 (150°) |
| 44         | 100                 | 4 (120°)                         | ---         | 4 (120°)    | 1 (60°)     | 4 (120°)    | 5 (135°)    | 6 (150°) |
| 52         | 200                 | ---                              | ---         | 4 (120°)    | ---         | 4 (120°)    | 5 (135°)    | 6 (150°) |

**Non-grounding Assemblies: Finish N**

| Shell Size | Current Rating Amps | Shell Master/Keyway Position |
|------------|---------------------|------------------------------|
|            |                     | DC                           |
|            |                     | 2 Wire                       |
|            |                     | 28 VDC                       |
| 28         | 40                  | N (105°)                     |
| 32         | 60                  | N (105°)                     |
| 44         | 100                 | N (105°)                     |
| 52         | 200                 | N (105°)                     |

**3. Shell Size -** related directly to current carrying capability.


- Size 28 - 40 amperes
- Size 32 - 60 amperes
- Size 44 - 100 amperes
- Size 52 - 200 amperes

**4. Master Key/Keyway Position - N** designates normal position. Positions 1, 4, 5 and 6 of the master key/keyway prevent cross-mating of incompatible voltages. Refer to the adjacent illustration.

**5. Insert Arrangement -** determined by connector size (current carrying capability) and cable configuration to be accommodated. Refer to pages 5 & 6.

**6. Contact Type - P** for pin, **S** for socket. MS90555 and MS90557 are supplied with socket contacts **only**. MS90556 and MS90558 are supplied with pin contacts **only**.

**7. Alternate Insert Rotation -** used to prevent cross-mating of incompatible frequencies. Absence of a letter in this space indicates normal (0°) position of the insert. Refer to page 7.

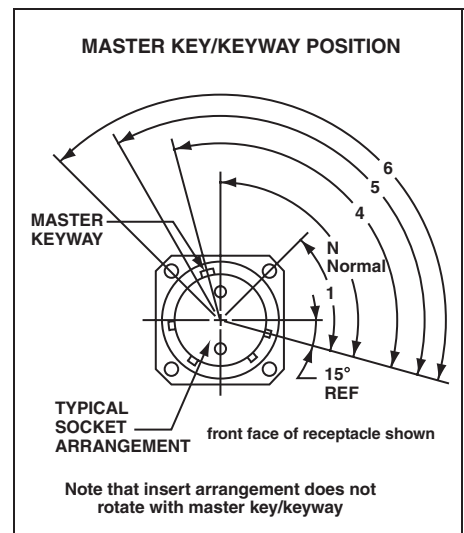

Amphenol Federal Vendor Identification  
 FSCM77820



# MIL-C-22992, Class L contact arrangements

## Shell Size 28, 40 amp rating



28-12, 28-13  
Three phase AC, 4 wire, grounding

### Cable:

|       |  |
|-------|--|
| 28-12 | IPCEA, type G, round, four #8 conductors   |
| 28-13 | CO-04 HDF, (4/6-4/12R) 1090 per MIL-C-3432 |

### Contacts:

| Position | Size | Pin<br>M39029/48 | Socket<br>M39029/49 |
|----------|------|------------------|---------------------|
| A, B, C  | 6    | -317             | -329                |
| N, G     | 6N   | -318             | -329                |

## Shell Size 32, 60 amp rating



32-04, 32-05  
Single phase AC, 2 wire, grounding

### Cable:

|       |   |
|-------|---|
| 32-04 | IPCEA, type G, round, two #6 conductors   |
| 32-05 | CO-02 HDF, (2/4-2/8R) 1100 per MIL-C-3432 |

### Contacts:

| Position | Size | Pin<br>M39029/48 | Socket<br>M39029/49 |
|----------|------|------------------|---------------------|
| A        | 4    | -320             | -331                |
| N        | 4N   | -321             | -331                |
| G1, G2   | 6N   | -318             | -329                |

## Shell Size 32, 60 amp rating



32-12, 32-13  
Three phase AC, 4 wire, grounding

### Cable:

|       |  |
|-------|--|
| 32-12 | IPCEA, type G, round, four #6 conductors   |
| 32-13 | CO-04 HDF, (4/4-4/12R) 1290 per MIL-C-3432 |

### Contacts:

| Position | Size | Pin<br>M39029/48 | Socket<br>M39029/49 |
|----------|------|------------------|---------------------|
| A, B, C  | 4    | -320             | -331                |
| N        | 4N   | -321             | -331                |
| G        | 6N   | -318             | -329                |

## Shell Size 44, 100 amp rating



44-02, 44-03  
28 Volts DC, 2 wire

### Cable:

|       |   |
|-------|---|
| 44-02 | IPCEA, type W, round, two #2 conductors |
| 44-03 | CO-02 HDF, (2/1) 1385 per MIL-C-3432    |

### Contacts:

| Position | Size   | Pin<br>M39029/48 | Socket<br>M39029/49 |
|----------|--------|------------------|---------------------|
| A        | 1/0-1  | -323             | -333                |
| N        | 1/0N-1 | -324             | -333                |

# MIL-C-22992, Class L contact arrangements

## Shell Size 44, 100 amp rating



44-12, 44-13  
Three phase AC, 4 wire, grounding

### Cable:

|       |   |
|-------|---|
| 44-12 | IPCEA, type G, round, four #2 conductors  |
| 44-13 | CO-04 HDF, (4/1-4/8R) 1620 per MIL-C-3432 |

### Contacts:

| Position       | Size   | Pin<br>M39029/48 | Socket<br>M39029/49 |
|----------------|--------|------------------|---------------------|
| A, B, C        | 1/0-1  | -323             | -333                |
| N              | 1/0N-1 | -324             | -333                |
| G1, G2, G3, G4 | 6G     | -319             | -330                |

## Shell Size 44, 100 amp rating For Navy Ground Support Equipment use only.



44-50, 44-51, 44-52, 44-56  
Three phase AC, 3 wire, grounding

|       |  |
|-------|--|
| 44-50 | Available in MS90555 & MS90558 only<br>4 each # 1 conductors |
|-------|--|

### Cable:

|       |  |
|-------|--|
| 44-51 | Available in MS90556 & MS90557 only<br>IPCEA, type W, round, four # 1 conductors |
| 44-52 | Available in MS90556 only<br>IPCEA, type W, round, four # 2 conductors           |
| 44-56 | Available in MS90556 only<br>IPCEA, type W, round, four # 6 conductors           |

### Contacts:

| Position | Size   | Pin<br>M39029/48 | Socket<br>M39029/49 |
|----------|--------|------------------|---------------------|
| A, B, C  | 1/0-1  | -323             | -333                |
| G        | 1/0N-1 | -324             | -333                |

## Shell Size 52, 200 amp rating



52-12, 52-13  
Three phase AC, 4 wire, grounding

### Cable:

|       |  |
|-------|--|
| 52-12 | IPCEA, type G, round, four #4/0 conductors   |
| 52-13 | CO-04 HDE, (4/0000-4/4R) 2380 per MIL-C-3432 |


### Contacts:

| Position       | Size | Pin<br>M39029/48 | Socket<br>M39029/49 |
|----------------|------|------------------|---------------------|
| A, B, C        | 4/0  | -327             | -335                |
| N              | 4/0N | -328             | -335                |
| G1, G2, G3, G4 | 4G   | -322             | -332                |

# MIL-C-22992, Class L alternate insert rotations

To avoid cross-plugging problems in applications requiring the use of more than one connector of the same size and arrangement, alternate insert rotations are available as indicated in the accompanying chart.

As shown in the diagram below, the front face of the pin insert is rotated within the shell in a clockwise direction from the normal shell key. The socket insert would be rotated counterclockwise the same number of degrees in respect to the normal shell key.

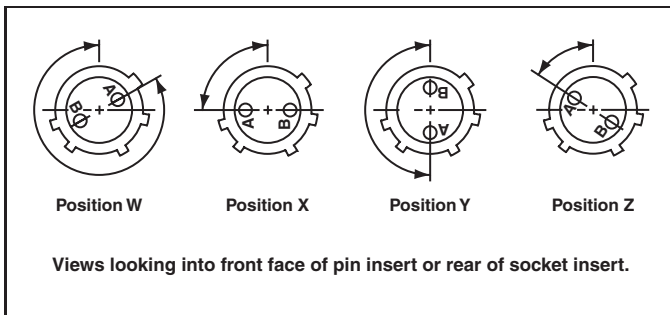

| Insert Arrangements | Keying Position<br>(degrees from normal position) |        |    |     |    |
|---------------------|---|--------|----|-----|----|
|                     | DC or 60 Hz<br>Normal                             | 400 Hz |    |     |    |
|                     |   | W      | X  | Y   | Z  |
| 28-12               | 0   | –      | –  | 180 | –  |
| 28-13               | 0   | –      | –  | 180 | –  |
| 32-04               | 0   | –      | 90 | –   | –  |
| 32-05               | 0   | –      | 90 | –   | –  |
| 32-12               | 0   | –      | –  | 180 | –  |
| 32-13               | 0   | –      | –  | 180 | –  |
| 44-12               | 0   | –      | –  | –   | 60 |
| 44-13               | 0   | –      | –  | –   | 60 |
| 44-50               | 0   | –      | –  | –   | –  |
| 44-51               | 0   | –      | –  | –   | –  |
| 44-52               | 0   | –      | –  | –   | –  |
| 44-56               | 0   | –      | –  | –   | –  |
| 52-12               | 0   | 300    | –  | –   | –  |
| 52-13               | 0   | 300    | –  | –   | –  |

# MIL-C-22992, Class L MS90555

wall mount receptacle (*power source*)



All dimensions for reference only.


| Shell Size | A Thread Class 2A .1428P-.2857L Double Stub | F* ±.031 | G Dia. +.006 -0.010 | H ±.005 | J +.016 -0.000 | N Dia. +.011 -0.020 | R (BSC) | S +.021 -0.020 | T Dia. ±.005 |
|------------|---|----------|---------------------|---------|----------------|---------------------|---------|----------------|--------------|
| 28         | 2.000                                       | 1.376    | 1.938               | 1.514   | 2.188          | 2.000               | 1.844   | 2.375          | .177         |
| 32         | 2.250                                       | 1.376    | 2.188               | 1.514   | 2.188          | 2.250               | 2.062   | 2.625          | .209         |
| 44         | 3.000                                       | 1.438    | 3.062               | 1.733   | 2.532          | 3.125               | 2.812   | 3.375          | .281         |
| 52         | 3.500                                       | 1.438    | 3.562               | 1.733   | 2.532          | 3.625               | 3.156   | 3.875          | .281         |

To complete MS Part number see how to order, pg. 4.

Protective cover MS90563 is supplied as part of this connector assembly. Refer to page 15 for dimensions.

\*F dimension applies only when rear nut is fully tightened

# MIL-C-22992, Class L MS90556 straight plug

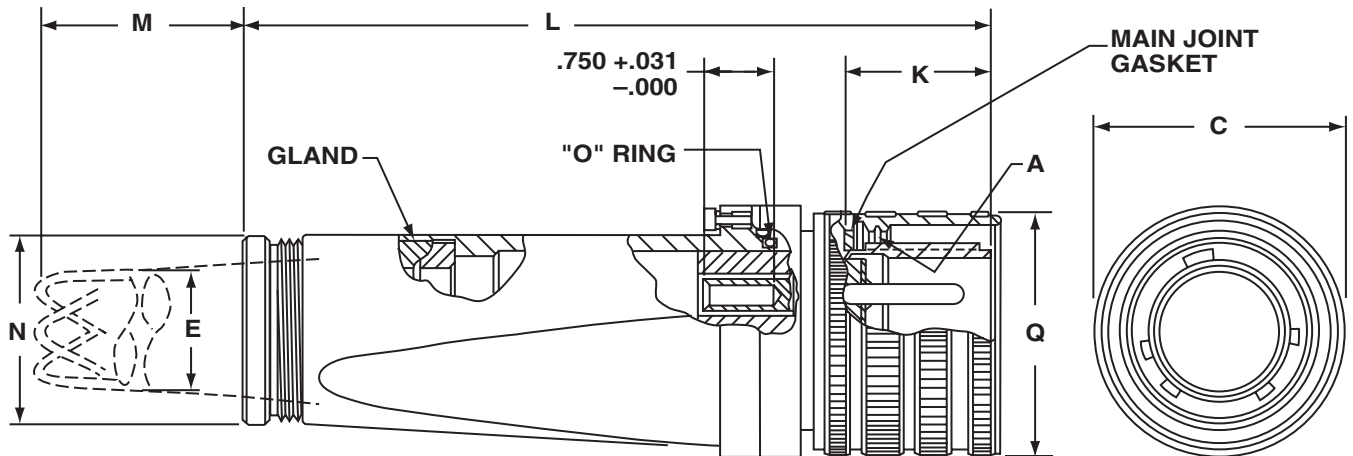

All dimensions for reference only.

| Shell Size and Arrangement | A Thread Class 2B .1428P-.2857L Double Stub | C Dia. Max | E Cable Range | K $\pm .005$ | L Max Free Length | M Approx. Free Length | N Dia $^{+.011}_{-.020}$ | Q Dia. Max |
|----------------------------|---|------------|---------------|--------------|-------------------|-----------------------|--------------------------|------------|
| 28-12                      | 2.000                                       | 2.439      | 1.047-.922    | 1.557        | 8.188             | 7.188                 | 2.000                    | 2.312      |
| 28-13                      |   |            | 1.130-1.005   |              |                   | 7.188                 |                          |            |
| 32-04                      | 2.250                                       | 2.689      | .969-.844     | 1.557        | 8.188             | 7.188                 | 2.000                    | 2.562      |
| 32-05, -12                 |   |            | 1.130-1.005   |              |                   | 7.188                 |                          |            |
| 32-13                      |   |            | 1.342-1.217   |              |                   | 8.688                 |                          |            |
| 44-02                      | 3.000                                       | 3.667      | 1.312-1.187   | 1.776        | 10.172            | 10.688                | 2.500                    | 3.531      |
| 44-03                      |   |            | 1.438-1.313   |              |                   | 9.688                 |                          |            |
| 44-12                      |   |            | 1.516-1.391   |              |                   | 10.688                |                          |            |
| 44-13                      |   |            | 1.672-1.547   |              |                   | 12.688                |                          |            |
| 44-51                      | 3.000                                       | 3.667      | 1.734-1.609   | 1.776        | 10.172            | 11.688                | 2.500                    | 3.531      |
| 44-52                      |   |            | 1.525-1.435   |              |                   | 11.188                |                          |            |
| 44-56                      |   |            | 1.135-1.065   |              |                   | 7.188                 |                          |            |
| 52-12                      | 3.500                                       | 4.167      | 2.328-2.183   | 1.776        | 11.109            | 17.188                | 3.250                    | 4.016      |
| 52-13                      |   |            | 2.453-2.308   |              |                   | 18.188                |                          |            |

To complete MS Part number see how to order, pg. 4.

Protective cover MS90564 is supplied as part of this connector assembly. Refer to page 15 for dimensions.

Contact brushings MS3348 are supplied as part of connector as required. Refer to page 13 for dimensions.

# MIL-C-22992, Class L MS90557

cable connecting receptacle *without coupling ring*



All dimensions for reference only.

| Shell Size and Arrangement | A Thread Class 2A .1428P-.2857L Double Stub | B ±.005 | C Dia. Max. | E Cable Range | L Max Free Length | M Approx. Free Length | N Dia +.011 -.020 |
|----------------------------|---|---------|-------------|---------------|-------------------|-----------------------|-------------------|
| 28-12                      | 2.000                                       | 1.514   | 2.439       | 1.047-.922    | 8.156             | 7.188                 | 2.000             |
| 28-13                      |   |         |             | 1.130-1.005   |                   | 7.188                 |                   |
| 32-04                      | 2.250                                       | 1.514   | 2.689       | .969-.844     | 8.156             | 7.188                 | 2.000             |
| 32-05, -12                 |   |         |             | 1.130-1.005   |                   | 7.188                 |                   |
| 32-13                      |   |         |             | 1.342-1.217   |                   | 8.688                 |                   |
| 44-02                      | 3.000                                       | 1.733   | 3.667       | 1.312-1.187   | 10.125            | 10.688                | 2.500             |
| 44-03                      |   |         |             | 1.438-1.313   |                   | 9.688                 |                   |
| 44-12                      |   |         |             | 1.516-1.391   |                   | 10.688                |                   |
| 44-13                      |   |         |             | 1.672-1.547   |                   | 12.688                |                   |
| 44-51                      |   |         |             | 1.734-1.609   |                   | 11.688                |                   |
| 52-12                      | 3.500                                       | 1.733   | 4.167       | 2.328-2.183   | 11.062            | 17.188                | 3.250             |
| 52-13                      |   |         |             | 2.453-2.308   |                   | 18.188                |                   |


To complete MS Part number see how to order, pg. 4.

Protective cover MS90563 is supplied as part of this connector assembly. Refer to page 15 for dimensions.

Contact bushings MS3348 are supplied as part of connector as required. Refer to page 13 for dimensions.

# MIL-C-22992, Class L MS90558

wall mount plug with coupling ring (*equipment end*)

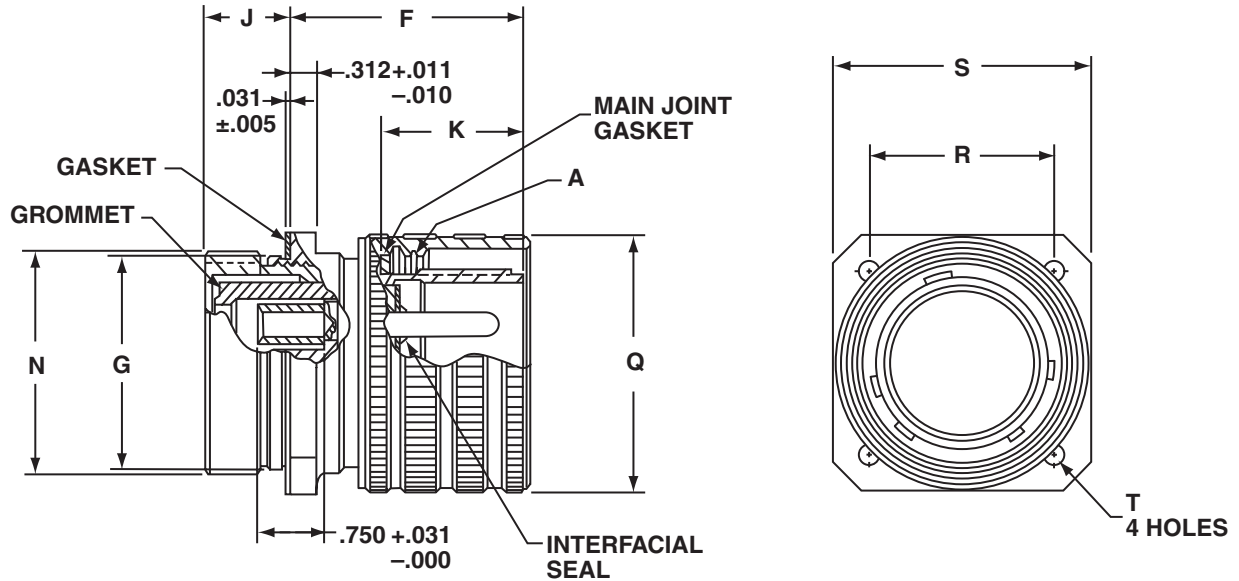

All dimensions for reference only.

| Shell Size | A Thread<br>Class 2B<br>.1428P-.2857L<br>Double Stub | J<br>$\pm .031$ | G<br>Dia<br>$+ .006 - .010$ | F*<br>$+ .016 - .000$ | K<br>$\pm .005$ | N<br>$+ .011 - .020$ | Q<br>Dia.<br>Max | R<br>(BSC) | S<br>$+ .021 - .020$ | T<br>Dia.<br>$\pm .005$ |
|------------|--|-----------------|-----------------------------|-----------------------|-----------------|----------------------|------------------|------------|----------------------|-------------------------|
| 28         | 2.000  | .959            | 1.938                       | 2.639                 | 1.557           | 2.000                | 2.312            | 1.844      | 2.375                | .177                    |
| 32         | 2.250  | .959            | 2.188                       | 2.639                 | 1.557           | 2.250                | 2.562            | 2.062      | 2.625                | .209                    |
| 44         | 3.000  | 1.021           | 3.062                       | 2.998                 | 1.776           | 3.125                | 3.531            | 2.812      | 3.375                | .281                    |
| 52         | 3.500  | 1.021           | 3.562                       | 2.998                 | 1.776           | 3.625                | 4.016            | 3.156      | 3.875                | .281                    |

To complete MS part number see how to order, pg. 4.


Protective cover MS90564 is supplied as part of this connector assembly. Refer to page 15 for dimensions.

\* F dimension applies only when rear nut is fully tightened.


# MIL-C-22992, Class L Accessories

## contacts

**M39029/48  
pin contact**

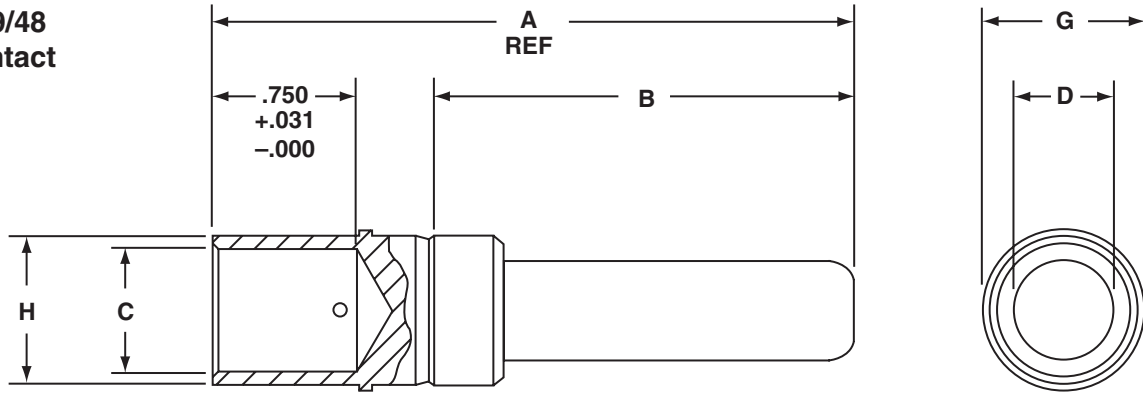

**M39029/49  
socket contact**

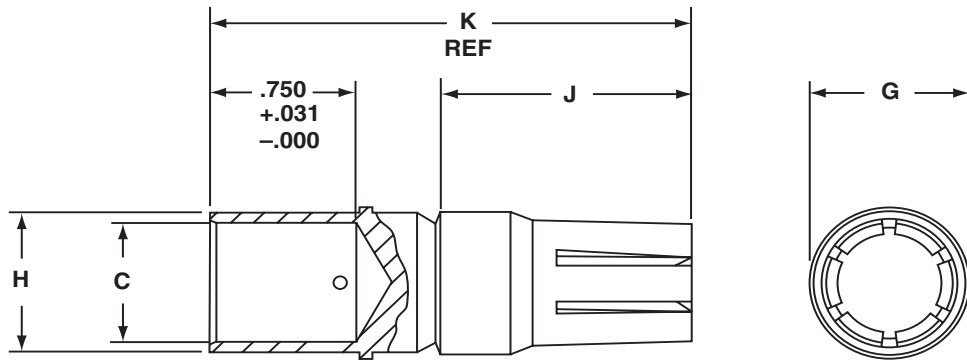

All dimensions for reference only.

| Socket MS Part Number* | Pin MS Part Number | Contact Size | Wire Well Size | A Ref. | B $\pm .005$ | C Dia                   | D Dia $\pm .001$ | G Dia           | H Dia                   | J $\pm .005$ | K Ref |
|------------------------|--------------------|--------------|----------------|--------|--------------|-------------------------|------------------|-----------------|-------------------------|--------------|-------|
| M39029/49-335          | M39029/48-327      | 4/0          | 4/0            | 3.207  | 2.097        | .641 $^{+.004}_{-.003}$ | .500             | .781 $\pm .003$ | .750 $^{+.004}_{-.003}$ | 1.283        | 2.393 |
| ---                    | M39029/48-328      | 4/0N         | 4/0            | 3.325  | 2.215        | .641 $^{+.004}_{-.003}$ | .500             | .781 $\pm .003$ | .750 $^{+.004}_{-.003}$ | ---          | ---   |
| M39029/49-333          | M39029/48-323      | 1/0          | 1              | 3.207  | 2.097        | .406 $^{+.004}_{-.003}$ | .357             | .609 $\pm .003$ | .506 $^{+.004}_{-.003}$ | 1.283        | 2.393 |
| ---                    | M39029/48-324      | 1/0N         | 1              | 3.325  | 2.215        | .406 $^{+.004}_{-.003}$ | .357             | .609 $\pm .003$ | .506 $^{+.004}_{-.003}$ | ---          | ---   |
| M39029/49-331          | M39029/48-320      | 4            | 4              | 2.786  | 1.738        | .281 $\pm .002$         | .225             | .417 $\pm .002$ | .374 $\pm .002$         | 1.158        | 2.206 |
| ---                    | M39029/48-321      | 4N           | 4              | 2.904  | 1.856        | .281 $\pm .002$         | .225             | .417 $\pm .002$ | .374 $\pm .002$         | ---          | ---   |
| M39029/49-329          | M39029/48-317      | 6            | 6              | 2.786  | 1.738        | .234 $\pm .002$         | .178             | .342 $\pm .002$ | .312 $\pm .002$         | 1/158        | 2.206 |
| ---                    | M39029/48-318      | 6N           | 6              | 2.904  | 1.856        | .234 $\pm .002$         | .178             | .342 $\pm .002$ | .312 $\pm .002$         | ---          | ---   |
| M39029/49-332          | M39029/48-322      | 4G           | 4              | 2.856  | 1.746        | .281 $\pm .002$         | .225             | .417 $\pm .002$ | .374 $\pm .002$         | 1.752        | 2.862 |
| M39029/49-330          | M39029/48-319      | 6G           | 6              | 2.856  | 1.746        | .234 $\pm .002$         | .178             | .342 $\pm .002$ | .312 $\pm .002$         | 1.752        | 2.862 |

\*Order by MS part number listed for either socket or pin.



# MIL-C-22992, Class L Accessories


## contact bushing/removal tool

### MS3348 contact bushing

All dimensions for reference only.

| MS Part Number* | Contact Wire Barrel Size (Ref) | Wire Size (Ref) | A Dia<br>+.010<br>-.003 | B Dia<br>+.002<br>-.003 |
|-----------------|--------------------------------|-----------------|-------------------------|-------------------------|
| MS3348-1 - 2L   | 1                              | 2               | .359                    | .396                    |
| MS3348-4 - 5L   | 4                              | 5               | .250                    | .272                    |
| MS3348-4 - 6L   | 4                              | 6               | .225                    | .272                    |
| MS3348-6 - 8L   | 6                              | 8               | .185                    | .225                    |
| MS3348-6 - 9L   | 6                              | 9               | .155                    | .225                    |
| MS3348-1 - 6L   | 1                              | 6               | .225                    | .396                    |
| MS3348-4 - 8L   | 4                              | 8               | .185                    | .272                    |
| MS3348-6 - 10L  | 6                              | 10              | .136                    | .225                    |
| MS3348-4/0-2/0L | 4/0                            | 2/0             | .500                    | .629                    |

\* Order by MS part number listed.

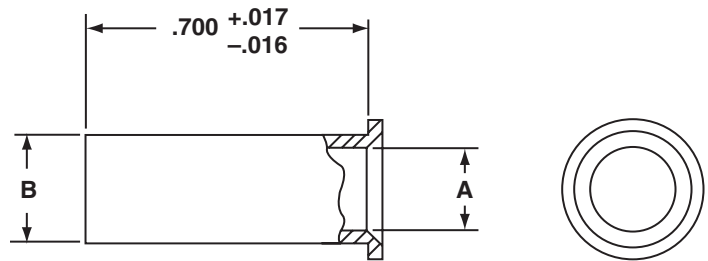


### MS90562 contact removal tool

All dimensions for reference only.

| MS Part Number* | Contact Size | A Dia<br>+.000<br>-.002 |
|-----------------|--------------|-------------------------|
| MS90562-1       | 4/0          | .790                    |
| MS90562-2       | 2/0          | .696                    |
| MS90562-3       | 1/0          | .558                    |
| MS90562-4       | 2            | .462                    |
| MS90562-5       | 4            | .376                    |
| MS90562-6       | 6            | .354                    |

\* Order by MS part number listed.

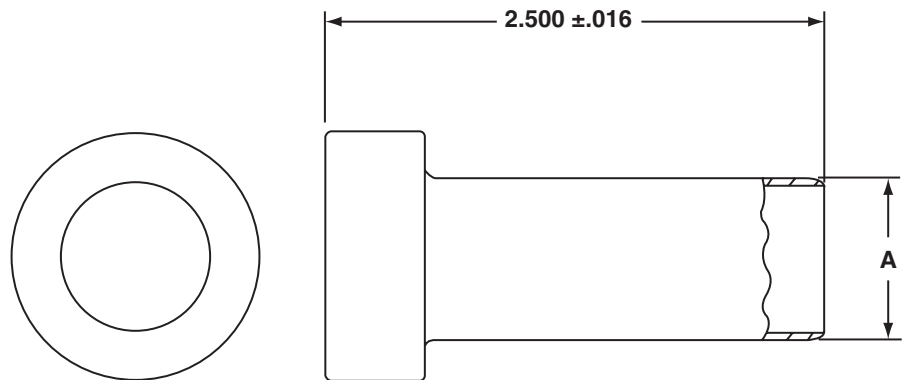

# MIL-C-22992, Class L Accessories


## cable strain relief/cable sealing gland

### MS90561 cable strain relief

All dimensions for reference only.

| MS Part Number* | Arrangement Number | A Dia<br>+.000<br>-.010 | H Dia<br>Cable Range |       | L<br>Approx. |
|-----------------|--------------------|-------------------------|----------------------|-------|--------------|
|                 |                    |                         | Max                  | Min   |              |
| MS90561-2       | 28-13,<br>32-12    | 1.797                   | 1.145                | 1.003 | 8.000        |
| MS90561-4       | 28-02, -04         | 1.797                   | .844                 | .688  | 7.500        |
| MS90561-12      | 28-12              | 1.797                   | 1.047                | .891  | 8.000        |
| MS90561-13      | 32-13              | 1.797                   | 1.342                | 1.185 | 9.500        |
| MS90561-15      | 44-12              | 2.235                   | 1.516                | 1.360 | 11.500       |
| MS90561-16      | 44-13              | 2.235                   | 1.688                | 1.531 | 13.500       |
| MS90561-17      | 52-12              | 2.922                   | 2.328                | 2.039 | 18.000       |
| MS90561-18      | 52-13              | 2.922                   | 2.500                | 2.211 | 19.000       |
| MS90561-19      | 44-51              | 2.235                   | 1.750                | 1.550 | 12.500       |
| MS90561-20      | 44-52              | 2.235                   | 1.578                | 1.375 | 12.000       |
| MS90561-21      | 44-56              | 2.235                   | 1.160                | 1.010 | 8.000        |

\* Order by MS part number listed.

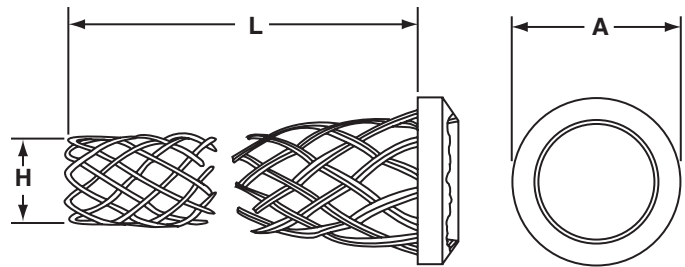

### MS23747 cable sealing gland

All dimensions for reference only.

| MS Part Number* | Arrangement Number   | A Dia<br>+.000<br>-.020 | B Dia<br>+.020<br>-.000 | C<br>±.010 | Min Cable Dia<br>Ref. |
|-----------------|----------------------|-------------------------|-------------------------|------------|-----------------------|
| MS23747-2       | 28-13,<br>32-05, -12 | 1.805                   | 1.130                   | 1.034      | 1.005                 |
| MS23747-12      | 28-12                | 1.805                   | 1.047                   | 1.034      | .922                  |
| MS23747-13      | 32-13                | 1.805                   | 1.342                   | 1.034      | 1.217                 |
| MS23747-14      | 44-03                | 2.242                   | 1.438                   | 1.160      | 1.313                 |
| MS23747-15      | 44-12                | 2.242                   | 1.516                   | 1.160      | 1.391                 |
| MS23747-16      | 44-13                | 2.242                   | 1.672                   | 1.160      | 1.547                 |
| MS23747-18      | 52-12                | 2.927                   | 2.328                   | 1.284      | 2.183                 |
| MS23747-19      | 52-13                | 2.927                   | 2.453                   | 1.284      | 2.308                 |
| MS23747-20      | 44-51                | 2.242                   | 1.734                   | 1.160      | 1.609                 |
| MS23747-21      | 44-52                | 2.242                   | 1.562                   | 1.160      | 1.437                 |
| MS23747-22      | 44-56                | 2.242                   | 1.150                   | 1.160      | 1.025                 |

\* Order by MS part number listed.

This gland must be used with MS90561 strain relief.



# MIL-C-22992, Class L Accessories


## protective covers

### MS90563 protective covers used with: MS90555 wall mount receptacle MS90557 cable connecting receptacle

All dimensions for reference only.

| MS Part Number* | Use with Shell Size | A Thread Class 2B .1428P-.2857L Double Stub | B Dia Ref   |             | C Approx. |
|-----------------|---------------------|---|-------------|-------------|-----------|
|                 |                     |   | For MS90555 | For MS90557 |           |
| MS90563-1( )    | 28                  | 2.000                                       | .177        | .177        | 6.000     |
| MS90563-3( )    | 32                  | 2.250                                       | .209        | —           | 4.500     |
| MS90563-4( )    | 32                  | 2.250                                       | —           | .177        | 6.000     |
| MS90563-7( )    | 44                  | 3.000                                       | .281        | .281        | 7.500     |
| MS90563-11( )   | 52                  | 3.500                                       | .281        | .281        | 7.500     |

\* To complete MS part number, add letter C (Conductive) for AC or N (Non-conductive) for DC connector assemblies.

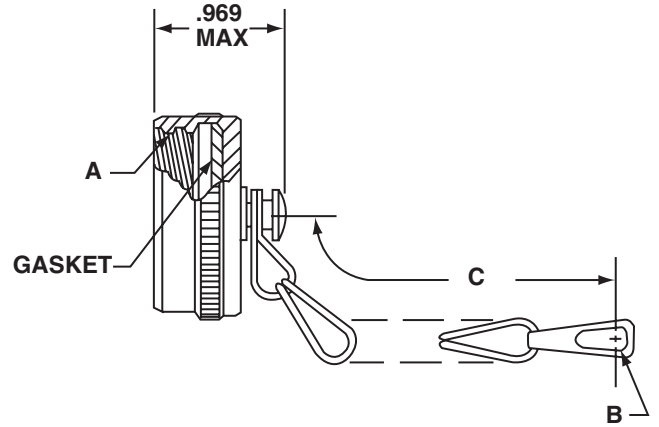


### MS90564 protective covers used with: MS90556 straight plug MS90558 wall mount plug

All dimensions for reference only.

| MS Part Number* | Use with Shell Size | A Thread Class 2A (Plated) .1428P-.2857L Double Stub | B Dia Ref   |             | C Approx. | J Max |
|-----------------|---------------------|--|-------------|-------------|-----------|-------|
|                 |                     |  | For MS90556 | For MS90558 |           |       |
| MS90564-1( )    | 28                  | 2.000  | .177        | .177        | 7.500     | 2.266 |
| MS90564-3( )    | 32                  | 2.250  | —           | .209        | 6.000     | 2.266 |
| MS90564-4( )    | 32                  | 2.250  | .177        | —           | 7.500     | 2.266 |
| MS90564-7( )    | 44                  | 3.000  | .281        | .281        | 8.500     | 2.484 |
| MS90564-11( )   | 52                  | 3.500  | .281        | .281        | 8.500     | 2.484 |

\* To complete MS part number, add letter C (Conductive) for AC or N (Non-conductive) for DC connector assemblies.

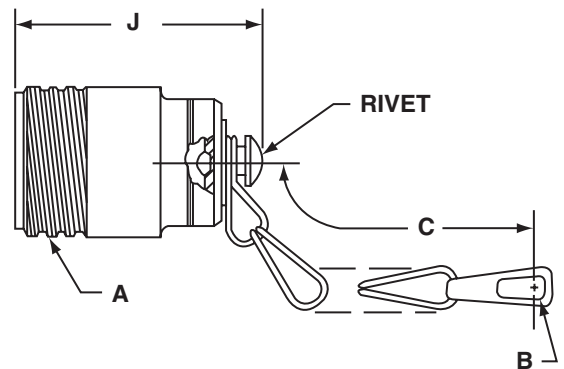

# MIL-C-22992, Class L installation instructions

Complete installation instructions (L-1014) for Class L connectors are available on request. Reproduced below are condensed assembly instructions to familiarize the user with the installation procedure and tooling required.

## Cable Preparation (MS90556 and MS90557 connectors only)

The following table shows the standard wire color coding, generator terminal markings, and connector contact identification used with Class L connectors.

**Standardized Generator Wiring and Connections**

| Generator Terminal Marking | Current | Contact Designation | Conductor Circuit | Wire Color                      |
|----------------------------|---------|---------------------|-------------------|---------------------------------|
| + (POS)                    | 28Vdc   | A                   | Positive          | Black                           |
| - (NEG) ground             | 28Vdc   | N                   | Negative          | White                           |
| L <sub>1</sub>             | AC      | A                   | Phase A           | Black                           |
| L <sub>2</sub>             | AC      | B                   | Phase B           | Red                             |
| L <sub>3</sub>             | AC      | C                   | Phase C           | Blue (Commercial may be orange) |
| L <sub>0</sub>             | AC      | N                   | Neutral           | White                           |
| G (or Gnd)                 | AC      | G                   | Safety grounding  | Green (Commercial may be bare)  |

**Step 1)** Determine cable lay to facilitate alignment of contacts and insert holes without wire crossing.

**Step 2)** Strip cable jacket to dimension shown. Avoid cutting or nicking individual conductor insulation.

| Connector Size | D Inches Approx. |
|----------------|------------------|
| 28             | 3.000            |
| 32             | 3.000            |
| 44             | 4.250            |
| 52             | 5.000            |



**Note**


Some insert arrangements require that two or more ground wires be terminated into one contact. Dimension D must therefore be increased to permit routing these wires around the larger conductors.

**Step 3)** Install connector components in the order shown in the applicable assembly view illustrated on pages 17 and 18.

**Step 4)** Strip insulation of individual conductors to 3/4 inch from end of conductor.

# MIL-C-22992, Class L installation instructions


## MS90555 Connector

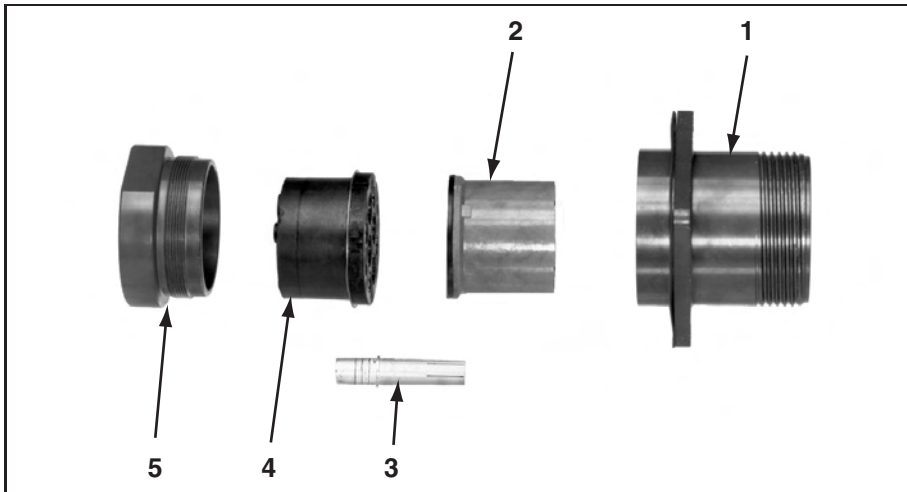

Wall Mount Receptacle Components:

1. Shell
2. Insert Assembly, Socket
3. Contact, Socket
4. Grommet Assembly, Socket
5. Nut, Retaining
6. Protective Cap Assembly (Not Shown)
7. Flange Gasket (Not Shown)

## MS90556 Connector

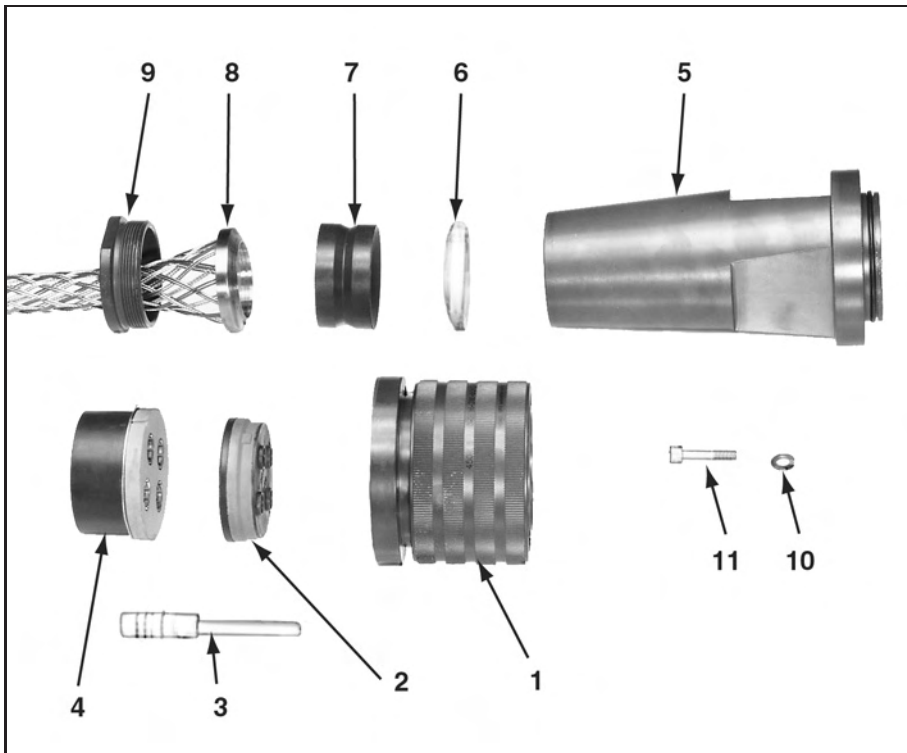


Straight Plug Components:

1. Shell and Coupling Nut Assembly
2. Insert Assembly, Pin
3. Contact, Pin
4. Spacer Assembly, Pin
5. Back Adapter
6. Gland Washer
7. Gland
8. Cable Grip
9. Gland Nut
10. Lockwasher (3 each)
11. Screw (3 each)
12. Protective Cap Assembly (Not Shown)

Note: On shell size 32 connectors, item #6 (Gland Washer) is contained within item #5 (Back Adapter).

# MIL-C-22992, Class L installation instructions

## MS90557 Connector

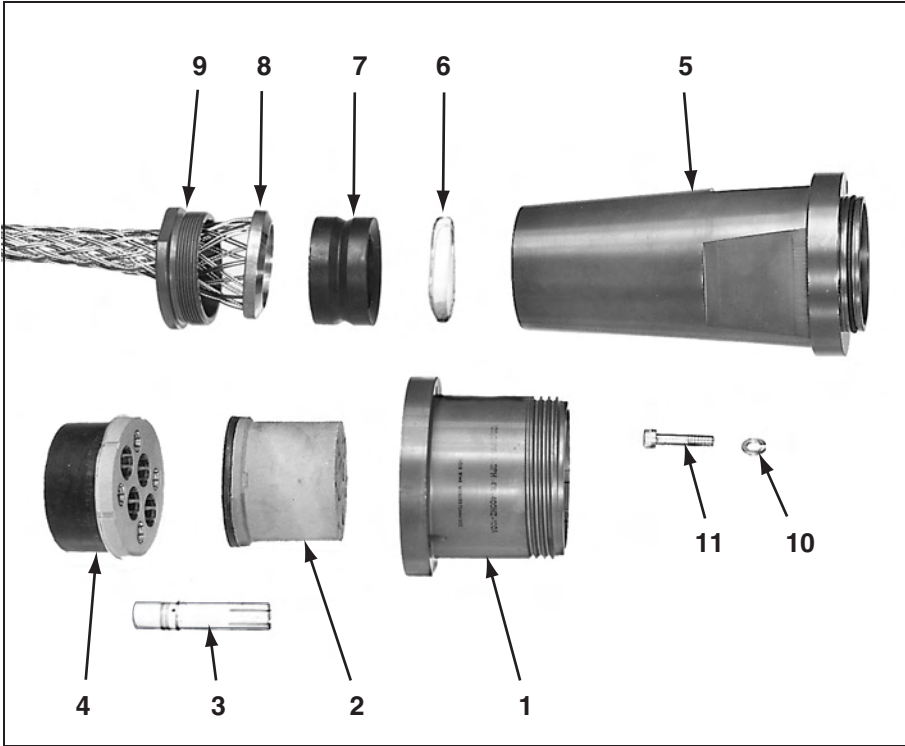


Cable Connecting Receptacle  
Components:

1. Shell
2. Insert Assembly, Socket
3. Contact, Socket
4. Spacer Assembly, Socket
5. Back Adapter
6. Gland Washer
7. Gland
8. Cable Grip
9. Gland Nut
10. Lockwasher (3 each)
11. Screw (3 each)
12. Protective Cap Assembly (Not shown)

Note: On shell size 32 connectors, item #6 (Gland Washer) is contained within item #5 (Back Adapter).

## MS90558 Connector

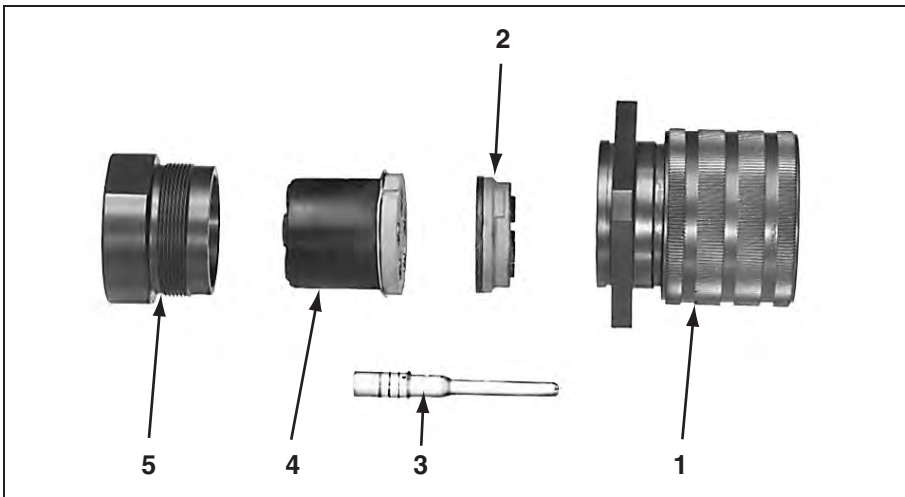

Wall Mount Plug Components:

1. Shell and Coupling Nut Assembly
2. Insert Assembly, Pin
3. Contact, Pin
4. Grommet Assembly, Pin
5. Nut, Retaining
6. Protective Cap Assembly (Not Shown)
7. Flange Gasket (Not Shown)

# MIL-C-22992, Class L installation instructions

## Contact Installation

**Step 1)** Insert stripped conductors in contact wirewells. If contact bushing is used, insert conductor in bushing and bushing in contact wirewell. If two or more ground wires are inserted into a single contact, make sure all wires are fully seated in wirewell.

**Step 2)** Select correct crimping tool, locator and die combination from the table for contacts to be installed. With conductor or contact bushing in place, insert contact into tool. Close crimping die fully to form a uniform crimp.

| Contact Part Number | Size | Type | Crimping Tool* | Locator* | Die*         | Removal Tool |
|---------------------|------|------|----------------|----------|--------------|--------------|
| M39029/48-327       | 4/0  | P    | Pico Model     |          |              |              |
| M39029/49-335       | 4/0  | S    | 400B or        | 4297-1   | 414DA-4/0N-1 | MS90562-1    |
| M39029/48-328       | 4/0N | P    | 400B-1         |          |              |              |
| M39029/48-323       | 1/0  | P    | Pico Model     |          |              |              |
| M39029/49-333       | 1/0  | S    | 400B or        | 4297-3   | 414DA-1/0N   | MS90562-3    |
| M39029/48-324       | 1/0N | P    | 400B-1         |          |              |              |
| M39029/48-320       | 4    | P    | Pico Model     |          |              |              |
| M39029/49-331       | 4    | S    | 400B or        | 4297-5   | 414DA-4N     | MS90562-5    |
| M39029/48-321       | 4N   | P    | 400B-1         |          |              |              |
| M39029/48-322       | 4G   | P    |                |          |              |              |
| M39029/49-332       | 4G   | S    |                |          |              |              |
| M39029/48-317       | 6    | P    | Pico Model     |          |              |              |
| M39029/49-329       | 6    | S    | 400B or        | 4297-6   | 414DA-6N     | MS90562-6    |
| M39029/48-318       | 6N   | P    | 400B-1         |          |              |              |
| M39029/48-319       | 6G   | P    |                |          |              |              |
| M39029/49-330       | 6G   | S    |                |          |              |              |

\* Available from Pico Crimping Tools Co.,  
9832 Jersey Ave.  
Santa Fe Springs, CA 90670  
Phone: 805-388-5510

If crimping tools are available, contacts may be affixed to conductors by soldering. Use rosin-alcohol solder flux, a good grade of 60/40 solder and a 500 watt soldering iron or probe type resistance soldering equipment. Pre-tin conductors before soldering. Solder must not be present on shoulder or retention area of contact.

## Connector Assembly

**Step 1)** If inserts are not already positioned in the connector shell, align large tab on insert with large slot in shell and push insert in until it bottoms in shell.

**Step 2)** Apply a thin coating of Dow Corning DC-4 lubricant to the periphery of contact holes in spacer or grommet assembly. Push contacts into rear of spacer or grommet assembly until locked into contact retainer bushing.

**Step 3)** Align contacts with proper holes in insert. Small key of insert must be aligned with appropriate keyway in spacer or grommet assembly. Slide contacts into insert holes until spacer or grommet assembly butts against insert. A thin film of Dow Corning DC-4 lubricant applied to the periphery of insert contact holes will provide maximum sealing efficiency.

**Step 4)** Assemble accessories to connector. The back adapter "O" ring should have a very thin film of Dow Corning DC-4 lubricant applied. Outer surfaces only of gland should be lubricated with a thin film of UniTemp Grease EP. Avoid getting grease on inside surfaces of gland and on cable jacket.

**Step 5)** Tighten retaining nut or gland nut on shell or adapter. A metal-to-metal seating condition is desirable, but may not be attainable with maximum cable diameters.

## Contact Removal

**Step 1)** Loosen all rear accessories and slide back along cable.

**Step 2)** Remove spacer or grommet assembly with contacts from connector insert.

**Step 3)** Using the appropriate size contact removal tool, push tool over front of contact until it bottoms in spacer or grommet assembly hole. This will open contact retaining bushing and allow contact to be removed from the spacer or grommet assembly from the rear. When using jacketed cable, all contacts should be released from contact retention bushings before removal from spacer or grommet assembly is accomplished.

**Heavy Duty  
Cylindrical  
MIL-C-22992  
QWLD**




# Amphenol® Heavy Duty Cylindrical Connectors

## MIL-C-22992, QWLD



wall mount receptacle

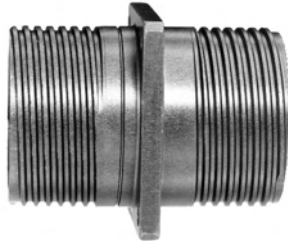

thru bulkhead receptacle



cable connecting plug



straight plug



box mount receptacle



jam nut receptacle  
(box mount)



jam nut receptacle  
(wall mount)

Amphenol® QWLD Series heavy duty cylindrical connectors provide reliable power and control functions in hostile environments where ordinary connectors cannot survive.

**Design features of this connector series provide:**

- **High Durability** - water and explosion proof, resistant to abrasion, corrosion, vibration and shock
- **Quick, Positive Mating** - double stub threads per MIL-STD-1373 for fast coupling, easily cleaned
- **Selection** - over 300 industrial and MS-approved insert patterns available, including coaxial and thermocouple

On the drilling platform in the North Sea, pump and motor generator controls run smoothly, although constantly exposed to salt spray.

At Prudhoe Bay where the nights are six months long, portable lighting systems permit operation regardless of temperature plummeting to 50° below zero.

The circus ferris wheel runs continuously despite the fact that it has rained for five days and all power connections are lying in six inches of mud.

These situations are typical of the extreme conditions under which thousands of Amphenol QWLD connectors are operating daily. Outstanding design features that make these cylindricals a necessity for difficult applications include:

- Alumilite 225\* hard anodic finish for abrasion and corrosion resistance or conductive cadmium plate
- Resilient inserts for moisture sealing, positive proof against shock and vibration
- Sealing gaskets at every joint for water-proof assembly
- Cable strain relief provided by clamp bar type accessories
- Left hand accessory threads to prevent damage from disconnect torque applied in the wrong direction
- Closed entry socket contact design in solder or replaceable crimp contacts

\* Registered trademark of Aluminum Company of America

# MIL-C-22992, QWLD

## how to order

### MS-APPROVED CONNECTORS

To illustrate the ordering procedure, part number MS17343R20N27PW is shown as follows:

| PART NUMBER    |          |           |          |           |          |          |
|----------------|----------|-----------|----------|-----------|----------|----------|
| <u>MS17343</u> | <u>R</u> | <u>20</u> | <u>N</u> | <u>27</u> | <u>P</u> | <u>W</u> |
| 1              | 2        | 3         | 4        | 5         | 6        | 7        |

#### 1. MS Number -

- MS17343 designates wall mount receptacle
- MS17344 designates straight plug
- MS17345 designates cable connecting plug
- MS17346 designates box mount receptacle
- MS17347 designates jam nut receptacle with rear accessory threads (wall mount)
- MS17348 designates jam nut receptacle (box mount)

#### 2. Class -

- C designates pressurized - used where circuit integrity is protected by a pressure differential
- R designates environmental - see table, page 1

#### 3. Shell Size -

available in shell sizes 12 through 44. Refer to pages 53 through 59 for dimensional data.

#### 4. Shell Finish -

C for conductive or N for non-conductive

#### 5. Insert Arrangement -

current MS insert arrangements are shown in black in the QWLD insert arrangements section of this catalog. Only these arrangements are available in MS-approved connectors.

#### 6. Contact Type -

P for pin, S for socket

#### 7. Alternate Insert Rotation -

used to prevent cross-mating of connectors. Absence of a letter in this space indicates normal (0°) position of the insert. Refer to page 26 for alternate insert rotation illustrations.

### QWLD INDUSTRIAL VERSIONS

These heavy duty connectors are identical to MS-approved types except for the added flexibility of connector shell and contact type and finish options, plus added insert arrangements. To illustrate the ordering procedure, part number 10-194622-14S is shown as follows:

| PART NUMBER |   |          |          |          |          |
|-------------|---|----------|----------|----------|----------|
| 10          | - | 194      | 6        | 22-14    | S        |
| <u>1</u>    |   | <u>2</u> | <u>3</u> | <u>4</u> | <u>5</u> |

#### 1. Base Number Prefix -

- used to define connector shell finish and contact type and finish
- 10 - Solder type contacts, silver plated
- 75- Crimp type contacts, silver plated
- 81- Crimp type contacts, plated .0001 gold over silver
- 82- Crimp type contacts for MIL-C-13777 cable, silver plated
- 83- Crimp type contacts for MIL-C-13777 cable, plated .0001 gold over silver
- 85- Crimp type contacts, plated .00005 gold over silver
- All above prefix numbers utilize connector shells with Alumilite\* non-conductive finish*
- 88- Solder type contacts, silver plated. Connector shell utilizes olive drab cadmium plate over nickel conductive finish.

#### 2. Base Number -

QWLD Series Heavy Duty Cylindrical Connector

#### 3. Shell Style -

- 0 designates wall mount receptacle
- 1 designates cable connecting plug
- 2 designates box mount receptacle
- 3 designates jam nut receptacle with rear accessory threads (wall mount)
- 4 designates thru bulkhead receptacle
- 6 designates straight plug
- 9 designates jam nut receptacle (box mount)

#### 4. Shell Size/Insert Arrangement -

Amphenol® QWLD connectors are available in equivalent MS shell sizes with all current MS insert arrangements as well as a large selection of special arrangements for power and signal circuits. Select the required insert arrangement number from those shown in black (MS arrangements) or red (industrial arrangements).

#### 5. Contact Type/Alternate Insert Rotation -

P for pin, S for socket. When an alternate position of the connector insert is required to prevent cross-mating of connectors, a different letter (other than P or S) is used. Select from the table below the Amphenol® letter which indicates both type of contact and insert rotation desired. Refer to page 26 for alternate insert rotation illustrations.

| Pin Contacts |                   | Socket Contacts |                   |
|--------------|-------------------|-----------------|-------------------|
| MS Letters   | Amphenol® Letters | MS Letters      | Amphenol® Letters |
| P            | P (normal)        | S               | S (normal)        |
| PW           | G                 | SW              | H                 |
| PX           | I                 | SX              | J                 |
| PY           | K                 | SY              | L                 |
| PZ           | M                 | SZ              | N                 |

Alumilite is a registered trademark of Aluminum Co. of America

# MIL-C-22992, QWLD

## insert arrangements

| Insert Arrangement |            | Service Rating                    | Total Contacts | Contact Size |   |   |    |    |
|--------------------|------------|-----------------------------------|----------------|--------------|---|---|----|----|
| MS Approved        | Industrial |                                   |                | 0            | 4 | 8 | 12 | 16 |
| 12-5               |            | D                                 | 1              |              |   |   | 1  |    |
|                    | 12-48      | A                                 | 3              |              |   |   |    | 3  |
|                    | 12-49      | A                                 | 2              |              |   |   |    | 2  |
| 14-3               |            | A                                 | 1              |              |   | 1 |    |    |
|                    | 14-53      | Inst.                             | 6              |              |   |   |    | 6  |
| 16-2               |            | E                                 | 1              |              |   |   | 1  |    |
| 16-7               |            | A                                 | 3              |              |   | 1 |    | 2  |
| 16-9               |            | A                                 | 4              |              |   |   | 2  | 2  |
| 16-10              |            | A                                 | 3              |              |   |   | 3  |    |
| 16-11              |            | A                                 | 2              |              |   |   | 2  |    |
| 16-12              |            | A                                 | 1              | 1            |   |   |    |    |
| 16-13              |            | A                                 | 2              |              |   |   | 2  |    |
|                    | 16-61      | A                                 | 7              |              |   |   | 7  |    |
| 18-1               |            | B, C, F, G = A;<br>Bal. = Inst.   | 10             |              |   |   |    | 10 |
|                    | 18-3       | D                                 | 2              |              |   |   | 2  |    |
| 18-4               |            | D                                 | 4              |              |   |   |    | 4  |
| 18-5               |            | D                                 | 3              |              |   |   | 2  | 1  |
| 18-6               |            | D                                 | 1              | 1            |   |   |    |    |
| 18-7               |            | B                                 | 1              |              |   | 1 |    |    |
| 18-8               |            | A                                 | 8              |              |   |   | 1  | 7  |
| 18-9               |            | Inst.                             | 7              |              |   |   | 2  | 5  |
|                    | 18-10      | A                                 | 4              |              |   |   | 4  |    |
| 18-11              |            | A                                 | 5              |              |   |   | 5  |    |
|                    | 18-12      | A                                 | 6              |              |   |   |    | 6  |
| 18-13              |            | A                                 | 4              |              |   | 1 | 3  |    |
| 18-14              |            | A                                 | 2              |              | 1 |   |    | 1  |
| 18-15              |            | A                                 | 4              |              |   |   | 4  |    |
| 18-16              |            | C                                 | 1              |              |   |   | 1  |    |
|                    | 18-17      | Inst.                             | 7              |              |   |   | 2  | 5  |
|                    | 18-19      | A                                 | 10             |              |   |   |    | 10 |
|                    | 18-20      | A                                 | 5              |              |   |   |    | 5  |
|                    | 18-22      | D                                 | 3              |              |   |   |    | 3  |
|                    | 18-24      | B, C, F, G = A;<br>Bal. = Inst.   | 10             |              |   |   |    | 10 |
|                    | 18-29      | A                                 | 5              |              |   |   |    | 5  |
|                    | 18-30      | A                                 | 5              |              |   |   |    | 5  |
|                    | 18-31      | A                                 | 5              |              |   |   |    | 5  |
| 20-2               |            | D                                 | 1              | 1            |   |   |    |    |
|                    | 20-3       | D                                 | 3              |              |   |   | 3  |    |
| 20-4               |            | D                                 | 4              |              |   |   | 4  |    |
|                    | 20-6       | D                                 | 3              |              |   |   |    | 3  |
| 20-7               |            | A, B, H, G = D;<br>C, D, E, F = A | 8              |              |   |   |    | 8  |
| 20-8               |            | Inst.                             | 6              |              |   | 2 |    | 4  |

| Insert Arrangement |            | Service Rating                    | Total Contacts | Contact Size |   |   |    |    |
|--------------------|------------|-----------------------------------|----------------|--------------|---|---|----|----|
| MS Approved        | Industrial |                                   |                | 0            | 4 | 8 | 12 | 16 |
| 20-9               |            | H = D; Bal. = A                   | 8              |              |   |   | 1  | 7  |
|                    | 20-11      | Inst.                             | 13             |              |   |   |    | 13 |
|                    | 20-12      | A                                 | 2              |              | 1 |   |    | 1  |
| 20-14              |            | A                                 | 5              |              |   | 2 | 3  |    |
| 20-15              |            | A                                 | 7              |              |   |   | 7  |    |
| 20-16              |            | A                                 | 9              |              |   |   | 2  | 7  |
| 20-17              |            | A                                 | 6              |              |   |   | 5  | 1  |
| 20-18              |            | A                                 | 9              |              |   |   | 3  | 6  |
|                    | 20-19      | A                                 | 3              |              |   | 3 |    |    |
|                    | 20-20      | A                                 | 4              |              | 1 |   | 3  |    |
| 20-21              |            | A                                 | 9              |              |   |   | 1  | 8  |
| 20-22              |            | A                                 | 6              |              |   | 3 |    | 3  |
|                    | 20-23      | A                                 | 2              |              |   | 2 |    |    |
| 20-24              |            | A                                 | 4              |              |   | 2 |    | 2  |
|                    | 20-25      | Inst.                             | 13             |              |   |   |    | 13 |
| 20-27              |            | A                                 | 14             |              |   |   |    | 14 |
| 20-29              |            | A                                 | 17             |              |   |   |    | 17 |
|                    | 20-30      | Inst.                             | 13             |              |   |   |    | 13 |
| 20-33              |            | A                                 | 11             |              |   |   |    | 11 |
|                    | 22-1       | D                                 | 2              |              |   | 2 |    |    |
| 22-2               |            | D                                 | 3              |              |   | 3 |    |    |
|                    | 22-4       | A                                 | 4              |              |   | 2 | 2  |    |
| 22-5               |            | D                                 | 6              |              |   |   | 2  | 4  |
|                    | 22-6       | D                                 | 3              |              |   | 2 |    | 1  |
| 22-7               |            | E                                 | 1              | 1            |   |   |    |    |
|                    | 22-8       | E                                 | 2              |              |   |   | 2  |    |
| 22-9               |            | E                                 | 3              |              |   |   | 3  |    |
| 22-10              |            | E                                 | 4              |              |   |   |    | 4  |
| 22-11              |            | B                                 | 2              |              |   |   |    | 2  |
| 22-12              |            | D                                 | 5              |              |   | 2 |    | 3  |
|                    | 22-13      | E = D;<br>A, B, C, D = A          | 5              |              |   |   | 4  | 1  |
| 22-14              |            | A                                 | 19             |              |   |   |    | 19 |
| 22-15              |            | D = E;<br>A, B, C, E, F = A       | 6              |              |   |   | 5  | 1  |
|                    | 22-16      | A                                 | 9              |              |   |   | 3  | 6  |
| 22-17              |            | A = D; Bal. = A                   | 9              |              |   |   | 1  | 8  |
| 22-18              |            | A, B, F, G, H = D;<br>C, D, E = A | 8              |              |   |   |    | 8  |
| 22-19              |            | A                                 | 14             |              |   |   |    | 14 |
|                    | 22-20      | A                                 | 9              |              |   |   |    | 9  |
| 22-21              |            | A                                 | 3              | 1            |   |   |    | 2  |
| 22-22              |            | A                                 | 4              |              |   | 4 |    |    |
| 22-23              |            | H = D; Bal. = A                   | 8              |              |   |   | 8  |    |
|                    | 22-24      | C, D, E = D;<br>A, B, F = A       | 6              |              |   |   | 2  | 4  |

# MIL-C-22992, QWLD

## insert arrangements

| Insert Arrangement |            | Service Rating   | Total Contacts | Contact Size |   |   |    |    |
|--------------------|------------|--|----------------|--------------|---|---|----|----|
| MS Approved        | Industrial |  |                | 0            | 4 | 8 | 12 | 16 |
| 22-27              |            | J = D; Bal. = A  | 9              |              |   | 1 |    | 8  |
|                    | 22-28      | A  | 7              |              |   |   | 7  |    |
|                    | 22-33      | A, B, C, D = D;<br>E, F, G = A                         | 7              |              |   |   |    | 7  |
|                    | 22-34      | D  | 5              |              |   |   | 3  | 2  |
| 22-36              |            | H = D; Bal. = A  | 8              |              |   |   | 8  |    |
| 24-2               |            | D  | 7              |              |   |   | 7  |    |
|                    | 24-3       | D  | 7              |              |   |   | 2  | 5  |
|                    | 24-5       | A  | 16             |              |   |   |    | 16 |
| 24-6               |            | A, G, H = D;<br>Bal. = A                               | 8              |              |   |   | 8  |    |
| 24-7               |            | A  | 16             |              |   |   | 2  | 14 |
|                    | 24-9       | A  | 2              |              | 2 |   |    |    |
| 24-10              |            | A  | 7              |              |   | 7 |    |    |
| 24-11              |            | A  | 9              |              |   | 3 | 6  |    |
| 24-12              |            | A  | 5              |              | 2 |   | 3  |    |
| 24-16              |            | A, B, F, G = D;<br>C, D, E = A                         | 7              |              |   | 1 | 3  | 3  |
|                    | 24-17      | D  | 5              |              |   |   | 2  | 3  |
| 24-20              |            | D  | 11             |              |   |   | 2  | 9  |
| 24-21              |            | D  | 10             |              |   | 1 |    | 9  |
| 24-22              |            | D  | 4              |              |   | 4 |    |    |
| 24-27              |            | E  | 7              |              |   |   |    | 7  |
| 24-28              |            | Inst.  | 24             |              |   |   |    | 24 |
| 28-1               |            | A, J, E = D;<br>Bal. = A                               | 9              |              |   | 3 | 6  |    |
| 28-2               |            | D  | 14             |              |   |   | 2  | 12 |
| 28-3               |            | E  | 3              |              |   | 3 |    |    |
| 28-4               |            | G, P, S = E;<br>Bal. = D                               | 9              |              |   |   | 2  | 7  |
| 28-5               |            | D  | 5              |              | 2 |   | 1  | 2  |
|                    | 28-6       | D  | 3              |              | 3 |   |    |    |
|                    | 28-7       | D  | 2              |              | 2 |   |    |    |
| 28-8               |            | L, M = E; B = D;<br>Bal. = A                           | 12             |              |   |   | 2  | 10 |
| 28-9               |            | D  | 12             |              |   |   | 6  | 6  |
| 28-10              |            | G = D; Bal. = A  | 7              |              | 2 | 2 | 3  |    |
| 28-11              |            | A  | 22             |              |   |   | 4  | 18 |
| 28-12              |            | A  | 26             |              |   |   |    | 26 |
|                    | 28-13      | A  | 26             |              |   |   |    | 26 |
| 28-15              |            | A  | 35             |              |   |   |    | 35 |
|                    | 28-16      | A  | 20             |              |   |   |    | 20 |
| 28-17              |            | R = B; M, N, P = D;<br>A to L = A                      | 15             |              |   |   |    | 15 |
| 28-18              |            | M = C; G, H, J, K,<br>L = D; A, B = H;<br>Bal. = Inst. | 12             |              |   |   |    | 12 |
| 28-19              |            | H, M = B; A, B = D;<br>Bal. = A                        | 10             |              |   |   | 4  | 6  |
| 28-20              |            | A  | 14             |              |   |   | 10 | 4  |

| Insert Arrangement |            | Service Rating                         | Total Contacts | Contact Size |   |   |    |     |
|--------------------|------------|--|----------------|--------------|---|---|----|-----|
| MS Approved        | Industrial |  |                | 0            | 4 | 8 | 12 | 16  |
| 28-21              |            | A                                      | 37             |              |   |   |    | 37  |
| 28-22              |            | D                                      | 6              |              |   | 3 |    | 3   |
| 32-1               |            | A = E; Bal. = D                        | 5              | 2            |   |   | 3  |     |
| 32-2               |            | E                                      | 5              |              |   | 3 |    | 2   |
| 32-3               |            | D                                      | 9              | 1            | 2 |   | 2  | 4   |
|                    | 32-4       | F, J, K, N = A;<br>Bal. = D            | 14             |              |   |   | 2  | 12  |
|                    | 32-5       | D                                      | 2              | 2            |   |   |    |     |
| 32-6               |            | A                                      | 23             |              | 2 | 3 | 2  | 16  |
| 32-7               |            | A, B, h, j = Inst.;<br>Bal. = A        | 35             |              |   |   | 7  | 28  |
|                    | 32-8       | A                                      | 30             |              |   |   | 6  | 24  |
| 32-9               |            | D                                      | 14             |              | 2 |   |    | 12  |
|                    | 32-10      | A, F = E; G = B;<br>B, E = D; C, D = A | 7              |              | 2 | 2 |    | 3   |
|                    | 32-12      | C, D, E, F, G = A;<br>Bal. = D         | 15             |              |   |   | 5  | 10  |
| 32-13              |            | D                                      | 23             |              |   |   | 5  | 18  |
| 32-15              |            | D                                      | 8              | 2            |   |   | 6  |     |
|                    | 32-16      | A                                      | 23             |              | 2 | 3 | 2  | 16  |
| 32-17              |            | D                                      | 4              |              | 4 |   |    |     |
| 32-73              |            | A                                      | 46             |              |   |   |    | 46  |
|                    | 36-1       | D                                      | 22             |              |   |   | 4  | 18  |
| 36-3               |            | D                                      | 6              | 3            |   |   | 3  |     |
|                    | 36-4       | A = D; B, C = A                        | 3              | 3            |   |   |    |     |
| 36-5               |            | A                                      | 4              | 4            |   |   |    |     |
| 36-6               |            | A                                      | 6              | 2            | 4 |   |    |     |
| 36-7               |            | A                                      | 47             |              |   |   | 7  | 40  |
| 36-8               |            | A                                      | 47             |              |   |   | 1  | 46  |
| 36-9               |            | A                                      | 31             |              | 1 | 2 | 14 | 14  |
| 36-10              |            | A                                      | 48             |              |   |   |    | 48  |
|                    | 36-11      | A                                      | 48             |              |   |   |    | 48  |
|                    | 36-12      | A                                      | 48             |              |   |   |    | 48  |
|                    | 36-13      | N, P, Q = E;<br>Bal. = A               | 17             |              |   |   | 2  | 15  |
|                    | 36-14      | D                                      | 16             |              |   | 5 | 5  | 6   |
| 36-15              |            | M = D; Bal. = A                        | 35             |              |   |   |    | 35  |
|                    | 36-16      | A                                      | 47             |              |   |   | 7  | 40  |
|                    | 36-17      | A                                      | 47             |              |   |   | 7  | 40  |
|                    | 36-18      | A                                      | 31             |              | 1 | 2 | 14 | 14  |
|                    | 36-20      | A                                      | 34             |              |   | 2 | 2  | 30  |
| 36-52              |            | A                                      | 52             |              |   |   |    | 52  |
| 40-1               |            | D                                      | 30             |              |   |   | 6  | 24  |
| 40-9               |            | A                                      | 47             |              |   | 1 | 22 | 24  |
| 40-56              |            | A                                      | 85             |              |   |   |    | 85  |
| 44-52              |            | A                                      | 104            |              |   |   |    | 104 |

# QWLD

## special insert arrangements

| Insert Arrangement | Service Rating | Total Con-acts | Contact Size |   |    |    |    |        |   |   |    |   |    |  |
|--------------------|----------------|----------------|--------------|---|----|----|----|--------|---|---|----|---|----|--|
|                    |                |                | 0            | 4 | 8  | 12 | 16 | Coax** |   |   |    |   |    |  |
|                    |                |                |              |   |    |    |    | 0      | 4 | 8 | 12 |   |    |  |
| 16-59              | A              | 4              |              |   |    | 4  |    |        |   |   |    |   |    |  |
| 20-51              | A              | 3              |              |   | 3  |    |    |        |   |   |    |   |    |  |
| 20-57              | A              | 7              |              |   |    | 7* |    |        |   |   |    |   |    |  |
| 20-58              | A              | 10             |              |   |    | 5  | 5  |        |   |   |    |   |    |  |
| 20-59              | A              | 3              |              |   | 3* |    |    |        |   |   |    |   |    |  |
| 20-66              | A              | 6              |              |   |    | 5* | 1  |        |   |   |    |   |    |  |
| 20-79              | A/D            | 8              |              |   |    | 1  | 7  |        |   |   |    |   |    |  |
| 22-63              | A              | 12             |              |   |    | 4  | 8  |        |   |   |    |   |    |  |
| 22-65              | A/D            | 8              |              |   |    | 8* |    |        |   |   |    |   |    |  |
| 22-70              | A              | 13             |              |   |    | 8  | 5  |        |   |   |    |   |    |  |
| 22-80              | A              | 3              |              |   | 3* |    |    |        |   |   |    |   |    |  |
| 24-51              | A              | 5              |              |   | 5  |    |    |        |   |   |    |   |    |  |
| 24-52              | Hi Volt.       | 1              |              |   |    | 1  |    |        |   |   |    |   |    |  |
| 24-53              | A              | 5              |              |   | 5  |    |    |        |   |   |    |   |    |  |
| 24-58              | A              | 13             |              |   | 3  | 3  | 7  |        |   |   |    |   |    |  |
| 24-59              | A              | 14             |              |   |    | 7  | 7  |        |   |   |    |   |    |  |
| 24-60              | A              | 7              |              |   | 7* |    |    |        |   |   |    |   |    |  |
| 24-65              | A              | 15             |              |   |    | 11 | 4  |        |   |   |    |   |    |  |
| 24-66              | D              | 7              |              |   |    | 7  |    |        |   |   |    |   |    |  |
| 24-67              | Inst.          | 19             |              |   |    | 19 |    |        |   |   |    |   |    |  |
| 24-71              | A              | 7              |              |   | 7* |    |    |        |   |   |    |   |    |  |
| 24-75              | A              | 7              |              |   | 7* |    |    |        |   |   |    |   |    |  |
| 24-79              | A              | 5              |              |   | 5  |    |    |        |   |   |    |   |    |  |
| 24-80              | Inst.          | 23             |              |   |    |    | 23 |        |   |   |    |   |    |  |
| 24-84              | A              | 19             |              |   |    | 1  |    |        |   |   |    |   | 18 |  |
| 28-51              | A              | 12             |              |   |    | 12 |    |        |   |   |    |   |    |  |
| 28-59              | A              | 17             |              |   |    | 7  | 10 |        |   |   |    |   |    |  |
| 28-66              | A              | 16             |              |   | 2  | 14 |    |        |   |   |    |   |    |  |
| 28-72              | Coax           | 3              |              |   |    |    |    |        | 3 |   |    |   |    |  |
| 28-74              | A              | 16             |              |   | 7* |    | 9  |        |   |   |    |   |    |  |
| 28-75              | A              | 16             |              |   | 7* |    | 9  |        |   |   |    |   |    |  |
| 28-79              | A              | 16             |              |   | 7  |    | 9  |        |   |   |    |   |    |  |
| 28-82              | D              | 6              |              |   | 2  | 4  |    |        |   |   |    |   |    |  |
| 28-84              | A              | 9              |              |   | 9  |    |    |        |   |   |    |   |    |  |
| 32-52              | D              | 8              | 2            |   |    | 6  |    |        |   |   |    |   |    |  |
| 32-53              | Inst./E        | 42             |              |   |    | 5  | 37 |        |   |   |    |   |    |  |
| 32-56              | A              | 30             |              |   |    | 6* | 24 |        |   |   |    |   |    |  |
| 32-57              | Coax           | 8              |              |   |    | 6  |    | 2      |   |   |    |   |    |  |
| 32-58              | Coax           | 4              |              |   |    |    |    |        | 4 |   |    |   |    |  |
| 32-60              | A              | 23             |              |   |    |    | 15 |        |   |   |    | 8 |    |  |
| 32-62              | Coax           | 23             |              | 2 | 1  | 2  | 16 |        |   |   |    | 2 |    |  |
| 32-64              | Inst.          | 54             |              |   |    |    | 54 |        |   |   |    |   |    |  |
| 32-68              | A              | 16             |              |   |    |    | 12 |        | 4 |   |    |   |    |  |
| 32-75              | Coax           | 9              |              |   |    | 2  |    |        |   |   | 7  |   |    |  |
| 32-76              | A              | 19             |              |   |    | 19 |    |        |   |   |    |   |    |  |
| 32-79              | D              | 5              |              | 4 | 1  |    |    |        |   |   |    |   |    |  |

| Insert Arrangement | Service Rating | Total Con-acts | Contact Size |    |    |    |     |        |   |   |    |    |   |  |
|--------------------|----------------|----------------|--------------|----|----|----|-----|--------|---|---|----|----|---|--|
|                    |                |                | 0            | 4  | 8  | 12 | 16  | Coax** |   |   |    |    |   |  |
|                    |                |                |              |    |    |    |     | 0      | 4 | 8 | 12 |    |   |  |
| 36-51              | D              | 4              | 2            | 2  |    |    |     |        |   |   |    |    |   |  |
| 36-54              | A              | 39             |              |    | 8  |    | 31  |        |   |   |    |    |   |  |
| 36-55              | A              | 39             |              |    | 8* |    | 31  |        |   |   |    |    |   |  |
| 36-59              | A              | 53             |              |    |    | 3* | 50  |        |   |   |    |    |   |  |
| 36-60              | A              | 47             |              |    |    | 7* | 40  |        |   |   |    |    |   |  |
| 36-64              | Coax           | 4              |              |    |    |    |     |        |   | 4 |    |    |   |  |
| 36-65              | Coax           | 4              |              |    |    |    |     |        |   | 4 |    |    |   |  |
| 36-71              | A              | 53             |              |    |    | 3  | 50  |        |   |   |    |    |   |  |
| 36-73              | Coax           | 7              |              |    |    |    |     |        |   |   | 7  |    |   |  |
| 36-74              | A              | 44             |              |    |    |    | 43  |        |   |   |    |    | 1 |  |
| 36-75              | A              | 48             |              |    |    |    | 48* |        |   |   |    |    |   |  |
| 36-76              | A              | 47             |              |    |    |    | 47  |        |   |   |    |    |   |  |
| 36-77              | D              | 7              |              | 7  |    |    |     |        |   |   |    |    |   |  |
| 36-78              | A              | 14             |              |    |    | 12 |     | 2      |   |   |    |    |   |  |
| 36-79              | A              | 20             |              |    |    |    | 20  |        |   |   |    |    |   |  |
| 36-80              | A              | 20             |              |    |    |    | 20* |        |   |   |    |    |   |  |
| 36-83              | Coax           | 7              |              |    |    |    |     |        |   |   | 7  |    |   |  |
| 36-85              | A/D            | 35             |              |    |    |    | 35* |        |   |   |    |    |   |  |
| 40-53              | A              | 60             |              |    |    |    | 60  |        |   |   |    |    |   |  |
| 40-57              | E              | 4              | 4            |    |    |    |     |        |   |   |    |    |   |  |
| 40-61              | A              | 59             |              |    |    | 1  | 3   | 55     |   |   |    |    |   |  |
| 40-62              | A              | 60             |              |    |    |    |     | 60     |   |   |    |    |   |  |
| 40-63              | A              | 61             |              |    |    |    |     | 61*    |   |   |    |    |   |  |
| 40-64              | Coax           | 36             |              |    |    | 3  | 20  |        |   |   |    | 13 |   |  |
| 40-66              | Coax           | 4              |              |    |    |    |     |        |   | 4 |    |    |   |  |
| 40-67              | A              | 11             |              |    |    |    | 1   |        |   |   | 10 |    |   |  |
| 40-68              | A              | 21             |              |    |    | 21 |     |        |   |   |    |    |   |  |
| 40-70              | A              | 61             |              |    |    |    |     | 61     |   |   |    |    |   |  |
| 40-72              | A              | 11             |              |    |    |    |     | 1      |   |   | 10 |    |   |  |
| 40-73              | A              | 61             |              |    |    |    |     | 61     |   |   |    |    |   |  |
| 40-74              | A              | 6              |              |    |    |    | 1   |        |   | 4 | 1  |    |   |  |
| 40-75              | E              | 5              | 4            |    |    |    | 1   |        |   |   |    |    |   |  |
| 40-80              | A              | 11             |              | 10 |    |    |     | 1      |   |   |    |    |   |  |
| 40-81              | A              | 62             |              |    |    |    |     | 62*    |   |   |    |    |   |  |
| 40-82              | A              | 62             |              |    |    |    |     | 62     |   |   |    |    |   |  |
| 40-85              | A              | 60             |              |    |    |    |     | 60*    |   |   |    |    |   |  |
| 40-86              | E              | 4              |              |    |    |    |     |        |   | 4 |    |    |   |  |
| 40-87              | D              | 7              |              | 7  |    |    |     |        |   |   |    |    |   |  |
| 44-53              | A              | 36             |              |    |    |    |     | 18     |   |   |    | 18 |   |  |
| 48-51†             | A              | 56             |              |    |    | 10 |     | 42     | 4 |   |    |    |   |  |
| 48-52†             | A              | 61             |              |    |    |    |     | 56     | 5 |   |    |    |   |  |
| 48-53†             | D              | 37             |              |    |    |    | 37  |        |   |   |    |    |   |  |
| 48-54†             | A              | 56             |              |    |    | 10 |     | 42     | 4 |   |    |    |   |  |
| 48-55†             | A              | 78             |              | 6  | 2  | 2  | 68  |        |   |   |    |    |   |  |
| 48-57†             | A              | 56             | 4            |    |    | 10 |     | 42     |   |   |    |    |   |  |
| 48-60†             | A              | 56             |              |    |    | 10 |     | 42     | 4 |   |    |    |   |  |

\* Crimp contacts accommodate wire the same size as the contact as well as wire of the next smaller, even size. Arrangements identified with an asterisk (\*) are exceptions. See insert arrangement drawings on pages 39-47 for application wire size.

\*\* Coaxial cable data can be found on insert arrangement drawings, pages 39-47. For further information on coaxial contacts and cable see catalog 12-130.


† Consult Sidney, NY for availability.

# MIL-C-22992, QWLD

## alternate insert rotations

To avoid cross-plugging problems in applications requiring the use of more than one connector of the same size and arrangement, alternate insert rotations are available as indicated in the accompanying chart.

As shown in the diagram below, the front face of the pin insert is rotated within the shell in a clockwise direction from the normal shell key. The socket insert would be rotated counterclockwise the same number of degrees in respect to the normal shell key.

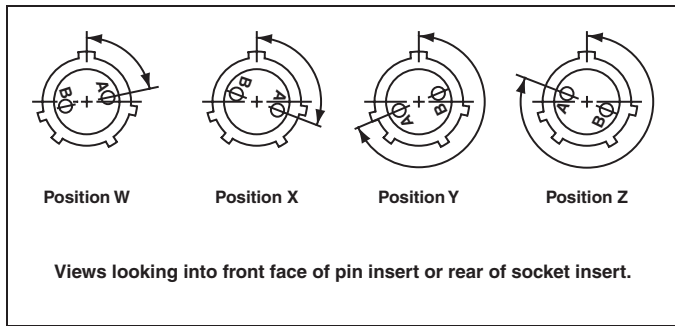

The following insert arrangements have the same alternate insert rotations for W, X, Y and Z which are:

| Degrees |     |     |     |
|---------|-----|-----|-----|
| W       | X   | Y   | Z   |
| 80      | 110 | 250 | 280 |

|       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|
| 16-7  | 20-14 | 22-16 | 24-3  | 24-21 | 28-16 | 32-9  |
| 18-5  | 20-16 | 22-17 | 24-4  | 24-28 | 28-17 | 32-10 |
| 18-9  | 20-20 | 22-18 | 24-5  | 28-1  | 28-19 | 32-12 |
| 18-13 | 20-22 | 22-19 | 24-6  | 28-4  | 28-20 | 32-13 |
| 18-14 | 22-3  | 22-21 | 24-7  | 28-8  | 28-21 | 36-1  |
| 20-7  | 22-6  | 22-24 | 24-12 | 28-9  | 32-1  | 36-7  |
| 20-8  | 22-12 | 22-25 | 24-16 | 28-10 | 32-3  | 36-8  |
| 20-9  | 22-14 | 22-33 | 24-17 | 28-11 | 32-4  | 36-13 |
| 20-12 | 22-15 | 22-34 | 24-20 | 28-15 | 32-6  |       |

| Insert Arrangement | Degrees |     |     |     |
|--------------------|---------|-----|-----|-----|
|                    | W       | X   | Y   | Z   |
| 16-9               | 35      | 110 | 250 | 325 |
| 16-10              | 90      | 180 | 270 | -   |
| 16-11              | 35      | 110 | 250 | 325 |
| 16-13              | 35      | 110 | 250 | 325 |
| 16-61              | 80      | -   | -   | 280 |
| 18-1               | 70      | 145 | 215 | 290 |
| 18-3               | 35      | 110 | 250 | 325 |
| 18-4               | 35      | 110 | 250 | 325 |
| 18-8               | 70      | -   | -   | 290 |
| 18-10              | -       | 120 | 240 | -   |
| 18-11              | -       | 170 | 265 | -   |
| 18-12              | 80      | -   | -   | 280 |
| 18-15              | -       | 120 | 240 | -   |
| 18-19              | -       | 120 | 240 | -   |
| 18-20              | 90      | 180 | 270 | -   |
| 18-22              | 70      | 145 | 215 | 290 |
| 18-29              | 90      | 180 | 270 | -   |
| 20-3               | 70      | 145 | 215 | 290 |
| 20-4               | 45      | 110 | 250 | -   |
| 20-5               | 35      | 110 | 250 | 325 |
| 20-6               | 70      | 145 | 215 | 290 |
| 20-15              | 80      | -   | -   | 280 |
| 20-17              | 90      | 180 | 270 | -   |
| 20-18              | 35      | 110 | 250 | 325 |
| 20-19              | 90      | 180 | 270 | -   |
| 20-21              | 35      | 110 | 250 | 325 |
| 20-23              | 35      | 110 | 250 | 325 |

| Insert Arrangement | Degrees |     |     |     |
|--------------------|---------|-----|-----|-----|
|                    | W       | X   | Y   | Z   |
| 20-24              | 35      | 110 | 250 | 325 |
| 20-27              | 35      | 110 | 250 | 325 |
| 20-29              | 80      | -   | -   | 280 |
| 22-1               | 35      | 110 | 250 | 325 |
| 22-2               | 70      | 145 | 215 | 290 |
| 22-4               | 35      | 110 | 250 | 325 |
| 22-5               | 35      | 110 | 250 | 325 |
| 22-8               | 35      | 110 | 250 | 325 |
| 22-9               | 70      | 145 | 215 | 290 |
| 22-10              | 35      | 110 | 250 | 325 |
| 22-11              | 35      | 110 | 250 | 325 |
| 22-13              | 35      | 110 | 250 | 325 |
| 22-20              | 35      | 110 | 250 | 325 |
| 22-22              | -       | 110 | 250 | -   |
| 22-23              | 35      | -   | 250 | -   |
| 22-27              | 80      | -   | 250 | 280 |
| 22-28              | 80      | -   | -   | 280 |
| 22-36              | 90      | -   | 270 | -   |
| 24-2               | 80      | -   | -   | 280 |
| 24-9               | 35      | 110 | 250 | 325 |
| 24-10              | 80      | -   | -   | 280 |
| 24-11              | 35      | 110 | 250 | 325 |
| 24-22              | 45      | 110 | 250 | -   |
| 24-27              | 80      | -   | -   | 280 |
| 28-2               | 35      | 110 | 250 | 325 |
| 28-3               | 70      | 145 | 215 | 290 |
| 28-5               | 35      | 110 | 250 | 325 |

| Insert Arrangement | Degrees |     |     |     |
|--------------------|---------|-----|-----|-----|
|                    | W       | X   | Y   | Z   |
| 28-6               | 70      | 145 | 215 | 290 |
| 28-7               | 35      | 110 | 250 | 325 |
| 28-12              | 90      | 180 | 270 | -   |
| 28-18              | 70      | 145 | 215 | 290 |
| 28-22              | 70      | 145 | 215 | 290 |
| 32-2               | 70      | 145 | 215 | 290 |
| 32-5               | 35      | 110 | 250 | 325 |
| 32-7               | 80      | 125 | 235 | 280 |
| 32-8               | 80      | 125 | 235 | 280 |
| 32-15              | 35      | 110 | 250 | 280 |
| 32-17              | 45      | 110 | 250 | -   |
| 32-73              | 36      | -   | -   | -   |
| 36-3               | 70      | 145 | 215 | 290 |
| 36-4               | 70      | 145 | 215 | 290 |
| 36-5               | -       | 120 | 240 | -   |
| 36-6               | 35      | 110 | 250 | 325 |
| 36-9               | 80      | 125 | 235 | 280 |
| 36-10              | 80      | 125 | 235 | 280 |
| 36-14              | 90      | 180 | 270 | -   |
| 36-15              | 60      | 125 | 245 | 305 |
| 36-52              | 72      | 144 | 216 | 288 |
| 40-1               | 65      | 130 | 235 | 300 |
| 40-9               | 65      | 125 | 225 | 310 |
| 40-56              | 72      | 144 | 216 | 288 |
| 44-52              | 72      | 135 | 225 | 288 |
|                    |         |     |     |     |
|                    |         |     |     |     |

# MIL-C-22992, QWLD

## contact arrangements

front face of pin insert or rear of socket insert illustrated

|                           |      |       |       |      |       |      |
|---------------------------|------|-------|-------|------|-------|------|
|                           |      |       |       |      |       |      |
| <b>Insert Arrangement</b> | 12-5 | 12-48 | 12-49 | 14-3 | 14-53 | 16-2 |
| <b>Service Rating</b>     | D    | A     | A     | A    | Inst. | E    |
| <b>Number of Contacts</b> | 1    | 3     | 2     | 1    | 6     | 1    |
| <b>Contact Size</b>       | 12   | 16    | 16    | 8    | 16    | 12   |

|                           |      |       |       |       |       |       |
|---------------------------|------|-------|-------|-------|-------|-------|
|                           |      |       |       |       |       |       |
| <b>Insert Arrangement</b> | 16-7 | 16-9  | 16-10 | 16-11 | 16-12 | 16-13 |
| <b>Service Rating</b>     | A    | A     | A     | A     | A     | A     |
| <b>Number of Contacts</b> | 1 2  | 2 2   | 3     | 2     | 1     | 2*    |
| <b>Contact Size</b>       | 8 16 | 12 16 | 12    | 12    | 4     | 12    |

|                           |       |                              |      |      |       |      |
|---------------------------|-------|------------------------------|------|------|-------|------|
|                           |       |                              |      |      |       |      |
| <b>Insert Arrangement</b> | 16-61 | 18-1                         | 18-3 | 18-4 | 18-5  | 18-6 |
| <b>Service Rating</b>     | A     | B, C, F, G = A; Bal. = Inst. | D    | D    | D     | D    |
| <b>Number of Contacts</b> | 7     | 10                           | 2    | 4    | 2 1   | 1    |
| <b>Contact Size</b>       | 16    | 16                           | 12   | 16   | 12 16 | 4    |

|                           |      |       |       |       |       |       |
|---------------------------|------|-------|-------|-------|-------|-------|
|                           |      |       |       |       |       |       |
| <b>Insert Arrangement</b> | 18-7 | 18-8  | 18-9  | 18-10 | 18-11 | 18-12 |
| <b>Service Rating</b>     | B    | A     | Inst. | A     | A     | A     |
| <b>Number of Contacts</b> | 1    | 1 7   | 2 5   | 4     | 5     | 6     |
| <b>Contact Size</b>       | 8    | 12 16 | 12 16 | 12    | 12    | 16    |


\*A = Iron; B = Constantan




# MIL-C-22992, QWLD

## contact arrangements


front face of pin insert or rear of socket insert illustrated

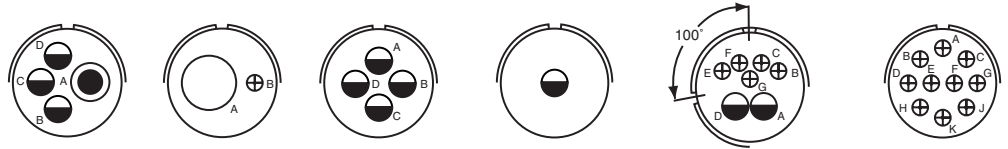

|                    |       |       |       |       |       |       |
|--------------------|-------|-------|-------|-------|-------|-------|
| Insert Arrangement | 18-13 | 18-14 | 18-15 | 18-16 | 18-17 | 18-19 |
| Service Rating     | A     | A     | A     | C     | Inst. | A     |
| Number of Contacts | 1 3   | 1 1   | 4**   | 1     | 2 5   | 10    |
| Contact Size       | 8 12  | 4 16  | 12    | 12    | 12 16 | 16    |

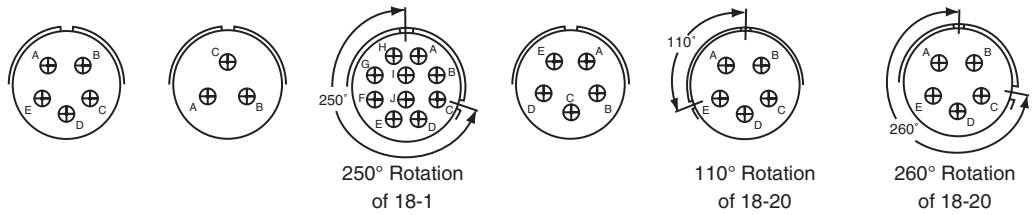

|                    |       |       |                              |       |       |       |
|--------------------|-------|-------|------------------------------|-------|-------|-------|
| Insert Arrangement | 18-20 | 18-22 | 18-24                        | 18-29 | 18-30 | 18-31 |
| Service Rating     | A     | D     | B, C, F, G = A, Bal. = Inst. | A     | A     | A     |
| Number of Contacts | 5     | 3     | 10                           | 5     | 5     | 5     |
| Contact Size       | 16    | 16    | 16                           | 16    | 16    | 16    |

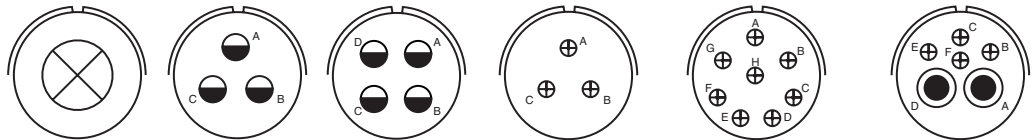

|                    |      |      |      |      |                                |       |
|--------------------|------|------|------|------|--------------------------------|-------|
| Insert Arrangement | 20-2 | 20-3 | 20-4 | 20-6 | 20-7                           | 20-8  |
| Service Rating     | D    | D    | D    | D    | A, B, H, G = D; C, D, E, F = A | Inst. |
| Number of Contacts | 1    | 3    | 4    | 3    | 8                              | 2 4   |
| Contact Size       | 0    | 12   | 12   | 16   | 16                             | 8 16  |

\*\*A, C = Iron; B, D = Constantan





# MIL-C-22992, QWLD

## contact arrangements

front face of pin insert or rear of socket insert illustrated

|                           |                 |       |       |       |       |       |
|---------------------------|-----------------|-------|-------|-------|-------|-------|
|                           |                 |       |       |       |       |       |
| <b>Insert Arrangement</b> | 20-9            | 20-11 | 20-12 | 20-14 | 20-15 | 20-16 |
| <b>Service Rating</b>     | H = D; Bal. = A | Inst. | A     | A     | A     | A     |
| <b>Number of Contacts</b> | 1 7             | 13    | 1 1   | 2 3   | 7     | 2 7   |
| <b>Contact Size</b>       | 12 16           | 16    | 4 16  | 8 12  | 12    | 12 16 |

|                           |       |       |       |       |       |       |
|---------------------------|-------|-------|-------|-------|-------|-------|
|                           |       |       |       |       |       |       |
| <b>Insert Arrangement</b> | 20-17 | 20-18 | 20-19 | 20-20 | 20-21 | 20-22 |
| <b>Service Rating</b>     | A     | A     | A     | A     | A     | A     |
| <b>Number of Contacts</b> | 5 1   | 3 6   | 3     | 1 3   | 1 8   | 3 3   |
| <b>Contact Size</b>       | 12 16 | 12 16 | 8     | 4 12  | 12 16 | 8 16  |

|                           |       |       |       |       |       |       |
|---------------------------|-------|-------|-------|-------|-------|-------|
|                           |       |       |       |       |       |       |
| <b>Insert Arrangement</b> | 20-23 | 20-24 | 20-25 | 20-27 | 20-29 | 20-30 |
| <b>Service Rating</b>     | A     | A     | Inst. | A     | A     | Inst. |
| <b>Number of Contacts</b> | 2     | 2 2   | 13    | 14    | 17    | 13    |
| <b>Contact Size</b>       | 8     | 8 16  | 16    | 16    | 16    | 16    |



# MIL-C-22992, QWLD

## contact arrangements

front face of pin insert or rear of socket insert illustrated

|                            |              |             |             |             |              |
|----------------------------|--------------|-------------|-------------|-------------|--------------|
|                            |              |             |             |             |              |
| <b>Insert Arrangements</b> | <b>20-33</b> | <b>22-1</b> | <b>22-2</b> | <b>22-4</b> | <b>22-5</b>  |
| <b>Service Rating</b>      | <b>A</b>     | <b>D</b>    | <b>D</b>    | <b>A</b>    | <b>D</b>     |
| <b>Number of Contacts</b>  | <b>11</b>    | <b>2</b>    | <b>3</b>    | <b>2 2</b>  | <b>2 4</b>   |
| <b>Contact Size</b>        | <b>16</b>    | <b>8</b>    | <b>8</b>    | <b>8 12</b> | <b>12 16</b> |

|                           |             |             |             |             |              |
|---------------------------|-------------|-------------|-------------|-------------|--------------|
|                           |             |             |             |             |              |
| <b>Insert Arrangement</b> | <b>22-6</b> | <b>22-7</b> | <b>22-8</b> | <b>22-9</b> | <b>22-10</b> |
| <b>Service Rating</b>     | <b>D</b>    | <b>E</b>    | <b>E</b>    | <b>E</b>    | <b>E</b>     |
| <b>Number of Contacts</b> | <b>2 1</b>  | <b>1</b>    | <b>2</b>    | <b>3</b>    | <b>4</b>     |
| <b>Contact Size</b>       | <b>8 16</b> | <b>0</b>    | <b>12</b>   | <b>12</b>   | <b>16</b>    |

|                           |              |              |                              |              |                                 |
|---------------------------|--------------|--------------|------------------------------|--------------|---------------------------------|
|                           |              |              |                              |              |                                 |
| <b>Insert Arrangement</b> | <b>22-11</b> | <b>22-12</b> | <b>22-13</b>                 | <b>22-14</b> | <b>22-15</b>                    |
| <b>Service Rating</b>     | <b>B</b>     | <b>D</b>     | <b>E = D; A, B, C, D = A</b> | <b>A</b>     | <b>D = E; A, B, C, E, F = A</b> |
| <b>Number of Contacts</b> | <b>2</b>     | <b>2 3</b>   | <b>4 1</b>                   | <b>19</b>    | <b>5 1</b>                      |
| <b>Contact Size</b>       | <b>16</b>    | <b>8 16</b>  | <b>12 16</b>                 | <b>16</b>    | <b>12 16</b>                    |

|                       |           |           |          |          |          |
|-----------------------|-----------|-----------|----------|----------|----------|
|                       |           |           |          |          |          |
| <b>CONTACT LEGEND</b> | <b>16</b> | <b>12</b> | <b>8</b> | <b>4</b> | <b>0</b> |

# MIL-C-22992, QWLD

## contact arrangements

front face of pin insert or rear of socket insert illustrated

|                           |              |                        |                                       |              |              |
|---------------------------|--------------|------------------------|---------------------------------------|--------------|--------------|
|                           |              |                        |                                       |              |              |
| <b>Insert Arrangement</b> | <b>22-16</b> | <b>22-17</b>           | <b>22-18</b>                          | <b>22-19</b> | <b>22-20</b> |
| <b>Service Rating</b>     | <b>A</b>     | <b>A = D; Bal. = A</b> | <b>A, B, F, G, H = D; C, D, E = A</b> | <b>A</b>     | <b>A</b>     |
| <b>Number of Contacts</b> | <b>3 6</b>   | <b>1 8</b>             | <b>8</b>                              | <b>14</b>    | <b>9</b>     |
| <b>Contact Size</b>       | <b>12 16</b> | <b>12 16</b>           | <b>16</b>                             | <b>16</b>    | <b>16</b>    |

|                           |              |              |                        |                                 |                        |
|---------------------------|--------------|--------------|------------------------|---------------------------------|------------------------|
|                           |              |              |                        |                                 |                        |
| <b>Insert Arrangement</b> | <b>22-21</b> | <b>22-22</b> | <b>22-23</b>           | <b>22-24</b>                    | <b>22-27</b>           |
| <b>Service Rating</b>     | <b>A</b>     | <b>A</b>     | <b>H = D; Bal. = A</b> | <b>C, D, E = D; A, B, F = A</b> | <b>J = D; Bal. = A</b> |
| <b>Number of Contacts</b> | <b>1 2</b>   | <b>4</b>     | <b>8</b>               | <b>2 4</b>                      | <b>1 8</b>             |
| <b>Contact Size</b>       | <b>0 16</b>  | <b>8</b>     | <b>12</b>              | <b>12 16</b>                    | <b>8 16</b>            |

|                           |              |                                    |              |                        |             |
|---------------------------|--------------|------------------------------------|--------------|------------------------|-------------|
|                           |              |                                    |              |                        |             |
| <b>Insert Arrangement</b> | <b>22-28</b> | <b>22-33</b>                       | <b>22-34</b> | <b>22-36</b>           | <b>24-2</b> |
| <b>Service Rating</b>     | <b>A</b>     | <b>A, B, C, D = D; E, F, G = A</b> | <b>D</b>     | <b>H = D; Bal. = A</b> | <b>D</b>    |
| <b>Number of Contacts</b> | <b>7</b>     | <b>7</b>                           | <b>3 2</b>   | <b>8</b>               | <b>7</b>    |
| <b>Contact Size</b>       | <b>12</b>    | <b>16</b>                          | <b>12 16</b> | <b>12</b>              | <b>12</b>   |



# MIL-C-22992, QWLD

## contact arrangements

front face of pin insert or rear of socket insert illustrated

|                           |       |      |                       |       |      |
|---------------------------|-------|------|-----------------------|-------|------|
|                           |       |      |                       |       |      |
| <b>Insert Arrangement</b> | 24-3  | 24-5 | 24-6                  | 24-7  | 24-9 |
| <b>Service Rating</b>     | D     | A    | A, G, H = D; Bal. = A | A     | A    |
| <b>Number of Contacts</b> | 2 5   | 16   | 8                     | 2 14  | 2    |
| <b>Contact Size</b>       | 12 16 | 16   | 12                    | 12 16 | 4    |

|                           |       |       |       |                             |       |
|---------------------------|-------|-------|-------|-----------------------------|-------|
|                           |       |       |       |                             |       |
| <b>Insert Arrangement</b> | 24-10 | 24-11 | 24-12 | 24-16                       | 24-17 |
| <b>Service Rating</b>     | A     | A     | A     | A, B, F, G = D; C, D, E = A | D     |
| <b>Number of Contacts</b> | 7     | 3 6   | 2 3   | 1 3 3                       | 2 3   |
| <b>Contact Size</b>       | 8     | 8 12  | 4 12  | 8 12 16                     | 12 16 |

|                           |       |       |       |       |       |
|---------------------------|-------|-------|-------|-------|-------|
|                           |       |       |       |       |       |
| <b>Insert Arrangement</b> | 24-20 | 24-21 | 24-22 | 24-27 | 24-28 |
| <b>Service Rating</b>     | D     | D     | D     | E     | Inst. |
| <b>Number of Contacts</b> | 2 9   | 1 9   | 4     | 7     | 24    |
| <b>Contact Size</b>       | 12 16 | 8 16  | 8     | 16    | 16    |

|                       |    |    |   |   |   |
|-----------------------|----|----|---|---|---|
|                       |    |    |   |   |   |
| <b>CONTACT LEGEND</b> | 16 | 12 | 8 | 4 | 0 |

# MIL-C-22992, QWLD contact arrangements

front face of pin insert or rear of socket insert illustrated



**28-1**  
A, J, E = D; Bal. = A  
3 6  
8 12



**28-2**  
D  
2 12  
12 16




**28-3**  
E  
3  
8




**28-4**  
G, P, S = E; Bal. = D  
2 7  
12 16


**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**




**28-5**  
D  
2 1 2  
4 12 16



**28-6**  
D  
3  
4




**28-7**  
D  
2  
4




**28-8**  
L, M = E; B = D; Bal. = A  
2 10  
12 16


**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**




**28-9**  
D  
6 6  
12 16



**28-10**  
G = D; Bal. = A  
2 2 3  
4 8 12




**28-11**  
A  
4 18  
12 16



**28-12**  
A  
26  
16

**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**

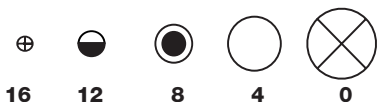

**CONTACT LEGEND**

16

12

8


4

0


# MIL-C-22992, QWLD

## contact arrangements


front face of pin insert or rear of socket insert illustrated

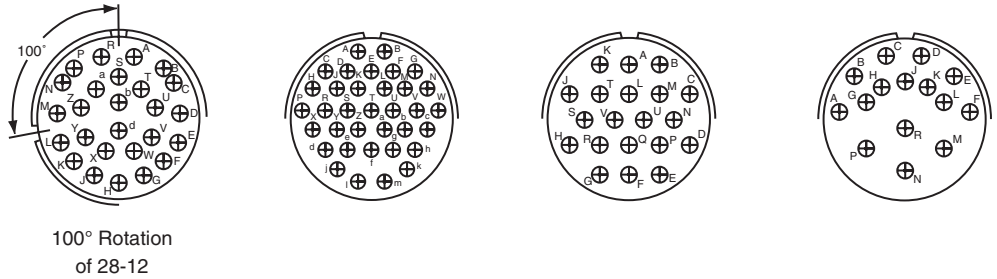


|                    |       |       |       |                                |
|--------------------|-------|-------|-------|--------------------------------|
| Insert Arrangement | 28-13 | 28-15 | 28-16 | 28-17                          |
| Service Rating     | A     | A     | A     | R = B; M, N, P = D; A to L = A |
| Number of Contacts | 26    | 35    | 20    | 15                             |
| Contact Size       | 16    | 16    | 16    | 16                             |

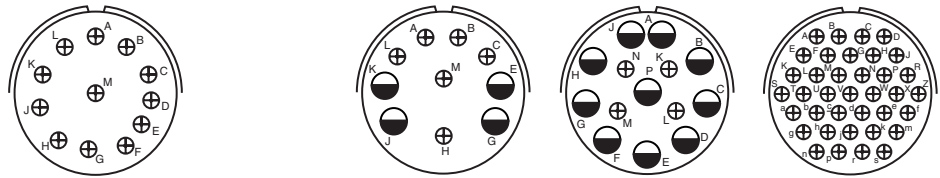

|                    |  |                          |       |       |
|--------------------|--|--------------------------|-------|-------|
| Insert Arrangement | 28-18  | 28-19                    | 28-20 | 28-21 |
| Service Rating     | M = C; G, H, J, K, L = D; A, B = H; Bal. = Inst. | H, M = B; A = D; Bal = A | A     | A     |
| Number of Contacts | 12   | 4 6                      | 10 4  | 37    |
| Contact Size       | 16   | 12 16                    | 12 16 | 16    |



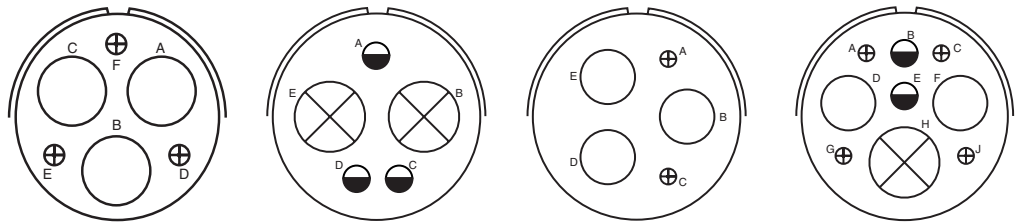


|                    |       |                 |      |           |
|--------------------|-------|-----------------|------|-----------|
| Insert Arrangement | 28-22 | 32-1            | 32-2 | 32-3      |
| Service Rating     | D     | A = E; Bal. = D | E    | D         |
| Number of Contacts | 3 3   | 2 3             | 3 2  | 1 2 2 4   |
| Contact Size       | 4 16  | 0 12            | 4 16 | 0 4 12 16 |

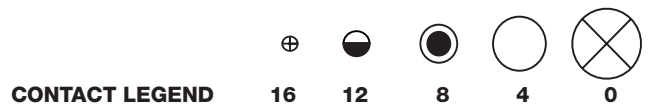

# MIL-C-22992, QWLD contact arrangements

front face of pin insert or rear of socket insert illustrated







|                           |                                 |
|---------------------------|---------------------------------|
| <b>Insert Arrangement</b> | <b>32-4</b>                     |
| <b>Service Rating</b>     | <b>F, J, K, N = A; Bal. = D</b> |
| <b>Number of Contacts</b> | <b>2 12</b>                     |
| <b>Contact Size</b>       | <b>12 16</b>                    |

|             |
|-------------|
| <b>32-5</b> |
| <b>D</b>    |
| <b>2</b>    |
| <b>0</b>    |

|                  |
|------------------|
| <b>32-6</b>      |
| <b>A</b>         |
| <b>2 3 2 16</b>  |
| <b>4 8 12 16</b> |





|                                    |
|------------------------------------|
| <b>32-7</b>                        |
| <b>A, B, h, j = Inst; Bal. = A</b> |
| <b>7 28</b>                        |
| <b>12 16</b>                       |



|                           |              |
|---------------------------|--------------|
| <b>Insert Arrangement</b> | <b>32-8</b>  |
| <b>Service Rating</b>     | <b>A</b>     |
| <b>Number of Contacts</b> | <b>6 24</b>  |
| <b>Contact Size</b>       | <b>12 16</b> |

|             |  |
|-------------|--|
| <b>32-9</b> | <b>D</b>                                   |
| <b>2 12</b> | <b>A, F = E, G = B; B, E = D; C, D = A</b> |
| <b>4 16</b> | <b>2 2 3</b>                               |
|             | <b>4 8 16</b>                              |

|                                    |
|------------------------------------|
| <b>32-12</b>                       |
| <b>C, D, E, F, G = A; Bal. = D</b> |
| <b>5 10</b>                        |
| <b>12 16</b>                       |

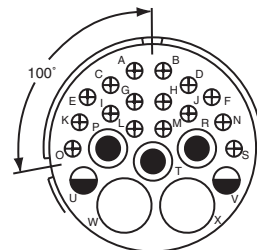

|                           |              |
|---------------------------|--------------|
| <b>Insert Arrangement</b> | <b>32-13</b> |
| <b>Service Rating</b>     | <b>D</b>     |
| <b>Number of Contacts</b> | <b>5 18</b>  |
| <b>Contact Size</b>       | <b>12 16</b> |

|              |
|--------------|
| <b>32-15</b> |
| <b>D</b>     |
| <b>2 6</b>   |
| <b>0 12</b>  |

100° Rotation  
of 32-6


|                  |
|------------------|
| <b>32-16</b>     |
| <b>A</b>         |
| <b>2 3 2 16</b>  |
| <b>4 8 12 16</b> |

|              |
|--------------|
| <b>32-17</b> |
| <b>D</b>     |
| <b>4</b>     |
| <b>4</b>     |




# MIL-C-22992, QWLD contact arrangements

front face of pin insert or rear of socket insert illustrated




Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size


32-73  
A  
46  
16



36-1  
D  
4 18  
12 16

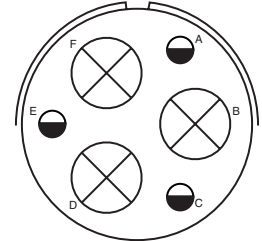


36-3  
D  
3 3  
0 12

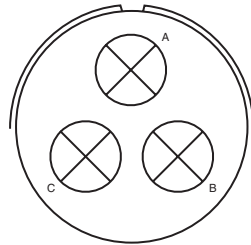


Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size


36-4  
A = D; B, C = A  
3  
0

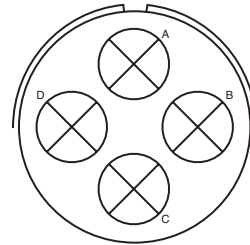

36-5  
A  
4  
0

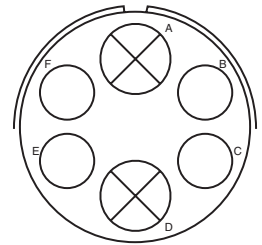


36-6  
A  
2 4  
0 4

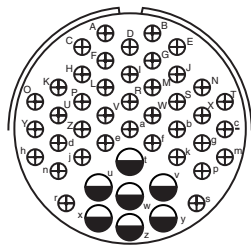


Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size

36-7  
A  
7 40  
12 16

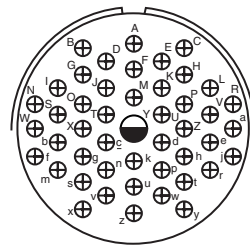


36-8  
A  
1 46  
12 16

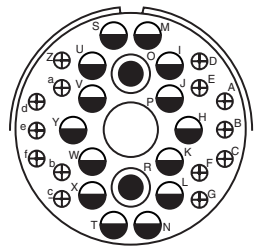

36-9  
A  
1 2 14 14  
4 8 12 16




## CONTACT LEGEND

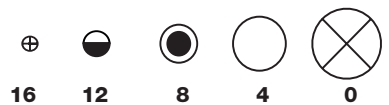



# MIL-C-22992, QWLD contact arrangements

front face of pin insert or rear of socket insert illustrated

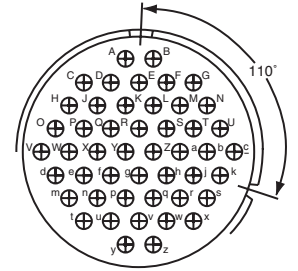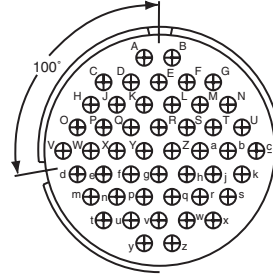

Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size




**36-10**  
**A**  
**48**  
**16**

100° Rotation  
of 36-10

**36-11**  
**A**  
**48**  
**16**

110° Rotation  
of 36-10

**36-12**  
**A**  
**48**  
**16**






Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size

**36-13**  
**N, P, Q = E; Bal. = A**  
**2 15**  
**12 16**

**36-14**  
**D**  
**5 5 6**  
**8 12 16**

**36-15**  
**M = D; Bal. = A**  
**35**  
**16**



Insert Arrangements  
Service Rating  
Number of CContacts  
Contact Size


**36-16**  
**A**  
**7 40**  
**12 16**

110° Rotation  
of 36-7

**36-17**  
**A**  
**7 40**  
**12 16**




100° Rotation  
of 36-9

**36-18**  
**A**  
**1 2 14 14**  
**4 8 12 16**

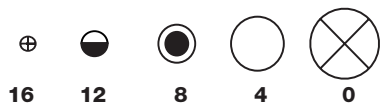

# MIL-C-22992, QWLD contact arrangements

front face of pin insert or rear of socket insert illustrated

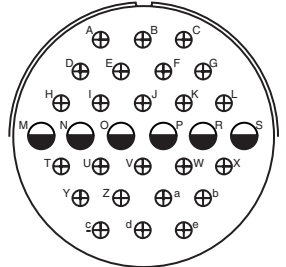
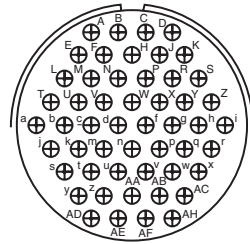
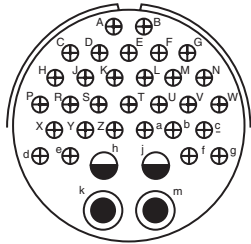


**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**

**36-20**  
**A**  
**2 2 30**  
**8 12 16**

**36-52**  
**A**  
**52**  
**16**

**40-1**  
**D**  
**6 24**  
**12 16**

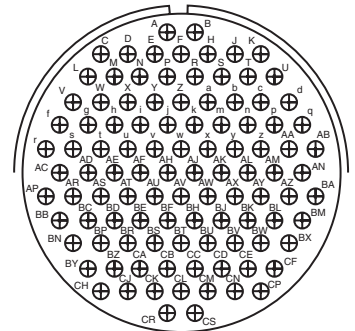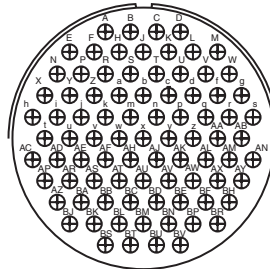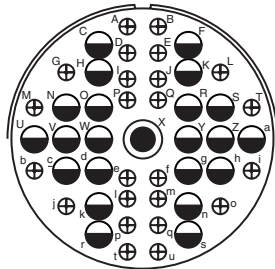


**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**

**40-9**  
**A**  
**1 22 24**  
**8 12 16**

**40-56**  
**A**  
**85**  
**16**

**44-52**  
**A**  
**104**  
**16**

**CONTACT LEGEND**

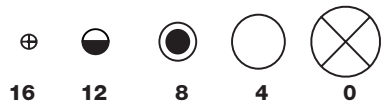

# QWLD

## special arrangements

Ever expanding requirements for more complex circuits in ground equipment and elevated altitude applications has prompted Amphenol to provide inserts not covered by the MS drawings. Pictured here and on the following pages are insert layouts which have anywhere from one contact

(high tension) to the 78 contact insert in shell size 48. Many of these special inserts are also available in alternate keyway positions. Please contact Amphenol, Sidney, NY or your local Amphenol sales office for arrangements particular to your circuit application.

front face of pin insert or rear of socket insert illustrated

|                           |       |       |                       |       |                      |
|---------------------------|-------|-------|-----------------------|-------|----------------------|
|                           |       |       |                       |       |                      |
| <b>Insert Arrangement</b> | 16-59 | 20-51 | 20-57                 | 20-58 | 20-59                |
| <b>Service Rating</b>     | A     | A     | A                     | A     | A                    |
| <b>Number of Contacts</b> | 4     | 3*    | 7*                    | 5 5   | 3*                   |
| <b>Contact Size</b>       | 12    | 8     | 12 for #14 or 16 wire | 12 16 | 8 for #10 or 12 wire |

|                           |                   |                    |       |                       |
|---------------------------|-------------------|--------------------|-------|-----------------------|
|                           |                   |                    |       |                       |
| <b>Insert Arrangement</b> | 20-66             | 20-79              | 22-63 | 22-65                 |
| <b>Service Rating</b>     | A                 | H = D; Bal. = A    | A     | H = D; Bal. = A       |
| <b>Number of Contacts</b> | 1 5               | 7* 1*              | 4 8   | 8*                    |
| <b>Contact Size</b>       | 16 12 or #10 wire | 16 12 for #16 wire | 12 16 | 12 for #14 or 16 wire |

|                           |       |                      |  |         |
|---------------------------|-------|----------------------|--|---------|
|                           |       |                      |  |         |
| <b>Insert Arrangement</b> | 22-70 | 22-80                | 24-51  | 24-52   |
| <b>Service Rating</b>     | A     | A                    | A  | Hi-Volt |
| <b>Number of Contacts</b> | 8 5   | 3*                   | 5*   | 1       |
| <b>Contact Size</b>       | 12 16 | 8 for #10 or 12 wire | B, E for AN #10 or 12 wire<br>A, C, D for AN #8 wire | 12      |


\*Solderless

|                       |    |    |   |   |   |
|-----------------------|----|----|---|---|---|
|                       |    |    |   |   |   |
| <b>CONTACT LEGEND</b> | 16 | 12 | 8 | 4 | 0 |


# QWLD

## special arrangements


front face of pin insert or rear of socket insert illustrated




**24-53**  
**A**  
**5\***  
**8**



**24-58**  
**A**  
**3 3 7**  
**8 12 16**




**24-59**  
**A**  
**7 7**  
**12 16**




**24-60**  
**A**  
**7\***  
**8 for #10 or 12 wire**

**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**




**24-65**  
**A**  
**11 4**  
**12 16**




**24-66**  
**D**  
**7**  
**12**


**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**




**24-67**  
**Inst.**  
**19**  
**12**



**24-71**  
**A**  
**2\* 5\***  
**8 8 for #10 or 12 wire**




**24-75**  
**A**  
**5 2**  
**8 8 for #16 wire**




**24-79**  
**A**  
**5**  
**8**

**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**



**24-80**  
**Inst.**  
**23**  
**16**



**24-84**  
**A**  
**1 18**  
**12 12 (Coax) RG-188/U**  
**or RG-174/U**

\*Solderless



# QWLD

## special arrangements

front face of pin insert or rear of socket insert illustrated

|                           |  |                          |                               |  |
|---------------------------|--|--------------------------|-------------------------------|--|
|                           |  |                          |                               |  |
| <b>Insert Arrangement</b> | <b>28-51</b>                             | <b>28-59</b>             | <b>28-66</b>                  | <b>28-72</b>                             |
| <b>Service Rating</b>     | <b>A</b>                                 | <b>A</b>                 | <b>A</b>                      | <b>-</b>                                 |
| <b>Number of Contacts</b> | <b>12</b>                                | <b>7 10</b>              | <b>2 14</b>                   | <b>3</b>                                 |
| <b>Contact Size</b>       | <b>12</b>                                | <b>12 16</b>             | <b>8 12</b>                   | <b>4 (Coax) RG-59A/U<br/>or RG-62A/U</b> |
|                           |  |                          |                               |  |
| <b>Insert Arrangement</b> | <b>28-74</b>                             | <b>28-75</b>             | <b>28-79</b>                  | <b>28-82</b>                             |
| <b>Service Rating</b>     | <b>A</b>                                 | <b>A</b>                 | <b>A</b>                      | <b>D</b>                                 |
| <b>Number of Contacts</b> | <b>9* 4* 3*</b>                          | <b>9* 7*</b>             | <b>7 9</b>                    | <b>2 4</b>                               |
| <b>Contact Size</b>       | <b>16 8 8 for #10 wire<br/>(S, T, R)</b> | <b>16 8 for #10 wire</b> | <b>8 16</b>                   | <b>8 12</b>                              |
|                           |  |                          |                               |  |
| <b>Insert Arrangement</b> | <b>28-84</b>                             | <b>32-52</b>             | <b>32-53</b>                  | <b>32-56</b>                             |
| <b>Service Rating</b>     | <b>A</b>                                 | <b>D</b>                 | <b>t, u = E; Bal. = Inst.</b> | <b>A</b>                                 |
| <b>Number of Contacts</b> | <b>9</b>                                 | <b>6 2</b>               | <b>5 37</b>                   | <b>24 6</b>                              |
| <b>Contact Size</b>       | <b>8</b>                                 | <b>12 0</b>              | <b>12 16</b>                  | <b>16 12 for #10 wire</b>                |


\*Solderless



# QWLD

## special arrangements

front face of pin insert or rear of socket insert illustrated




32-57

\*\*

Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size


6 2  
12 0 (Coax) RG-71/U



32-58

-


4 (Coax) RG-161U  
or RG-179/U



32-60

A


15 8  
16 8 (Coax) RG-124/U



32-62

\*\*

2 1 2 16 2  
4 8 12 16 8 (Coax)RG-124/U




32-64

Inst.

Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size


54  
16



32-68

A


12 4  
16 4 (Coax) RG-58C/U



32-75

8, 9 = D


2 7  
12 8 (Coax) RG-180B/U



32-76

A

19  
12




32-79

D

Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size


4 1  
4 8



36-51

D


2 2  
0 4



36-54

A

8 31  
8 16




36-55

A


31 8  
16 8 for #6 wire

\*\*Consult Sidney, NY for service rating of power contacts.

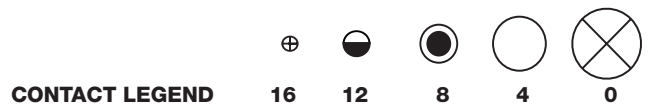

# QWLD special arrangements

front face of pin insert or rear of socket insert illustrated

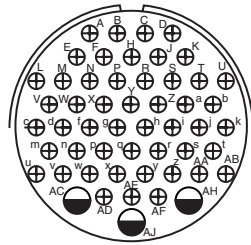


**36-59**

**A**

**50 3**

**16 12 for #10 wire**




**36-60**

**\*\***

**40 7**

**16 12 for #10 wire**

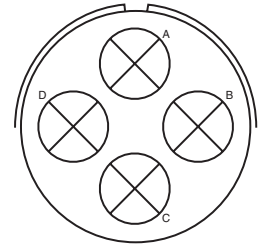


**36-64**

**-**

**4**

**0 (Coax) RG-11/U  
RG-12/U or RG-13/U**

**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**

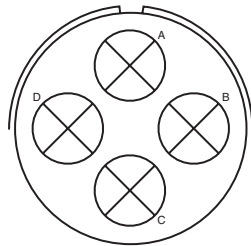


**36-65**

**-**

**4**

**0 (Coax) RG-59/U, RG-62/U  
or RG-71/U**




**36-71**

**A**

**3 50**

**12 16**

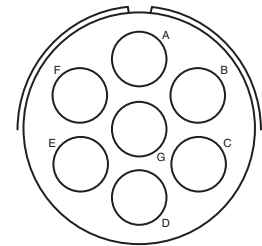


**36-73**

**-**

**7**

**4 (Coax) RG-62B/U**

**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**

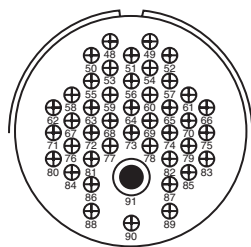


**36-74**

**A**

**43 1**

**16 8 (Coax) RG-187/U**




**36-75**

**A**

**48**

**16 for #14 wire**

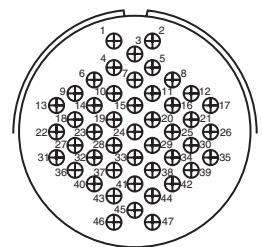


**36-76**

**A**

**47**

**16**

**Insert Arrangement**  
**Service Rating**  
**Number of Contacts**  
**Contact Size**

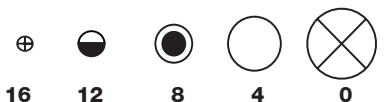

**CONTACT LEGEND**

**16**

**12**

**8**

**4**

**0**

\*\*Consult Sidney, NY for service rating of power contacts.

# QWLD special arrangements

front face of pin insert or rear of socket insert illustrated



Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size

**36-77**  
**D**  
**7**  
**4**



**36-78**  
**A**  
**2 12**  
**16 8**



**36-79**  
**A**  
**20**  
**12**



Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size


**36-80**  
**A**  
**20**  
**12 for #10 wire**



**36-83**  
**-**  
**7**  
**4 (Coax) RG-58/U**




**36-85**  
**M = D; Bal. = A**  
**35**  
**16 for #12 wire**

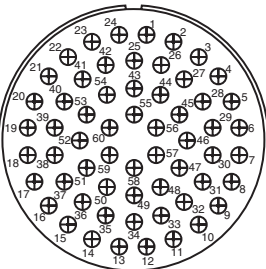


Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size

**40-53**  
**A**  
**60**  
**16**

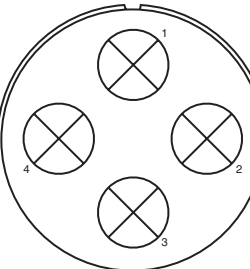

**40-57**  
**E**  
**4**  
**0**

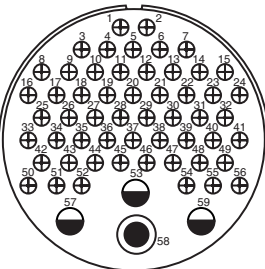


**40-61**  
**A**  
**1 3 55**  
**8 12 16**






# QWLD special arrangements


front face of pin insert or rear of socket insert illustrated

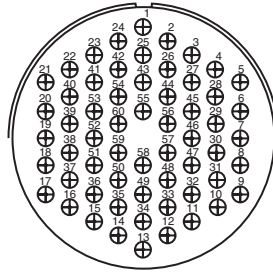


**Insert Arrangement** 40-62  
**Service Rating** A  
**Number of Contacts** 60  
**Contact Size** 16

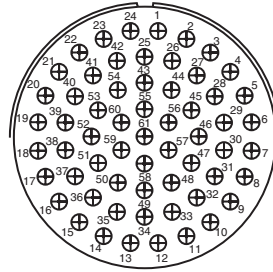


**Insert Arrangement** 40-63  
**Service Rating** A  
**Number of Contacts** 61  
**Contact Size** 16 for #14 wire

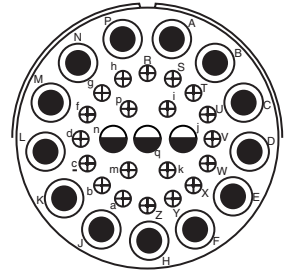


**Insert Arrangement** 40-64  
**Service Rating** -  
**Number of Contacts** 3 20 13  
**Contact Size** 12 16 8 (Coax) RG-124/U

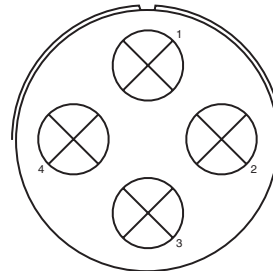


**Insert Arrangement** 40-66  
**Service Rating** -  
**Number of Contacts** 4  
**Contact Size** 0 (Coax) RG-63B/U

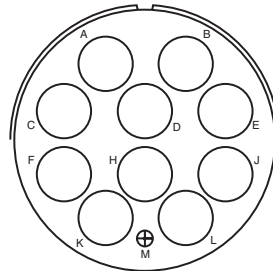


**Insert Arrangement** 40-67  
**Service Rating** A  
**Number of Contacts** 1 10  
**Contact Size** 16 4 (Coax) RG-59/U

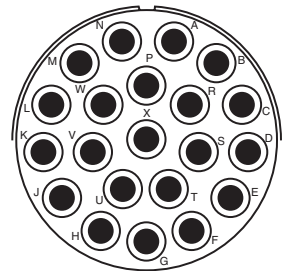


**Insert Arrangement** 40-68  
**Service Rating** A  
**Number of Contacts** 21  
**Contact Size** 8

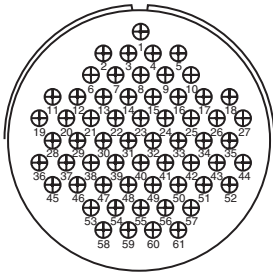


**Insert Arrangement** 40-70  
**Service Rating** A  
**Number of Contacts** 61  
**Contact Size** 16

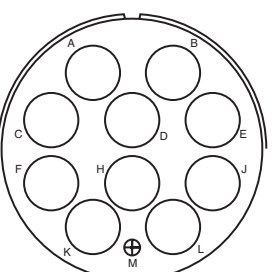

**Insert Arrangement** 40-72  
**Service Rating** A  
**Number of Contacts** 1 10  
**Contact Size** 16 4 (Coax) RG-9B/U

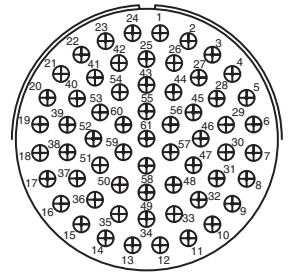

**Insert Arrangement** 40-73  
**Service Rating** A  
**Number of Contacts** 61  
**Contact Size** 16

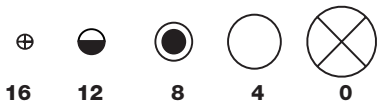

**CONTACT LEGEND**

16

12

8

4

0

# QWLD special arrangements

front face of pin insert or rear of socket insert illustrated




40-74

A

1 1 4  
12 4 (Coax) RG-62/U 0 (Coax) RG-9B/U  
or RG-214/U


Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size



40-75

E


1 4  
12 0

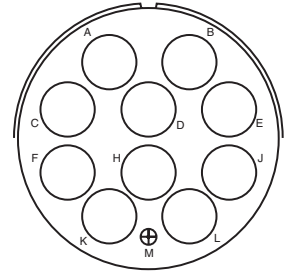

40-80

A

1 10  
16 4

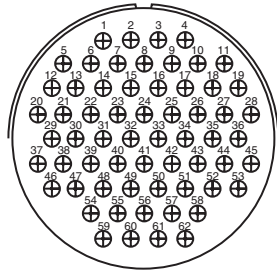


40-81

A

62  
16 for #14 wire


Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size



40-82

A


62  
16

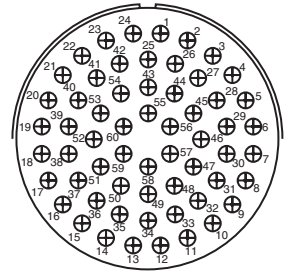

40-85

A

60  
16 for #14 wire

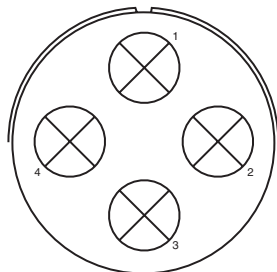


40-86

-

4  
0 (Coax) RG-115A/U


Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size

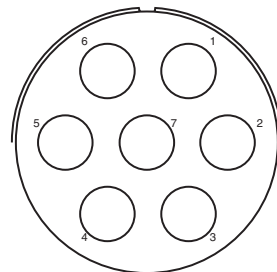

40-87

D


7  
4

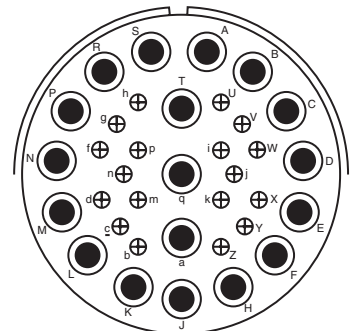

44-53

A

18 18  
16 8 (Coax) RG-124/U

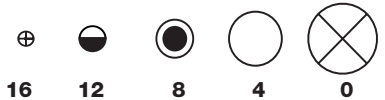

CONTACT LEGEND

16

12


8

4

0

# QWLD special arrangements

front face of pin insert or rear of socket insert illustrated

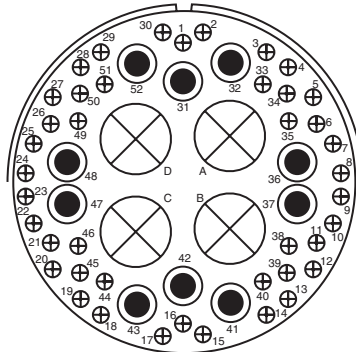


48-51†

A

Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size


42 10 4  
16 8 0 (Coax) RG-41/U

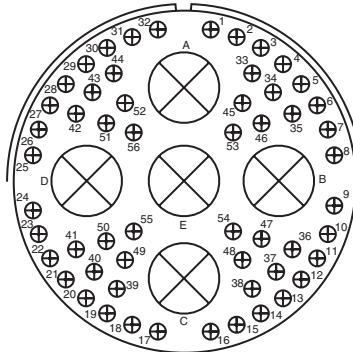

48-52†

A


56 5  
16 0 (Coax) RG-41/U

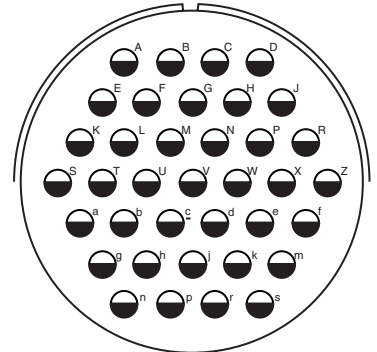

48-53†

D

37  
12

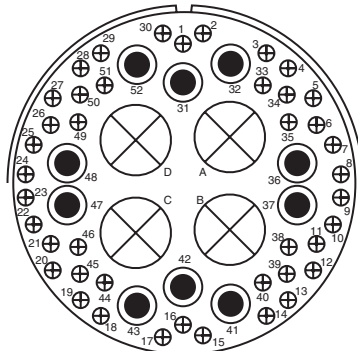


48-54†

A

Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size


42 10 4  
16 8 0 (Coax) RG-59/U

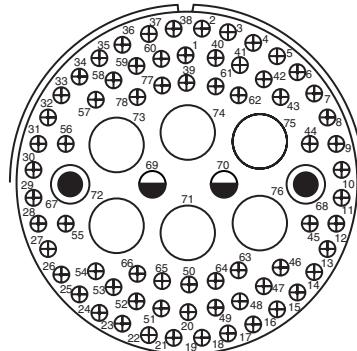

48-55†

A


68 2 2 6  
16 12 8 4

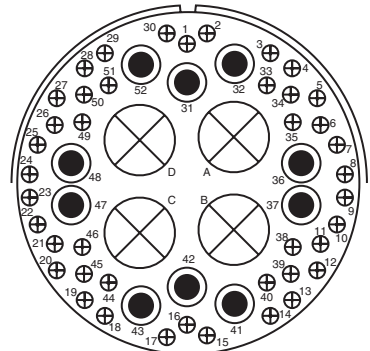

48-57†

A

42 10 4  
16 8 0

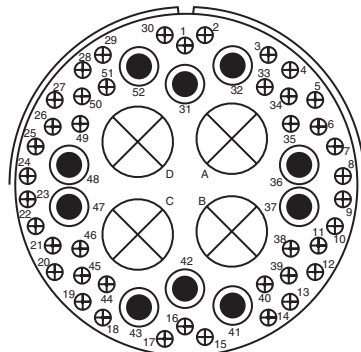

48-60†


A

Insert Arrangement  
Service Rating  
Number of Contacts  
Contact Size

42 10 4  
16 8 0 (Coax) RG-214/U

†Consult Sidney, NY for availability

## CONTACT LEGEND

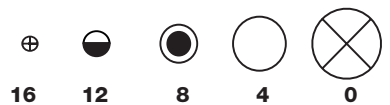

# QWLD

## thermocouple contact availability

A complete line of cylindrical connectors containing thermocouple insert arrangements is available. The contact layout for a particular arrangement will be found in either the MIL-C-22992, QWLD contact arrangement section, pages 27-38, or the Special contact arrangement section, pages 39-47. All thermocouple contact layouts may contain either iron, alumel, chromel, constantan, standard (copper) or brass (dummy) contacts. See the thermocouple tabulations on the following pages.

The following abbreviations are used in the contact material column in the charts that follow. Also, thermocouple contacts are color coded as shown. (This identification is made by means of small dots of stain on solder well end of the contact.)

| Abbreviation | Material     | Color Code |
|--------------|--------------|------------|
| Ir.          | Iron         | Black      |
| Con          | Constantan   | Yellow     |
| Cu.          | Copper Alloy | N/A        |
| Ch.          | Chromel      | White      |
| Al.          | Alumel       | Green      |
| Dummy        | Brass        | N/A        |

### WIRE WELL DATA

| Contact Size | Well Inside Dia.<br>+ .004<br>- .002 | Well Depth<br>+ .031<br>- .000 | Solder Well Barrel<br>Outside Dia. |
|--------------|--------------------------------------|--------------------------------|------------------------------------|
| 12           | .125                                 | .250                           | .166 ±.003                         |
| 16           | .094                                 | .188                           | .125 +.002<br>-.004                |

### RECOMMENDED WIRE

|                    |  |
|--------------------|--|
| I Chromel-Alumel   | Use wire in accordance with MIL-W-5848 |
| II Iron-Constantan | Use wire in accordance with MIL-W-5845 |

# QWLD

## thermocouple arrangements

| Shell Size and Arrg. | Similar to MS Arrg. | Total Contacts | Contact Size |    | Pin Insert Rotation CW | Contact Material                                |
|----------------------|---------------------|----------------|--------------|----|------------------------|---|
|                      |                     |                | 12           | 16 |                        |   |
| 14-59                | 14-53               | 6              |              | 6  | None                   | A = Al.; B = Ch.; C = Ir.; D = Con.; E,F = Cu.  |
| 16-52                | 16-11               | 2              | 2            |    | 90°                    | A = Al.; B = Ch.                                |
| 16-53                | 16-9                | 4              | 2            | 2  | 70°                    | A = Al.; C = Ch.; B, D = Cu.                    |
| 16-55                | 16-10               | 3              | 3            |    | 45°                    | A = Al.; B = Ch.; C = Cu.                       |
| 16-56                | 16-13               | 2              | 2            |    | 90°                    | A = Con.; B = Cu.                               |
| 16-57                | 16-10               | 3              | 3            |    | None                   | A = Al.; B = Cu.; C = Ch.                       |
| 16-58                | 16-10               | 3              | 3            |    | None                   | A = Con.; B, C = Cu.                            |
| 16-60                | 16-13               | 2              | 2            |    | None                   | A = Al.; B = Ch.                                |
| 16-62                | 16-11               | 2              | 2            |    | None                   | A = Con.; B = Cu.                               |
| 16-67                | 16-11               | 2              | 2            |    | None                   | A = Al.; B = Ch.                                |
| 16-68                | 16-9                | 4              | 2            | 2  | None                   | A, B, C = Ch.; D = Al.                          |
| 18-51                | 18-12               | 6              |              | 6  | None                   | A = Ir.; B, E = Con.; D = Cu.; C, F = Dummy     |
| 18-52                | 18-11               | 5              | 5            |    | None                   | A = Ir.; B = Con.; C = Ch.; D = Al.; E = Dummy  |
| 18-53                | 18-12               | 6              |              | 6  | None                   | A, D = Ir.; B, E = Con.; C, F = Dummy           |
| 18-54                | 18-15               | 4              | 4            |    | None                   | A, C = Al.; B, D = Ch.                          |
| 18-56                | 18-1                | 10             |              | 10 | 45°                    | A, C, E, G, I = Ir.; B, D, F, H, J = Con        |
| 18-57                | 18-12               | 6              |              | 6  | 45°                    | A, C, E = Al.; B, D, F = Ch.                    |
| 18-59                | 18-12               | 6              |              | 6  | 45°                    | A, C = Ir.; B, E, F = Con.; D = Cu.             |
| 18-60                | 18-11               | 5              | 5            |    | 45°                    | A, D = Al.; B, C = Ch.; E = Al.                 |
| 18-61                | 18-12               | 6              |              | 6  | None                   | A, C = Ir.; B, D = Con.; E = Ch.; F = Al.       |
| 18-62                | 18-12               | 6              |              | 6  | None                   | A, B, D = Ir.; D, E, F = Con.                   |
| 18-63                | 18-15               | 4              | 4            |    | None                   | A, C = Con.; B, D = Cu.                         |
| 18-65                | 18-12               | 6              |              | 6  | None                   | A = Ir.; B = Con.; Balance = Cu.                |
| 18-66                | 18-1                | 10             |              | 10 | None                   | A, C, E, G, I = Cu.; B, D, F, H, J = Con.       |
| 18-67                | 18-12               | 6              |              | 6  | None                   | A, C, E = Cu.; B, D, F = Con.                   |
| 18-68                | 18-11               | 5              | 5            |    | None                   | A, D = Al.; B, C = Ch.; E = Cu.                 |
| 18-69                | 18-1                | 10             |              | 10 | None                   | A = Al.; B = Ch.; Balance = Cu.                 |
| 18-70                | 18-11               | 5              | 5            |    | None                   | A = Ir.; B = Con.; C = Ch.; D = Al.; E = Cu.    |
| 18-71                | 18-15               | 4              | 4            |    | None                   | A = Con.; Balance = Cu.                         |
| 18-72                | 18-15               | 4              | 4            |    | None                   | D = Con.; Balance = Cu.                         |
| 18-73                | 18-9                | 7              | 2            | 5  | None                   | A = Al.; D = Ch; Balance = Cu.                  |
| 18-74                | 18-12               | 6              |              | 6  | None                   | A = Ch.; B = Al.; D = Ir.; E = Cu.; C, F = Con. |
| 18-76                | 18-1                | 10             |              | 10 | None                   | A, C, E, G, I = Al.; B, D, F, H, J = Ch.        |
| 18-77                | 18-1                | 10             |              | 10 | None                   | A, C, E, G = Al.; B, D, F, H = Ch.; Bal. = Cu.  |
| 18-78                | 18-1                | 10             |              | 10 | None                   | A = Al.; B = Ch.; D, F, H, J = Con.; Bal. = Cu. |
| 18-79                | 18-12               | 6              |              | 6  | None                   | A, F = Ir.; B, E = Con.; C, D = Cu.             |
| 18-80                | 18-15               | 4              | 4            |    | None                   | A, C = Cu.; B, D = Con.                         |
| 18-81                | 18-1                | 10             |              | 10 | None                   | E, G = Con.; Bal. = Cu.                         |
| 18-82                | 18-1                | 10             |              | 10 | None                   | E, G = Con.; F, H = Ir.; Bal = Cu.              |
| 20-52                | 20-4                | 4              | 4            |    | 315°                   | A= Ir.; B = Con.; C = Ch.; D = Al               |
| 20-56                | 20-7                | 8              |              | 8  | 45°                    | A, B, G, H = Ir.; C, D, E, F = Con.             |
| 20-60                | 20-7                | 8              |              | 8  | 45°                    | D = Ch.; E = Al.; Balance = Cu.                 |
| 20-61                | 20-29               | 17             |              | 17 | 45°                    | A, B, M = Cu.; Balance = Con.                   |
| 20-62                | 20-15               | 7              | 7            |    | 80°                    | A, C, E, = Al.; B, D, F, = Ch.; G = Cu.         |

# QWLD

## thermocouple arrangements

| Shell Size and Arrg. | Similar to MS Arrg. | Total Contacts | Contact Size |    | Pin Insert Rotation CW | Contact Material   |
|----------------------|---------------------|----------------|--------------|----|------------------------|--|
|                      |                     |                | 12           | 16 |                        |  |
| 20-64                | 20-27               | 14             |              | 14 | None                   | A = Al.; C = Ch.; Balance = Cu.  |
| 20-65                | 20-27               | 14             |              | 14 | None                   | A, B, C, D, E, F, G = Ir.; H, I, J, K, L, M, N = Con.                      |
| 20-67                | 20-16               | 9              | 2            | 7  | None                   | H = Al.; I = Ch.; Balance = Cu.  |
| 20-68                | 20-7                | 8              |              | 8  | None                   | A, B, G, H = Con.; C, D, E, F = Cu.  |
| 20-69                | 20-27               | 14             |              | 14 | None                   | A, B, C, D, E, F, G = Cu.; H, I, J, K, L, M, N = Con.                      |
| 20-70                | 20-29               | 17             |              | 17 | None                   | A, C, E, G, J, L, N, R, T = Ir.; B, D, F, H, K, M, P, S = Con.             |
| 20-71                | 20-29               | 17             |              | 17 | None                   | S = Al.; R = Ch.; Balance = Cu.  |
| 20-74                | 20-29               | 17             |              | 17 | None                   | A, C, E, G, J, L, N, R = Ir.; B, D, F, H, K, M, P, S = Con.; T = Cu.       |
| 20-75                | 20-15               | 7              | 7            |    | None                   | G = Al.; Balance = Ch.   |
| 20-77                | 20-16               | 9              | 2            | 7  | None                   | A = Con.; Balance = Std.   |
| 20-80                | 20-27               | 14             |              | 14 | None                   | A, C, E, G, I, K, M = Cu.; B, D, F, H, J, L, N = Con.                      |
| 20-81                | 20-27               | 14             |              | 14 | None                   | A, C, E, G, I, K, M = Ch.; B, D, F, H, J, L, N = Al                        |
| 20-82                | 20-29               | 17             |              | 17 | None                   | A, C, E, G, J, L, N, R = Al.; B, D, F, H, K, M, P, S = Ch.; T = Cu.        |
| 20-85                | 20-33               | 11             |              | 11 | None                   | K, L = Al.; Bal. = Ch.   |
| 20-87                | 20-29               | 17             |              | 17 | None                   | A, C, E, G, J, L, N, R = Con.; Bal. = Cu.                                  |
| 20-88                | 20-27               | 14             |              | 14 | None                   | A, C, E = Al.; B, D, F = Ch.; G, H, K, N = Con.; Bal. = Cu.                |
| 20-89                | 20-27               | 14             |              | 14 | None                   | B, D, F, H, J, L = Al.; A, C, E, G, I, K = Ch., M, N = Cu.                 |
| 20-90                | 20-27               | 14             |              | 14 | None                   | C, G, I = Ch.; K, L, M = Al.; Bal. = Cu.                                   |
| 20-91                | 20-27               | 14             |              | 14 | None                   | I = Ch.; K = Al.; Bal. = Cu.   |
| 20-92                | 20-7                | 8              |              | 8  | None                   | A = Al.; H = Cu.; Bal. = Ch.   |
| 20-93                | 20-27               | 14             |              | 14 | None                   | A = Ch.; B = Al.; Bal. = Cu.   |
| 20-94                | 20-15               | 7              | 7            |    | None                   | A, C, E = Al.; B, D, F = Ch.; G = Cu.                                      |
| 20-99                | 20-33               | 11             |              | 11 | None                   | A = Al.; Bal. = Ch.  |
|                      |                     |                |              |    |                        |  |
| 22-57                | 22-14               | 19             |              | 19 | 45°                    | A, C, E, G, J, L, N, R = Ir.; B, D, F, H, K, M, P, S = Con.; T, U, V = Cu. |
| 22-60                | 22-14               | 19             |              | 19 | 45°                    | U = Al.; N = Ch.; Bal. = Cu.   |
| 22-62                | 22-23               | 8              | 8            |    | 60°                    | A, B, F, G = Al.; C, D, E, H = Ch.   |
| 22-68                | 22-19               | 14             |              | 14 | 45°                    | A, C, E, G, J, L, M = Ir.; B, D, F, H, K, P, N = Con.                      |
| 22-69                | 22-19               | 14             |              | 14 | 45°                    | A, C, E, G, J, L, M = Cu.; B, D, F, H, K, P, N = Con.                      |
| 22-71                | 22-14               | 19             |              | 19 | None                   | V = Al.; U = Ch.; Balance = Cu.  |
| 22-72                | 22-5                | 6              | 2            | 4  | None                   | B = Al.; E = Ch.; Balance = Cu.  |
| 22-73                | 22-5                | 6              | 2            | 4  | None                   | E = Al.; B = Ch.; Balance = Cu.  |
| 22-74                | 22-23               | 8              | 8            |    | None                   | A, C, E, G = Ir.; B, D, F, H = Con.  |
| 22-75                | 22-23               | 8              | 8            |    | None                   | A = Al.; B, D, G, H = Cu.; C = Ch.; E = Ir.; F = Con                       |
| 22-76                |                     | 21             |              | 21 | None                   | W = Con.; Balance = Cu.  |
| 22-77                | 22-19               | 14             |              | 14 | None                   | B, D, F, H, J, K, M, P = Cu.; A, E, L = Ir.; C, G, N = Con.                |
| 22-78                | 22-14               | 19             |              | 19 | None                   | A, C, E, G, H, K, M, P, R, T = Con.; Balance = Cu.                         |
| 22-79                | 22-10               | 4              |              | 4  | None                   | A, C = Con.; B, D = Cu.  |
| 22-82                | 22-14               | 19             |              | 19 | None                   | A, C, E, G, J, L, N, R, T = Ir.; B, D, F, H, K, M, P, S, U = Con.; V = Cu. |
| 22-83                | 22-18               | 8              |              | 8  | None                   | A, C, E, G = Al.; B, D, F, H = Ch.   |
| 22-84                | 22-14               | 19             |              | 19 | None                   | A, C, S = Ch.; B, D, T = Al.; Bal. = Cu.                                   |
| 22-85                | 22-19               | 14             |              | 14 | None                   | A, C, E, G, J, L, N = Al.; B, D, F, H, K, M, P = Ch.                       |
| 22-89                | 22-88               | 7              | 7            |    | None                   | A, C, E = Ir.; B, D, F = Con.; G = Cu.                                     |
|                      |                     |                |              |    |                        |  |
| 24-56                | 24-20               | 11             | 2            | 9  | 45°                    | E = Al.; F = Ch.; Balance = Cu.  |
| 24-57                | 24-26               | 24             |              | 24 | 45°                    | A, C, J, V, Y, W, K, E, H, U, S, M = Ch.; Balance = Al                     |
| 24-62                | 24-28               | 24             |              | 24 | None                   | A, C, E, G = Ir.; B, D, F, H = Con.; R, T = Ch.; S, U = Al.; Balance = Cu. |

# QWLD

## thermocouple arrangements

| Shell Size and Arrg. | Similar to MS Arrg. | Total Contacts | Contact Size |    | Pin Insert Rotation CW | Contact Material  |
|----------------------|---------------------|----------------|--------------|----|------------------------|---|
|                      |                     |                | 12           | 16 |                        |   |
| 24-63                | 24-28               | 24             |              | 24 | None                   | A, C, E, G, J, L, K, N, S, U, W, Y = Cu.; B, D, F, H, Q, R, M, P, T, V, X, Z = Con.   |
| 24-64                | 24-5                | 16             |              | 16 | None                   | A, B, C, D, E, F, G, H = Ir.; J, K, L, M, N, P, R, S = Con.   |
| 24-68                | 24-28               | 24             |              | 24 | None                   | D = Con.; Balance = Cu.   |
| 24-81                | 24-7                | 16             | 2            | 14 | None                   | A, C, E, G, I, K, M, N, P = Cu.; B, D, F, H, J, L, O = Con.   |
| 24-88                | 24-28               | 24             |              | 24 | None                   | A, B, C, D, E, F, G, H, J, K, L, M = Con.; Bal. = Ir.   |
| 24-91                | 24-5                | 16             |              | 16 | None                   | A, B, C, D, E, F, G, H = Al.; J, K, L, M, N, P, R, S = Ch.  |
|                      |                     |                |              |    |                        |   |
| 28-53                | 28-11               | 22             | 4            | 18 | 45°                    | J, L = Al.; K, M = Ch.; Balance = Cu.   |
| 28-58                | 28-20               | 14             | 10           | 4  | 45°                    | A, C, E, G, K, M = Al.; B, D, F, H, L, N = Ch.; J, P = Cu.  |
| 28-61                | 28-21               | 37             |              | 37 | 45°                    | A, C, J, Z, m, r, n, a, K, F, H, X, k, h, T, M, N, d = Ir.; Balance = Con.  |
| 28-63                | 28-20               | 14             | 10           | 4  | 45°                    | A, C, E, G, J = Al.; B, D, F, H, P = Ch.; Balance = Cu.   |
| 28-64                | 28-15               | 35             |              | 35 | None                   | A, d = Al.; B, j = Ch.; C, D, E, F, G, N, P, R, S, H, J, K, L, M, W, X, Y, Z = Con.; Balance = Cu.                                  |
| 28-65                | 28-12               | 26             |              | 26 | None                   | A, C, E, G, J, L, N, R, T, V = Ir.; X, Z = Al.; B, D, F, H, K, M, P, S, U, W = Con.; Y, a = Ch.; b, d = Cu.                         |
| 28-67                | 28-16               | 20             |              | 20 | None                   | U = Con.; Balance = Cu.   |
| 28-68                | 28-15               | 35             |              | 35 | 45°                    | T = Al.; U = Ch.; Balance = Cu.   |
| 28-69                | 28-11               | 22             | 4            | 18 | None                   | G = Al.; R = Ch.; Balance = Cu.   |
| 28-70                | 28-11               | 22             | 4            | 18 | None                   | A = Al.; B = Ch.; Balance = Cu.   |
| 28-77                | 28-11               | 22             | 4            | 18 | None                   | J = Con.; Balance = Cu.   |
| 28-81                | 28-21               | 37             |              | 37 | None                   | A, D, S, Z, n, s = Ir.; B, J, K, f, g, r = Con.; G, L, P, b, e, j = Al.; F, H, T, X, h, k = Ch.; Balance = Cu.                      |
| 28-85                | 28-11               | 22             | 4            | 18 | 45°                    | K, M = Al.; J, L = Ch.; Bal. = Cu.  |
| 28-91                | 28-9                | 12             | 6            | 6  | None                   | M = Ir.; L = Con.; Bal. = Cu.   |
| 28-94                | 28-12               | 26             |              | 26 | None                   | B, D, F, H, K, M, P, S, U, W, Y, a, d = Al.; Bal. = Ch.   |
| 28-98                | 28-21               | 37             |              | 37 | None                   | M = Al.; F = Ch.; Bal. = Cu.  |
| 28-99                | 28-12               | 26             |              | 26 | None                   | B, D, F, H, K, M, P, S, U, W, Y, a = Con.; Bal. = Cu.   |
| 28-AC                | 28-16               | 20             |              | 20 | None                   | A, C, E, G, J, L = Ir.; B, D, F, N, K, M = Con.; Bal. = Cu.   |
| 28-AD                | 28-21               | 37             |              | 37 | 45°                    | A, C, F, H, J, K, M, N, T, X, Z, a, d, h, k, m, n, r = Cu.; Bal. = Cu.  |
| 28-AE                | 28-21               | 37             |              | 37 | None                   | A, C, E, G, J, L, N, R, T, V, X, a, c, e, g, j, m, p, s = Cu.; Bal. = Con.  |
| 28-AF                | 28-18               | 12             |              | 12 | None                   | A, C, E, G, J, L = Ch.; Bal. = Al.  |
| 28-AG                | 28-12               | 26             |              | 26 | None                   | A, C, E, G, J, L, N, R = Al.; B, D, F, H, K, M, P, S = Ch.; Bal. = Cu.  |
| 28-AK                | 28-21               | 37             |              | 37 | 45°                    | A, B, C, D, J, K, L, M, N, P, a, b, c, d, e, m, p = Ch.; n = Cu.; Bal. = Al.  |
|                      |                     |                |              |    |                        |   |
| 32-51                | 32-8                | 30             | 6            | 24 | 90°                    | M = Ch.; N = Al.; Balance = Cu.   |
| 32-55                | 32-8                | 30             | 6            | 24 | 125°                   | M, N = Ch.; O, P = Al.; Balance = Cu.   |
| 32-91                | 32-64               | 54             |              | 54 | None                   | A, C, E, G, J, L, N, P, S, U, W, Y, a, c, e, g, j, m = Ir.; B, D, F, H, K, M, O, R, T, V, X, Z, b, d, f, h, k, n = Con.; Bal. = Cu. |
|                      |                     |                |              |    |                        |   |
| 36-53                | 36-7                | 47             | 7            | 40 | 45°                    | u, v, w = Al.; x, y, z = Ch.; Balance = Cu.   |
| 36-56                | 36-10               | 48             |              | 48 | None                   | A, C, E, G, L, J, H, P, R, T, V, X, Z, b, d, f, h, k, q, n, m, u, w, y = Con.; Bal. = Cu.   |
| 36-57                | 36-8                | 47             | 1            | 46 | None                   | W = Al.; f = Ch.; Balance = Cu.   |
| 36-58                | 36-15               | 35             |              | 35 | None                   | H = Al.; G = Ch.; Balance = Cu.   |
| 36-61                | 36-15               | 35             |              | 35 | None                   | A, C, E, J, K, L, M, N, P, R, T, V, f, X, Y, h, j, c = Con.; Balance = Cu.  |
| 36-62                | 36-10               | 48             |              | 48 | None                   | A, C, E = Al.; B, D, F = Ch.; Balance = Cu.   |
| 36-82                | 36-52*              | 52             |              | 52 | None                   | v, g = Ir.; p, y, c = Con.; x = Ch.; Balance = Cu.  |

\* Amphenol arrangement

# QWLD


## thermocouple arrangements

| Shell Size and Arrg. | Similar to MS Arrg. | Total Contacts | Contact Size |     | Pin Insert Rotation CW | Contact Material   |
|----------------------|---------------------|----------------|--------------|-----|------------------------|--|
|                      |                     |                | 12           | 16  |                        |  |
| 36-86                | 36-10               | 48             |              | 48  | None                   | A, C, E, G, J, L, N, P, R, T, V, X = Al.; B, D, F, H, K, M, O, Q, S, U, W, Y = Ch.; z, b, d, f, h, k, n, q, s, u, w, y = Con.; a, c, e, g, j, m, p, r, t, v, x, z = Cu.  |
| 36-88                | 36-52               | 52             |              | 52  | None                   | A, C, E, H, K, M, P, S, U, W, Y, a, c, f, h, j, m, p, r, t, v, x, z, AB, AD, AF = Cu.; Bal. = Con.   |
| 40-58                | 40-56*              | 85             |              | 85  | None                   | A, C, E, H, K, M, P, S, U, W, Y, a, c, f, h, j, m, p, r, t, v, x, z, AB, AD, AF, AJ, AL, AN, AP, AS, AU, AW, AY, BA, BC, BE, BH, BK, BM, BP, BS, BU = Ir.; Balance = Con.  |
| 40-59                | 40-56*              | 85             |              | 85  | None                   | B = Ch.; C = Con.; Balance = Cu.   |
| 40-77                | 40-53*              | 60             |              | 60  | None                   | 55, 60 = Ir.; 57, 58, 59 = Con.; 56 = Ch.; Balance = Cu.   |
| 40-78                | 40-53*              | 60             |              | 60  | None                   | 50, 51 = Ir.; 27, 28, 29, 31, 32, 34, 36, 37 = Con.; 25, 39, 40, 41 = Al.; 43, 44, 45, 46, 47, 48, 49, 52, 53, 54 = Ch.; Balance = Cu.   |
| 40-88                | 40-53               | 60             |              | 60  | None                   | 1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59 = Con.; Bal. = Cu.   |
| 40-AA                | 40-56               | 85             |              | 85  | None                   | A, C, E, H, K, M, P, S, U, W, Y, a, c, f, h, j, m, p, r, t, v, x, z, AB, AD, AF, AJ, AL, AN, AR, AT = Cu.; B, D, F, J, L, N, R, T, V, X, Z, b, d, g, i, k, n, q, s, u, w, y, AA, AC, AE, AH, AK, AM, AP, AS = Con.; AU, AW, AY, BA, BC, BE, BH, BK, BM, BP, BS, BU = Cu.; AV, AX, AZ, BB, BD, BF, BJ, BL, BN, BR, BT, BV = Al. |
| 44-57                | 44-52               | 104            |              | 104 | None                   | A, C, E, G, J, L, etc. = Cu.; B, D, F, H, K, M, etc. = Con.  |
| 44-59                | 44-52               | 104            |              | 104 | None                   | 34 = Con.; 70 = Cu.  |
| 44-60                | 44-52               | 104            |              | 104 | None                   | A, C, E, etc. = Ch., (52); B, D, F, etc. = Al., (52)   |
| 44-62                | 44-52               | 104            |              | 104 | None                   | BY, BZ, CA, CB, CC, CD, CE, CR = Al.; CH, CJ, CK, CL, CM, CN, CP, CS = Ch.; Bal. = Cu.   |

\* Amphenol arrangement



# MIL-C-22992, QWLD MS17343 or 10-1940XX wall mount receptacle

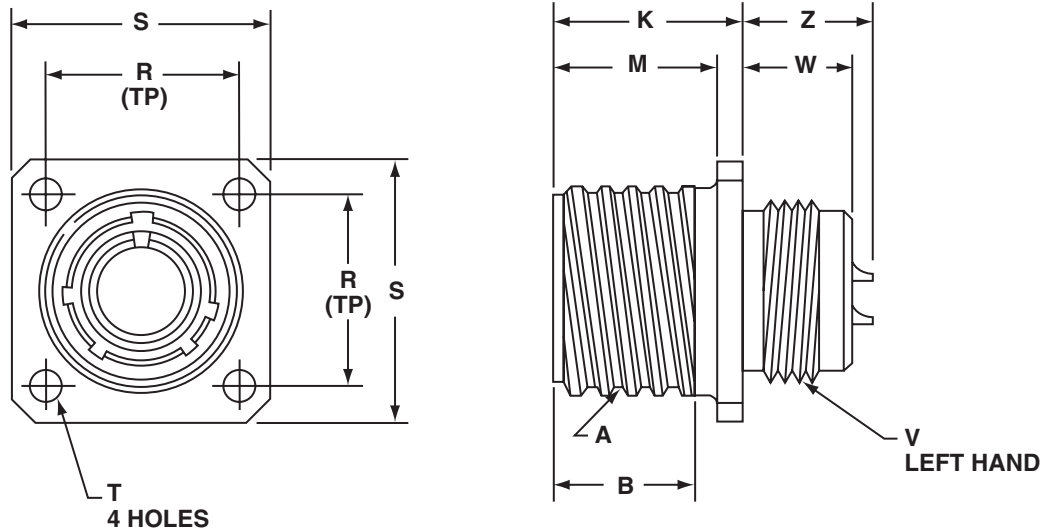

All dimensions for reference only.

| Part Number* | Shell Size | A Thread Class 2A (Plated) 0.1P-0.2L Double Stub | B Min Full Thd | K $+0.021$ $-0.020$ | M $+0.010$ $-0.000$ | R (TP) | S $+0.021$ $-0.020$ | T Dia $+0.004$ $-0.003$ | V Thread Class 2A-LH (Plated) | W $\pm 0.010$ | Z Max |
|--------------|------------|--|----------------|---------------------|---------------------|--------|---------------------|-------------------------|-------------------------------|---------------|-------|
| 10-194013    | 12         | .8750  | .672           | .937                | .797                | .906   | 1.188               | .150                    | .750-20UNEF                   | .640          | .700  |
| 10-194015    | 14         | 1.0000   | .672           | .937                | .797                | .969   | 1.281               | .150                    | .875-20UNEF                   | .640          | .700  |
| 10-194017    | 16         | 1.1250   | .672           | .937                | .797                | 1.062  | 1.375               | .150                    | 1.000-20UNEF                  | .640          | .700  |
| 10-194018    | 18         | 1.2500   | .672           | .953                | .797                | 1.156  | 1.500               | .177                    | 1.125-18UNEF                  | .625          | .686  |
| 10-194020    | 20         | 1.3750   | .672           | .953                | .797                | 1.250  | 1.625               | .177                    | 1.250-18UNEF                  | .625          | .686  |
| 10-194022    | 22         | 1.5000   | .672           | .953                | .797                | 1.375  | 1.750               | .177                    | 1.375-18UNEF                  | .625          | .686  |
| 10-194024    | 24         | 1.7500   | .672           | 1.047               | .859                | 1.562  | 2.000               | .177                    | 1.625-18UNEF                  | .594          | .585  |
| 10-194028    | 28         | 2.0000   | .672           | 1.047               | .859                | 1.750  | 2.250               | .177                    | 1.875-16UN                    | .594          | .591  |
| 10-194032    | 32         | 2.2500   | .672           | 1.109               | .922                | 1.938  | 2.500               | .209                    | 2.0625-16UNS                  | .530          | .528  |
| 10-194036    | 36         | 2.5000   | .672           | 1.109               | .922                | 2.188  | 2.750               | .209                    | 2.3125-16UNS                  | .530          | .528  |
| 10-194040    | 40         | 2.7500   | .672           | 1.109               | .922                | 2.375  | 3.000               | .209                    | 2.625-16UN                    | .703          | .528  |
| 10-194044    | 44         | 3.0000   | .672           | 1.109               | .922                | 2.625  | 3.250               | .209                    | 2.875-16UN                    | .703          | .770  |
| 10-194048†   | 48†        | 3.2500   | .672           | 1.109               | .922                | 2.875  | 3.500               | .209                    | 3.125-16UN                    | .703          | .770  |

\*To complete 10- part number or to complete MS part number, see how to order, pg. 22.

†Shell size 48 available in proprietary versions only. Consult Sidney, NY for availability and ordering information.

# MIL-C-22992, QWLD MS17345 or 10-1941XX cable connecting plug




All dimensions for reference only.

| Part Number* | Shell Size | A Thread Class 2A (Plated) 0.1P-0.2L Double Stub | B $+.016$ $-.000$ | K $+.021$ $-.020$ | S $+.021$ $-.020$ | V Thread Class 2A-LH (Plated) | W $\pm.010$ | Z Max |
|--------------|------------|--|-------------------|-------------------|-------------------|-------------------------------|-------------|-------|
| 10-194113    | 12         | .8750  | .688              | .938              | 1.000             | .750-20UNEF                   | .641        | .696  |
| 10-194115    | 14         | 1.0000   | .688              | .938              | 1.094             | .875-20UNEF                   | .641        | .696  |
| 10-194117    | 16         | 1.1250   | .688              | .938              | 1.281             | 1.000-20UNEF                  | .641        | .696  |
| 10-194118    | 18         | 1.2500   | .703              | .957              | 1.375             | 1.125-18UNEF                  | .625        | .680  |
| 10-194120    | 20         | 1.3750   | .703              | .957              | 1.500             | 1.250-18UNEF                  | .625        | .680  |
| 10-194122    | 22         | 1.5000   | .703              | .957              | 1.625             | 1.375-18UNEF                  | .625        | .680  |
| 10-194124    | 24         | 1.7500   | .766              | 1.016             | 1.875             | 1.625-18UNEF                  | .625        | .617  |
| 10-194128    | 28         | 2.0000   | .766              | 1.016             | 2.125             | 1.875-16UN                    | .625        | .617  |
| 10-194132    | 32         | 2.2500   | .703              | 1.078             | 2.375             | 2.0625-16UN                   | .563        | .555  |
| 10-194136    | 36         | 2.5000   | .703              | 1.078             | 2.625             | 2.3125-16UN                   | .563        | .555  |
| 10-194140    | 40         | 2.7500   | .703              | 1.078             | 3.000             | 2.625-16UN                    | .703        | .555  |
| 10-194144    | 44         | 3.0000   | .703              | 1.078             | 3.250             | 2.875-16UN                    | .703        | .805  |

\*To complete 10- part number or to complete MS part number, see how to order, pg. 22.

# MIL-C-22992, QWLD MS17346 or 10-1942XX box mount receptacle

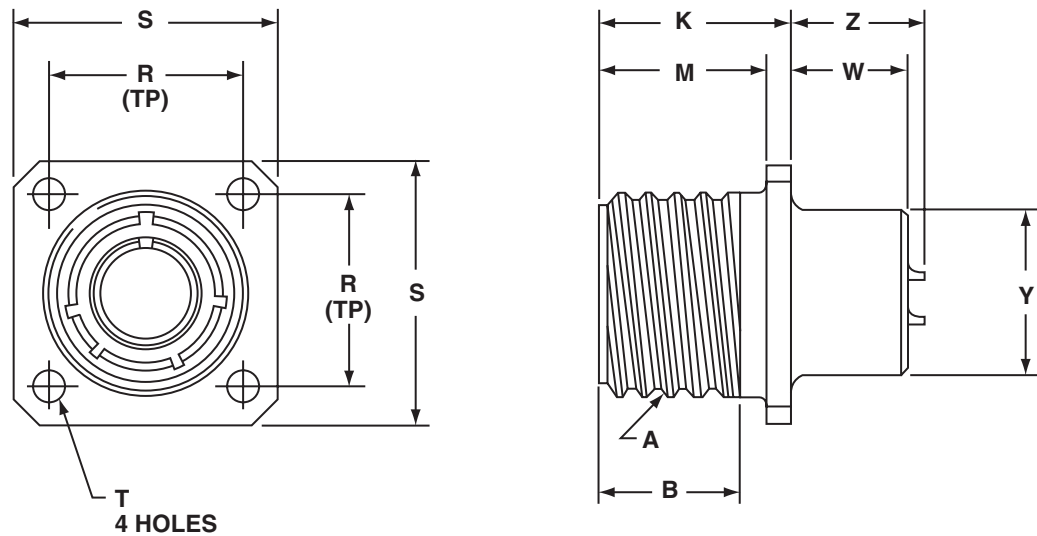


All dimensions for reference only.


| Part Number* | Shell Size | A Thread Class 2A (Plated) 0.1P-0.2L Double Stub | B Min Full Thd | K +.021 - .010 | M +.010 - .000 | R (TP) | S +.021 - .020 | T Dia +.004 - .003 | W +.020 - .030 | Y +.011 - .010 | Z Max |
|--------------|------------|--|----------------|----------------|----------------|--------|----------------|--------------------|----------------|----------------|-------|
| 10-194213    | 12         | .8750  | .672           | .938           | .797           | .906   | 1.188          | .150               | .640           | .640           | .700  |
| 10-194215    | 14         | 1.0000   | .672           | .938           | .797           | .969   | 1.281          | .150               | .640           | .765           | .700  |
| 10-194217    | 16         | 1.1250   | .672           | .938           | .797           | 1.062  | 1.375          | .150               | .640           | .890           | .700  |
| 10-194218    | 18         | 1.2500   | .672           | .953           | .797           | 1.156  | 1.500          | .177               | .625           | 1.015          | .686  |
| 10-194220    | 20         | 1.3750   | .672           | .953           | .797           | 1.250  | 1.625          | .177               | .625           | 1.171          | .686  |
| 10-194222    | 22         | 1.5000   | .672           | .953           | .797           | 1.375  | 1.750          | .177               | .625           | 1.296          | .686  |
| 10-194224    | 24         | 1.7500   | .672           | 1.047          | .859           | 1.562  | 2.000          | .177               | .594           | 1.421          | .585  |
| 10-194228    | 28         | 2.0000   | .672           | 1.047          | .859           | 1.750  | 2.250          | .177               | .594           | 1.625          | .591  |
| 10-194232    | 32         | 2.2500   | .672           | 1.110          | .922           | 1.938  | 2.500          | .209               | .531           | 1.891          | .528  |
| 10-194236    | 36         | 2.5000   | .672           | 1.110          | .922           | 2.188  | 2.750          | .209               | .531           | 2.078          | .528  |
| 10-194240    | 40         | 2.7500   | .672           | 1.110          | .922           | 2.375  | 3.000          | .209               | .531           | 2.312          | .528  |
| 10-194244    | 44         | 3.0000   | .672           | 1.110          | .922           | 2.625  | 3.250          | .209               | .531           | 2.562          | .778  |

\*To complete 10- part number or to complete MS part number, see how to order, pg. 22.

# MIL-C-22992, QWLD MS17347 or 10-1943XX jam nut receptacle (wall mount)

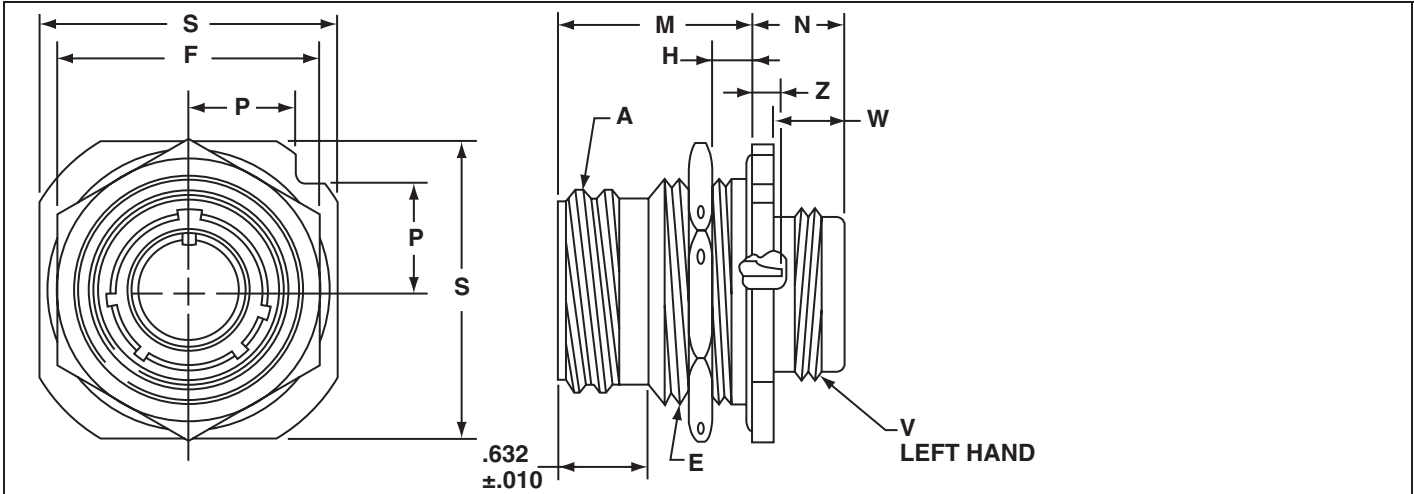

| Shell Size | K Dia.<br>+.005<br>-.000 | G<br>±.003 | U<br>±.005 |
|------------|--------------------------|------------|------------|
| 12,13      | 1.005                    | .562       | .688       |
| 14,15      | 1.130                    | .606       | .750       |
| 16,17      | 1.255                    | .699       | .875       |
| 18         | 1.380                    | .739       | .938       |
| 20         | 1.505                    | .783       | 1.000      |
| 22         | 1.630                    | .830       | 1.062      |
| 24         | 1.880                    | .919       | 1.188      |
| 28         | 2.130                    | 1.007      | 1.312      |
| 32         | 2.380                    | 1.096      | 1.438      |
| 36         | 2.630                    | 1.183      | 1.562      |
| 40         | 2.880                    | 1.292      | 1.703      |

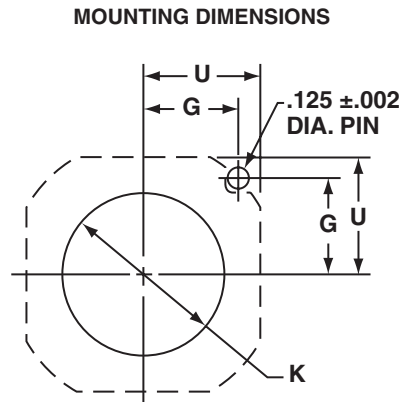

All dimensions for reference only.

| Part Number* | Shell Size | A Thread<br>Class 2A (Plated)<br>0.1P-0.2L<br>Double Stud | E Thread<br>Class 2A<br>(Plated) | F Hex<br>+.017<br>-.016 | H Panel Thickness |      | M<br>±.010 | N<br>+.021<br>-.020 | P<br>±.010 | S<br>+.011<br>-.010 | V Thread<br>Class 2A-LH<br>(Plated) | W<br>±.010 | Z<br>Max |
|--------------|------------|---|----------------------------------|-------------------------|-------------------|------|------------|---------------------|------------|---------------------|-------------------------------------|------------|----------|
|              |            |   |                                  |                         | Min               | Max  |            |                     |            |                     |                                     |            |          |
| 10-194313    | 12         | .8750   | 1.000-20UNEF                     | 1.250                   | .094              | .188 | 1.141      | .641                | .486       | 1.375               | .750-20UNEF                         | .516       | .483     |
| 10-194315    | 14         | 1.0000  | 1.125-18UNEF                     | 1.312                   | .094              | .188 | 1.141      | .641                | .530       | 1.500               | .875-20UNEF                         | .516       | .483     |
| 10-194317    | 16         | 1.1250  | 1.250-18UNEF                     | 1.500                   | .094              | .188 | 1.141      | .703                | .623       | 1.750               | 1.000-20UNEF                        | .516       | .483     |
| 10-194318    | 18         | 1.2500  | 1.375-18UNEF                     | 1.562                   | .094              | .203 | 1.156      | .703                | .663       | 1.875               | 1.125-18UNEF                        | .516       | .467     |
| 10-194320    | 20         | 1.3750  | 1.500-18UNEF                     | 1.750                   | .094              | .203 | 1.156      | .703                | .707       | 2.000               | 1.250-18UNEF                        | .516       | .467     |
| 10-194322    | 22         | 1.5000  | 1.625-18UNEF                     | 1.875                   | .094              | .203 | 1.156      | .703                | .751       | 2.125               | 1.375-18UNEF                        | .516       | .467     |
| 10-194324    | 24         | 1.7500  | 1.875-16UN                       | 2.125                   | .094              | .265 | 1.219      | .703                | .840       | 2.375               | 1.625-18UNEF                        | .516       | .404     |
| 10-194328    | 28         | 2.0000  | 2.125-16UN                       | 2.375                   | .094              | .277 | 1.231      | .785                | .928       | 2.625               | 1.875-16UN                          | .516       | .392     |
| 10-194332    | 32         | 2.2500  | 2.375-16UN                       | 2.625                   | .094              | .215 | 1.231      | .785                | 1.017      | 2.875               | 2.0625-16UN                         | .516       | .392     |
| 10-194336    | 36         | 2.5000  | 2.625-16UN                       | 2.875                   | .094              | .215 | 1.231      | .785                | 1.104      | 3.125               | 2.3125-16UN                         | .516       | .392     |
| 10-194340    | 40         | 2.7500  | 2.875-16UN                       | 3.125                   | .094              | .215 | 1.231      | .972                | 1.213      | 3.406               | 2.625-16UN                          | .703       | .392     |
| 10-194344    | 44         | 3.0000  | 3.125-16UN                       | 3.375                   | .094              | .215 | 1.231      | .972                | 1.299      | 3.656               | 2.875-16UN                          | .703       | .642     |

\*To complete 10- part number or to complete MS part number, see how to order, pg. 22.

# QWLD 10-1944XX

thru bulkhead receptacle




All dimensions for reference only.

| Part Number* | Shell Size | A Thread Class 2A (Plated) 0.1P-0.2L Double Stub | H Max | L ±.015 | M +.000 -0.010 | R (TP) | S +.021 -0.020 | T Dia +.004 -0.003 |
|--------------|------------|--|-------|---------|----------------|--------|----------------|--------------------|
| 10-194413    | 12         | .8750  | .312  | 2.219   | 1.032          | .906   | 1.188          | .150               |
| 10-194415    | 14         | 1.0000   | .312  | 2.219   | 1.032          | .969   | 1.281          | .150               |
| 10-194417    | 16         | 1.1250   | .312  | 2.219   | 1.032          | 1.062  | 1.375          | .150               |
| 10-194418    | 18         | 1.2500   | .312  | 2.219   | 1.032          | 1.156  | 1.500          | .177               |
| 10-194420    | 20         | 1.3750   | .312  | 2.219   | 1.032          | 1.250  | 1.625          | .177               |
| 10-194422    | 22         | 1.5000   | .312  | 2.219   | 1.032          | 1.375  | 1.750          | .177               |
| 10-194424    | 24         | 1.7500   | .312  | 2.219   | 1.032          | 1.562  | 2.000          | .177               |
| 10-194428    | 28         | 2.0000   | .312  | 2.219   | 1.032          | 1.750  | 2.250          | .177               |
| 10-194432    | 32         | 2.2500   | .312  | 2.219   | 1.032          | 1.938  | 2.500          | .209               |
| 10-194436    | 36         | 2.5000   | .312  | 2.219   | 1.032          | 2.188  | 2.750          | .209               |
| 10-194440    | 40         | 2.7500   | .312  | 2.219   | 1.032          | 2.375  | 3.000          | .209               |
| 10-194444    | 44         | 3.0000   | .447  | 2.469   | 1.157          | 2.625  | 3.250          | .209               |
| 10-194448†   | 48†        | 3.2500   | .447  | 2.469   | 1.157          | 2.875  | 3.500          | .209               |

\*To complete 10- part number or to complete MS part number, see how to order, pg. 22.

†Shell size 48 available in proprietary versions only. Consult Sidney, NY for availability and ordering information.

# MIL-C-22992, QWLD MS17344 or 10-1946XX straight plug

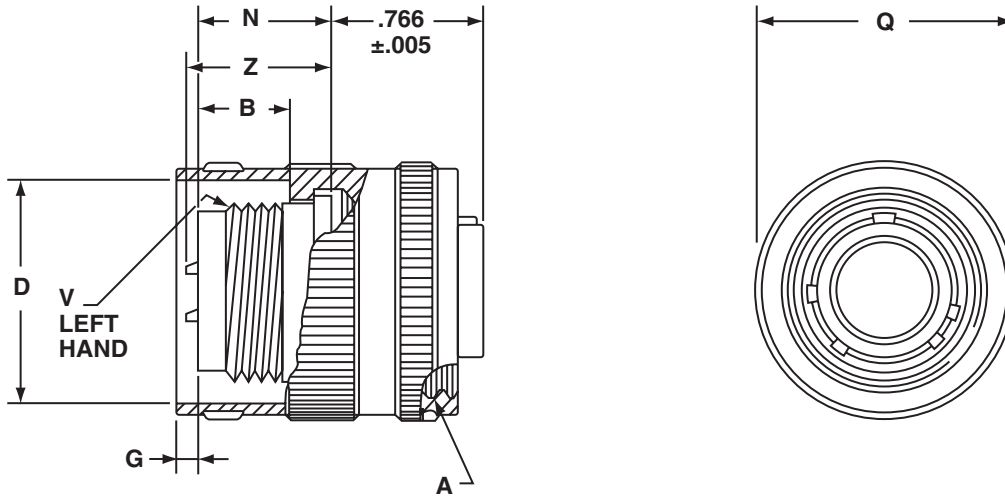

All dimensions for reference only.

| Part Number* | Shell Size | A Thread Class 2B 0.1P-0.2L Double Stub | B         | D $+0.010$ $-0.001$ | G         | N $+0.011$ $-0.010$ | Q Dia Max | V Thread Class 2A-LH (Plated) | Z Max |
|--------------|------------|---|-----------|---------------------|-----------|---------------------|-----------|-------------------------------|-------|
| 10-194613    | 12         | .8750                                   | .519±.020 | .985                | .030±.030 | .738                | 1.156     | .750-20UNEF                   | .807  |
| 10-194615    | 14         | 1.0000                                  | .519±.020 | 1.109               | .013±.030 | .738                | 1.281     | .875-20UNEF                   | .807  |
| 10-194617    | 16         | 1.1250                                  | .519±.020 | 1.235               | .091±.030 | .738                | 1.469     | 1.000-20UNEF                  | .807  |
| 10-194618    | 18         | 1.2500                                  | .519±.020 | 1.359               | .216±.030 | .738                | 1.563     | 1.125-18UNEF                  | .807  |
| 10-194620    | 20         | 1.3750                                  | .519±.020 | 1.485               | .216±.030 | .738                | 1.688     | 1.250-18UNEF                  | .807  |
| 10-194622    | 22         | 1.5000                                  | .519±.020 | 1.609               | .216±.030 | .738                | 1.844     | 1.375-18UNEF                  | .807  |
| 10-194624    | 24         | 1.7500                                  | .519±.020 | 1.859               | .184±.030 | .800                | 2.094     | 1.625-18UNEF                  | .807  |
| 10-194628    | 28         | 2.0000                                  | .519±.020 | 2.109               | .184±.030 | .800                | 2.344     | 1.875-16UN                    | .807  |
| 10-194632    | 32         | 2.2500                                  | .525±.026 | 2.359               | .190±.033 | .875                | 2.594     | 2.0625-16UNS                  | .807  |
| 10-194636    | 36         | 2.5000                                  | .525±.026 | 2.609               | .234±.033 | .875                | 2.844     | 2.3125-16UNS                  | .807  |
| 10-194640    | 40         | 2.7500                                  | .710±.023 | 2.922               | .049±.030 | 1.041               | 3.156     | 2.625-16UN                    | .807  |
| 10-194644    | 44         | 3.0000                                  | .710±.023 | 3.172               | .049±.030 | 1.041               | 3.406     | 2.875-16UN                    | .957  |

\*To complete 10- part number or to complete MS part number, see how to order, pg. 22.

# MIL-C-22992, QWLD MS17348 or 10-1949XX jam nut receptacle (box mount)



| Shell Size | K Dia.<br>+.005<br>-.000 | G<br>±.003 | U<br>±.005 |
|------------|--------------------------|------------|------------|
| 12,13      | 1.005                    | .562       | .688       |
| 14,15      | 1.130                    | .606       | .750       |
| 16,17      | 1.255                    | .699       | .875       |
| 18         | 1.380                    | .739       | .938       |
| 20         | 1.505                    | .783       | 1.000      |
| 22         | 1.630                    | .830       | 1.062      |
| 24         | 1.880                    | .919       | 1.188      |
| 28         | 2.130                    | 1.007      | 1.312      |
| 32         | 2.380                    | 1.096      | 1.438      |
| 36         | 2.630                    | 1.183      | 1.562      |
| 40         | 2.880                    | 1.292      | 1.703      |



All dimensions for reference only.


| Part Number | Shell Size | A Thread<br>Class 2A (Plated)<br>0.1P-0.2L<br>Double Stub | C<br>+.006<br>-.005 | E Thread<br>Class 2A<br>(Plated) | F Hex<br>+.017<br>-.016 | H Panel<br>Thickness |      | L<br>+.011<br>-.010 | M<br>±.010 | P<br>±.010 | S<br>+.011<br>-.010 | Y<br>+.011<br>-.010 | Z<br>Max |
|-------------|------------|---|---------------------|----------------------------------|-------------------------|----------------------|------|---------------------|------------|------------|---------------------|---------------------|----------|
|             |            |   |                     |                                  |                         | Min                  | Max  |                     |            |            |                     |                     |          |
| 10-194913   | 12         | .8750   | .125                | 1.000-20UNEF                     | 1.250                   | .094                 | .297 | 1.578               | 1.235      | .486       | 1.375               | .640                | .389     |
| 10-194915   | 14         | 1.0000  | .125                | 1.125-18UNEF                     | 1.312                   | .094                 | .297 | 1.578               | 1.235      | .530       | 1.500               | .765                | .389     |
| 10-194917   | 16         | 1.1250  | .188                | 1.250-18UNEF                     | 1.500                   | .094                 | .297 | 1.578               | 1.235      | .623       | 1.750               | .890                | .389     |
| 10-194918   | 18         | 1.2500  | .188                | 1.375-18UNEF                     | 1.562                   | .094                 | .266 | 1.578               | 1.203      | .663       | 1.875               | 1.015               | .421     |
| 10-194920   | 20         | 1.3750  | .188                | 1.500-18UNEF                     | 1.750                   | .094                 | .266 | 1.578               | 1.203      | .707       | 2.000               | 1.171               | .421     |
| 10-194922   | 22         | 1.5000  | .188                | 1.625-18UNEF                     | 1.875                   | .094                 | .266 | 1.578               | 1.203      | .751       | 2.125               | 1.296               | .421     |
| 10-194924   | 24         | 1.7500  | .188                | 1.875-16UN                       | 2.125                   | .094                 | .328 | 1.641               | 1.266      | .840       | 2.375               | 1.421               | .358     |
| 10-194928   | 28         | 2.0000  | .219                | 2.125-16UN                       | 2.375                   | .094                 | .328 | 1.641               | 1.329      | .928       | 2.625               | 1.625               | .295     |
| 10-194932   | 32         | 2.2500  | .219                | 2.375-16UN                       | 2.625                   | .094                 | .328 | 1.641               | 1.329      | 1.017      | 2.875               | 1.891               | .295     |
| 10-194936   | 36         | 2.5000  | .219                | 2.625-16UN                       | 2.875                   | .094                 | .328 | 1.641               | 1.329      | 1.104      | 3.125               | 2.078               | .295     |
| 10-194940   | 40         | 2.7500  | .219                | 2.875-16UN                       | 3.125                   | .094                 | .328 | 1.641               | 1.329      | 1.213      | 3.406               | 2.312               | .295     |
| 10-194944   | 44         | 3.0000  | .219                | 3.125-16UN                       | 3.375                   | .094                 | .328 | 1.641               | 1.329      | 1.299      | 3.656               | 2.562               | .545     |

\*To complete 10- part number or to complete MS part number, see how to order, pg. 22.

# MIL-C-22992, QWLD Accessories

## M85049 or 10-522958

cable sealing adapters (plug)

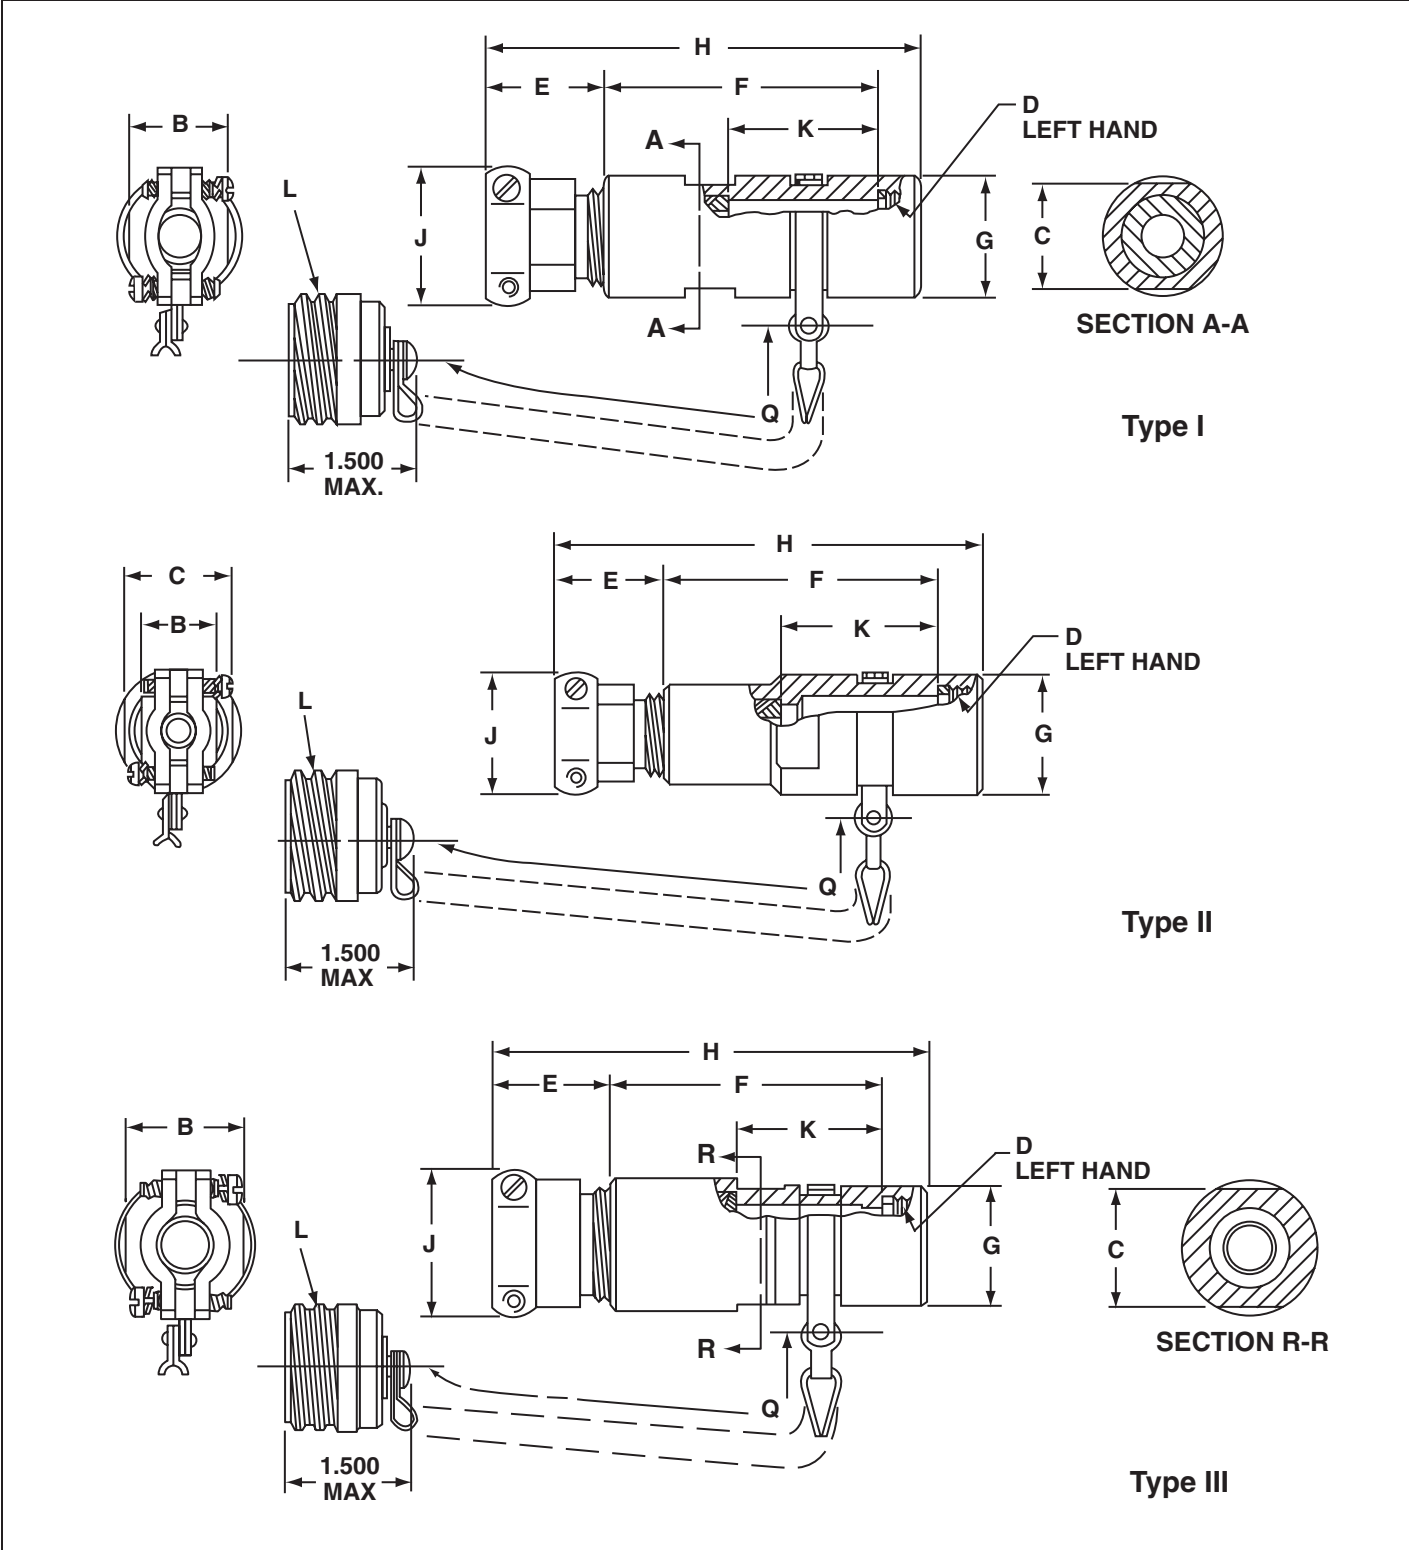



# MIL-C-22992, QWLD Accessories M85049 or 10-522958 cable sealing adapters (plug)

All dimensions for reference only.

| MS Part Number* | Superseded MS Part Number | Proprietary Part Number* | Used With Shell Size | Cable Range |         | B<br>+ .000<br>- .010 | C<br>+ .000<br>- .010 | D<br>Thread<br>Class 2B-LH | E<br>Free Length<br>Max | F<br>+ .010<br>- .020 | G<br>Dia<br>+ .010<br>- .020 | H<br>Max | J<br>± .031 | K<br>+ .015<br>- .025 | L<br>Thread<br>Class 2A (Plated)<br>0.1P-0.2L<br>Double Stub | Q<br>Approx. | Type |
|-----------------|---------------------------|--------------------------|----------------------|-------------|---------|-----------------------|-----------------------|----------------------------|-------------------------|-----------------------|------------------------------|----------|-------------|-----------------------|--|--------------|------|
|                 |                           |                          |                      | Max Dia     | Min Dia |                       |                       |                            |                         |                       |                              |          |             |                       |  |              |      |
| M85049/4A1A1    | MS17342N1A1               | 10-522958-131            | 12                   | .530        | .436    | 1.000                 | .812                  | .750-20UNEF                | 1.062                   | 2.719                 | .938                         | 4.275    | 1.375       | 1.219                 | .8750  | 5.000        | III  |
| M85049/4A2A1    | MS17342N2A1               | 10-522958-132            | 12                   | .500        | .406    | .875                  | .938                  | .750-20UNEF                | .969                    | 2.215                 | .938                         | 3.678    | 1.125       | .871                  | .8750  | 5.000        | III  |
| M85049/4A3A1    | MS17342N3A1               | 10-522958-133            | 12                   | .405        | .311    | 1.000                 | .812                  | .750-20UNEF                | 1.062                   | 2.719                 | .938                         | 4.275    | 1.375       | 1.219                 | .8750  | 5.000        | III  |
| M85049/3A1A1    | MS17340N1A1               | 10-522958-134            | 12                   | .375        | .281    | .750                  | .812                  | .750-20UNEF                | .969                    | 1.902                 | .938                         | 3.365    | 1.062       | .621                  | .8750  | 5.000        | I    |
| M85049/3A2A1    | MS17340N2A1               | 10-522958-135            | 12                   | .281        | .188    | .750                  | .812                  | .750-20UNEF                | .969                    | 1.902                 | .938                         | 3.365    | 1.062       | .621                  | .8750  | 5.000        | I    |
| M85049/5A1A1    | MS17341N1A1               | 10-522958-136            | 12                   | .250        | .156    | .825                  | .812                  | .750-20UNEF                | .906                    | 1.782                 | .938                         | 3.182    | .938        | .563                  | .8750  | 5.000        | II   |
| M85049/4A5A1    | MS17342N5A1               | 10-522958-151            | 14                   | .625        | .531    | 1.062                 | 1.125                 | .875-20UNEF                | 1.062                   | 2.933                 | 1.062                        | 4.489    | 1.562       | 1.371                 | 1.0000   | 5.000        | III  |
| M85049/4A4A1    | MS17342N4A1               | 10-522958-152            | 14                   | .605        | .511    | 1.000                 | 1.062                 | .875-20UNEF                | 1.062                   | 2.621                 | 1.062                        | 4.177    | 1.375       | 1.121                 | 1.0000   | 5.000        | III  |
| M85049/4A6A1    | MS17342N6A1               | 10-522958-153            | 14                   | .530        | .436    | 1.000                 | 1.062                 | .875-20UNEF                | 1.062                   | 2.621                 | 1.062                        | 4.177    | 1.375       | 1.121                 | 1.0000   | 5.000        | III  |
| M85049/3A3A1    | MS17340N3A1               | 10-522958-154            | 14                   | .438        | .344    | .875                  | .938                  | .875-20UNEF                | .969                    | 2.215                 | 1.062                        | 3.678    | 1.125       | .871                  | 1.0000   | 5.000        | I    |
| M85049/4A7A1    | MS17342N7A1               | 10-522958-155            | 14                   | .405        | .311    | 1.000                 | 1.062                 | .875-20UNEF                | 1.062                   | 2.621                 | 1.062                        | 4.177    | 1.375       | 1.121                 | 1.0000   | 5.000        | III  |
| M85049/3A4A1    | MS17340N4A1               | 10-522958-171            | 16                   | .605        | .511    | 1.000                 | 1.062                 | 1.000-20UNEF               | 1.062                   | 2.621                 | 1.188                        | 4.177    | 1.375       | 1.121                 | 1.1250   | 5.000        | I    |
| M85049/3A5A1    | MS17340N5A1               | 10-522958-172            | 16                   | .530        | .436    | 1.000                 | 1.062                 | 1.000-20UNEF               | 1.062                   | 2.621                 | 1.188                        | 4.177    | 1.375       | 1.121                 | 1.1250   | 5.000        | I    |
| M85049/3A6A1    | MS17340N6A1               | 10-522958-173            | 16                   | .405        | .311    | 1.000                 | 1.062                 | 1.000-20UNEF               | 1.062                   | 2.621                 | 1.188                        | 4.177    | 1.375       | 1.121                 | 1.1250   | 5.000        | I    |
| M85049/4A8A1    | MS17342N8A1               | 10-522958-181            | 18                   | .828        | .715    | 1.188                 | 1.250                 | 1.125-18UNEF               | 1.094                   | 2.996                 | 1.312                        | 4.584    | 1.688       | 1.343                 | 1.2500   | 5.000        | III  |
| M85049/3A8A1    | MS17340N8A1               | 10-522958-182            | 18                   | .699        | .605    | 1.062                 | 1.125                 | 1.125-18UNEF               | 1.062                   | 2.933                 | 1.312                        | 4.489    | 1.562       | 1.371                 | 1.2500   | 5.000        | I    |
| M85049/3A7A1    | MS17340N7A1               | 10-522958-183            | 18                   | .625        | .531    | 1.062                 | 1.125                 | 1.125-18UNEF               | 1.062                   | 2.933                 | 1.312                        | 4.489    | 1.562       | 1.371                 | 1.2500   | 5.000        | I    |
| M85049/5A5A1    | MS17341N5A1               | 10-522958-184            | 18                   | .605        | .511    | 1.000                 | 1.125                 | 1.125-18UNEF               | 1.062                   | 2.621                 | 1.312                        | 4.177    | 1.375       | 1.121                 | 1.2500   | 5.000        | II   |
| M85049/5A6A1    | MS17341N6A1               | 10-522958-185            | 18                   | .530        | .436    | 1.000                 | 1.125                 | 1.125-18UNEF               | 1.062                   | 2.621                 | 1.312                        | 4.177    | 1.375       | 1.121                 | 1.2500   | 5.000        | II   |
| M85049/3A9A1    | MS17340N9A1               | 10-522958-186            | 18                   | .500        | .406    | 1.062                 | 1.125                 | 1.125-18UNEF               | 1.062                   | 2.933                 | 1.312                        | 4.489    | 1.562       | 1.371                 | 1.2500   | 5.000        | I    |
| M85049/3A10A1   | MS17340N10A1              | 10-522958-187            | 18                   | .455        | .361    | 1.062                 | 1.125                 | 1.125-18UNEF               | 1.062                   | 2.933                 | 1.312                        | 4.489    | 1.562       | 1.371                 | 1.2500   | 5.000        | I    |
| M85049/5A2A1    | MS17341N2A1               | 10-522958-188            | 18                   | .375        | .281    | .750                  | 1.125                 | 1.125-18UNEF               | .969                    | 2.438                 | 1.312                        | 3.901    | 1.062       | 1.157                 | 1.2500   | 5.000        | II   |
| M85049/5A3A1    | MS17341N3A1               | 10-522958-189            | 18                   | .375        | .281    | .875                  | 1.125                 | 1.125-18UNEF               | .969                    | 2.469                 | 1.312                        | 3.932    | 1.125       | 1.125                 | 1.2500   | 5.000        | II   |
| M85049/5A4A1    | MS17341N4A1               | 10-522958-190            | 18                   | .281        | .188    | .750                  | 1.125                 | 1.125-18UNEF               | .969                    | 2.438                 | 1.312                        | 3.901    | 1.062       | 1.157                 | 1.2500   | 5.000        | II   |
| M85049/4A12A1   | MS17342N12A1              | 10-522958-201            | 20                   | 1.055       | .930    | 1.546                 | 1.375                 | 1.250-18UNEF               | 1.281                   | 3.121                 | 1.438                        | 4.896    | 2.125       | 1.371                 | 1.3750   | 5.000        | III  |
| M85049/4A10A1   | MS17342N10A1              | 10-522958-202            | 20                   | 1.000       | .875    | 1.546                 | 1.375                 | 1.250-18UNEF               | 1.281                   | 3.121                 | 1.438                        | 4.896    | 2.125       | 1.371                 | 1.3750   | 5.000        | III  |
| M85049/4A11A1   | MS17342N11A1              | 10-522958-203            | 20                   | .900        | .787    | 1.312                 | 1.375                 | 1.250-18UNEF               | 1.094                   | 3.059                 | 1.438                        | 4.647    | 1.812       | 1.371                 | 1.3750   | 5.000        | III  |
| M85049/3A11A1   | MS17340N11A1              | 10-522958-204            | 20                   | .828        | .715    | 1.188                 | 1.250                 | 1.250-18UNEF               | 1.125                   | 2.996                 | 1.438                        | 4.615    | 1.688       | 1.371                 | 1.3750   | 5.000        | I    |
| M85049/4A9A1    | MS17342N9A1               | 10-522958-205            | 20                   | .750        | .637    | 1.312                 | 1.375                 | 1.250-18UNEF               | 1.094                   | 3.059                 | 1.438                        | 4.647    | 1.812       | 1.371                 | 1.3750   | 5.000        | III  |
| M85049/5A7A1    | MS17341N7A1               | 10-522958-206            | 20                   | .699        | .605    | 1.062                 | 1.250                 | 1.250-18UNEF               | 1.062                   | 2.933                 | 1.438                        | 4.489    | 1.562       | 1.371                 | 1.3750   | 5.000        | II   |
| M85049/5A9A1    | MS17341N9A1               | 10-522958-207            | 20                   | .605        | .511    | 1.000                 | 1.250                 | 1.250-18UNEF               | 1.062                   | 2.750                 | 1.438                        | 4.308    | 1.375       | 1.250                 | 1.3750   | 5.000        | II   |
| M85049/3A12A1   | MS17340N12A1              | 10-522958-208            | 20                   | .562        | .449    | 1.188                 | 1.250                 | 1.250-18UNEF               | 1.125                   | 2.996                 | 1.438                        | 4.615    | 1.688       | 1.371                 | 1.3750   | 5.000        | I    |
| M85049/5A8A1    | MS17341N8A1               | 10-522958-209            | 20                   | .455        | .361    | 1.062                 | 1.250                 | 1.250-18UNEF               | 1.062                   | 2.933                 | 1.438                        | 4.489    | 1.562       | 1.371                 | 1.3750   | 5.000        | II   |
| M85049/4A14A1   | MS17342N14A1              | 10-522958-221            | 22                   | 1.109       | .984    | 1.546                 | 1.625                 | 1.375-18UNEF               | 1.281                   | 3.121                 | 1.562                        | 4.896    | 2.125       | 1.371                 | 1.5000   | 6.000        | III  |
| M85049/4A13A1   | MS17342N13A1              | 10-522958-222            | 22                   | 1.000       | .875    | 1.546                 | 1.625                 | 1.375-18UNEF               | 1.281                   | 3.121                 | 1.562                        | 4.896    | 2.125       | 1.371                 | 1.5000   | 6.000        | III  |
| M85049/3A14A1   | MS17340N14A1              | 10-522958-223            | 22                   | .900        | .787    | 1.312                 | 1.375                 | 1.375-18UNEF               | 1.094                   | 3.059                 | 1.562                        | 4.647    | 1.812       | 1.371                 | 1.5000   | 6.000        | I    |
| M85049/5A14A1   | MS17341N14A1              | 10-522958-224            | 22                   | .828        | .715    | 1.188                 | 1.406                 | 1.375-18UNEF               | 1.094                   | 2.996                 | 1.562                        | 4.306    | 1.375       | 1.250                 | 1.5000   | 6.000        | II   |
| M85049/3A15A1   | MS17340N15A1              | 10-522958-225            | 22                   | .805        | .692    | 1.312                 | 1.375                 | 1.375-18UNEF               | 1.094                   | 3.059                 | 1.562                        | 4.647    | 1.812       | 1.371                 | 1.5000   | 6.000        | I    |
| M85049/3A13A1   | MS17340N13A1              | 10-522958-226            | 22                   | .750        | .637    | 1.312                 | 1.375                 | 1.375-18UNEF               | 1.094                   | 3.059                 | 1.562                        | 4.647    | 1.812       | 1.371                 | 1.5000   | 6.000        | I    |
| M85049/5A10A1   | MS17341N10A1              | 10-522958-227            | 22                   | .562        | .449    | 1.188                 | 1.406                 | 1.375-18UNEF               | 1.094                   | 3.059                 | 1.562                        | 4.647    | 1.812       | 1.371                 | 1.5000   | 6.000        | II   |
| M85049/5A11A1   | MS17341N11A1              | 10-522958-228            | 22                   | .405        | .311    | 1.000                 | 1.375                 | 1.375-18UNEF               | 1.062                   | 2.750                 | 1.562                        | 4.306    | 1.375       | 1.250                 | 1.5000   | 6.000        | II   |

\* Ordering procedure: Locate shell size needed (Column 4); select cable diameter range to be accommodated within the shell size (column 5); order by either MS part number (column 1) or Proprietary part number (column 3).

MS numbers shown are non-conductive finish. To order conductive finish, substitute "W" for "A" in the part number listed.

10- numbers shown are non-conductive finish. To order conductive finish, substitute prefix 88-.

# MIL-C-22992, QWLD Accessories

## M85049 or 10-522958

### cable sealing adapters (plug)

All dimensions for reference only.

| MS Part Number* | Superseded MS Part Number | Proprietary Part Number* | Used With Shell Size | Cable Range |         | B<br>+0.00<br>-0.10 | C<br>+0.00<br>-0.10 | D<br>Thread<br>Class 2B-LH | E<br>Free<br>Length<br>Max | F<br>+0.10<br>-0.020 | G<br>Dia<br>+0.010<br>-0.020 | H<br>Max | J<br>±.031 | K<br>+0.015<br>-0.025 | L Thread<br>Class 2A (Plated)<br>0.1P-0.2L<br>Double Stub | Q<br>Approx. | Type |
|-----------------|---------------------------|--------------------------|----------------------|-------------|---------|---------------------|---------------------|----------------------------|----------------------------|----------------------|------------------------------|----------|------------|-----------------------|---|--------------|------|
|                 |                           |                          |                      | Max Dia     | Min Dia |                     |                     |                            |                            |                      |                              |          |            |                       |   |              |      |
| M85049/4A18A1   | MS17342N18A1              | 10-522958-241            | 24                   | 1.375       | 1.250   | 2.000               | 1.875               | 1.625-18UNEF               | 1.281                      | 3.184                | 1.812                        | 4.959    | 2.625      | 1.309                 | 1.7500  | 6.000        | III  |
| M85049/4A16A1   | MS17342N16A1              | 10-522958-242            | 24                   | 1.310       | 1.185   | 1.780               | 1.875               | 1.625-18UNEF               | 1.281                      | 3.184                | 1.812                        | 4.959    | 2.469      | 1.372                 | 1.7500  | 6.000        | III  |
| M85049/4A17A1   | MS17342N17A1              | 10-522958-243            | 24                   | 1.230       | 1.105   | 1.780               | 1.875               | 1.625-18UNEF               | 1.281                      | 3.184                | 1.812                        | 4.959    | 2.469      | 1.372                 | 1.7500  | 6.000        | III  |
| M85049/4A15A1   | MS17342N15A1              | 10-522958-244            | 24                   | 1.180       | 1.055   | 1.780               | 1.875               | 1.625-18UNEF               | 1.281                      | 3.184                | 1.812                        | 4.959    | 2.469      | 1.372                 | 1.7500  | 6.000        | III  |
| M85049/3A18A1   | MS17340N18A1              | 10-522958-245            | 24                   | 1.109       | .984    | 1.546               | 1.625               | 1.625-18UNEF               | 1.281                      | 3.121                | 1.812                        | 4.896    | 2.125      | 1.371                 | 1.7500  | 6.000        | I    |
| M85049/3A16A1   | MS17340N16A1              | 10-522958-246            | 24                   | 1.055       | .930    | 1.546               | 1.625               | 1.625-18UNEF               | 1.281                      | 3.121                | 1.812                        | 4.896    | 2.125      | 1.371                 | 1.7500  | 6.000        | I    |
| M85049/3A17A1   | MS17340N17A1              | 10-522958-247            | 24                   | 1.000       | .675    | 1.546               | 1.625               | 1.625-18UNEF               | 1.281                      | 3.121                | 1.812                        | 4.896    | 2.125      | 1.371                 | 1.7500  | 6.000        | I    |
| M85049/5A16A1   | MS17341N16A1              | 10-522958-248            | 24                   | .970        | .857    | 1.312               | 1.625               | 1.625-18UNEF               | 1.094                      | 3.059                | 1.812                        | 4.647    | 1.812      | 1.371                 | 1.7500  | 6.000        | II   |
| M85049/5A13A1   | MS17341N13A1              | 10-522958-249            | 24                   | .900        | .787    | 1.312               | 1.625               | 1.625-18UNEF               | 1.094                      | 3.059                | 1.812                        | 4.647    | 1.812      | 1.371                 | 1.7500  | 6.000        | II   |
| M85049/5A19A1   | MS17340N19A1              | 10-522958-250            | 24                   | .880        | .755    | 1.546               | 1.625               | 1.625-18UNEF               | 1.281                      | 3.121                | 1.812                        | 4.896    | 2.125      | 1.371                 | 1.7500  | 6.000        | I    |
| M85049/5A17A1   | MS17341N17A1              | 10-522958-251            | 24                   | .828        | .715    | 1.188               | 1.625               | 1.625-18UNEF               | 1.094                      | 2.954                | 1.812                        | 4.542    | 1.688      | 1.301                 | 1.7500  | 6.000        | II   |
| M85049/5A18A1   | MS17341N18A1              | 10-522958-252            | 24                   | .805        | .692    | 1.312               | 1.625               | 1.625-18UNEF               | 1.094                      | 3.059                | 1.812                        | 4.647    | 1.812      | 1.371                 | 1.7500  | 6.000        | II   |
| M85049/5A15A1   | MS17341N15A1              | 10-522958-253            | 24                   | .750        | .637    | 1.312               | 1.625               | 1.625-18UNEF               | 1.094                      | 3.059                | 1.812                        | 4.647    | 1.812      | 1.371                 | 1.7500  | 6.000        | II   |
| M85049/5A14A1   | MS17341N14A1              | 10-522958-254            | 24                   | .630        | .517    | 1.312               | 1.625               | 1.625-18UNEF               | 1.094                      | 3.059                | 1.812                        | 4.647    | 1.812      | 1.371                 | 1.7500  | 6.000        | II   |
| M85049/4A20A1   | MS17342N20A1              | 10-522958-281            | 28                   | 1.531       | 1.406   | 2.000               | 2.062               | 1.875-16UN                 | 1.281                      | 3.246                | 2.062                        | 5.021    | 2.625      | 1.371                 | 2.000   | 6.000        | III  |
| M85049/4A19A1   | MS17342N19A1              | 10-522958-282            | 28                   | 1.445       | 1.320   | 2.000               | 2.062               | 1.875-16UN                 | 1.281                      | 3.246                | 2.062                        | 5.021    | 2.625      | 1.371                 | 2.000   | 6.000        | III  |
| M85049/4A21A1   | MS17342N21A1              | 10-522958-283            | 28                   | 1.375       | 1.250   | 2.000               | 2.062               | 1.875-16UN                 | 1.281                      | 3.246                | 2.062                        | 5.021    | 2.625      | 1.371                 | 2.000   | 6.000        | III  |
| M85049/4A22A1   | MS17340N22A1              | 10-522958-284            | 28                   | 1.310       | 1.185   | 1.780               | 1.875               | 1.875-16UN                 | 1.281                      | 3.184                | 2.062                        | 4.959    | 2.469      | 1.372                 | 2.000   | 6.000        | I    |
| M85049/3A21A1   | MS17340N21A1              | 10-522958-285            | 28                   | 1.230       | 1.105   | 1.780               | 1.875               | 1.875-16UN                 | 1.281                      | 3.184                | 2.062                        | 4.959    | 2.469      | 1.372                 | 2.000   | 6.000        | I    |
| M85049/3A20A1   | MS17340N20A1              | 10-522958-286            | 28                   | 1.180       | 1.055   | 1.780               | 1.875               | 1.875-16UN                 | 1.281                      | 3.184                | 2.062                        | 4.959    | 2.469      | 1.372                 | 2.000   | 6.000        | I    |
| M85049/5A20A1   | MS17341N20A1              | 10-522958-287            | 28                   | 1.109       | .984    | 1.546               | 1.875               | 1.875-16UN                 | 1.281                      | 3.121                | 2.062                        | 4.896    | 2.125      | 1.371                 | 2.000   | 6.000        | II   |
| M85049/5A24A1   | MS17341N24A1              | 10-522958-288            | 28                   | 1.100       | .875    | 1.546               | 1.875               | 1.875-16UN                 | 1.281                      | 3.121                | 2.062                        | 4.896    | 2.125      | 1.371                 | 2.000   | 6.000        | II   |
| M85049/5A23A1   | MS17341N23A1              | 10-522958-289            | 28                   | .970        | .857    | 1.312               | 1.875               | 1.875-16UN                 | 1.094                      | 3.059                | 2.062                        | 4.647    | 1.812      | 1.371                 | 2.000   | 6.000        | II   |
| M85049/5A19A1   | MS17341N19A1              | 10-522958-290            | 28                   | .880        | .755    | 1.546               | 1.875               | 1.875-16UN                 | 1.281                      | 3.121                | 2.062                        | 4.896    | 2.125      | 1.371                 | 2.000   | 6.000        | II   |
| M85049/5A21A1   | MS17341N21A1              | 10-522958-291            | 28                   | .750        | .637    | 1.312               | 1.875               | 1.875-16UN                 | 1.094                      | 3.059                | 2.062                        | 4.647    | 1.812      | 1.371                 | 2.000   | 6.000        | II   |
| M85049/5A26A1   | MS17341N26A1              | 10-522958-292            | 28                   | .680        | .567    | 1.312               | 1.875               | 1.875-16UN                 | 1.094                      | 3.059                | 2.062                        | 4.647    | 1.812      | 1.371                 | 2.000   | 6.000        | II   |
| M85049/5A25A1   | MS17341N25A1              | 10-522958-293            | 28                   | .530        | .436    | 1.000               | 1.812               | 1.875-16UN                 | 1.062                      | 2.875                | 2.062                        | 4.431    | 1.375      | 1.375                 | 2.000   | 6.000        | II   |
| M85049/5A22A1   | MS17341N22A1              | 10-522958-294            | 28                   | .375        | .281    | .875                | 1.875               | 1.875-16UN                 | .969                       | 2.766                | 2.062                        | 4.229    | 1.125      | 1.422                 | 2.000   | 6.000        | II   |
| M85049/4A23A1   | MS17342N23A1              | 10-522958-321            | 32                   | 1.828       | 1.700   | 2.438               | 2.312               | 2.0625-16UN                | 1.391                      | 3.500                | 2.312                        | 5.385    | 3.171      | 1.375                 | 2.2500  | 6.000        | III  |
| M85049/4A25A1   | MS17342N25A1              | 10-522958-322            | 32                   | 1.730       | 1.605   | 2.438               | 2.312               | 2.0625-16UN                | 1.391                      | 3.500                | 2.312                        | 5.385    | 3.171      | 1.375                 | 2.2500  | 6.000        | III  |
| M85049/4A22A1   | MS17342N22A1              | 10-522958-323            | 32                   | 1.656       | 1.531   | 2.250               | 2.312               | 2.0625-16UN                | 1.281                      | 3.308                | 2.312                        | 5.083    | 2.953      | 1.370                 | 2.2500  | 6.000        | III  |
| M85049/4A24A1   | MS17342N24A1              | 10-522958-324            | 32                   | 1.562       | 1.437   | 2.250               | 2.312               | 2.0625-16UN                | 1.281                      | 3.308                | 2.312                        | 5.083    | 2.953      | 1.370                 | 2.2500  | 6.000        | III  |
| M85049/3A24A1   | MS17340N24A1              | 10-522958-325            | 32                   | 1.531       | 1.406   | 2.000               | 2.062               | 2.0625-16UN                | 1.281                      | 3.246                | 2.312                        | 5.021    | 2.625      | 1.371                 | 2.2500  | 6.000        | I    |
| M85049/3A23A1   | MS17340N23A1              | 10-522958-326            | 32                   | 1.445       | 1.320   | 2.000               | 2.062               | 2.0625-16UN                | 1.281                      | 3.246                | 2.312                        | 5.021    | 2.625      | 1.371                 | 2.2500  | 6.000        | I    |
| M85049/3A25A1   | MS17340N25A1              | 10-522958-327            | 32                   | 1.375       | 1.250   | 2.000               | 2.062               | 2.0625-16UN                | 1.281                      | 3.246                | 2.312                        | 5.021    | 2.625      | 1.371                 | 2.2500  | 6.000        | I    |
| M85049/5A28A1   | MS17341N28A1              | 10-522958-328            | 32                   | 1.230       | 1.150   | 1.780               | 2.062               | 2.0625-16UN                | 1.281                      | 3.184                | 2.312                        | 4.959    | 2.469      | 1.372                 | 2.2500  | 6.000        | II   |
| M85049/5A35A1   | MS17341N35A1              | 10-522958-329            | 32                   | 1.130       | 1.005   | 1.780               | 2.062               | 2.0625-16UN                | 1.281                      | 3.184                | 2.312                        | 4.959    | 2.469      | 1.372                 | 2.2500  | 6.000        | II   |
| M85049/5A31A1   | MS17341N31A1              | 10-522958-330            | 32                   | 1.109       | .984    | 1.546               | 2.062               | 2.0625-16UN                | 1.281                      | 3.121                | 2.312                        | 4.896    | 2.125      | 1.371                 | 2.2500  | 6.000        | II   |
| M85049/5A27A1   | MS17341N27A1              | 10-522958-331            | 32                   | 1.055       | .930    | 1.546               | 2.062               | 2.0625-16UN                | 1.281                      | 3.121                | 2.312                        | 4.896    | 2.125      | 1.371                 | 2.2500  | 6.000        | II   |
| M85049/5A32A1   | MS17341N32A1              | 10-522958-332            | 32                   | .970        | .857    | 1.312               | 2.062               | 2.0625-16UN                | 1.094                      | 3.059                | 2.312                        | 4.647    | 1.812      | 1.371                 | 2.2500  | 6.000        | II   |
| M85049/5A30A1   | MS17341N30A1              | 10-522958-333            | 32                   | .880        | .755    | 1.546               | 2.062               | 2.0625-16UN                | 1.281                      | 3.121                | 2.312                        | 4.896    | 2.125      | 1.371                 | 2.2500  | 6.000        | II   |
| M85049/5A29A1   | MS17341N29A1              | 10-522958-334            | 32                   | .750        | .637    | 1.312               | 2.062               | 2.0625-16UN                | 1.094                      | 3.059                | 2.312                        | 4.647    | 1.812      | 1.371                 | 2.2500  | 6.000        | II   |

\* Ordering procedure: Locate shell size needed (Column 4); select cable diameter range to be accommodated within the shell size (column 5); order by either MS part number (column 1) or Proprietary part number (column 3).

MS numbers shown are non-conductive finish. To order conductive finish, substitute "W" for "A" in the part number listed.

10- numbers shown are non-conductive finish. To order conductive finish, substitute prefix 88-.

# MIL-C-22992, QWLD Accessories

## M85049 or 10-522958

### cable sealing adapters (plug)

All dimensions for reference only.

| MS Part Number* | Superseded MS Part Number | Proprietary Part Number* | Used With Shell Size | Cable Range |         | B<br>+.000<br>-.010 | C<br>+.000<br>-.010 | D<br>Thread<br>Class 2B-LH | E<br>Free Length<br>Max | F<br>+.010<br>-.020 | G<br>Dia<br>+.010<br>-.020 | H<br>Max | J<br>±.031 | K<br>+.015<br>-.025 | L Thread<br>Class 2A (Plated)<br>0.1P-0.2L<br>Double Stub | Q<br>Approx. | Type |
|-----------------|---------------------------|--------------------------|----------------------|-------------|---------|---------------------|---------------------|----------------------------|-------------------------|---------------------|----------------------------|----------|------------|---------------------|---|--------------|------|
|                 |                           |                          |                      | Max Dia     | Min Dia |                     |                     |                            |                         |                     |                            |          |            |                     |   |              |      |
| M85049/5A34A1   | MS17341N34A1              | 10-522958-335            | 32                   | .530        | .436    | 1.000               | 2.000               | 2.0625-16UN                | 1.062                   | 2.875               | 2.312                      | 4.431    | 1.375      | 1.375               | 2.2500  | 6.000        | II   |
| M85049/5A33A1   | MS17341N33A1              | 10-522958-336            | 32                   | .375        | .281    | .875                | 2.062               | 2.0625-16UN                | .969                    | 2.813               | 2.312                      | 4.276    | 1.125      | 1.469               | 2.2500  | 6.000        | II   |
| M85049/4A30A1   | MS17342N30A1              | 10-522958-361            | 36                   | 2.062       | 1.917   | 2.750               | 2.500               | 2.3125-16UN                | 1.391                   | 3.500               | 2.562                      | 5.385    | 3.375      | 1.375               | 2.5000  | 6.000        | III  |
| M85049/4A29A1   | MS17342N29A1              | 10-522958-362            | 36                   | 1.984       | 1.859   | 2.438               | 2.500               | 2.3125-16UN                | 1.391                   | 3.469               | 2.562                      | 5.354    | 3.171      | 1.344               | 2.5000  | 6.000        | III  |
| M85049/4A26A1   | MS17342N26A1              | 10-522958-363            | 36                   | 1.900       | 1.775   | 2.438               | 2.500               | 2.3125-16UN                | 1.391                   | 3.469               | 2.562                      | 5.354    | 3.171      | 1.344               | 2.5000  | 6.000        | III  |
| M85049/4A28A1   | MS17342N28A1              | 10-522958-364            | 36                   | 1.825       | 1.799   | 2.438               | 2.500               | 2.3125-16UN                | 1.391                   | 3.469               | 2.562                      | 5.354    | 3.171      | 1.344               | 2.5000  | 6.000        | III  |
| M85049/4A27A1   | MS17342N27A1              | 10-522958-365            | 36                   | 1.730       | 1.605   | 2.438               | 2.500               | 2.3125-16UN                | 1.391                   | 3.469               | 2.562                      | 5.354    | 3.171      | 1.344               | 2.5000  | 6.000        | III  |
| M85049/3A26A1   | MS17340N26A1              | 10-522958-366            | 36                   | 1.656       | 1.531   | 2.250               | 2.312               | 2.3125-16UN                | 1.281                   | 3.308               | 2.562                      | 5.083    | 2.953      | 1.370               | 2.5000  | 6.000        | I    |
| M85049/3A27A1   | MS17340N27A1              | 10-522958-367            | 36                   | 1.562       | 1.437   | 2.250               | 2.312               | 2.3125-16UN                | 1.281                   | 3.308               | 2.562                      | 5.083    | 2.953      | 1.370               | 2.5000  | 6.000        | I    |
| M85049/5A40A1   | MS17341N40A1              | 10-522958-368            | 36                   | 1.445       | 1.320   | 2.000               | 2.312               | 2.3125-16UN                | 1.281                   | 3.246               | 2.562                      | 5.021    | 2.625      | 1.371               | 2.5000  | 6.000        | II   |
| M85049/5A38A1   | MS17341N38A1              | 10-522958-369            | 36                   | 1.375       | 1.250   | 2.000               | 2.312               | 2.3125-16UN                | 1.281                   | 3.246               | 2.562                      | 5.021    | 2.625      | 1.371               | 2.5000  | 6.000        | II   |
| M85049/5A36A1   | MS17341N36A1              | 10-522958-370            | 36                   | 1.310       | 1.185   | 1.780               | 2.312               | 2.3125-16UN                | 1.281                   | 3.184               | 2.562                      | 4.959    | 2.469      | 1.372               | 2.5000  | 6.000        | II   |
| M85049/5A42A1   | MS17341N42A1              | 10-522958-371            | 36                   | 1.230       | 1.105   | 1.780               | 2.312               | 2.3125-16UN                | 1.281                   | 3.184               | 2.562                      | 4.959    | 2.469      | 1.372               | 2.5000  | 6.000        | II   |
| M85049/5A39A1   | MS17341N39A1              | 10-522958-372            | 36                   | 1.180       | 1.055   | 1.780               | 2.312               | 2.3125-16UN                | 1.281                   | 3.184               | 2.562                      | 4.959    | 2.469      | 1.372               | 2.5000  | 6.000        | II   |
| M85049/5A37A1   | MS17341N37A1              | 10-522958-373            | 36                   | 1.109       | .984    | 1.546               | 2.312               | 2.3125-16UN                | 1.281                   | 3.121               | 2.562                      | 4.896    | 2.125      | 1.371               | 2.5000  | 6.000        | II   |
| M85049/5A41A1   | MS17341N41A1              | 10-522958-374            | 36                   | .970        | .857    | 1.312               | 2.250               | 2.3125-16UN                | 1.094                   | 3.063               | 2.562                      | 4.651    | 1.812      | 1.375               | 2.5000  | 6.000        | II   |
| M85049/4A31A1   | MS17342N31A1              | 10-522958-401            | 40                   | 2.375       | 2.230   | 3.000               | 2.812               | 2.625-16UN                 | 1.391                   | 3.609               | 2.875                      | 5.682    | 3.625      | 1.421               | 2.7500  | 6.000        | III  |
| M85049/4A32A1   | MS17342N32A1              | 10-522958-402            | 40                   | 2.250       | 2.105   | 2.875               | 2.625               | 2.625-16UN                 | 1.391                   | 3.609               | 2.875                      | 5.682    | 3.500      | 1.421               | 2.7500  | 6.000        | III  |
| M85049/4A33A1   | MS17342N33A1              | 10-522958-403            | 40                   | 2.145       | 2.000   | 2.750               | 2.625               | 2.625-16UN                 | 1.391                   | 3.547               | 2.875                      | 5.620    | 3.375      | 1.422               | 2.7500  | 6.000        | III  |
| M85049/4A34A1   | MS17342N34A1              | 10-522958-404            | 40                   | 2.062       | 1.917   | 2.750               | 2.625               | 2.625-16UN                 | 1.391                   | 3.547               | 2.875                      | 5.620    | 3.375      | 1.422               | 2.7500  | 6.000        | III  |
| M85049/5A43A1   | MS17341N43A1              | 10-522958-405            | 40                   | 1.940       | 1.815   | 2.438               | 2.750               | 2.625-16UN                 | 1.391                   | 4.281               | 2.875                      | 6.354    | 3.171      | 2.156               | 2.7500  | 6.000        | II   |
| M85049/5A44A1   | MS17341N44A1              | 10-522958-406            | 40                   | 1.825       | 1.700   | 2.438               | 2.750               | 2.625-16UN                 | 1.391                   | 4.281               | 2.875                      | 6.354    | 3.171      | 2.156               | 2.7500  | 6.000        | II   |
| M85049/5A45A1   | MS17341N45A1              | 10-522958-407            | 40                   | 1.730       | 1.605   | 2.438               | 2.750               | 2.625-16UN                 | 1.391                   | 4.281               | 2.875                      | 6.354    | 3.171      | 2.156               | 2.7500  | 6.000        | II   |
| M85049/5A46A1   | MS17341N46A1              | 10-522958-408            | 40                   | 1.656       | 1.531   | 2.250               | 2.750               | 2.625-16UN                 | 1.281                   | 4.094               | 2.875                      | 6.037    | 2.953      | 2.156               | 2.7500  | 6.000        | II   |

\* Ordering procedure: Locate shell size needed (Column 4); select cable diameter range to be accommodated within the shell size (column 5); order by either MS part number (column 1) or Proprietary part number (column 3).

MS numbers shown are non-conductive finish. To order conductive finish, substitute "W" for "A" in the part number listed.

10- numbers shown are non-conductive finish. To order conductive finish, substitute prefix 88-.

# MIL-C-22992, QWLD Accessories

## M85049 or 10-524959

cable sealing adapters (receptacle)



# MIL-C-22992, QWLD Accessories M85049 or 10-524959 cable sealing adapters (receptacle)

All dimensions for reference only.

| MS Part Number* | Superseded MS Part Number | Proprietary Part Number* | Used With Shell Size | Cable Range |         | B<br>+.000<br>-.010 | C<br>+.000<br>-.010 | D<br>Thread<br>Class 2B-LH | E<br>Free<br>Length<br>Max | F<br>+.010<br>-.020 | G<br>Dia<br>+.010<br>-.020 | H<br>Max | J<br>±.031 | K<br>+.015<br>-.025 | L<br>Thread<br>Class 2A<br>0.1P-0.2L<br>Double Stub | N<br>Dia<br>Maz | P<br>Max | Q<br>Approx. | Type |
|-----------------|---------------------------|--------------------------|----------------------|-------------|---------|---------------------|---------------------|----------------------------|----------------------------|---------------------|----------------------------|----------|------------|---------------------|---|-----------------|----------|--------------|------|
|                 |                           |                          |                      | Max Dia     | Min Dia |                     |                     |                            |                            |                     |                            |          |            |                     |   |                 |          |              |      |
| M85049/4A1B1    | MS17342N1B1               | 10-524959-131            | 12                   | .530        | .436    | 1.000               | .812                | .750-20UNEF                | 1.062                      | 2.719               | .938                       | 4.275    | 1.375      | 1.219               | .8750   | 2.719           | .765     | 5.000        | III  |
| M85049/4A2B1    | MS17342N2B1               | 10-524959-132            | 12                   | .500        | .406    | .875                | .938                | .750-20UNEF                | .969                       | 2.215               | .938                       | 3.678    | 1.125      | .871                | .8750   | 2.719           | .765     | 5.000        | III  |
| M85049/4A3B1    | MS17342N3B1               | 10-524959-133            | 12                   | .405        | .311    | 1.000               | .812                | .750-20UNEF                | 1.062                      | 2.719               | .938                       | 4.275    | 1.375      | 1.219               | .8750   | 1.094           | .765     | 5.000        | III  |
| M85049/3A1B1    | MS17340N1B1               | 10-524959-134            | 12                   | .375        | .281    | .750                | .812                | .750-20UNEF                | .969                       | 1.902               | .938                       | 3.365    | 1.062      | .621                | .8750   | 1.094           | .765     | 5.000        | I    |
| M85049/3A2B1    | MS17340N2B1               | 10-524959-135            | 12                   | .281        | .188    | .750                | .812                | .750-20UNEF                | .969                       | 1.902               | .938                       | 3.365    | 1.062      | .621                | .8750   | 1.094           | .765     | 5.000        | I    |
| M85049/5A1B1    | MS17341N1B1               | 10-524959-136            | 12                   | .250        | .156    | .625                | .812                | .750-20UNEF                | .906                       | 1.782               | .938                       | 3.182    | .938       | .563                | .8750   | 1.094           | .765     | 5.000        | II   |
| M85049/4A5B1    | MS17342N5B1               | 10-524959-151            | 14                   | .625        | .531    | 1.062               | 1.125               | .875-20UNEF                | 1.062                      | 2.933               | 1.062                      | 4.489    | 1.562      | 1.371               | 1.0000  | 1.094           | .765     | 5.000        | III  |
| M85049/4A4B1    | MS17342N4B1               | 10-524959-152            | 14                   | .605        | .511    | 1.000               | 1.062               | .875-20UNEF                | 1.062                      | 2.621               | 1.062                      | 4.177    | 1.375      | 1.121               | 1.0000  | 1.094           | .765     | 5.000        | III  |
| M85049/4A6B1    | MS17342N6B1               | 10-524959-153            | 14                   | .530        | .436    | 1.000               | 1.062               | .875-20UNEF                | 1.062                      | 2.621               | 1.062                      | 4.177    | 1.375      | 1.121               | 1.0000  | 1.094           | .765     | 5.000        | III  |
| M85049/3A3B1    | MS17340N3B1               | 10-524959-154            | 14                   | .438        | .344    | .875                | .938                | .875-20UNEF                | .969                       | 2.215               | 1.062                      | 3.678    | 1.125      | .871                | 1.0000  | 1.219           | .765     | 5.000        | I    |
| M85049/4A7B1    | MS17342N7B1               | 10-524959-155            | 14                   | .405        | .311    | 1.000               | 1.062               | .875-20UNEF                | 1.062                      | 2.621               | 1.188                      | 4.177    | 1.375      | 1.121               | 1.0000  | 1.344           | .765     | 5.000        | III  |
| M85049/3A4B1    | MS17340N4B1               | 10-524959-171            | 16                   | .605        | .511    | 1.000               | 1.062               | 1.000-20UNEF               | 1.062                      | 2.621               | 1.188                      | 4.177    | 1.375      | 1.121               | 1.1250  | 1.344           | .980     | 5.000        | I    |
| M85049/3A5B1    | MS17340N5B1               | 10-524959-172            | 16                   | .530        | .436    | 1.000               | 1.062               | 1.000-20UNEF               | 1.062                      | 2.621               | 1.188                      | 4.177    | 1.375      | 1.121               | 1.1250  | 1.344           | .980     | 5.000        | I    |
| M85049/3A6B1    | MS17340N6B1               | 10-524959-173            | 16                   | .405        | .311    | 1.000               | 1.062               | 1.000-20UNEF               | 1.062                      | 2.621               | 1.312                      | 4.177    | 1.375      | 1.121               | 1.1250  | 1.344           | .980     | 5.000        | I    |
| M85049/4A8B1    | MS17342N8B1               | 10-524959-181            | 18                   | .828        | .715    | 1.188               | 1.250               | 1.125-18UNEF               | 1.094                      | 2.996               | 1.312                      | 4.584    | 1.688      | 1.343               | 1.2500  | 1.469           | .980     | 5.000        | III  |
| M85049/3A8B1    | MS17340N8B1               | 10-524959-182            | 18                   | .699        | .605    | 1.062               | 1.125               | 1.125-18UNEF               | 1.062                      | 2.933               | 1.312                      | 4.489    | 1.562      | 1.371               | 1.2500  | 1.469           | .980     | 5.000        | I    |
| M85049/3A7B1    | MS17340N7B1               | 10-524959-183            | 18                   | .625        | .531    | 1.062               | 1.125               | 1.125-18UNEF               | 1.062                      | 2.933               | 1.312                      | 4.489    | 1.562      | 1.371               | 1.2500  | 1.469           | .980     | 5.000        | I    |
| M85049/5A5B1    | MS17341N5B1               | 10-524959-184            | 18                   | .605        | .511    | 1.000               | 1.125               | 1.125-18UNEF               | 1.062                      | 2.621               | 1.312                      | 4.177    | 1.375      | 1.121               | 1.2500  | 2.719           | .980     | 5.000        | II   |
| M85049/5A6B1    | MS17341N6B1               | 10-524959-185            | 18                   | .530        | .436    | 1.000               | 1.125               | 1.125-18UNEF               | 1.062                      | 2.621               | 1.312                      | 4.177    | 1.375      | 1.121               | 1.2500  | 2.719           | .980     | 5.000        | II   |
| M85049/3A9B1    | MS17340N9B1               | 10-524959-186            | 18                   | .500        | .406    | 1.062               | 1.125               | 1.125-18UNEF               | 1.062                      | 2.933               | 1.312                      | 4.489    | 1.562      | 1.371               | 1.2500  | 1.469           | .980     | 5.000        | I    |
| M85049/3A10B1   | MS17340N10B1              | 10-524959-187            | 18                   | .455        | .361    | 1.062               | 1.125               | 1.125-18UNEF               | 1.062                      | 2.933               | 1.312                      | 4.489    | 1.562      | 1.371               | 1.2500  | 1.469           | .980     | 5.000        | I    |
| M85049/5A2B1    | MS17341N2B1               | 10-524959-188            | 18                   | .375        | .281    | .750                | 1.125               | 1.125-18UNEF               | .969                       | 2.438               | 1.312                      | 4.901    | 1.062      | 1.157               | 1.2500  | 2.719           | .980     | 5.000        | II   |
| M85049/5A3B1    | MS17341N3B1               | 10-524959-189            | 18                   | .375        | .281    | .875                | 1.125               | 1.125-18UNEF               | .969                       | 2.469               | 1.312                      | 4.932    | 1.125      | 1.125               | 1.2500  | 2.719           | .980     | 5.000        | II   |
| M85049/5A4B1    | MS17341N4B1               | 10-524959-190            | 18                   | .281        | .188    | .750                | 1.125               | 1.125-18UNEF               | .969                       | 2.438               | 1.312                      | 4.901    | 1.062      | 1.157               | 1.2500  | 2.719           | .980     | 5.000        | II   |
| M85049/4A12B1   | MS17342N12B1              | 10-524959-201            | 20                   | 1.055       | .930    | 1.546               | 1.375               | 1.250-18UNEF               | 1.281                      | 3.121               | 1.438                      | 4.896    | 2.125      | 1.371               | 1.3750  | 2.719           | .980     | 5.000        | III  |
| M85049/4A10B1   | MS17342N10B1              | 10-524959-202            | 20                   | 1.000       | .875    | 1.546               | 1.375               | 1.250-18UNEF               | 1.281                      | 3.121               | 1.438                      | 4.896    | 2.125      | 1.371               | 1.3750  | 2.719           | .980     | 6.000        | III  |
| M85049/4A11B1   | MS17342N11B1              | 10-524959-203            | 20                   | .900        | .787    | 1.312               | 1.375               | 1.250-18UNEF               | 1.094                      | 3.059               | 1.438                      | 4.647    | 1.812      | 1.371               | 1.3750  | 2.719           | .980     | 5.000        | III  |
| M85049/3A11B1   | MS17340N11B1              | 10-524959-204            | 20                   | .828        | .715    | 1.188               | 1.250               | 1.250-18UNEF               | 1.125                      | 2.996               | 1.438                      | 4.615    | 1.688      | 1.371               | 1.3750  | 1.562           | .980     | 5.000        | I    |
| M85049/4A9B1    | MS17342N9B1               | 10-524959-205            | 20                   | .750        | .637    | 1.312               | 1.375               | 1.250-18UNEF               | 1.094                      | 3.059               | 1.438                      | 4.647    | 1.812      | 1.371               | 1.3750  | 2.719           | .980     | 5.000        | III  |
| M85049/5A7B1    | MS17341N7B1               | 10-524959-206            | 20                   | .699        | .605    | 1.062               | 1.250               | 1.250-18UNEF               | 1.062                      | 2.933               | 1.438                      | 4.489    | 1.562      | 1.250               | 1.3750  | 2.719           | .980     | 5.000        | II   |
| M85049/5A9B1    | MS17341N9B1               | 10-524959-207            | 20                   | .605        | .511    | 1.000               | 1.250               | 1.250-18UNEF               | 1.062                      | 2.750               | 1.438                      | 4.306    | 1.375      | 1.371               | 1.3750  | 1.562           | .980     | 5.000        | II   |
| M85049/3A12B1   | MS17340N12B1              | 10-524959-208            | 20                   | .562        | .449    | 1.188               | 1.250               | 1.250-18UNEF               | 1.125                      | 2.996               | 1.438                      | 4.615    | 1.688      | 1.371               | 1.3750  | 1.562           | .980     | 5.000        | I    |
| M85049/5A8B1    | MS17341N8B1               | 10-524959-209            | 20                   | .455        | .361    | 1.062               | 1.250               | 1.250-18UNEF               | 1.062                      | 2.933               | 1.438                      | 4.489    | 1.562      | 1.371               | 1.3750  | 1.562           | .980     | 5.000        | II   |
| M85049/4A14B1   | MS17342N14B1              | 10-524959-221            | 22                   | 1.109       | .984    | 1.546               | 1.625               | 1.375-18UNEF               | 1.281                      | 3.121               | 1.562                      | 4.896    | 2.125      | 1.371               | 1.5000  | 1.562           | .980     | 6.000        | III  |
| M85049/4A13B1   | MS17342N13B1              | 10-524959-222            | 22                   | 1.000       | .875    | 1.546               | 1.625               | 1.375-18UNEF               | 1.281                      | 3.121               | 1.562                      | 4.896    | 2.125      | 1.371               | 1.5000  | 1.562           | .980     | 6.000        | III  |
| M85049/3A14B1   | MS17340N14B1              | 10-524959-223            | 22                   | .900        | .787    | 1.312               | 1.375               | 1.375-18UNEF               | 1.094                      | 3.059               | 1.562                      | 4.647    | 1.812      | 1.371               | 1.5000  | 1.688           | .980     | 6.000        | I    |
| M85049/5A12B1   | MS17341N12B1              | 10-524959-224            | 22                   | .828        | .715    | 1.188               | 1.406               | 1.375-18UNEF               | 1.094                      | 2.996               | 1.562                      | 4.306    | 1.375      | 1.250               | 1.5000  | 1.688           | .980     | 6.000        | II   |
| M85049/3A15B1   | MS17340N15B1              | 10-524959-225            | 22                   | .805        | .692    | 1.312               | 1.375               | 1.375-18UNEF               | 1.094                      | 3.059               | 1.562                      | 4.647    | 1.812      | 1.371               | 1.5000  | 1.688           | .980     | 6.000        | I    |
| M85049/3A13B1   | MS17340N13B1              | 10-524959-226            | 22                   | .750        | .637    | 1.312               | 1.375               | 1.375-18UNEF               | 1.094                      | 3.059               | 1.562                      | 4.647    | 1.812      | 1.371               | 1.5000  | 1.688           | .980     | 6.000        | I    |
| M85049/5A10B1   | MS17341N10B1              | 10-524959-227            | 22                   | .562        | .449    | 1.188               | 1.406               | 1.375-18UNEF               | 1.094                      | 2.996               | 1.562                      | 4.584    | 1.688      | 1.343               | 1.5000  | 2.719           | .980     | 6.000        | II   |
| M85049/5A11B1   | MS17341N11B1              | 10-524959-228            | 22                   | .405        | .311    | 1.000               | 1.375               | 1.375-18UNEF               | 1.062                      | 2.750               | 1.562                      | 4.306    | 1.375      | 1.250               | 1.5000  | 2.719           | .980     | 6.000        | II   |

\* Ordering procedure: Locate shell size needed (Column 4); select cable diameter range to be accommodated within the shell size (column 5); order by either MS part number (column 1) or Proprietary part number (column 3).

MS numbers shown are non-conductive finish. To order conductive finish, substitute "W" for "A" in the part number listed.

10- numbers shown are non-conductive finish. To order conductive finish, substitute prefix 88-.

# MIL-C-22992, QWLD Accessories

## M85049 or 10-524959

### cable sealing adapters (receptacle)

All dimensions for reference only.

| MS Part Number* | Superseded MS Part Number | Proprietary Part Number* | Used With Shell Size | Cable Range |         | B<br>+ .000<br>- .010 | C<br>+ .000<br>- .010 | D<br>Thread<br>Class 2B-LH | E<br>Free Length<br>Max | F<br>+ .010<br>- .020 | G<br>Dia<br>+ .010<br>- .020 | H<br>Max | J<br>± .031 | K<br>+ .015<br>- .025 | L<br>Thread Class 2A<br>0.1P-0.2L<br>Double Stub | N<br>Dia<br>Max | P<br>Max | Q<br>Approx. | Type |
|-----------------|---------------------------|--------------------------|----------------------|-------------|---------|-----------------------|-----------------------|----------------------------|-------------------------|-----------------------|------------------------------|----------|-------------|-----------------------|--|-----------------|----------|--------------|------|
|                 |                           |                          |                      | Max Dia     | Min Dia |                       |                       |                            |                         |                       |                              |          |             |                       |  |                 |          |              |      |
| MS85049/4A18B1  | MS17342N18B1              | 10-524959-241            | 24                   | 1.375       | 1.250   | 2.000                 | 1.875                 | 1.625-18UNEF               | 1.281                   | 3.184                 | 1.812                        | 4.959    | 2.625       | 1.309                 | 1.7500   | 2.719           | .980     | 6.000        | III  |
| MS85049/4A16B1  | MS17342N16B1              | 10-524959-242            | 24                   | 1.310       | 1.185   | 1.780                 | 1.875                 | 1.625-18UNEF               | 1.281                   | 3.184                 | 1.812                        | 4.959    | 2.469       | 1.372                 | 1.7500   | 2.719           | .980     | 6.000        | III  |
| MS85049/4A17B1  | MS17342N17B1              | 10-524959-243            | 24                   | 1.230       | 1.105   | 1.780                 | 1.875                 | 1.625-18UNEF               | 1.281                   | 3.184                 | 1.812                        | 4.959    | 2.469       | 1.372                 | 1.7500   | 2.719           | .980     | 6.000        | III  |
| MS85049/4A15B1  | MS17342N15B1              | 10-524959-244            | 24                   | 1.180       | 1.055   | 1.780                 | 1.875                 | 1.625-18UNEF               | 1.281                   | 3.184                 | 1.812                        | 4.959    | 2.469       | 1.372                 | 1.7500   | 2.719           | .980     | 6.000        | III  |
| MS85049/3A18B1  | MS17340N18B1              | 10-524959-245            | 24                   | 1.109       | .984    | 1.546                 | 1.625                 | 1.625-18UNEF               | 1.281                   | 3.121                 | 1.812                        | 4.896    | 2.125       | 1.371                 | 1.7500   | 1.938           | .980     | 6.000        | I    |
| MS85049/3A16B1  | MS17340N16B1              | 10-524959-246            | 24                   | 1.055       | .930    | 1.546                 | 1.625                 | 1.625-18UNEF               | 1.281                   | 3.121                 | 1.812                        | 4.896    | 2.125       | 1.371                 | 1.7500   | 1.938           | .980     | 6.000        | I    |
| MS85049/3A17B1  | MS17340N17B1              | 10-524959-247            | 24                   | 1.000       | .675    | 1.546                 | 1.625                 | 1.625-18UNEF               | 1.281                   | 3.121                 | 1.812                        | 4.896    | 2.125       | 1.371                 | 1.7500   | 1.938           | .980     | 6.000        | I    |
| MS85049/5A16B1  | MS17341N16B1              | 10-524959-248            | 24                   | .970        | .857    | 1.312                 | 1.625                 | 1.625-18UNEF               | 1.094                   | 3.059                 | 1.812                        | 4.647    | 1.812       | 1.371                 | 1.7500   | 2.719           | .980     | 6.000        | II   |
| MS85049/5A13B1  | MS17341N13B1              | 10-524959-249            | 24                   | .900        | .787    | 1.312                 | 1.625                 | 1.625-18UNEF               | 1.094                   | 3.059                 | 1.812                        | 4.647    | 1.812       | 1.371                 | 1.7500   | 2.719           | .980     | 6.000        | II   |
| MS85049/3A19B1  | MS17340N19B1              | 10-524959-250            | 24                   | .880        | .755    | 1.546                 | 1.625                 | 1.625-18UNEF               | 1.281                   | 3.121                 | 1.812                        | 4.896    | 2.125       | 1.371                 | 1.7500   | 1.938           | .980     | 6.000        | I    |
| MS85049/5A17B1  | MS17341N17B1              | 10-524959-251            | 24                   | .828        | .715    | 1.188                 | 1.625                 | 1.625-18UNEF               | 1.094                   | 2.954                 | 1.812                        | 4.542    | 1.688       | 1.301                 | 1.7500   | 2.719           | .980     | 6.000        | II   |
| MS85049/5A18B1  | MS17341N18B1              | 10-524959-252            | 24                   | .805        | .692    | 1.312                 | 1.625                 | 1.625-18UNEF               | 1.094                   | 3.059                 | 1.812                        | 4.647    | 1.812       | 1.371                 | 1.7500   | 2.719           | .980     | 6.000        | II   |
| MS85049/5A15B1  | MS17341N15B1              | 10-524959-253            | 24                   | .750        | .637    | 1.312                 | 1.625                 | 1.625-18UNEF               | 1.094                   | 3.059                 | 1.812                        | 4.647    | 1.812       | 1.371                 | 1.7500   | 2.719           | .980     | 6.000        | II   |
| MS85049/5A14B1  | MS17341N14B1              | 10-524959-254            | 24                   | .630        | .517    | 1.312                 | 1.625                 | 1.625-18UNEF               | 1.094                   | 3.059                 | 1.812                        | 4.647    | 1.812       | 1.371                 | 1.7500   | 2.719           | .980     | 6.000        | II   |
| MS85049/4A20B1  | MS17342N20B1              | 10-524959-281            | 28                   | 1.531       | 1.406   | 2.000                 | 2.062                 | 1.875-16UN                 | 1.281                   | 3.246                 | 2.062                        | 5.021    | 2.625       | 1.371                 | 2.0000   | 2.719           | .980     | 6.000        | III  |
| MS85049/4A19B1  | MS17342N19B1              | 10-524959-282            | 28                   | 1.445       | 1.320   | 2.000                 | 2.062                 | 1.875-16UN                 | 1.281                   | 3.246                 | 2.062                        | 5.021    | 2.625       | 1.371                 | 2.0000   | 2.719           | .980     | 6.000        | III  |
| MS85049/4A21B1  | MS17342N21B1              | 10-524959-283            | 28                   | 1.375       | 1.250   | 2.000                 | 2.062                 | 1.875-16UN                 | 1.281                   | 3.246                 | 2.062                        | 5.021    | 2.625       | 1.371                 | 2.0000   | 2.719           | .980     | 6.000        | III  |
| MS85049/3A22B1  | MS17340N22B1              | 10-524959-284            | 28                   | 1.310       | 1.185   | 1.780                 | 1.875                 | 1.875-16UN                 | 1.281                   | 3.184                 | 2.062                        | 4.959    | 2.469       | 1.372                 | 2.0000   | 2.219           | .980     | 6.000        | I    |
| MS85049/3A21B1  | MS17340N21B1              | 10-524959-285            | 28                   | 1.230       | 1.105   | 1.780                 | 1.875                 | 1.875-16UN                 | 1.281                   | 3.184                 | 2.062                        | 4.959    | 2.469       | 1.372                 | 2.0000   | 2.219           | .980     | 6.000        | I    |
| MS85049/3A20B1  | MS17340N20B1              | 10-524959-286            | 28                   | 1.180       | 1.055   | 1.780                 | 1.875                 | 1.875-16UN                 | 1.281                   | 3.184                 | 2.062                        | 4.959    | 2.469       | 1.372                 | 2.0000   | 2.219           | .980     | 6.000        | I    |
| MS85049/5A20B1  | MS17341N20B1              | 10-524959-287            | 28                   | 1.109       | .984    | 1.546                 | 1.875                 | 1.875-16UN                 | 1.281                   | 3.121                 | 2.062                        | 4.896    | 2.125       | 1.371                 | 2.0000   | 2.279           | .980     | 6.000        | II   |
| MS85049/5A24B1  | MS17341N24B1              | 10-524959-288            | 28                   | 1.000       | .875    | 1.546                 | 1.875                 | 1.875-16UN                 | 1.281                   | 3.121                 | 2.062                        | 4.896    | 2.125       | 1.371                 | 2.0000   | 2.279           | .980     | 6.000        | II   |
| MS85049/5A23B1  | MS17341N23B1              | 10-524959-289            | 28                   | .970        | .857    | 1.312                 | 1.875                 | 1.875-16UN                 | 1.094                   | 3.059                 | 2.062                        | 4.647    | 1.812       | 1.371                 | 2.0000   | 2.719           | .980     | 6.000        | II   |
| MS85049/5A19B1  | MS17341N19B1              | 10-524959-290            | 28                   | .880        | .755    | 1.546                 | 1.875                 | 1.875-16UN                 | 1.281                   | 3.121                 | 2.062                        | 4.896    | 2.125       | 1.371                 | 2.0000   | 2.719           | .980     | 6.000        | II   |
| MS85049/5A19B1  | MS17341N21B1              | 10-524959-291            | 28                   | .750        | .637    | 1.312                 | 1.875                 | 1.875-16UN                 | 1.094                   | 3.059                 | 2.062                        | 4.647    | 1.812       | 1.371                 | 2.0000   | 2.719           | .980     | 6.000        | II   |
| MS85049/5A26B1  | MS17341N26B1              | 10-524959-292            | 28                   | .680        | .567    | 1.312                 | 1.875                 | 1.875-16UN                 | 1.094                   | 3.059                 | 2.062                        | 4.647    | 1.812       | 1.371                 | 2.0000   | 2.219           | .980     | 6.000        | II   |
| MS85049/5A25B1  | MS17341N25B1              | 10-524959-293            | 28                   | .530        | .436    | 1.000                 | 1.812                 | 1.875-16UN                 | 1.062                   | 2.875                 | 2.062                        | 4.431    | 1.375       | 1.375                 | 2.0000   | 2.219           | .980     | 6.000        | II   |
| MS85049/5A22B1  | MS17341N22B1              | 10-524959-294            | 28                   | .375        | .281    | .875                  | 1.875                 | 1.875-16UN                 | .969                    | 2.766                 | 2.062                        | 4.229    | 1.125       | 1.422                 | 2.0000   | 2.219           | .980     | 6.000        | II   |
| MS85049/4A23B1  | MS17342N23B1              | 10-524959-321            | 32                   | 1.828       | 1.700   | 2.438                 | 2.312                 | 2.0625-16UN                | 1.391                   | 3.500                 | 2.312                        | 5.385    | 3.171       | 1.375                 | 2.2500   | 2.469           | .980     | 6.000        | III  |
| MS85049/4A25B1  | MS17342N25B1              | 10-524959-322            | 32                   | 1.730       | 1.605   | 2.438                 | 2.312                 | 2.0625-16UN                | 1.391                   | 3.500                 | 2.312                        | 5.385    | 3.171       | 1.375                 | 2.2500   | 2.469           | .980     | 6.000        | III  |
| MS85049/4A22B1  | MS17342N22B1              | 10-524959-323            | 32                   | 1.656       | 1.531   | 2.250                 | 2.312                 | 2.0625-16UN                | 1.281                   | 3.308                 | 2.312                        | 5.083    | 2.953       | 1.370                 | 2.2500   | 2.469           | .980     | 6.000        | III  |
| MS85049/4A24B1  | MS17342N24B1              | 10-524959-324            | 32                   | 1.562       | 1.437   | 2.250                 | 2.312                 | 2.0625-16UN                | 1.281                   | 3.308                 | 2.312                        | 5.083    | 2.953       | 1.370                 | 2.2500   | 2.469           | .980     | 6.000        | III  |
| MS85049/3A24B1  | MS17340N24B1              | 10-524959-325            | 32                   | 1.531       | 1.406   | 2.000                 | 2.062                 | 2.0625-16UN                | 1.281                   | 3.246                 | 2.312                        | 5.021    | 2.625       | 1.371                 | 2.2500   | 2.469           | .980     | 6.000        | I    |
| MS85049/3A23B1  | MS17340N23B1              | 10-524959-326            | 32                   | 1.445       | 1.320   | 2.000                 | 2.062                 | 2.0625-16UN                | 1.281                   | 3.246                 | 2.312                        | 5.021    | 2.625       | 1.371                 | 2.2500   | 2.469           | .980     | 6.000        | I    |
| MS85049/3A25B1  | MS17340N25B1              | 10-524959-327            | 32                   | 1.375       | 1.250   | 2.000                 | 2.062                 | 2.0625-16UN                | 1.281                   | 3.246                 | 2.312                        | 5.021    | 2.625       | 1.371                 | 2.2500   | 2.469           | .980     | 6.000        | I    |
| MS85049/5A28B1  | MS17341N28B1              | 10-524959-328            | 32                   | 1.230       | 1.150   | 1.780                 | 2.062                 | 2.0625-16UN                | 1.281                   | 3.184                 | 2.312                        | 4.959    | 2.469       | 1.372                 | 2.2500   | 2.469           | .980     | 6.000        | II   |
| MS85049/5A35B1  | MS17341N35B1              | 10-524959-329            | 32                   | 1.130       | 1.005   | 1.780                 | 2.062                 | 2.0625-16UN                | 1.281                   | 3.184                 | 2.312                        | 4.959    | 2.469       | 1.372                 | 2.2500   | 2.469           | .980     | 6.000        | II   |
| MS85049/5A31B1  | MS17341N31B1              | 10-524959-330            | 32                   | 1.109       | .984    | 1.546                 | 2.062                 | 2.0625-16UN                | 1.281                   | 3.121                 | 2.312                        | 4.896    | 2.125       | 1.371                 | 2.2500   | 2.469           | .980     | 6.000        | II   |
| MS85049/5A27B1  | MS17341N27B1              | 10-524959-331            | 32                   | 1.055       | .930    | 1.546                 | 2.062                 | 2.0625-16UN                | 1.281                   | 3.121                 | 2.312                        | 4.896    | 2.125       | 1.371                 | 2.2500   | 2.469           | .980     | 6.000        | II   |
| MS85049/5A32B1  | MS17341N32B1              | 10-524959-332            | 32                   | .970        | .858    | 1.312                 | 2.062                 | 2.0625-16UN                | 1.094                   | 3.059                 | 2.312                        | 4.647    | 1.812       | 1.371                 | 2.2500   | 2.469           | .980     | 6.000        | II   |
| MS85049/5A30B1  | MS17341N30B1              | 10-524959-333            | 32                   | .880        | .755    | 1.546                 | 2.062                 | 2.0625-16UN                | 1.281                   | 3.121                 | 2.312                        | 4.896    | 2.125       | 1.371                 | 2.2500   | 2.469           | .980     | 6.000        | II   |

\* Ordering procedure: Locate shell size needed (Column 4); select cable diameter range to be accommodated within the shell size (column 5); order by either MS part number (column 1) or Proprietary part number (column 3).

MS numbers shown are non-conductive finish. To order conductive finish, substitute "W" for "A" in the part number listed.

10- numbers shown are non-conductive finish. To order conductive finish, substitute prefix 88-.

# MIL-C-22992, QWLD Accessories

## M85049 or 10-524959

### cable sealing adapters (receptacle)

All dimensions for reference only.

| MS Part Number* | Superseded MS Part Number | Proprietary Part Number* | Used With Shell Size | Cable Range |         | B<br>+.000<br>-.010 | C<br>+.000<br>-.010 | D<br>Thread<br>Class 2B-LH | E<br>Free<br>Length<br>Max | F<br>+.010<br>-.020 | G<br>Dia<br>+.010<br>-.020 | H<br>Max | J<br>±.031 | K<br>+.015<br>-.025 | L<br>Thread<br>Class 2A<br>0.1P-0.2L<br>Double Stub | N<br>Dia<br>Max | P<br>Max | Q<br>Approx. | Type |
|-----------------|---------------------------|--------------------------|----------------------|-------------|---------|---------------------|---------------------|----------------------------|----------------------------|---------------------|----------------------------|----------|------------|---------------------|---|-----------------|----------|--------------|------|
|                 |                           |                          |                      | Max Dia     | Min Dia |                     |                     |                            |                            |                     |                            |          |            |                     |   |                 |          |              |      |
| M85049/5A29B1   | MS17341N29B1              | 10-524959-334            | 32                   | .750        | .637    | 1.312               | 2.062               | 2.0625-16UN                | 1.094                      | 3.059               | 2.312                      | 4.647    | 1.612      | 1.371               | 2.2500  | 2.469           | .980     | 6.000        | II   |
| M85049/5A34B1   | MS17341N34B1              | 10-524959-335            | 32                   | .530        | .436    | 1.000               | 2.000               | 2.0625-16UN                | 1.062                      | 2.875               | 2.312                      | 4.431    | 1.375      | 1.375               | 2.2500  | 2.469           | .980     | 6.000        | II   |
| M85049/5A53B1   | MS17341N33B1              | 10-524959-336            | 32                   | .375        | .281    | .875                | 2.062               | 2.0625-16UN                | .969                       | 2.813               | 2.312                      | 4.276    | 1.125      | 1.469               | 2.2500  | 2.469           | .980     | 6.000        | II   |
| M85049/4A30A1   | MS17342N30B1              | 10-524959-361            | 36                   | 2.062       | 1.917   | 2.750               | 2.500               | 2.3125-16UN                | 1.391                      | 3.500               | 2.562                      | 5.385    | 3.375      | 1.375               | 2.5000  | 2.719           | .980     | 6.000        | III  |
| M85049/4A29B1   | MS17342N29B1              | 10-524959-362            | 36                   | 1.984       | 1.859   | 2.438               | 2.500               | 2.3125-16UN                | 1.391                      | 3.469               | 2.562                      | 5.354    | 3.171      | 1.344               | 2.5000  | 2.719           | .980     | 6.000        | III  |
| M85049/4A26B1   | MS17342N26B1              | 10-524959-363            | 36                   | 1.900       | 1.775   | 2.438               | 2.500               | 2.3125-16UN                | 1.391                      | 3.469               | 2.562                      | 5.354    | 3.171      | 1.344               | 2.5000  | 2.719           | .980     | 6.000        | III  |
| M85049/4A28B1   | MS17342N28B1              | 10-524959-364            | 36                   | 1.825       | 1.700   | 2.438               | 2.500               | 2.3125-16UN                | 1.391                      | 3.469               | 2.562                      | 5.354    | 3.171      | 1.344               | 2.5000  | 2.719           | .980     | 6.000        | III  |
| M85049/4A27B1   | MS17342N27B1              | 10-524959-365            | 36                   | 1.730       | 1.605   | 2.438               | 2.500               | 2.3125-16UN                | 1.391                      | 3.469               | 2.562                      | 5.354    | 3.171      | 1.344               | 2.5000  | 2.719           | .980     | 6.000        | III  |
| M85049/3A26B1   | MS17340N26B1              | 10-524959-366            | 36                   | 1.656       | 1.531   | 2.250               | 2.312               | 2.3125-16UN                | 1.281                      | 3.308               | 2.562                      | 5.083    | 2.953      | 1.370               | 2.5000  | 2.719           | .980     | 6.000        | I    |
| M85049/3A27B1   | MS17340N27B1              | 10-524959-367            | 36                   | 1.562       | 1.437   | 2.250               | 2.312               | 2.3125-16UN                | 1.281                      | 3.308               | 2.562                      | 5.083    | 2.953      | 1.370               | 2.5000  | 2.719           | .980     | 6.000        | I    |
| M85049/5A40B1   | MS17341N40B1              | 10-524959-368            | 36                   | 1.445       | 1.320   | 2.000               | 2.312               | 2.3125-16UN                | 1.281                      | 3.246               | 2.562                      | 5.021    | 2.625      | 1.371               | 2.5000  | 2.719           | .980     | 6.000        | II   |
| M85049/5A38B1   | MS17341N38B1              | 10-524959-369            | 36                   | 1.375       | 1.250   | 2.000               | 2.312               | 2.3125-16UN                | 1.281                      | 3.246               | 2.562                      | 5.021    | 2.625      | 1.371               | 2.5000  | 2.719           | .980     | 6.000        | II   |
| M85049/5A36B1   | MS17341N36B1              | 10-524959-370            | 36                   | 1.310       | 1.185   | 1.780               | 2.312               | 2.3125-16UN                | 1.281                      | 3.184               | 2.562                      | 4.959    | 2.469      | 1.372               | 2.5000  | 2.719           | .980     | 6.000        | II   |
| M85049/5A42B1   | MS17341N42B1              | 10-524959-371            | 36                   | 1.230       | 1.105   | 1.780               | 2.312               | 2.3125-16UN                | 1.281                      | 3.184               | 2.562                      | 4.959    | 2.469      | 1.372               | 2.5000  | 2.719           | .980     | 6.000        | II   |
| M85049/5A39B1   | MS17341N39B1              | 10-524959-372            | 36                   | 1.180       | 1.055   | 1.780               | 2.312               | 2.3125-16UN                | 1.281                      | 3.184               | 2.562                      | 4.959    | 2.469      | 1.372               | 2.5000  | 2.719           | .980     | 6.000        | II   |
| M85049/5A37B1   | MS17341N37B1              | 10-524959-373            | 36                   | 1.109       | .984    | 1.546               | 2.312               | 2.3125-16UN                | 1.281                      | 3.121               | 2.562                      | 4.896    | 2.125      | 1.371               | 2.5000  | 2.719           | .980     | 6.000        | II   |
| M85049/5A41B1   | MS17341N41B1              | 10-524959-374            | 36                   | .970        | .857    | 1.312               | 2.250               | 2.3125-16UN                | 1.094                      | 3.063               | 2.562                      | 4.651    | 1.812      | 1.375               | 2.5000  | 2.719           | .980     | 6.000        | II   |
| M85049/4A31B1   | MS17342N31B1              | 10-524959-401            | 40                   | 2.375       | 2.230   | 3.000               | 2.812               | 2.625-16UN                 | 1.391                      | 3.609               | 2.875                      | 5.682    | 3.625      | 1.421               | 2.7500  | 2.969           | .980     | 6.000        | III  |
| M85049/4A32B1   | MS17342N32B1              | 10-524959-402            | 40                   | 2.250       | 2.105   | 2.875               | 2.625               | 2.625-16UN                 | 1.391                      | 3.609               | 2.875                      | 5.682    | 3.500      | 1.421               | 2.7500  | 2.969           | .980     | 6.000        | III  |
| M85049/4A33B1   | MS17342N33B1              | 10-524959-403            | 40                   | 2.145       | 2.000   | 2.750               | 2.625               | 2.625-16UN                 | 1.391                      | 3.547               | 2.875                      | 5.620    | 3.375      | 1.422               | 2.7500  | 2.969           | .980     | 6.000        | III  |
| M85049/4A34B1   | MS17342N34B1              | 10-524959-404            | 40                   | 2.062       | 1.917   | 2.750               | 2.625               | 2.625-16UN                 | 1.391                      | 3.547               | 2.875                      | 5.620    | 3.375      | 1.422               | 2.7500  | 2.969           | .980     | 6.000        | III  |
| M85049/5A43B1   | MS17341N43B1              | 10-524959-405            | 40                   | 1.940       | 1.815   | 2.438               | 2.750               | 2.625-16UN                 | 1.391                      | 4.281               | 2.875                      | 6.334    | 3.171      | 2.156               | 2.7500  | 2.969           | .980     | 6.000        | II   |
| M85049/5A44B1   | MS17341N44B1              | 10-524959-406            | 40                   | 1.825       | 1.700   | 2.438               | 2.750               | 2.625-16UN                 | 1.391                      | 4.281               | 2.875                      | 6.334    | 3.171      | 2.156               | 2.7500  | 2.969           | .980     | 6.000        | II   |
| M85049/5A45B1   | MS17341N45B1              | 10-524959-407            | 40                   | 1.730       | 1.605   | 2.438               | 2.750               | 2.625-16UN                 | 1.391                      | 4.281               | 2.875                      | 6.334    | 3.171      | 2.156               | 2.7500  | 2.969           | .980     | 6.000        | II   |
| M85049/5A46B1   | MS17341N46B1              | 10-524959-408            | 40                   | 1.656       | 1.531   | 2.250               | 2.625               | 2.625-16UN                 | 1.281                      | 4.094               | 2.875                      | 6.057    | 2.953      | 2.156               | 2.7500  | 2.969           | .980     | 6.000        | II   |

\* Ordering procedure: Locate shell size needed (Column 4); select cable diameter range to be accommodated within the shell size (column 5); order by either MS part number (column 1) or Proprietary part number (column 3).


MS numbers shown are non-conductive finish. To order conductive finish, substitute "W" for "A" in the part number listed.

10- numbers shown are non-conductive finish. To order conductive finish, substitute prefix 88-.


# MIL-C-22992, QWLD Accessories

**10-350695** adapter,  
**10-350349** cable clamp

**10-350695-XX( )**  
 adapter

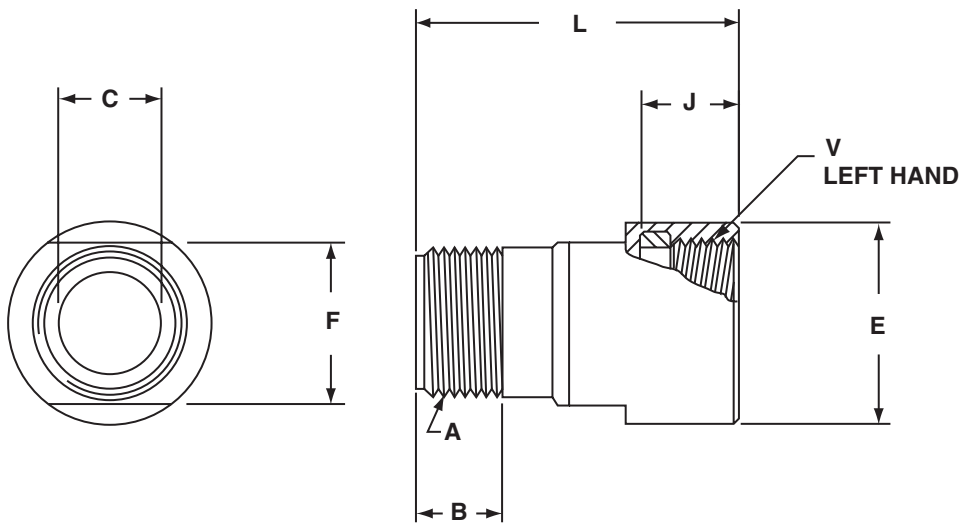

**10-350349-( )3**  
 cable clamp

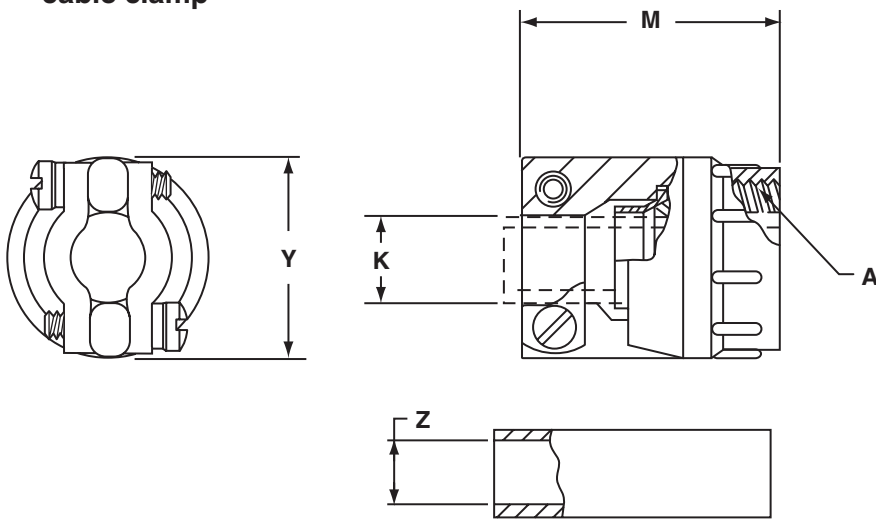

**MS3420-( )A**  
 sleeve



# MIL-C-22992, QWLD Accessories

## 10-350695 adapter,

## 10-350349 cable clamp

All dimensions for reference only.

| Shell Size | Proprietary Adapter Part Number* | Clamp Part Number** | Superseded MS Part Number | A Thread Class 2A (Plated) | B Min Full Thd | C Dia +.000 - .010 | E +.010 - .020 | F ±.010 | J +.010 - .000 | K Dia |        | L ±.010 | M Max | V Thread Class 2B-LH | Y Max |
|------------|----------------------------------|---------------------|---------------------------|----------------------------|----------------|--------------------|----------------|---------|----------------|-------|--------|---------|-------|----------------------|-------|
|            |                                  |                     |                           |                            |                |                    |                |         |                | Free  | Closed |         |       |                      |       |
| 12         | 10-350695-13( )                  | 10-350349-12( )     | MS3057-4C                 | .625-24UNEF                | .422           | .386               | .875           | .688    | .484           | .302  | .094   | 1.609   | 1.375 | .750-20UNEF          | .906  |
| 14         | 10-350695-15( )                  | 10-350349-14( )     | MS3057-6C                 | .750-20UNEF                | .422           | .500               | 1.000          | .812    | .484           | .428  | .230   | 1.609   | 1.375 | .875-20UNEF          | 1.031 |
| 16         | 10-350695-17( )                  | 10-350349-16( )     | MS3057-8C                 | .875-20UNEF                | .422           | .625               | 1.188          | .938    | .481           | .515  | .316   | 1.609   | 1.375 | 1.000-20UNEF         | 1.125 |
| 18         | 10-350695-18( )                  | 10-350349-18( )     | MS3057-10C                | 1.000-20UNEF               | .422           | .752               | 1.312          | 1.062   | .481           | .614  | .378   | 1.609   | 1.437 | 1.125-18UNEF         | 1.234 |
| 20         | 10-350695-20( )                  | 10-350349-20( )     | MS3057-12C                | 1.1875-18UNEF              | .422           | .891               | 1.438          | 1.250   | .481           | .738  | .445   | 1.609   | 1.437 | 1.250-18UNEF         | 1.484 |
| 22         | 10-350695-22( )                  | 10-350349-20( )     | MS3057-12C                | 1.1875-18UNEF              | .422           | .891               | 1.562          | 1.250   | .481           | .738  | .445   | 1.609   | 1.437 | 1.375-18UNEF         | 1.484 |
| 24         | 10-350695-24( )                  | 10-350349-24( )     | MS3057-16C                | 1.4375-18UNEF              | .422           | 1.111              | 1.812          | 1.500   | .481           | .926  | .611   | 1.609   | 1.562 | 1.625-18UNEF         | 1.671 |
| 28         | 10-350695-28( )                  | 10-350349-24( )     | MS3057-16C                | 1.4375-18UNEF              | .422           | 1.111              | 2.062          | 1.500   | .481           | .926  | .611   | 1.781   | 1.562 | 1.875-16UN           | 1.671 |
| 32         | 10-350695-32( )                  | 10-350349-32( )     | MS3057-20C                | 1.750-18UNS                | .484           | 1.422              | 2.250          | 1.875   | .481           | 1.200 | .922   | 1.781   | 1.812 | 2.0625-16UNS         | 2.188 |
| 36         | 10-350695-36( )                  | 10-350349-36( )     | MS3057-24C                | 2.000-18UNS                | .562           | 1.672              | 2.500          | 2.125   | .481           | 1.363 | .922   | 1.781   | 2.062 | 2.3125-16UNS         | 2.344 |
| 40         | 10-350695-40( )                  | 10-350349-40( )     | MS3057-28C                | 2.250-16UN                 | .562           | 1.914              | 2.812          | 2.375   | .672           | 1.611 | 1.180  | 2.032   | 2.062 | 2.625-16UN           | 2.594 |

\* To attach the cable clamp to the left hand accessory threads of QWLD connectors, adapter 10-350695-XX is needed. Order this proprietary adapter from column 2 and suffix the part number with the finish desired, listed in the finish chart below.

\*\* Order MS clamp (column 3) to accommodate the cable type being used. Standard finish on the clamp is olive drab, cadmium plate.

| Shell Size | Sleeve† MS Part Number | Z Dia      |        |
|------------|------------------------|------------|--------|
|            |                        | Free ±.016 | Closed |
| 12         | MS3420-4A              | .219       | .010   |
| 14         | MS3420-4A              | .219       | .020   |
|            | MS3420-6A              | .312       | .114   |
| 16         | MS3420-6A              | .312       | .085   |
|            | MS3420-8A              | .438       | .222   |
| 18         | MS3420-6A              | .312       | .085   |
|            | MS3420-10A             | .438       | .200   |
| 20         | MS3420-8A              | .438       | .177   |
|            | MS3420-12A             | .541       | .270   |
| 22         | MS3420-8A              | .438       | .177   |
|            | MS3420-12A             | .541       | .270   |
| 24         | MS3420-8A              | .438       | .186   |
|            | MS3420-12A             | .541       | .260   |
|            | MS3420-16A             | .750       | .433   |
| 28         | MS3420-8A              | .438       | .186   |
|            | MS3420-12A             | .541       | .260   |
|            | MS3420-16A             | .750       | .433   |
| 32         | MS3420-12A             | .541       | .273   |
|            | MS3420-16A             | .750       | .442   |
|            | MS3420-20A             | .938       | .620   |
| 36         | MS3420-16A             | .750       | .358   |
|            | MS3420-18A             | .938       | .504   |
|            | MS3420-24A             | 1.125      | .682   |
| 40         | MS3420-16A             | .750       | .368   |
|            | MS3420-20A             | .938       | .514   |
|            | MS3420-28A             | 1.250      | .816   |




†Sleeve not supplied as part of assembly. Order separately by part number shown

| Finish Chart for Adapter & Clamp      | Suffix |
|---------------------------------------|--------|
| Bright Cadmium Plate                  | -XX1   |
| Black Anodize                         | -XX2   |
| Olive Drab, Cadmium Plate             | -XX3   |
| Gray Anodize                          | -XX4   |
| Anodic Coating                        | -XX*   |
| Olive Drab Cadmium Plate, Nickel Base | -XX9   |

\* No third digit required for 10-350695 and not available for 10-350349.

# MIL-C-22992, QWLD Accessories

## protective covers

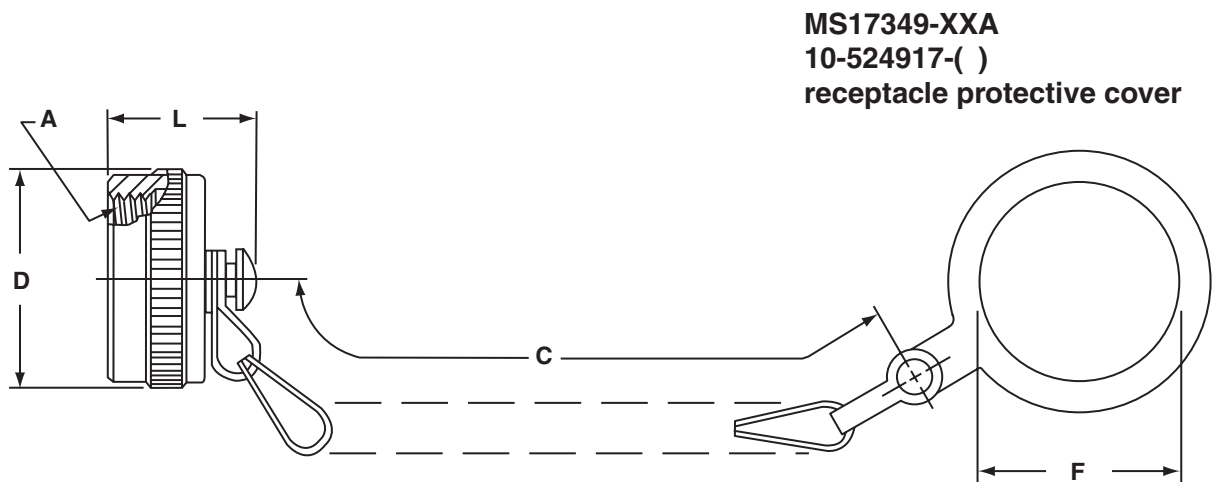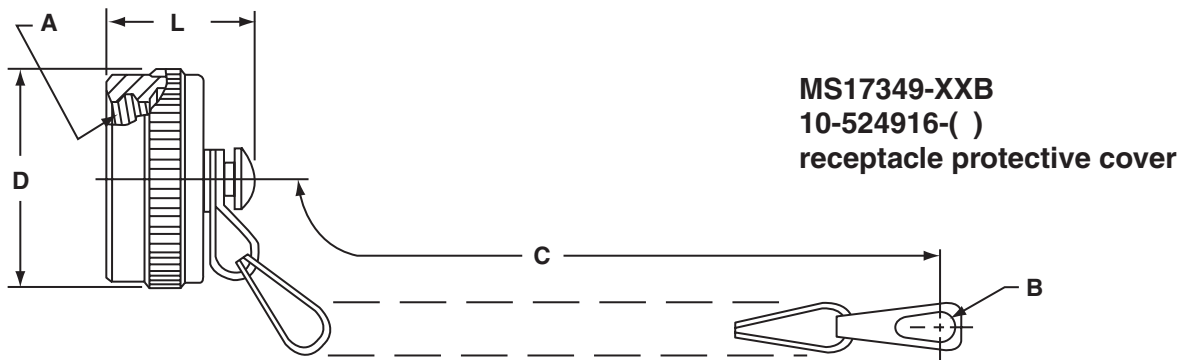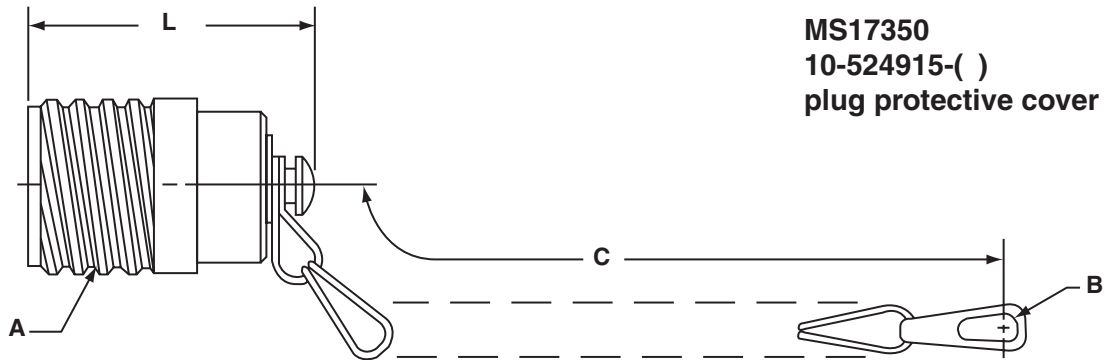

# MIL-C-22992, QWLD Accessories

## protective covers

All dimensions for reference only.

| Shell Size | Plug Protective Cover MS Part Number* | Plug Protective Cover Proprietary Part Number** | A Thread Class 2A (Plated) 0.1P-0.2L Double Stub | B Dia +.010 -.005 | C Approx. | L Max |
|------------|---------------------------------------|---|--|-------------------|-----------|-------|
| 12         | MS17350-( )                           | 10-524915-12( )                                 | .8750  | .156              | 5.000     | 1.500 |
| 14         | MS17350-( )                           | 10-524915-14( )                                 | 1.0000   | .156              | 5.000     | 1.500 |
| 16         | MS17350-( )                           | 10-524915-16( )                                 | 1.1250   | .156              | 5.000     | 1.500 |
| 18         | MS17350-( )                           | 10-524915-18( )                                 | 1.2500   | .180              | 5.000     | 1.500 |
| 20         | MS17350-( )                           | 10-524915-20( )                                 | 1.3750   | .180              | 5.000     | 1.500 |
| 22         | MS17350-( )                           | 10-524915-22( )                                 | 1.5000   | .180              | 6.000     | 1.500 |
| 24         | MS17350-( )                           | 10-524915-24( )                                 | 1.7500   | .180              | 6.000     | 1.500 |
| 28         | MS17350-( )                           | 10-524915-28( )                                 | 2.0000   | .180              | 6.000     | 1.500 |
| 32         | MS17350-( )                           | 10-524915-32( )                                 | 2.2500   | .209              | 6.000     | 1.500 |
| 36         | MS17350-( )                           | 10-524915-36( )                                 | 2.5000   | .209              | 6.000     | 1.500 |
| 40         | MS17350-( )                           | 10-524915-40( )                                 | 2.7500   | .209              | 6.000     | 1.500 |

\*Order MS-approved covers as per coded part number example:

| PART NUMBER    |          |           |          |
|----------------|----------|-----------|----------|
| <u>MS17350</u> | <u>C</u> | <u>28</u> | <u>A</u> |
| 1              | 2        | 3         | 4        |

- MS Number** - MS17350 designated plug protective cover MS17349 designated receptacle protect cover
- Cover Finish** - C for conductive, N for non-conductive.
- Cover Size** - Shell size of connector with which cover is used.
- Cover Type** - (MS17349 only) -  
A - Washer Termination, used with:  
MS17345 line (cable connecting) plug  
MS17347 jam nut receptacle  
MS17348 jam nut receptacle  
B - Eyelet Termination - used with:  
MS17343 wall mount receptacle  
MS17346 box mount receptacle

\*\*Order Proprietary covers as per coded part number example:

| PART NUMBER      |   |           |          |
|------------------|---|-----------|----------|
| <u>10-524915</u> | - | <u>28</u> | <u>5</u> |
| 1                |   | 2         | 3        |


| Shell Size | Receptacle Protective Cover MS Part Number* | Receptacle Protective Cover Proprietary Part Number** | A Thread Class 2B 0.1P-0.2L Double Stub | B +.010 -.005 | C Approx. | D Dia. Max | F +.010 -.000 | L Max |
|------------|---|---|---|---------------|-----------|------------|---------------|-------|
| 12         | MS17349-( )B<br>MS17349-( )A                | 10-524916-12( )<br>10-524917-12( )                    | .8750                                   | .156          | 5.000     | 1.094      | 1.016         | .765  |
| 14         | MS17349-( )B<br>MS17349-( )A                | 10-524916-14( )<br>10-524917-14( )                    | 1.0000                                  | .156          | 5.000     | 1.219      | 1.141         | .765  |
| 16         | MS17349-( )B<br>MS17349-( )A                | 10-524916-16( )<br>10-524917-16( )                    | 1.1250                                  | .156          | 5.000     | 1.344      | 1.266         | .980  |
| 18         | MS17349-( )B<br>MS17349-( )A                | 10-524916-18( )<br>10-524917-18( )                    | 1.2500                                  | .180          | 5.000     | 1.469      | 1.391         | .980  |
| 20         | MS17349-( )B<br>MS17349-( )A                | 10-524916-20( )<br>10-524917-20( )                    | 1.3750                                  | .180          | 5.000     | 1.562      | 1.516         | .980  |
| 22         | MS17349-( )B<br>MS17349-( )A                | 10-524916-22( )<br>10-524917-22( )                    | 1.5000                                  | .180          | 6.000     | 1.688      | 1.641         | .980  |
| 24         | MS17349-( )B<br>MS17349-( )A                | 10-524916-24( )<br>10-524917-24( )                    | 1.7500                                  | .180          | 6.000     | 1.938      | 1.891         | .980  |
| 28         | MS17349-( )B<br>MS17349-( )A                | 10-524916-28( )<br>10-524917-28( )                    | 2.0000                                  | .180          | 6.000     | 2.219      | 2.141         | .980  |
| 32         | MS17349-( )B<br>MS17349-( )A                | 10-524916-32( )<br>10-524917-32( )                    | 2.2500                                  | .209          | 6.000     | 2.469      | 2.391         | .980  |
| 36         | MS17349-( )B<br>MS17349-( )A                | 10-524916-36( )<br>10-524917-36( )                    | 2.5000                                  | .209          | 6.000     | 2.719      | 2.641         | .980  |
| 40         | MS17349-( )B<br>MS17349-( )A                | 10-524916-40( )<br>10-524917-40( )                    | 2.7500                                  | .209          | 6.000     | 2.969      | 2.891         | .980  |

- Base Number** - 10-524915 designates plug cover with chain 10-524916 designates receptacle cover with chain 10-524917 designates receptacle cover with chain and attaching ring
- Cover Size** - Shell size of connector with which cover is used.
- Finish** -  
5 - Non-conductive Alumilite finish  
9 - Conductive olive drab cadmium plate over nickel finish

**Note:**  
Protective covers are supplied with all M85049 style cable sealing adapters.

# QWLD Accessories

## sealing gaskets

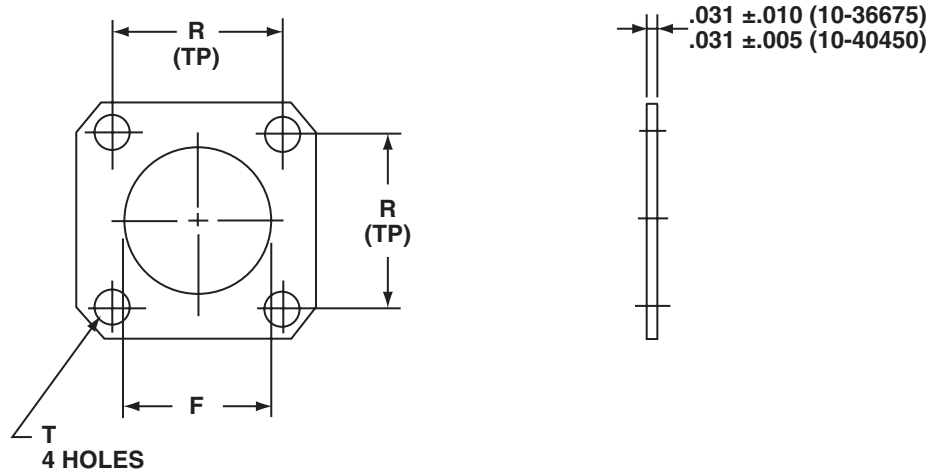

All dimensions for reference only.

| Part Number* | Shell Size | F Dia<br>+.016<br>-.000 | R<br>±.010 | T Dia<br>±.010 |
|--------------|------------|-------------------------|------------|----------------|
| 10-36675-14  | 12         | .875                    | .906       | .172           |
| 10-36675-16  | 14         | 1.000                   | .969       | .172           |
| 10-36675-18  | 16         | 1.125                   | 1.063      | .203           |
| 10-36675-20  | 18         | 1.250                   | 1.156      | .203           |
| 10-36675-22  | 20         | 1.375                   | 1.250      | .203           |
| 10-36675-24  | 22         | 1.500                   | 1.375      | .203           |
| 10-36675-28  | 24         | 1.750                   | 1.563      | .203           |
| 10-36675-32  | 28         | 2.000                   | 1.750      | .219           |
| 10-36675-36  | 32         | 2.188                   | 1.938      | .219           |
| 10-36675-40  | 36         | 2.438                   | 2.188      | .219           |
| 10-36675-44  | 40         | 2.688                   | 2.375      | .219           |
| 10-36675-48  | 44         | 2.938                   | 2.625      | .219           |

\*10-36675-( ) for operating temperature range - 67° to + 275°F.  
Order by part number listed to accommodate shell size being used.

| Part Number** | Shell Size | F Dia<br>+.016<br>-.000 | R<br>±.010 | T Dia<br>±.010 |
|---------------|------------|-------------------------|------------|----------------|
| 10-40450-14   | 12         | .875                    | .906       | .172           |
| 10-40450-16   | 14         | 1.000                   | .969       | .172           |
| 10-40450-18   | 16         | 1.125                   | 1.063      | .203           |
| 10-40450-20   | 18         | 1.250                   | 1.156      | .203           |
| 10-40450-22   | 20         | 1.375                   | 1.250      | .203           |
| 10-40450-24   | 22         | 1.500                   | 1.375      | .203           |
| 10-40450-28   | 24         | 1.750                   | 1.563      | .203           |
| 10-40450-32   | 28         | 2.000                   | 1.750      | .219           |
| 10-40450-36   | 32         | 2.188                   | 1.938      | .219           |
| 10-40450-40   | 36         | 2.437                   | 2.188      | .219           |
| 10-40450-44   | 40         | 2.688                   | 2.375      | .219           |
| 10-40450-48   | 44         | 2.938                   | 2.625      | .219           |

\*\*10-40450-( ) for operating temperature range 0° to + 275°F.  
Order by part number listed to accommodate shell size being used.

# QWLD Accessories

## encapsulation adapter



All dimensions for reference only.


| Part Number*    | Shell Size | A Thread Class 2B-LH | C Dia ±.031 | D Dia ±.005 | G $+.010 / -.000$ | H Dia ±.005 | L ±.031 | N ±.016 | Q ±.010 | Y Dia |
|-----------------|------------|----------------------|-------------|-------------|-------------------|-------------|---------|---------|---------|-------|
| 10-242067-13( ) | 12         | .750-20UNEF          | .500        | .673        | .766              | .673        | 1.175   | .479    | .923    | .798  |
| 10-242067-15( ) | 14         | .875-20UNEF          | .656        | .797        | .844              | .797        | 1.175   | .479    | 1.047   | .922  |
| 10-242067-17( ) | 16         | 1.000-20UNEF         | .813        | .923        | .969              | .923        | 1.175   | .479    | 1.172   | 1.048 |
| 10-242067-18( ) | 18         | 1.125-18UNEF         | .938        | 1.047       | 1.094             | 1.047       | 1.175   | .479    | 1.297   | 1.172 |
| 10-242067-20( ) | 20         | 1.250-18UNEF         | 1.063       | 1.172       | 1.219             | 1.172       | 1.175   | .479    | 1.422   | 1.297 |
| 10-242067-22( ) | 22         | 1.375-18UNEF         | 1.188       | 1.297       | 1.344             | 1.297       | 1.175   | .479    | 1.547   | 1.423 |
| 10-242067-24( ) | 24         | 1.625-18UNEF         | 1.312       | 1.537       | 1.469             | 1.422       | 1.175   | .479    | 1.787   | 1.662 |
| 10-242067-28( ) | 28         | 1.875-16UN           | 1.500       | 1.797       | 1.719             | 1.679       | 1.175   | .479    | 2.047   | 1.922 |
| 10-242067-32( ) | 32         | 2.0625-16UN          | 1.800       | 2.047       | 2.000             | 1.960       | 1.175   | .479    | 2.297   | 2.172 |
| 10-242067-36( ) | 36         | 2.3125-16UN          | 2.000       | 2.297       | 2.219             | 2.179       | 1.175   | .479    | 2.547   | 2.422 |
| 10-242067-40( ) | 40         | 2.625-16UN           | 2.250       | 2.609       | 2.469             | 2.429       | 1.375   | .667    | 2.859   | 2.734 |
| 10-242067-44( ) | 44         | 2.875-16UN           | 2.459       | 2.857       | 2.782             | 2.742       | 1.375   | .667    | 3.110   | 2.982 |
| 10-242067-48( ) | 48         | 3.125-16UN           | 2.719       | 3.107       | 3.046             | 3.004       | 1.375   | .667    | 3.360   | 3.244 |

\*Order by part number listed to accommodate shell size being used. To complete part number add suffix for finish desired from table below.

| Finish                    | Suffix |
|---------------------------|--------|
| Bright Cadmium Plate      | -XX1   |
| Black Anodize             | -XX2   |
| Cadmium Plate, Olive Drab | -XX3   |
| Gray Anodize              | -XX4   |
| Anodic Coating            | -XX5   |
| Cadmium Plate Nickel Base | -XX7   |

# QWLD Accessories

## encapsulation end bell

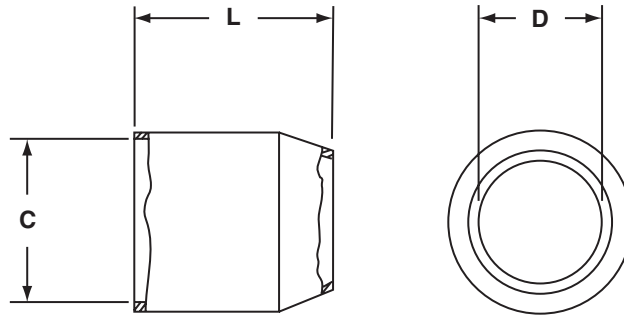

All dimensions are for reference only.

| Part Number* | C Dia                                      | D Dia<br>±.010 | L<br>±.010 |
|--------------|--|----------------|------------|
| 10-130999-13 | .766 <sup>+0.000</sup> / <sub>-.010</sub>  | .484           | 1.273      |
| 10-130999-15 | .844 <sup>+0.000</sup> / <sub>-.010</sub>  | .609           | 1.273      |
| 10-130999-17 | .969 <sup>+0.000</sup> / <sub>-.010</sub>  | .734           | 1.273      |
| 10-130999-18 | 1.094 <sup>+0.000</sup> / <sub>-.010</sub> | .859           | 1.242      |
| 10-130999-20 | 1.219 <sup>+0.000</sup> / <sub>-.015</sub> | .984           | 1.242      |
| 10-130999-22 | 1.344 <sup>+0.000</sup> / <sub>-.015</sub> | 1.109          | 1.242      |
| 10-130999-24 | 1.469 <sup>+0.000</sup> / <sub>-.015</sub> | 1.234          | 1.179      |
| 10-130999-28 | 1.719 <sup>+0.000</sup> / <sub>-.015</sub> | 1.427          | 1.179      |
| 10-130999-32 | 2.000 <sup>+0.000</sup> / <sub>-.020</sub> | 1.708          | 1.101      |
| 10-130999-36 | 2.219 <sup>+0.000</sup> / <sub>-.020</sub> | 1.895          | 1.101      |
| 10-130999-40 | 2.469 <sup>+0.000</sup> / <sub>-.020</sub> | 2.130          | 1.101      |
| 10-130999-44 | 2.782 <sup>+0.000</sup> / <sub>-.020</sub> | 2.443          | 1.101      |
| 10-130999-48 | 3.046 <sup>+0.000</sup> / <sub>-.020</sub> | 2.707          | 1.101      |

\*Order by part number listed to accommodate shell size being used.

# MIL-C-22992, QWLD

## MS solder contacts

Machine copper alloy contacts in a full range of sizes, with closed entry socket design in the size 12 and 16 contacts. A heavy silver-plated finish is deposited on all MS style solder contacts for maximum corrosion resistance, maximum current carrying capacity and low millivolt drop. Gold plated contacts are also available (See how to order, page 22).

### SOLDER CONTACTS\*

| Part Number                | Pin/Socket    | Mating End Size | Wire Barrel Size | Allowable Wire Size  | Test Current** Amps  |
|----------------------------|---------------|-----------------|------------------|----------------------|----------------------|
| 10-36982-3<br>10-36983-3   | Pin<br>Socket | 16 Long         | 16               | 16<br>18<br>20<br>22 | 13<br>10<br>7.5<br>5 |
| 10-36982-5<br>10-36983-5   | Pin<br>Socket | 12              | 12               | 12<br>10             | 23<br>17             |
| 10-407028-8<br>10-407029-8 | Pin<br>Socket | 8               | 8                | 8<br>10              | 46<br>33             |
| 10-407028-4<br>10-407029-4 | Pin<br>Socket | 4               | 4                | 4<br>6               | 80<br>60             |
| 10-407028-3<br>10-407029-3 | Pin<br>Socket | 0               | 0                | 0<br>1<br>2          | 150<br>125<br>100    |

\* Solder Wells Unfilled

\*\* Contact ratings as stated are test ratings only. The connector could not withstand full rated current through all contacts continuously. Please note that the electrical data given is not an establishment of electrical safety factors. This is left entirely in the designer's hands as he can best determine which peak voltage, switching surges, transients, etc. can be expected in a particular circuit.

**Table I**  
**CONTACT ARRANGEMENT**  
**SERVICE RATING**

| MS Service Rating | Recommended Operating Voltage* at Sea Level |         | Effective Creepage Distance Nom. | Mechanical Spacing Nom. |
|-------------------|---|---------|----------------------------------|-------------------------|
|                   | DC  | AC(RMS) |                                  |                         |
| Inst.             | 250   | 200     | 1/16                             |                         |
| A                 | 700   | 500     | 1/8                              | 1/16                    |
| D                 | 1250  | 900     | 3/16                             | 1/8                     |
| E                 | 1750  | 1250    | 1/4                              | 3/16                    |
| B                 | 2450  | 1750    | 5/16                             | 1/4                     |
| C                 | 4200  | 3000    | 1                                | 5/16                    |

\* The values listed in Table I represent operating values which include a generous safety factor. It may be necessary for some applications to exceed the operating voltages listed here. If this is necessary, designers will find Table II useful for determining the degree to which the recommended values of Table I can be exceeded.

**Table II**  
**ALTITUDE VOLTAGE**  
**DERATING\*\* CHART**

| MS Service Rating | Nominal Distance |          | Standard Sea Level Conditions     |                      | Pressure Altitude† 50,000 Feet    |                      | Pressure Altitude† 70,000 Feet    |                      |
|-------------------|------------------|----------|-----------------------------------|----------------------|-----------------------------------|----------------------|-----------------------------------|----------------------|
|                   | Airspace         | Creepage | Minimum Flashover Voltage AC(RMS) | Test Voltage AC(RMS) | Minimum Flashover Voltage AC(RMS) | Test Voltage AC(RMS) | Minimum Flashover Voltage AC(RMS) | Test Voltage AC(RMS) |
| Inst.             | 1/32             | 1/16     | 1400                              | 1000                 | 550                               | 400                  | 325                               | 260                  |
| A                 | 1/16             | 1/8      | 2800                              | 2000                 | 800                               | 600                  | 450                               | 360                  |
| D                 | 1/8              | 3/16     | 3600                              | 2800                 | 900                               | 675                  | 500                               | 400                  |
| E                 | 3/16             | 1/4      | 4500                              | 3500                 | 1000                              | 750                  | 550                               | 440                  |
| B                 | 1/4              | 5/16     | 5700                              | 4500                 | 1100                              | 825                  | 600                               | 480                  |
| C                 | 5/16             | 1        | 8500                              | 7000                 | 1300                              | 975                  | 700                               | 560                  |

† Not corrected for changes in density due to variations in temperature.

\*\* No attempt has been made to recommend operating voltages. The designer must determine his own operating voltage by the application of a safety factor to the above derating chart to compensate for circuit transients, surges, etc.

# QWLD

## solderless (crimp) contacts

Machined from copper alloys and silver-plated for maximum corrosion resistance, with a minimum millivolt drop and a maximum current carrying capacity, the size 16 and 12 socket contacts are of the closed entry design. Crimp contacts are available for all MS insert arrangements and are identified with an Amphenol® proprietary number. Gold plated contacts are also available (See how to order, page 22).

### CRIMP CONTACTS\*

| Part Number                  | Pin/Socket | Mating End Size | Wire Barrel Size | Allowable Wire Size | Required Wire Adapter Sleeve | Test Current** Amps |
|------------------------------|------------|-----------------|------------------|---------------------|------------------------------|---------------------|
| 10-40557                     | Pin        | 16 Long         | 16               | 16                  | —                            | 13                  |
| 10-40556 or<br>10-597109-171 | Socket     |                 |                  | 18                  | —                            | 10                  |
|                              |            |                 |                  | 20                  | —                            | 7.5                 |
|                              |            |                 |                  | 22*                 | 10-74696-6                   | 5                   |
| 10-40561                     | Pin        | 12              | 12               | 12                  | —                            | 23                  |
| 10-40560 or<br>10-597109-131 | Socket     |                 |                  | 14                  | —                            | 17                  |
| 10-40792                     | Pin        | 8               | 8                | 8                   | —                            | 46                  |
| 10-40793                     | Socket     |                 |                  | 10*                 | 10-74696-1                   | 33                  |
| 10-40564                     | Pin        | 4               | 4                | 4                   | —                            | 80                  |
| 10-40565                     | Socket     |                 |                  | 6*                  | 10-74696-2                   | 60                  |
| 10-40562                     | Pin        | 0               | 0                | 0                   | —                            | 150                 |
| 10-40563                     | Socket     |                 |                  | 2*                  | 10-74696-7                   | 100                 |

\* When using wire adapter sleeve shown.

\*\* Contact ratings as stated are test ratings only. The connector could not withstand full rated current through all contacts continuously. Please note that the electrical data given is not an establishment of electrical safety factors. This is left entirely in the designer's hands as he can best determine which peak voltage, switching surges, transients, etc. can be expected in a particular circuit.

**Table I**  
**CONTACT ARRANGEMENT**  
**SERVICE RATING**

| MS Service Rating | Recommended Operating Voltage* at Sea Level |          | Effective Creepage Distance Nom. | Mechanical Spacing Nom. |
|-------------------|---|----------|----------------------------------|-------------------------|
|                   | DC  | AC (RMS) |                                  |                         |
| Inst.             | 250   | 200      | 1/16                             |                         |
| A                 | 700   | 500      | 1/8                              | 1/16                    |
| D                 | 1250  | 900      | 3/16                             | 1/8                     |
| E                 | 1750  | 1250     | 1/4                              | 3/16                    |
| B                 | 2450  | 1750     | 5/16                             | 1/4                     |
| C                 | 4200  | 3000     | 1                                | 5/16                    |

\* The values listed in Table I represent operating values which include a generous safety factor. It may be necessary for some applications to exceed the operating voltages listed here. If this is necessary, designers will find Table II useful for determining the degree to which the recommended values of Table I can be exceeded.

**Table II**  
**ALTITUDE VOLTAGE**  
**DERATING\*\***

| MS Service Rating | Nominal Distance |          | Standard Sea Level Conditions      |                       | Pressure Altitude† 50,000 feet     |                       | Pressure Altitude† 70,000 feet     |                       |
|-------------------|------------------|----------|------------------------------------|-----------------------|------------------------------------|-----------------------|------------------------------------|-----------------------|
|                   | Airspace         | Creepage | Minimum Flashover Voltage AC (RMS) | Test Voltage AC (RMS) | Minimum Flashover Voltage AC (RMS) | Test Voltage AC (RMS) | Minimum Flashover Voltage AC (RMS) | Test Voltage AC (RMS) |
| Inst.             | 1/32             | 1/16     | 1400                               | 1000                  | 550                                | 400                   | 325                                | 260                   |
| A                 | 1/16             | 1/8      | 2800                               | 2000                  | 800                                | 600                   | 450                                | 360                   |
| D                 | 1/8              | 3/16     | 3600                               | 2800                  | 900                                | 675                   | 500                                | 400                   |
| E                 | 3/16             | 1/4      | 4500                               | 3500                  | 1000                               | 750                   | 550                                | 440                   |
| B                 | 1/4              | 5/16     | 5700                               | 4500                  | 1100                               | 825                   | 600                                | 480                   |
| C                 | 5/16             | 1        | 8500                               | 7000                  | 1300                               | 975                   | 700                                | 560                   |

† Not corrected for changes in density due to variations in temperature.

\*\* No attempt has been made to recommend operating voltages. The designer must determine his own operating voltage by the application of a safety factor to the above derating chart to compensate for circuit transients, surges, etc.



# QWLD

## application tools

Complete installation instructions (L-615) for Amphenol® QWLD Series Connectors are available on request.

The following data includes information pertaining to the application tools which have been established for crimping, inserting and removing crimp contacts used in QWLD Series Connectors.

### Contact Crimping, Insertion & Removal Tools

| Crimping Tool | Positioner/<br>Turret | Contact Size | Contact Style | Insertion Tool | Removal Tool                        |
|---------------|-----------------------|--------------|---------------|----------------|-------------------------------------|
| M22520/1-01   | *                     | 16           | Pin & Socket  | 11-7345        | 11-8250 Kit                         |
| M22520/1-01   | *                     | 12           | Pin & Socket  | 11-7082        | 11-8250 Kit                         |
| **            | **                    | 8            | Pin & Socket  | 11-8220        | 11-8250 Kit                         |
| **            | **                    | 4            | Pin & Socket  | 11-7365-4†     | Pin 11-7370-4†<br>Socket 11-7674-2† |
| **            | **                    | 0            | Pin & Socket  | 11-7365-5†     | Pin 11-7370-5†<br>Socket 11-7674-3† |

\* Use Daniels Turret TH29-1 or Astro Tool Co. Turret 616266

\*\* For appropriate crimp tool and positioner refer to Pico Crimping Tool Co.

† Tool used with Arbor press 11-7364.

# Amphenol® Heavy Duty Cylindrical Connectors

## QWL Series



wall mount receptacle



thru bulkhead receptacle



cable connecting plug



straight plug



box mount receptacle



flange mount plug



jam nut receptacle  
(wall mount)



jam nut receptacle  
(box mount)

**Amphenol® QWL Series Connectors are tailor made for compact, heavy duty industrial use.**

The outstanding performance of this series makes it well suited for ship-board installations and ground support power distribution applications where physical strength and dependability are key requirements.

**The QWL Series are a versatile, economical alternative to military qualified designs.**

Equivalent MS shell sizes and insert arrangements offer compatibility with all standard cable types. MIL-C-22992 environmental connector requirements (see page 1) are used as a performance criteria base for this series to assure reliability under the most severe conditions.

**The design features of this connector series provide:**

- **Exceptional Service** - high strength aluminum shells with Alu-milite 225\* hard anodic finish and shock resistant resilient inserts.
- **Foolproof Operation** - rugged double stub coupling threads, left hand accessory threads and simple single keyway mating.
- **Versatility** - both MS and custom insert patterns available for a wide variety of multiconductor cables.

A complete line of accessories is available for use with QWL Series connectors, including cable sealing and clamp adapters, protective covers, flange gaskets and banding clamps.

For further information concerning Amphenol® QWL Series connectors, request catalog 12-053 or contact your local sales office.

\* Registered trademark of Aluminum Company of America

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А