


# CGH60030D

30 W, 6.0 GHz, GaN HEMT Die

Cree's CGH60030D is a gallium nitride (GaN) High Electron Mobility Transistor (HEMT). GaN has superior properties compared to silicon or gallium arsenide, including higher breakdown voltage, higher saturated electron drift velocity, and higher thermal conductivity. GaN HEMTs offer greater power density and wider bandwidths compared to Si and GaAs transistors.

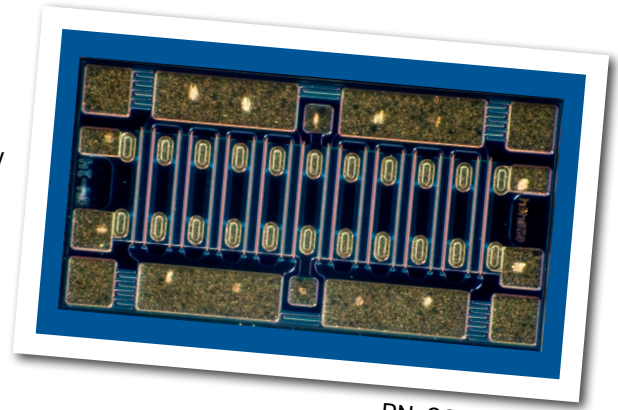

PN: CGH60030D

## FEATURES


- 15 dB Typical Small Signal Gain at 4 GHz
- 12 dB Typical Small Signal Gain at 6 GHz
- 30 W Typical  $P_{SAT}$
- 28 V Operation
- High Breakdown Voltage
- High Temperature Operation
- Up to 6 GHz Operation
- High Efficiency

## APPLICATIONS

- 2-Way Private Radio
- Broadband Amplifiers
- Cellular Infrastructure
- Test Instrumentation
- Class A, AB, Linear amplifiers suitable for OFDM, W-CDMA, EDGE, CDMA waveforms



## Packaging Information

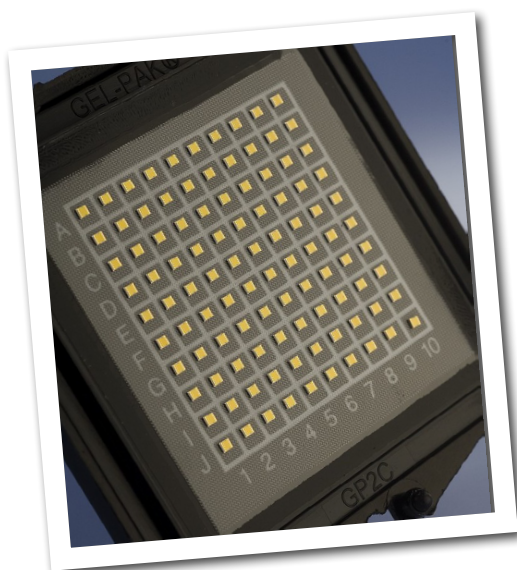

- Bare die are shipped in Gel-Pak® containers.
- Non-adhesive tacky membrane immobilizes die during shipment.

Large Signal Models Available for ADS and MWO

## Absolute Maximum Ratings (not simultaneous) at 25°C

Parameter	Symbol	Rating	Units	Conditions
Drain-source Voltage	$V_{DS}$	84	VDC	25°C
Gate-source Voltage	$V_{GS}$	-10, +2	VDC	25°C
Storage Temperature	$T_{STG}$	-65, +150	°C	
Operating Junction Temperature	$T_J$	225	°C	
Maximum Forward Gate Current	$I_{GMAX}$	7.0	mA	25°C
Maximum Drain Current <sup>1</sup>	$I_{DMAX}$	3.0	A	25°C
Thermal Resistance, Junction to Case (packaged) <sup>2</sup>	$R_{\theta JC}$	4.8	°C/W	
Thermal Resistance, Junction to Case (die only)	$R_{\theta JC}$	3.0	°C/W	85°C
Mounting Temperature (30 seconds)	$T_S$	320	°C	30 seconds

Note<sup>1</sup> Current limit for long term, reliable operation

Note<sup>2</sup> Eutectic die attach using 80/20 AuSn mounted to a 40 mil thick CuMoCu carrier.

## Electrical Characteristics (Frequency = 4 GHz unless otherwise stated; $T_C = 25^\circ\text{C}$ )


Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
<b>DC Characteristics</b>						
Gate Threshold Voltage	$V_{GS(TH)}$	-3.8	-3.0	-2.3	V	$V_{DS} = 10\text{ V}, I_D = 7.2\text{ mA}$
Gate Quiescent Voltage	$V_{GS(Q)}$	-	-2.7	-	V <sub>DC</sub>	$V_{DD} = 28\text{ V}, I_{DQ} = 200\text{ mA}$
Drain Current	$I_{DS}$	5.8	7.0	-	A	$V_{DS} = 6.0\text{ V}, V_{GS} = 2.0\text{ V}$
Drain-Source Breakdown Voltage	$V_{BD}$	120	-	-	V	$V_{GS} = -8\text{ V}, I_D = 7.2\text{ mA}$
On Resistance	$R_{ON}$	-	0.5	-	$\Omega$	$V_{DS} = 0.1\text{ V}$
Gate Forward Voltage	$V_{G-ON}$	-	1.9	-	V	$I_{GS} = 7.2\text{ mA}$
<b>RF Characteristics</b>						
Small Signal Gain	$G_{SS}$	-	15	-	dB	$V_{DD} = 28\text{ V}, I_{DQ} = 200\text{ mA}$
Saturated Power Output <sup>1</sup>	$P_{SAT}$	-	30	-	W	$V_{DD} = 28\text{ V}, I_{DQ} = 200\text{ mA}$
Drain Efficiency <sup>2</sup>	$\eta$	-	65	-	%	$V_{DD} = 28\text{ V}, I_{DQ} = 200\text{ mA}, P_{SAT} = 30\text{ W}$
Intermodulation Distortion	IM3	-	-30	-	dBc	$V_{DD} = 28\text{ V}, I_{DQ} = 200\text{ mA}, P_{OUT} = 30\text{ W PEP}$
Output Mismatch Stress	VSWR	-	-	10 : 1	$\Psi$	No damage at all phase angles, $V_{DD} = 28\text{ V}, I_{DQ} = 200\text{ mA}, P_{OUT} = 30\text{ W CW}$
<b>Dynamic Characteristics</b>						
Input Capacitance	$C_{GS}$	-	8.2	-	pF	$V_{DS} = 28\text{ V}, V_{GS} = -8\text{ V}, f = 1\text{ MHz}$
Output Capacitance	$C_{DS}$	-	1.7	-	pF	$V_{DS} = 28\text{ V}, V_{GS} = -8\text{ V}, f = 1\text{ MHz}$
Feedback Capacitance	$C_{GD}$	-	0.4	-	pF	$V_{DS} = 28\text{ V}, V_{GS} = -8\text{ V}, f = 1\text{ MHz}$

### Notes:

<sup>1</sup>  $P_{SAT}$  is defined as  $I_G = 0.7\text{ mA}$ .

<sup>2</sup> Drain Efficiency =  $P_{OUT} / P_{DC}$ .

## DIE DIMENSIONS (units in microns)

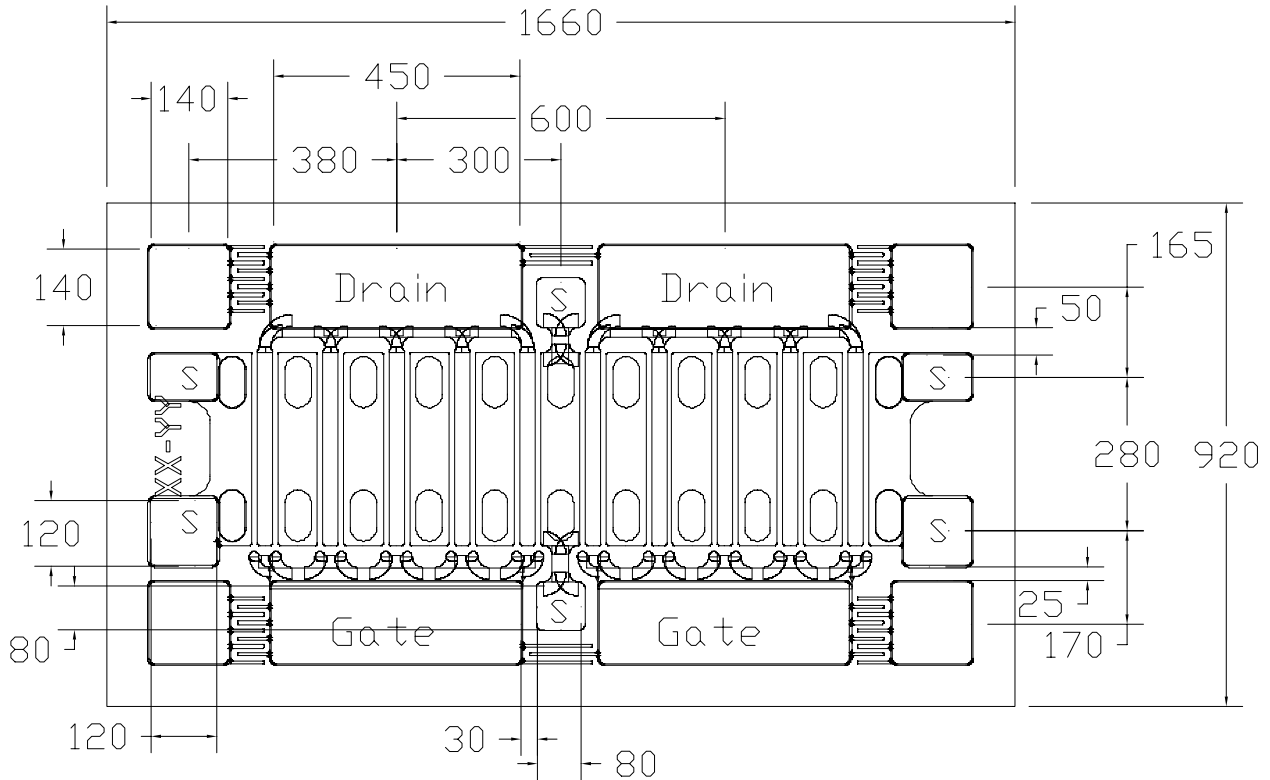

Overall die size 1660 x 920 (+0/-50) microns, die thickness 100 (+/- 10) microns.  
All Gate and Drain pads must be wire bonded for electrical connection.


### Assembly Notes:

- Recommended solder is AuSn (80/20) solder. Refer to Cree's website for the Eutectic Die Bond Procedure application note at [http://www.cree.com/products/wireless\\_documents.asp](http://www.cree.com/products/wireless_documents.asp)
- Vacuum collet is the preferred method of pick-up.
- The backside of the die is the Source (ground) contact.
- Die back side gold plating is 5 microns thick minimum.
- Thermosonic ball or wedge bonding are the preferred connection methods.
- Gold wire must be used for connections.
- Use the die label (XX-YY) for correct orientation.

## Typical Performance

Simulated Maximum Available Gain and K Factor of the CGH60030D

$V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 250\text{ mA}$

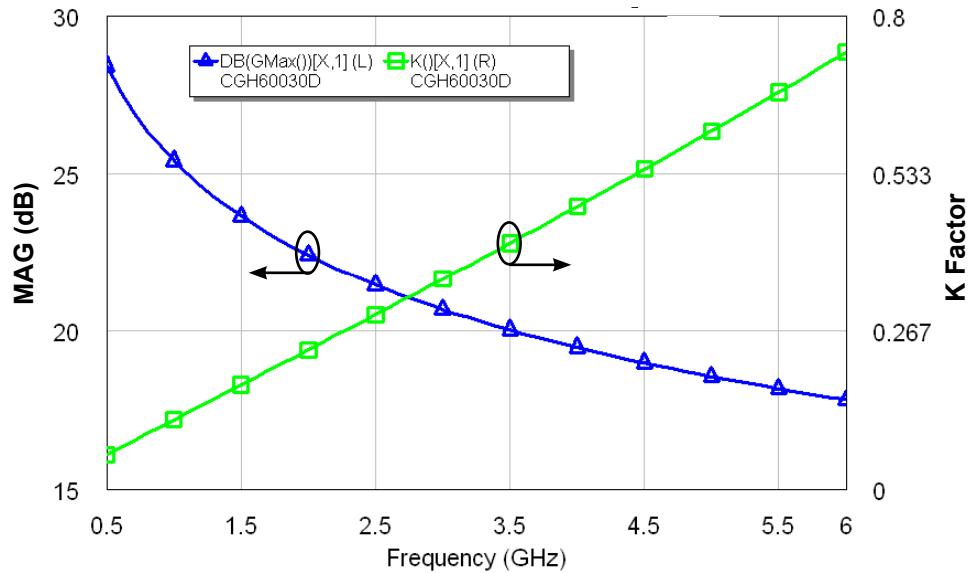


Intrinsic die parameters - reference planes at centers of gate and drain bonding pads. No wire bonds assumed.

## Typical Noise Performance

Simulated Minimum Noise Figure and Noise Resistance vs Frequency of the CGH60030D

$V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 250\text{ mA}$

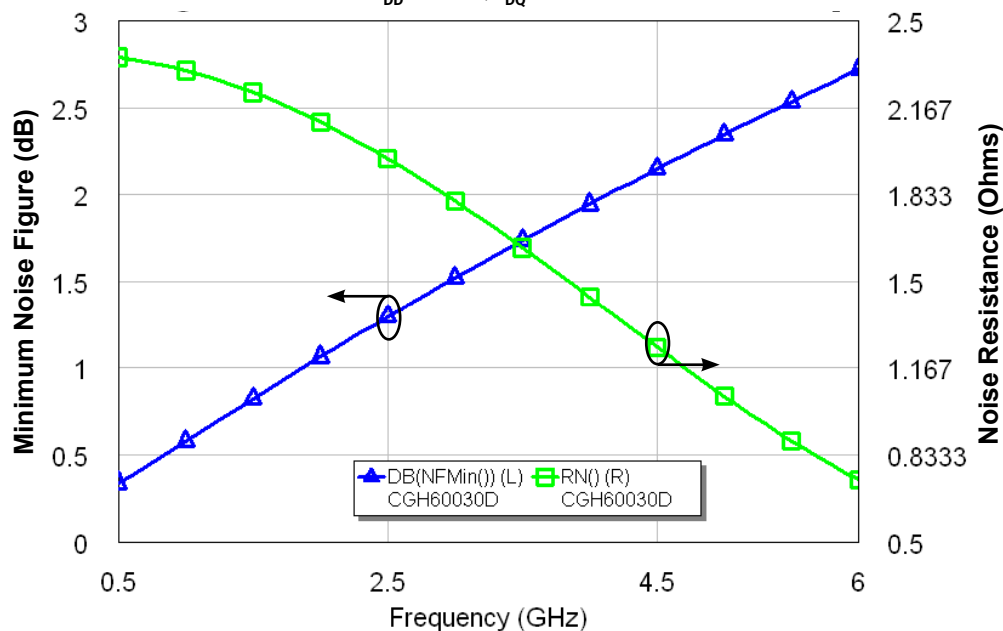

Typical Die S-Parameters (Small Signal,  $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 100\text{ mA}$ , magnitude / angle)

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
500 MHz	0.928	-148.38	12.12	97.65	0.026	8.46	0.377	-137.96
600 MHz	0.927	-153.41	10.18	93.73	0.026	4.70	0.383	-141.15
700 MHz	0.926	-157.06	8.75	90.48	0.026	1.62	0.389	-143.08
800 MHz	0.926	-159.83	7.66	87.68	0.026	-1.02	0.397	-144.26
900 MHz	0.926	-162.00	6.80	85.17	0.026	-3.37	0.406	-144.97
1.0 GHz	0.927	-163.74	6.10	82.88	0.026	-5.49	0.415	-145.39
1.1 GHz	0.927	-165.17	5.53	80.75	0.026	-7.46	0.425	-145.63
1.2 GHz	0.927	-166.37	5.05	78.75	0.026	-9.30	0.435	-145.76
1.3 GHz	0.928	-167.39	4.64	76.85	0.026	-11.03	0.446	-145.83
1.4 GHz	0.929	-168.26	4.28	75.04	0.026	-12.68	0.457	-145.87
1.5 GHz	0.929	-169.03	3.97	73.30	0.026	-14.26	0.468	-145.91
1.6 GHz	0.930	-169.70	3.70	71.62	0.025	-15.78	0.479	-145.96
1.7 GHz	0.931	-170.30	3.46	69.99	0.025	-17.24	0.491	-146.02
1.8 GHz	0.932	-170.83	3.24	68.41	0.025	-18.66	0.502	-146.10
1.9 GHz	0.933	-171.31	3.04	66.88	0.025	-20.03	0.514	-146.22
2.0 GHz	0.934	-171.75	2.87	65.39	0.025	-21.36	0.525	-146.35
2.1 GHz	0.934	-172.16	2.71	63.93	0.024	-22.65	0.537	-146.52
2.2 GHz	0.935	-172.53	2.56	62.51	0.024	-23.90	0.548	-146.71
2.3 GHz	0.936	-172.87	2.43	61.13	0.024	-25.13	0.559	-146.92
2.4 GHz	0.937	-173.19	2.31	59.77	0.024	-26.32	0.570	-147.16
2.5 GHz	0.938	-173.49	2.19	58.45	0.024	-27.48	0.581	-147.42
2.6 GHz	0.939	-173.77	2.09	57.15	0.023	-28.61	0.592	-147.70
2.7 GHz	0.940	-174.04	1.99	55.89	0.023	-29.71	0.602	-147.99
2.8 GHz	0.941	-174.29	1.90	54.65	0.023	-30.79	0.613	-148.30
2.9 GHz	0.942	-174.53	1.82	53.44	0.023	-31.84	0.623	-148.63
3.0 GHz	0.943	-174.76	1.74	52.25	0.022	-32.86	0.633	-148.97
3.2 GHz	0.945	-175.19	1.60	49.95	0.022	-34.84	0.652	-149.67
3.4 GHz	0.947	-175.59	1.47	47.74	0.021	-36.72	0.670	-150.40
3.6 GHz	0.948	-175.97	1.36	45.62	0.021	-38.52	0.687	-151.16
3.8 GHz	0.950	-176.32	1.26	43.58	0.020	-40.23	0.703	-151.92
4.0 GHz	0.952	-176.65	1.17	41.62	0.020	-41.86	0.718	-152.69
4.2 GHz	0.953	-176.97	1.09	39.74	0.019	-43.42	0.732	-153.47
4.4 GHz	0.955	-177.28	1.02	37.92	0.019	-44.91	0.745	-154.24
4.6 GHz	0.956	-177.58	0.95	36.17	0.018	-46.33	0.758	-155.00
4.8 GHz	0.957	-177.86	0.89	34.49	0.018	-47.69	0.770	-155.75
5.0 GHz	0.959	-178.14	0.84	32.87	0.018	-48.99	0.781	-156.49
5.2 GHz	0.960	-178.41	0.79	31.30	0.017	-50.23	0.791	-157.22
5.4 GHz	0.961	-178.67	0.74	29.79	0.017	-51.41	0.801	-157.93
5.6 GHz	0.962	-178.92	0.70	28.33	0.016	-52.55	0.810	-158.62
5.8 GHz	0.963	-179.17	0.66	26.91	0.016	-53.64	0.819	-159.30
6.0 GHz	0.964	-179.42	0.62	25.54	0.015	-54.68	0.827	-159.97

To download the s-parameters in s2p format, go to the [CGH60030D Product Page](#) and click the documentation tab.

Typical Die S-Parameters (Small Signal,  $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 250\text{ mA}$ , magnitude / angle)

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
500 MHz	0.942	-153.97	12.93	96.51	0.019	7.34	0.456	-157.13
600 MHz	0.941	-158.22	10.84	93.23	0.019	4.23	0.462	-158.92
700 MHz	0.941	-161.30	9.31	90.53	0.019	1.69	0.467	-159.94
800 MHz	0.941	-163.63	8.15	88.20	0.019	-0.48	0.472	-160.51
900 MHz	0.941	-165.46	7.24	86.11	0.019	-2.39	0.477	-160.77
1.0 GHz	0.941	-166.93	6.51	84.20	0.019	-4.13	0.483	-160.84
1.1 GHz	0.941	-168.14	5.90	82.43	0.019	-5.74	0.488	-160.78
1.2 GHz	0.941	-169.15	5.40	80.76	0.019	-7.24	0.494	-160.64
1.3 GHz	0.942	-170.02	4.96	79.17	0.018	-8.66	0.500	-160.45
1.4 GHz	0.942	-170.77	4.59	77.65	0.018	-10.02	0.506	-160.22
1.5 GHz	0.942	-171.42	4.27	76.18	0.018	-11.32	0.512	-159.98
1.6 GHz	0.943	-171.99	3.99	74.76	0.018	-12.57	0.519	-159.73
1.7 GHz	0.943	-172.50	3.73	73.38	0.018	-13.79	0.526	-159.49
1.8 GHz	0.944	-172.96	3.51	72.03	0.018	-14.97	0.533	-159.26
1.9 GHz	0.944	-173.38	3.31	70.72	0.018	-16.11	0.540	-159.04
2.0 GHz	0.945	-173.76	3.12	69.43	0.018	-17.23	0.547	-158.85
2.1 GHz	0.945	-174.10	2.96	68.18	0.018	-18.32	0.555	-158.67
2.2 GHz	0.946	-174.42	2.81	66.94	0.018	-19.39	0.562	-158.51
2.3 GHz	0.946	-174.72	2.67	65.73	0.018	-20.43	0.569	-158.38
2.4 GHz	0.947	-174.99	2.54	64.55	0.017	-21.45	0.577	-158.27
2.5 GHz	0.947	-175.25	2.42	63.38	0.017	-22.45	0.584	-158.18
2.6 GHz	0.948	-175.49	2.31	62.23	0.017	-23.43	0.592	-158.11
2.7 GHz	0.948	-175.72	2.21	61.10	0.017	-24.39	0.599	-158.07
2.8 GHz	0.949	-175.94	2.12	60.00	0.017	-25.33	0.607	-158.04
2.9 GHz	0.949	-176.14	2.03	58.90	0.017	-26.25	0.614	-158.03
3.0 GHz	0.950	-176.34	1.95	57.83	0.017	-27.16	0.621	-158.05
3.2 GHz	0.951	-176.71	1.80	55.73	0.016	-28.92	0.636	-158.12
3.4 GHz	0.952	-177.05	1.67	53.70	0.016	-30.62	0.650	-158.27
3.6 GHz	0.953	-177.37	1.55	51.73	0.016	-32.25	0.664	-158.46
3.8 GHz	0.954	-177.67	1.44	49.82	0.015	-33.83	0.677	-158.70
4.0 GHz	0.955	-177.95	1.35	47.97	0.015	-35.35	0.690	-158.99
4.2 GHz	0.957	-178.22	1.26	46.17	0.015	-36.81	0.702	-159.31
4.4 GHz	0.958	-178.48	1.18	44.42	0.015	-38.22	0.714	-159.66
4.6 GHz	0.959	-178.73	1.11	42.73	0.014	-39.57	0.726	-160.03
4.8 GHz	0.960	-178.98	1.05	41.09	0.014	-40.88	0.737	-160.42
5.0 GHz	0.961	-179.21	0.99	39.49	0.014	-42.14	0.747	-160.82
5.2 GHz	0.961	-179.44	0.93	37.94	0.013	-43.36	0.757	-161.24
5.4 GHz	0.962	-179.67	0.88	36.43	0.013	-44.53	0.767	-161.67
5.6 GHz	0.963	-179.89	0.84	34.96	0.013	-45.65	0.776	-162.11
5.8 GHz	0.964	-179.90	0.79	33.54	0.013	-46.74	0.784	-162.55
6.0 GHz	0.965	-179.68	0.75	32.15	0.012	-47.79	0.793	-162.99

To download the s-parameters in s2p format, go to the [CGH60030D Product Page](#) and click the documentation tab.

Typical Die S-Parameters (Small Signal,  $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 400\text{ mA}$ , magnitude / angle)

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
500 MHz	0.948	-155.97	12.94	96.03	0.016	6.87	0.489	-162.06
600 MHz	0.948	-159.93	10.84	92.98	0.016	3.99	0.495	-163.44
700 MHz	0.947	-162.79	9.31	90.46	0.016	1.65	0.499	-164.22
800 MHz	0.947	-164.96	8.15	88.28	0.016	-0.36	0.503	-164.63
900 MHz	0.947	-166.67	7.24	86.34	0.016	-2.13	0.507	-164.80
1.0 GHz	0.947	-168.04	6.51	84.56	0.016	-3.73	0.512	-164.82
1.1 GHz	0.947	-169.17	5.90	82.91	0.016	-5.21	0.516	-164.72
1.2 GHz	0.948	-170.12	5.40	81.35	0.016	-6.60	0.521	-164.56
1.3 GHz	0.948	-170.93	4.97	79.86	0.016	-7.91	0.525	-164.35
1.4 GHz	0.948	-171.63	4.60	78.44	0.016	-9.17	0.530	-164.11
1.5 GHz	0.948	-172.24	4.28	77.06	0.016	-10.37	0.535	-163.85
1.6 GHz	0.949	-172.78	4.00	75.73	0.016	-11.53	0.541	-163.59
1.7 GHz	0.949	-173.27	3.75	74.43	0.016	-12.66	0.546	-163.33
1.8 GHz	0.949	-173.70	3.52	73.17	0.016	-13.75	0.552	-163.07
1.9 GHz	0.949	-174.09	3.32	71.93	0.016	-14.82	0.558	-162.82
2.0 GHz	0.950	-174.45	3.14	70.72	0.015	-15.86	0.563	-162.59
2.1 GHz	0.950	-174.78	2.98	69.53	0.015	-16.87	0.569	-162.37
2.2 GHz	0.951	-175.08	2.83	68.37	0.015	-17.87	0.576	-162.17
2.3 GHz	0.951	-175.36	2.69	67.22	0.015	-18.84	0.582	-161.99
2.4 GHz	0.951	-175.62	2.56	66.09	0.015	-19.79	0.588	-161.82
2.5 GHz	0.952	-175.87	2.45	64.98	0.015	-20.73	0.594	-161.67
2.6 GHz	0.952	-176.10	2.34	63.89	0.015	-21.65	0.601	-161.54
2.7 GHz	0.953	-176.31	2.24	62.82	0.015	-22.55	0.607	-161.43
2.8 GHz	0.953	-176.52	2.15	61.76	0.015	-23.44	0.613	-161.34
2.9 GHz	0.953	-176.72	2.06	60.72	0.015	-24.31	0.619	-161.27
3.0 GHz	0.954	-176.90	1.98	59.69	0.015	-25.16	0.626	-161.21
3.2 GHz	0.955	-177.25	1.83	57.68	0.014	-26.83	0.638	-161.15
3.4 GHz	0.956	-177.58	1.70	55.72	0.014	-28.44	0.651	-161.14
3.6 GHz	0.957	-177.88	1.58	53.82	0.014	-30.00	0.663	-161.19
3.8 GHz	0.957	-178.16	1.47	51.97	0.014	-31.51	0.675	-161.30
4.0 GHz	0.958	-178.43	1.38	50.16	0.013	-32.96	0.686	-161.44
4.2 GHz	0.959	-178.69	1.29	48.41	0.013	-34.37	0.698	-161.63
4.4 GHz	0.960	-178.94	1.22	46.71	0.013	-35.73	0.709	-161.84
4.6 GHz	0.961	-179.18	1.14	45.05	0.013	-37.04	0.719	-162.09
4.8 GHz	0.962	-179.41	1.08	43.43	0.012	-38.31	0.729	-162.36
5.0 GHz	0.962	-179.63	1.02	41.85	0.012	-39.54	0.739	-162.66
5.2 GHz	0.963	-179.85	0.96	40.32	0.012	-40.72	0.749	-162.97
5.4 GHz	0.964	179.93	0.91	38.83	0.012	-41.87	0.758	-163.30
5.6 GHz	0.965	179.72	0.87	37.37	0.012	-42.97	0.767	-163.64
5.8 GHz	0.965	179.52	0.82	35.95	0.011	-44.04	0.775	-163.99
6.0 GHz	0.966	179.32	0.78	34.57	0.011	-45.07	0.783	-164.35

To download the s-parameters in s2p format, go to the [CGH60030D Product Page](#) and click the documentation tab.



## Electrostatic Discharge (ESD) Classifications

Parameter	Symbol	Class	Test Methodology
Human Body Model	HBM	1A (> 250 V)	JEDEC JESD22 A114-D
Charge Device Model	CDM	II (200 < 500 V)	JEDEC JESD22 C101-C

## Product Ordering Information

Order Number	Description	Unit of Measure
CGH60030D	GaN HEMT Bare Die	Each





## Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for its use or for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications, and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended, or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death, or in applications for the planning, construction, maintenance or direct operation of a nuclear facility. CREE and the CREE logo are registered trademarks of Cree, Inc.

For more information, please contact:

Cree, Inc.  
4600 Silicon Drive  
Durham, North Carolina, USA 27703  
[www.cree.com/rf](http://www.cree.com/rf)

Sarah Miller  
Marketing & Export  
Cree, RF Components  
1.919.407.5302

Ryan Baker  
Marketing  
Cree, RF Components  
1.919.407.7816

Tom Dekker  
Sales Director  
Cree, RF Components  
1.919.407.5639

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А