


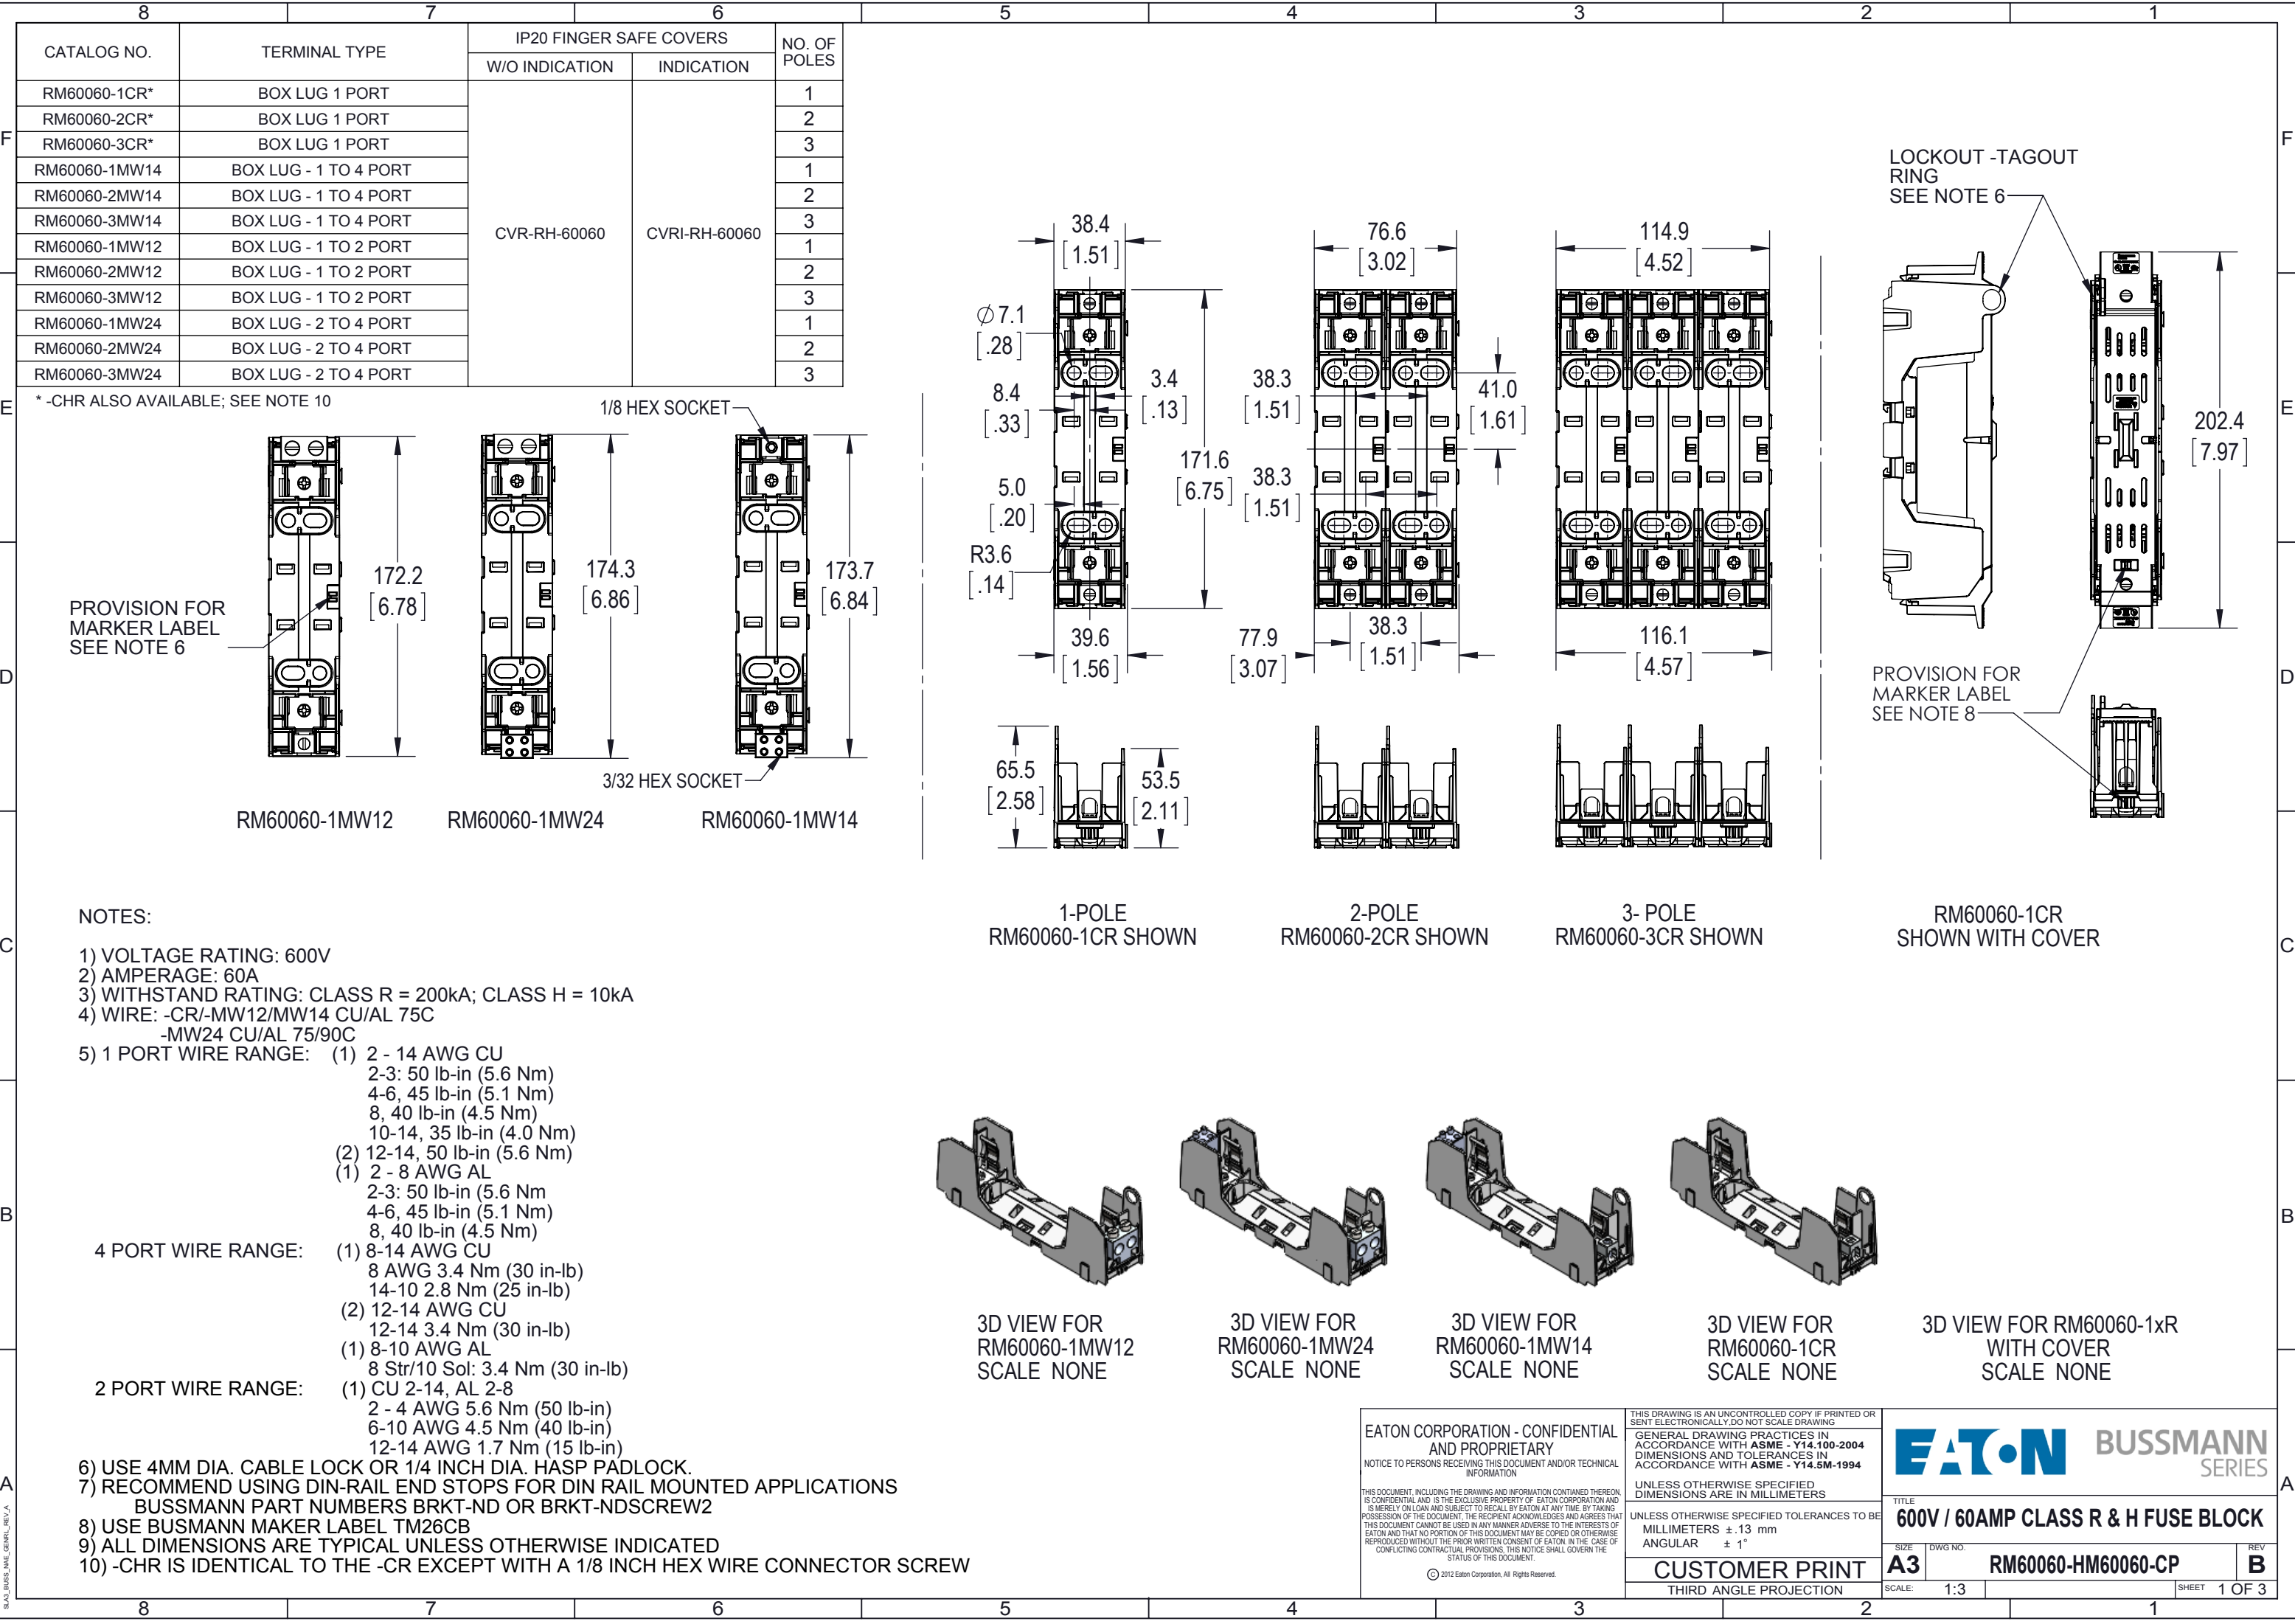

NOTES:

1) VOLTAGE RATING: 600V

2) AMPERAGE: 60A

3) WITHSTAND RATING: CLASS R = 200kA; CLASS H = 10kA

4) WIRE: -CR/-MW12/MW14 CU/AL 75C
-MW24 CU/AL 75/90C

5) 1 PORT WIRE RANGE: (1) 2 - 14 AWG CU
2-3: 50 lb-in (5.6 Nm)
4-6, 45 lb-in (5.1 Nm)
8, 40 lb-in (4.5 Nm)
10-14, 35 lb-in (4.0 Nm)

(2) 12-14, 50 lb-in (5.6 Nm)

(1) 2 - 8 AWG AL
2-3: 50 lb-in (5.6 Nm)
4-6, 45 lb-in (5.1 Nm)
8, 40 lb-in (4.5 Nm)

4 PORT WIRE RANGE: (1) 8-14 AWG CU
8 AWG 3.4 Nm (30 in-lb)
14-10 2.8 Nm (25 in-lb)

(2) 12-14 AWG CU
12-14 3.4 Nm (30 in-lb)

(1) 8-10 AWG AL
8 Str/10 Sol: 3.4 Nm (30 in-lb)

2 PORT WIRE RANGE: (1) CU 2-14, AL 2-8
2 - 4 AWG 5.6 Nm (50 lb-in)
6-10 AWG 4.5 Nm (40 lb-in)
12-14 AWG 1.7 Nm (15 lb-in)

6) USE 4MM DIA. CABLE LOCK OR 1/4 INCH DIA. HASP PADLOCK.

7) RECOMMEND USING DIN-RAIL END STOPS FOR DIN RAIL MOUNTED APPLICATIONS
BUSSMANN PART NUMBERS BRKT-ND OR BRKT-NDSCREW2

8) USE BUSMANN MAKER LABEL TM26CB

9) ALL DIMENSIONS ARE TYPICAL UNLESS OTHERWISE INDICATED

10) -CHR IS IDENTICAL TO THE -CR EXCEPT WITH A 1/8 INCH HEX WIRE CONNECTOR SCREW

3D VIEW FOR RM60060-1MW12
SCALE NONE

3D VIEW FOR RM60060-1MW24
SCALE NONE

3D VIEW FOR RM60060-1MW14
SCALE NONE

3D VIEW FOR RM60060-1CR
SCALE NONE

3D VIEW FOR RM60060-1xR
WITH COVER
SCALE NONE

1-POLE
RM60060-1CR SHOWN

2-POLE
RM60060-2CR SHOWN

3- POLE
RM60060-3CR SHOWN

RM60060-1CR
SHOWN WITH COVER

LOCKOUT -TAGOUT
RING
SEE NOTE 6

PROVISION FOR
MARKER LABEL
SEE NOTE 8

65.5 [2.58]

53.5 [2.11]

38.4 [1.51]

76.6 [3.02]

114.9 [4.52]

171.6 [6.75]

39.6 [1.56]

77.9 [3.07]

116.1 [4.57]

202.4 [7.97]

1-POLE
RM60060-1CR SHOWN

2-POLE
RM60060-2CR SHOWN

3- POLE
RM60060-3CR SHOWN

RM60060-1CR
SHOWN WITH COVER

THIS DRAWING IS AN UNCONTROLLED COPY IF PRINTED OR SENT ELECTRONICALLY. DO NOT SCALE DRAWING

GENERAL DRAWING PRACTICES IN ACCORDANCE WITH ASME - Y14.100-2004 DIMENSIONS AND TOLERANCES IN ACCORDANCE WITH ASME - Y14.5M-1994

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES TO BE MILLIMETERS ±.13 mm ANGULAR ± 1°

CUSTOMER PRINT

THIRD ANGLE PROJECTION

EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY

NOTICE TO PERSONS RECEIVING THIS DOCUMENT AND/OR TECHNICAL INFORMATION

THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON, IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION AND IS MERELY ON LOAN AND SUBJECT TO RECALL BY EATON AT ANY TIME. BY TAKING POSSESSION OF THE DOCUMENT, THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE USED IN ANY MANNER ADVERSE TO THE INTERESTS OF EATON AND THAT NO PORTION OF THIS DOCUMENT MAY BE COPIED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WRITTEN CONSENT OF EATON IN THE CASE OF CONFLICTING CONTRACTUAL PROVISIONS, THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT.

© 2012 Eaton Corporation. All Rights Reserved.


TITLE
600V / 60AMP CLASS R & H FUSE BLOCK

SIZE DWG NO.
A3 RM60060-HM60060-CP

REV
B

SCALE: 1:3

SHEET 1 OF 3

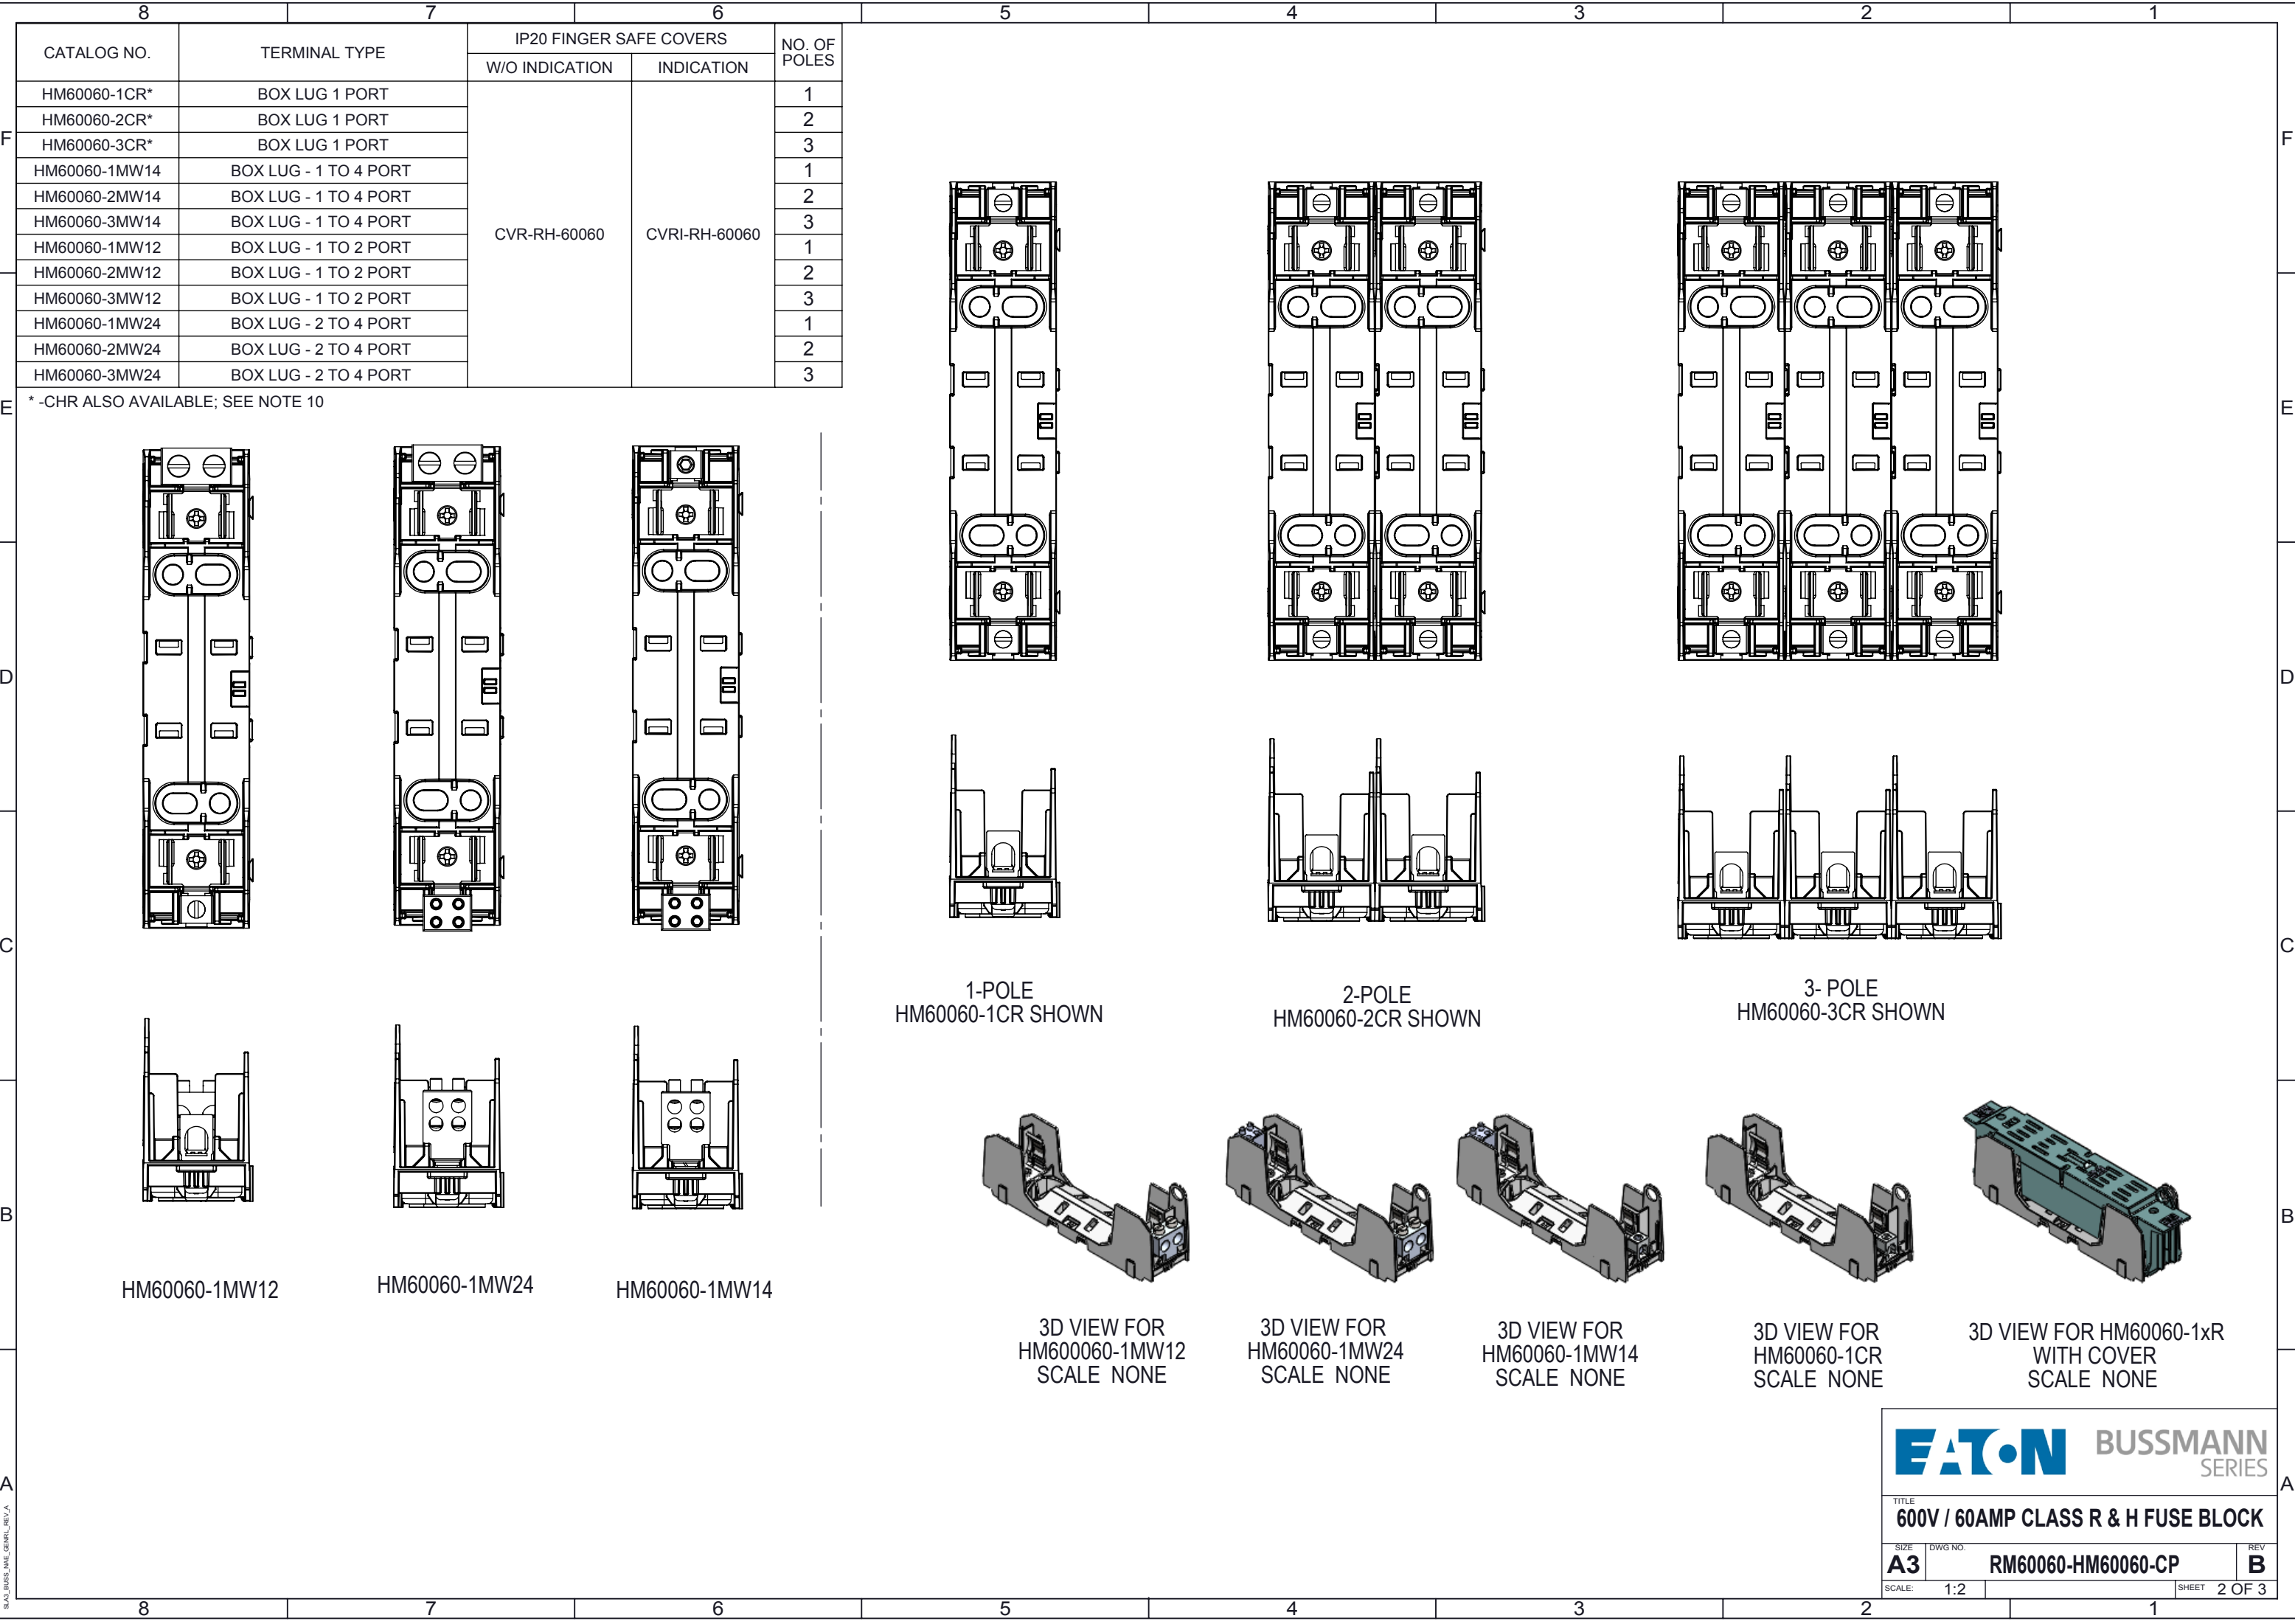

* -CHR ALSO AVAILABLE; SEE NOTE 10

SLA3_BUSSMAN_GENRBL_REV_A

EAT•N

BUSSMANN
SERIES

TITLE
600V / 60AMP CLASS R & H FUSE BLOCK



SIZE
A3

DWG NO.
RM60060-HM60060-CP



REV
B

SCALE: 1:2

SHEET 2 OF 3

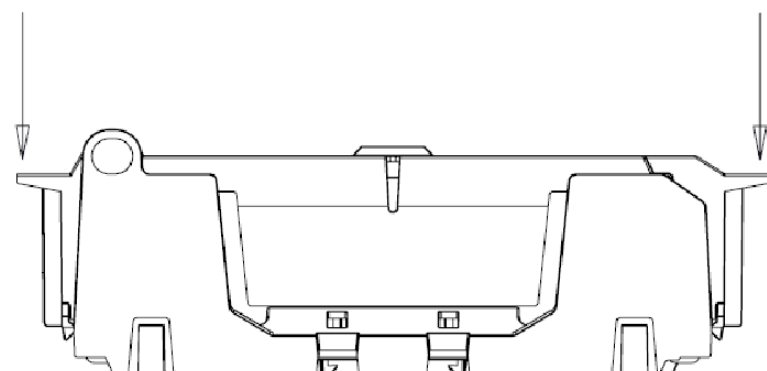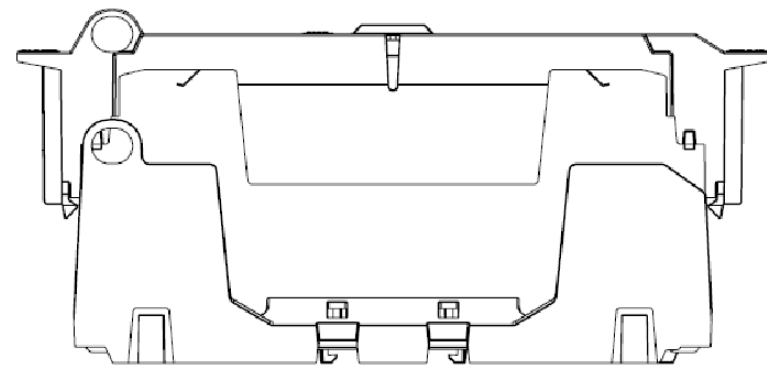


CLOSING
PUSH STRAIGHT DOWN UNTIL SNAPS CLICK INTO PLACE

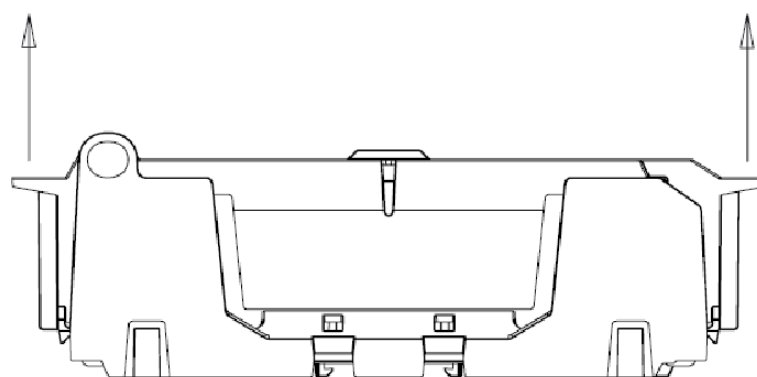
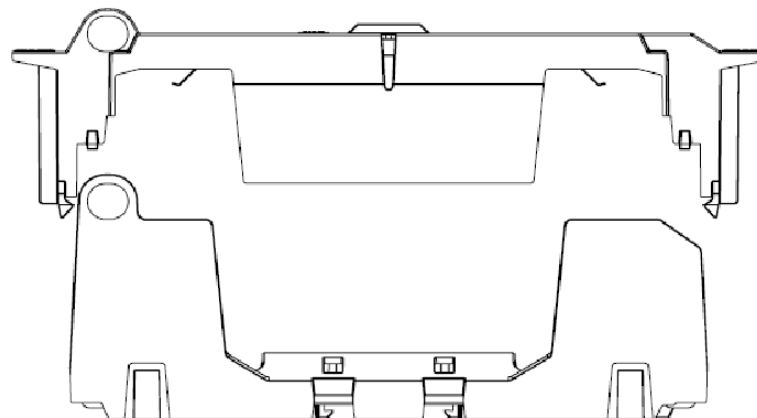


OPENING
PULL STRAIGHT UP AT BOTH OUTSIDE HANDLES


CUT COVER TAB AT NOTCH FOR USE WITH WIRES LARGER THAN 8 AWG

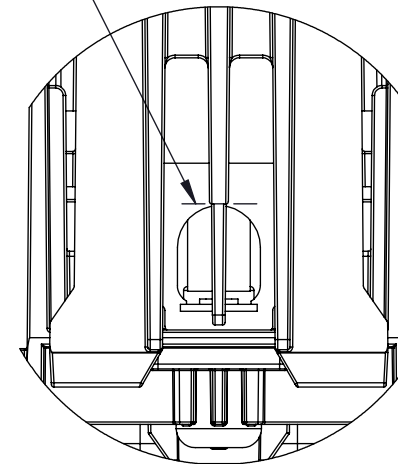

DETAIL A
SCALE 4 : 3

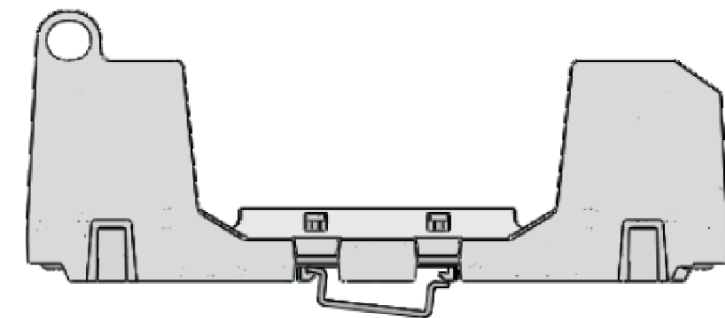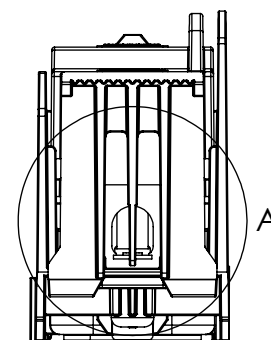

1. HOOK DIN RAIL SNAPS ON ONE SIDE OF THE DIN RAIL

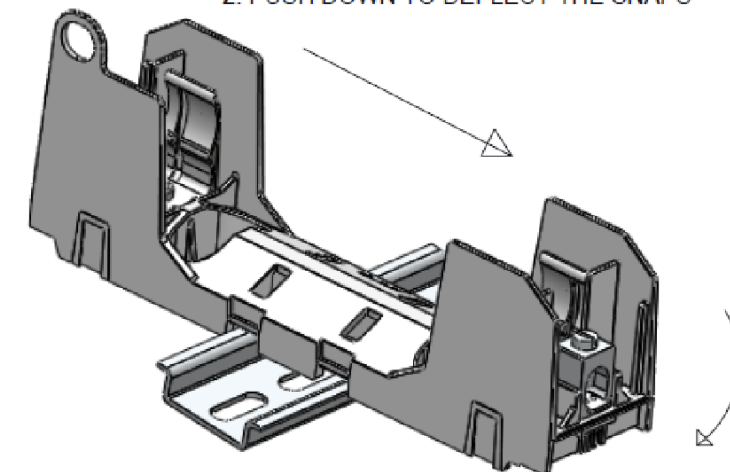

2. PUSH DOWN TO DEFLECT THE SNAPS

3. ROTATE UNTIL THE OPPOSITE SIDE SNAPS ONTO DIN RAIL

INSTALLATION ON DIN RAIL
END STOPS MAY BE NECESSARY FOR SOME ASSEMBLY CONDITIONS - SEE NOTE 7

EAT•N BUSSMANN
SERIES

TITLE
600V / 60AMP CLASS R & H FUSE BLOCK

SIZE DWG NO. REV
A3 **RM60060-HM60060-CP** **B**

SCALE: 2:3 SHEET 3 OF 3

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А