

FO converters - FL MC EF 1300 MM SC - 2902853

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



FO converter with SC duplex fiber optic connection (1300 nm), for converting 10/100Base-T(X) to multi-mode fiberglass (50/125 µm). Auto negotiation and auto MDI(X) function. Comprehensive link diagnostics. DIN-rail mountable, 18 ... 30 V DC supply.

Product Features

- Transmission ranges up to 10 km
- Auto negotiation
- Auto MDI/MDI-X switch-over
- Link fault pass through (LFP) and far end fault (FEF) functions for easy connection monitoring
- Data rates 10/100 Mbps



Key commercial data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 PCE |
| Weight per Piece (excluding packing) | 180.0 GRM |
| Custom tariff number | 85176200 |
| Country of origin | Germany |

Technical data

Note:

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------|----------|
| Width | 22.5 mm |
| Height | 99 mm |
| Depth | 114.5 mm |

Ambient conditions

| | |
|---------------------------------|-------------------------------------|
| Ambient temperature (operation) | -40 °C ... 65 °C |
| | -25 °C ... 55 °C (With UL approval) |

FO converters - FL MC EF 1300 MM SC - 2902853

Technical data

Ambient conditions

| | |
|--|--|
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Permissible humidity (operation) | 30 % ... 95 % (no condensation) |
| Permissible humidity (storage/transport) | 30 % ... 95 % (no condensation) |
| Altitude | 5000 m (For restrictions see manufacturer's declaration) |
| | 2000 m (With UL approval) |
| Degree of protection | IP20 |

General

| | |
|--|--|
| Electrical isolation | according to IEEE 802.3 |
| | (VCC // FE // Ethernet) |
| Test voltage data interface/power supply | 1.5 kV _{rms} (50 Hz, 1 min.) |
| Standards/regulations | EN 60950-1 |
| Electromagnetic compatibility | Conformance with EMC Directive 2004/108/EC |
| Net weight | 120 g |
| Housing material | PA 6.6-FR |
| Color | green |
| MTBF | 479 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day)) |
| | 140 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day)) |
| MTTF | 1400 Years (SN 29500 standard, temperature 25°C, operating cycle 21% (5 days a week, 8 hours a day)) |
| | 599 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25% (5 days a week, 12 hours a day)) |
| | 101 Years (SN 29500 standard, temperature 40°C, operating cycle 100% (7 days a week, 24 hours a day)) |
| Conformance | CE-compliant |
| ATEX | # II 3 G Ex nA IIC T4 Gc X |
| | # II (2) D [Ex op is Db] IIIC (PTB 06 ATEX 2042 U) |
| | # II (2) G [Ex op is Gb] IIC (PTB 06 ATEX 2042 U) |
| UL, USA / Canada | cULus listed UL 508 |
| | Class I, Zone 2, AEx nA IIC T4 |
| | Class I, Zone 2, Ex nA IIC T4 Gc X |
| | Class I, Div. 2, Groups A, B, C, D |

Power supply

| | |
|-----------------------------|---|
| Supply voltage range | 18 V DC ... 30 V DC (Screw connection) |
| | 18 V DC ... 30 V DC (as an alternative or redundant, via backplane bus contact and system current supply) |
| Typical current consumption | < 100 mA (24 V DC) |

FO converters - FL MC EF 1300 MM SC - 2902853

Technical data

Power supply

| | |
|--|--|
| Protective circuit | Protection against polarity reversal |
| Connection method | Plug-in screw terminal block (COMBICON), redundancy possible |
| Conductor cross section stranded max. | 2.50 mm ² |
| Conductor cross section stranded min. | 0.20 mm ² |
| Conductor cross section solid max. | 2.50 mm ² |
| Conductor cross section solid min. | 0.20 mm ² |
| Max. AWG conductor cross section, stranded | 14 |
| Min. AWG conductor cross section, stranded | 24 |
| Conductor cross section AWG/kcmil max | 14 |
| Conductor cross section AWG/kcmil min. | 24 |

Serial interface

| | |
|--|--|
| Interface 1 | Ethernet interface, 10/100BASE-T(X) in acc. with IEEE 802.3u |
| Connection method | RJ45 socket, shielded |
| Transmission medium | Copper |
| Transmission length | 100 m (twisted pair, shielded) |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 14 |
| Auto-negotiation modes | Auto |
| Link through | Link fault pass through |
| Basic functions | Store-and-forward media converter |
| MDI-/MDI-X switchover | Auto-MDI(X) |
| Signal LEDs | Activity, link status, 10/100 Mbps |

Optical interface FO

| | |
|---|--|
| Transmit capacity, minimum | ≥ -23.5 dBm ((50/125 μm) dynamic in link mode (average)) |
| | ≥ -20 dBm ((62,5/125 μm) dynamic in link mode (average)) |
| Transmit capacity, maximum | ≤ -14 dBm ((50/125 μm) dynamic in link mode (average)) |
| | ≤ -14 dBm ((62,5/125 μm) dynamic in link mode (average)) |
| Minimum receiver sensitivity | -31 dBm (dynamic in link mode (average)) |
| Maximum receiver sensitivity | -14 dBm (dynamic in link mode (average)) |
| Wavelength | 1300 nm |
| Transmission length incl. 3 dB system reserve | 6.4 km (with F-G 50/125 0,7 dB/km F 1000) |
| | 2.8 km (with F-G 50/125 1,6 dB/km F 800) |

FO converters - FL MC EF 1300 MM SC - 2902853

Technical data

Optical interface FO

| | |
|---------------------|--|
| | 10 km (with F-G 62,5/125 0,7 dB/km F 1000) |
| | 3 km (with F-G 62.5/125 2.6 dB/km F 600) |
| | 2 km (with 2GK200/230 GI-HCS) |
| Transmission medium | Multi-mode fiberglass |
| | GI-HCS fiber |
| Connection method | SC duplex |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27230207 |
| eCl@ss 4.1 | 27230207 |
| eCl@ss 5.0 | 27230207 |
| eCl@ss 5.1 | 27230207 |
| eCl@ss 6.0 | 27230207 |
| eCl@ss 7.0 | 27230207 |
| eCl@ss 8.0 | 27230207 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000310 |
| ETIM 4.0 | EC000310 |
| ETIM 5.0 | EC001467 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211506 |
| UNSPSC 7.0901 | 39121008 |
| UNSPSC 11 | 39121008 |
| UNSPSC 12.01 | 39121008 |
| UNSPSC 13.2 | 39121008 |

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

FO converters - FL MC EF 1300 MM SC - 2902853


Approvals


Ex Approvals

ATEX / UL Listed / cUL Listed / cULus Listed

Approvals submitted

Approval details

UL Listed 

cUL Listed 

cULus Listed 

Accessories

Accessories

Connector set

RJ45 connector - FL PLUG RJ45 GR/2 - 2744856



RJ45 connector, shielded, with bend protection sleeve, 2 pieces, gray for straight cables, for assembly on site. For connections that are not crossed, it is recommended that you use the connector set with gray bend protection sleeve.

RJ45 connector - FL PLUG RJ45 GN/2 - 2744571



RJ45 connector, shielded, with bend protection sleeve, 2 pieces, green for crossed cables, for assembly on site. For connections that are crossed, it is recommended that the connector set with green bend protection sleeves is used.

FO converters - FL MC EF 1300 MM SC - 2902853

Accessories

FO connectors - PSM-SET-SC-DUPLEX/2-HCS/PN - 2313779



SC duplex connector set for standard PROFINET HCS fiber cables with 2.2 mm diameter of the individual elements. Consisting of 2 duplex quick mounting connectors with bend protection for self-assembly.

Data cable by the meter

Cable - FL CAT5 HEAVY - 2744814



CAT5-SF/UTP cable (J-02YS(ST)C HP 2 x 2 x 24 AWG), heavy-duty installation cable, 2 x 2 x 0.22 mm², solid conductor, shielded, outer sheath: 7.8 mm diameter, inner sheath: 5.75 mm ± 0.15 mm diameter

Network cable - FL CAT5 FLEX - 2744830



CAT5-SF/UTP cable (J-LI02YS(ST)C H 2 x 2 x 26 AWG), light-duty, flexible installation cable 2 x 2 x 0.14 mm², stranded, shielded, outer sheath: 5.75 mm ± 0.15 mm diameter

FO cable - PSM-LWL-GDO- 50/125 - 2799432



Fiberglass cable, duplex 50/125 µm, by the meter, without connector, for outdoor installation

FO cable - PSM-LWL-GDM-RUGGED- 50/125 - 2799322



Fiberglass cable, duplex 50/125 µm, by the meter, without connector, for indoor installation

FO converters - FL MC EF 1300 MM SC - 2902853

Accessories

FO cable - FL FOC PN-C-HCS-GI-200/230 - 2313410



PROFINET HCS GI fiber cables, duplex 200/230 μm , increased bandwidth for Ethernet applications in particular. Robust PUR outer sheath. Heavy version suitable for drag chains and indoor installation, sold by the meter without plugs

Data cable preassembled

FO patch cable - FL MM PATCH 1,0 LC-SC - 2989161



Assembled fiber optic cable, break-out cable, fiberglass multi-mode 50/125 μm , connector: LC/SC duplex, degree of protection: IP20, for installation in cable ducts or control cabinets, length: 1 m

FO patch cable - FL MM PATCH 2,0 LC-SC - 2989268



Assembled fiber optic cable, break-out cable, fiberglass multi-mode 50/125 μm , connector: LC/SC duplex, degree of protection: IP20, for installation in cable ducts or control cabinets, length: 2 m

FO patch cable - FL MM PATCH 5,0 LC-SC - 2901800



Assembled FO cable, break out cable, multi-mode fiberglass 50/125 μm , plug: LC / SC-Duplex, protection type: IP20, for installation in cable ducts or control cabinets, length: 5 m

FO patch cable - FL MM PATCH 1,0 SC-SC - 2901805



Assembled FO cable, break out cable, multi-mode fiberglass 50/125 μm , connector: SC Duplex / SC-Duplex, protection type: IP20, for installation in cable ducts or control cabinets, length: 1 m

FO converters - FL MC EF 1300 MM SC - 2902853

Accessories

FO patch cable - FL MM PATCH 2,0 SC-SC - 2901807



Assembled FO cable, break out cable, multi-mode fiberglass 50/125 µm, connector: SC Duplex / SC-Duplex, protection type: IP20, for installation in cable ducts or control cabinets, length: 2 m

FO patch cable - FL MM PATCH 5,0 SC-SC - 2901808



Assembled FO cable, break out cable, multi-mode fiberglass 50/125 µm, connector: SC Duplex / SC-Duplex, protection type: IP20, for installation in cable ducts or control cabinets, length: 5 m

FO patch cable - FL MM PATCH 1,0 SC-ST - 2901809



Assembled FO cable, break out cable, multi-mode fiberglass 50/125 µm, connector: SC Duplex / B-FOC, protection type: IP20, for installation in cable ducts or control cabinets, length: 1 m

FO patch cable - FL MM PATCH 2,0 SC-ST - 2901810



Assembled FO cable, break out cable, multi-mode fiberglass 50/125 µm, connector: SC Duplex / B-FOC (ST), protection type: IP20, for installation in cable ducts or control cabinets, length: 2 m

FO patch cable - FL MM PATCH 5,0 SC-ST - 2901811



Assembled FO cable, break out cable, multi-mode fiberglass 50/125 µm, connector: SC Duplex / B-FOC (ST), protection type: IP20, for installation in cable ducts or control cabinets, length: 5 m

FO converters - FL MC EF 1300 MM SC - 2902853

Accessories

FO patch cable - FL MM PATCH 1,0 SC-SCRJ - 2901812



Assembled FO cable, break out cable, multi-mode fiberglass 50/125 µm, connector: SC Duplex / B-FOC (ST), protection type: IP20, for installation in cable ducts or control cabinets, length: 1 m

FO patch cable - FL MM PATCH 2,0 SC-SCRJ - 2901813



Assembled FO cable, break out cable, multi-mode fiberglass 50/125 µm, connector: SC Duplex / SCRJ, protection type: IP20, for installation in cable ducts or control cabinets, length: 2 m[^]

FO patch cable - FL MM PATCH 5,0 SC-SCRJ - 2901814



Assembled FO cable, break out cable, multi-mode fiberglass 50/125 µm, connector: SC Duplex / B-FOC (ST), protection type: IP20, for installation in cable ducts or control cabinets, length: 5 m

FO patch cable - FOC-GDM-RUGGED-1016/IP20/... - 2901558



rugged GOF installation cable (IP20 heads only) for inner areas with highly tear-proof aramid strain-relief elements. Individual elements consist of highly flexible FRNC material. The cable is halogen-free, ozone and UV resistant and has a rugged polyurethane (PUR) outer sheath.

FO patch cable - FOC-GDM-RUGGED-1016/... - 1402193



rugged GOF installation cable for inner areas with highly tear-proof aramid strain-relief elements. Individual elements consist of highly flexible FRNC material. The cable is halogen-free, ozone and UV resistant and has a rugged polyurethane (PUR) outer sheath.

FO converters - FL MC EF 1300 MM SC - 2902853

Accessories

FO patch cable - FOC-GDO-1017/IP20/... - 2901559



Highly rugged GOF round cable (IP20 heads only) for assembly and for outdoor installation with integrated moisture barrier as well as rodent-proof scrim. Individual elements made from highly flexible FRNC material. The wire is ozone and UV resistant with a very rugged polyethylene outer sheath.

FO patch cable - FOC-GDO-1017/... - 1402194



Highly rugged GOF round cable for assembly and for outdoor installation with integrated moisture barrier as well as rodent-proof scrim. Individual elements made from highly flexible FRNC material. The wire is ozone and UV resistant with a very rugged polyethylene outer sheath.

FO patch cable - FOC-PN-HCS-GI-1005/IP20/... - 2901554



PROFINET HCS-GI installation cable (IP20 heads only) for fixed installation in the inner area. Gradient index fiber. Individual elements made from highly flexible FRNC material. Halogen-free, ozone and UV resistant with a polyurethane (PUR) outer sheath.

FO patch cable - FOC-PN-HCS-GI-1005/... - 1402189



HCS-GI installation cable for assembly for fixed installation in the inner area, with gradient index fibers for the highest performance requirements, as well as individual elements made of highly flexible FRNC material. The cable is halogen-free, ozone and UV resistant and has a rugged polyurethane (PUR) outer sheath.

Data plug

RJ45 connector - VS-08-RJ45-5-Q/IP20 - 1656725



RJ45 connector, IP20, CAT5e, 8-pos., with QUICKON fast connection technology, for 26 ... 23 AWG 1-wire and 7-wire conductors, for 4.5 mm ... 8.0 mm cable diameter, labeling: TIA 568 B, color: gray

FO converters - FL MC EF 1300 MM SC - 2902853

Accessories

DIN rail connector

Cable - ME 22,5 TBUS 1,5/ 5-ST-3,81 GN - 2707437



DIN rail connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.

Electronic housing - ME 17,5 TBUS 1,5/ 5-ST-3,81 GN - 2709561



DIN rail connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.

Power supply

Power supply unit - MINI-SYS-PS-100-240AC/24DC/1.5 - 2866983



DIN rail power supply unit, primary-switched mode, narrow design, output: 24 V DC / 1.5 A

Universal tools

Assembly tool - FL CRIMPTOOL - 2744869




Crimping pliers, for assembling the RJ45 plugs FL PLUG RJ45..., for assembly on site

Drawings

FO converters - FL MC EF 1300 MM SC - 2902853

Block diagram

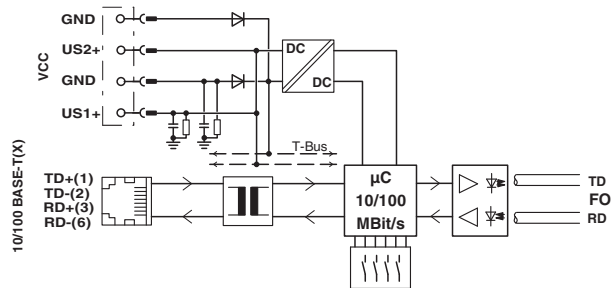

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А