

Polypropylene (PP) Capacitors for Pulse Applications with Double-Sided Metallized Electrodes in PCM 7.5 mm to 52.5 mm. Capacitances from 1000 pF to 47 µF. Rated Voltages from 100 VDC to 3000 VDC.

Special Features

- Pulse duty construction
- Self-healing
- Very low dissipation factor
- Negative capacitance change versus temperature
- According to RoHS 2011/65/EU

Typical Applications

For pulse applications e.g.

- Switch mode power supplies
- TV and monitor sets
- Lighting
- Audio/video equipment


Construction

Dielectric: Polypropylene (PP) film

Capacitor electrodes:

Double-sided metallized plastic film

Internal construction:

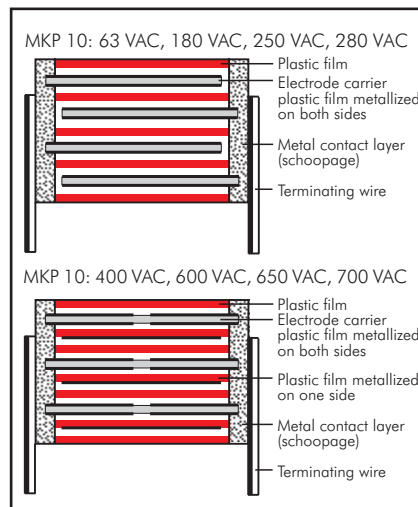

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations: Tinned wire.

Marking: Colour: Red.

Marking: Black.

Electrical Data

Capacitance range:

1000 pF to 47 µF (E12-values on request)

Rated voltages: 100 VDC, 250 VDC, 400 VDC, 630 VDC, 850 VDC, 1000 VDC, 1250 VDC, 1600 VDC, 2000 VDC, 2500 VDC, 3000 VDC

Capacitance tolerances:

±20%, ±10%, ±5%

Operating temperature range:

−55° C to +110° C

Insulation resistance at +20° C:

$C \leq 0.33 \mu\text{F}$: $\geq 1 \times 10^5 \text{ M}\Omega$

$C > 0.33 \mu\text{F}$: $\geq 30\,000 \text{ sec (M}\Omega \times \mu\text{F)}$

Measuring voltage: 100 V/1 min.

Test voltage: 2 sec.

L	$\leq 2000 \text{ VDC}$	2500 VDC	$\geq 3000 \text{ VDC}$
< 41.5	1.6 U_r	1.4 U_r	1.2 U_r
41.5	1.4 U_r	1.4 U_r	1.2 U_r
57	1.2 U_r	1.2 U_r	1.2 U_r

Dissipation factors at +20° C: $\tan \delta$

at f	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$C > 1.0 \mu\text{F}$
1 kHz	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$
10 kHz	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$	–
100 kHz	$\leq 15 \times 10^{-4}$	–	–

Maximum pulse rise time for pulses equal to the rated voltage

Capacitance pF/µF	max. pulse rise time V/µsec at $T_A < 40^\circ \text{C}$										
	100 VDC	250 VDC	400 VDC	630 VDC	850 VDC	1000 VDC	1250 VDC	1600 VDC	2000 VDC	2500 VDC	3000 VDC
1000 ... 2200	1250	2300	2300	2300	3500	3500	7000	7000	11500	11500	–
3300 ... 6800	1150	1500	1500	1500	3500	3500	7000	7000	11500	11500	–
0.01 ... 0.022	900	1400	1500	1500	2700	2700	3800	3800	4400	11500	–
0.033 ... 0.068	500	1000	1150	1400	2700	2700	2700	2700	2700	2700	2700
0.1 ... 0.22	250	650	650	1150	1800	1800	1800	1800	1800	1800	1800
0.33 ... 0.68	130	390	500	900	1150	1150	1150	1150	1150	1150	1150
1.0 ... 2.2	90	250	250	500	500	500	650	650	650	650	500
3.3 ... 4.7	65	100	130	190	230	230	330	330	–	–	–
6.8 ... 15	45	65	90	160	–	–	–	–	–	–	–
22 ... 47	30	45	45	–	–	–	–	–	–	–	–

Climatic test category:

55/100/56 in accordance with IEC

Dielectric absorption: 0.05 %

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from +85° C for DC voltages and from +75° C for AC voltages.

Reliability:

Operational life > 300 000 hours

Failure rate < 1 fit ($10.5 \times U_r$ and 40° C)

Specific dissipation:

Box size* WxHxL in mm	Specific dissipation in Watts per K above the ambient temperature
35 x 50 x 57	0.132
45 x 55 x 57	0.164
45 x 65 x 57	0.184

* other box sizes see page 11.

Mechanical Tests

Pull test on pins:

$d \leq 0.8 \phi$: 10 N in direction of pins

$d > 0.8 \phi$: 20 N in direction of pins

according to IEC 60068-2-21

Vibration: 6 hours at 10 ... 2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

Low air density: 1 kPa = 10 mbar in accordance with IEC 60068-2-13

Bump test: 4000 bumps at 390 m/sec² in accordance with IEC 60068-2-29

Packing

Available taped and reeled up to and including case size 15 x 26 x 31.5 / PCM 27.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data

Capacitance	100 VDC/63 VAC*					250 VDC/180 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	10	7.5	MKP1D011002C	4	9	10	7.5	MKP1F011002C
1500 "	4	9	10	7.5	MKP1D011502C	4	9	10	7.5	MKP1F011502C
2200 "	4	9	10	7.5	MKP1D012202C	4	9	10	7.5	MKP1F012202C
3300 "	4	9	10	7.5	MKP1D013302C	4	9	10	7.5	MKP1F013302C
4700 "	4	9	10	7.5	MKP1D014702C	4	9	10	7.5	MKP1F014702C
6800 "	4	9	10	7.5	MKP1D016802C	4	9	10	7.5	MKP1F016802C
0.01 µF	4	9	10	7.5	MKP1D021002C	4	9	10	7.5	MKP1F021002C
0.015 "	4	9	10	7.5	MKP1D021502C	4	9	13	10	MKP1F021003C
0.022 "	4	9	10	7.5	MKP1D022202C	4	9	10	7.5	MKP1F021502C
0.033 "	5	10.5	10.3	7.5	MKP1D023302E	4	9	13	10	MKP1F021503C
0.047 "	4	9	13	10	MKP1D023303C	4	9	10	7.5	MKP1F022202C
0.068 "	5	10.5	10.3	7.5	MKP1D024702E	4	9	13	10	MKP1F022203C
	4	9	13	10	MKP1D024703C	5	10.5	10.3	7.5	MKP1F023302E
	5	11	13	10	MKP1D026803F	4	9	13	10	MKP1F023303C
						5	11	13	10	MKP1F024702E
						5	11	18	15	MKP1F024703C
0.1 µF	6	12	13	10	MKP1D031003G	6	12	13	10	MKP1F026803F
0.15 "	6	12.5	18	15	MKP1D031504C	5	11	18	15	MKP1F026804B
0.22 "	7	14	18	15	MKP1D032204D	6	12.5	18	15	MKP1F031003G
0.33 "	8	15	18	15	MKP1D033304F	6	15	26.5	22.5	MKP1F031004B
0.47 "	9	16	18	15	MKP1D034704J	7	14	18	15	MKP1F031504C
0.68 "	7	16.5	26.5	22.5	MKP1D034705D	6	15	26.5	22.5	MKP1F031505B
	8.5	18.5	26.5	22.5	MKP1D036805F	8	15	18	15	MKP1F032204D
						6	15	26.5	22.5	MKP1F032205B
						9	16	18	15	MKP1F033304F
						7	16.5	26.5	22.5	MKP1F033305B
						8.5	18.5	26.5	22.5	MKP1F034704J
						9	19	31.5	27.5	MKP1F034705D
1.0 µF	10.5	19	26.5	22.5	MKP1D041005G	11	21	26.5	22.5	MKP1F036805F
1.5 "	11	21	31.5	27.5	MKP1D041506B	11	21	31.5	27.5	MKP1F036806A
2.2 "	13	24	31.5	27.5	MKP1D042206D	13	24	31.5	27.5	MKP1F041005I
3.3 "	17	29	31.5	27.5	MKP1D043306G	13	24	41.5	37.5	MKP1F041006B
4.7 "	20	39.5	31.5	27.5	MKP1D044706J	15	26	31.5	27.5	MKP1F041506D
6.8 "	17	29	41.5	37.5	MKP1D044707E	13	24	41.5	37.5	MKP1F041507C
	19	32	41.5	37.5	MKP1D046807F	17	29	31.5	27.5	MKP1F042206F
10 µF	20	39.5	41.5	37.5	MKP1D051007G	17	29	41.5	37.5	MKP1F042207C
15 "	24	45.5	41.5	37.5	MKP1D051507H	17	29	41.5	37.5	MKP1F043306I
	31	46	41.5	37.5	MKP1D051507I	20	39.5	31.5	27.5	MKP1F043307E
22 "	35	50	41.5	37.5	MKP1D052207J	19	32	41.5	37.5	MKP1F044706J
33 "	40	55	41.5	37.5	MKP1D053307K	20	39.5	41.5	37.5	MKP1F044707F
47 "	35	50	57	52.5	MKP1D053309F	20	39.5	41.5	37.5	MKP1F046807G
	45	65	57	52.5	MKP1D054709J					

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Rights reserved to amend design data without prior notification.

Part number completion:

Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 149.		

Continuation

General Data

Capacitance	400 VDC/250 VAC*					630 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	10	7.5	MKP1G011002C	4	9	10	7.5*	MKP1J011002C
1500 "	4	9	10	7.5	MKP1G011502C	4	9	10	7.5*	MKP1J011502C
2200 "	4	9	10	7.5	MKP1G012202C	4	9	10	7.5*	MKP1J012202C
3300 "	4	9	10	7.5	MKP1G013302C	4	9	10	7.5*	MKP1J013302C
4700 "	4	9	10	7.5	MKP1G014702C	4	9	10	7.5*	MKP1J014702C
6800 "	4	9	10	7.5	MKP1G016802C	4	9	10	7.5*	MKP1J016802C
						4	9	13	10	MKP1J016803C
0.01 µF	4	9	10	7.5	MKP1G021002C	5	10.5	10.3	7.5*	MKP1J021002E
	4	9	13	10	MKP1G021003C	4	9	13	10	MKP1J021003C
0.015 "	5	10.5	10.3	7.5	MKP1G021502E	5	11	13	10	MKP1J021503F
	4	9	13	10	MKP1G021503C	5	11	18	15	MKP1J021504B
0.022 "	5	10.5	10.3	7.5	MKP1G022202E	5	11	13	10	MKP1J022203F
	4	9	13	10	MKP1G022203C	5	11	18	15	MKP1J022204B
0.033 "	5.7	12.5	10.3	7.5	MKP1G023302F	6	12	13	10	MKP1J023303G
	5	11	13	10	MKP1G023303F	5	11	18	15	MKP1J023304B
0.047 "	6	12	13	10	MKP1G024703G	6	12.5	18	15	MKP1J024704C
	5	11	18	15	MKP1G024704B	6	15	26.5	22.5	MKP1J024705B
0.068 "	6	12.5	18	15	MKP1G026804C	7	14	18	15	MKP1J026804D
	6	15	26.5	22.5	MKP1G026805B	6	15	26.5	22.5	MKP1J026805B
0.1 µF	7	14	18	15	MKP1G031004D	9	16	18	15	MKP1J031004J
	6	15	26.5	22.5	MKP1G031005B	7	16.5	26.5	22.5	MKP1J031005D
0.15 "	8	15	18	15	MKP1G031504F	8.5	18.5	26.5	22.5	MKP1J031505F
	6	15	26.5	22.5	MKP1G031505B	9	19	31.5	27.5	MKP1J031506A
0.22 "	9	16	18	15	MKP1G032204J	8.5	18.5	26.5	22.5	MKP1J032205F
	7	16.5	26.5	22.5	MKP1G032205D	9	19	31.5	27.5	MKP1J032206A
0.33 "	8.5	18.5	26.5	22.5	MKP1G033305F	11	21	26.5	22.5	MKP1J033305I
	9	19	31.5	27.5	MKP1G033306A	11	21	31.5	27.5	MKP1J033306B
0.47 "	10.5	19	26.5	22.5	MKP1G034705G	11	21	31.5	27.5	MKP1J034706B
	9	19	31.5	27.5	MKP1G034706A					
0.68 "	11	21	26.5	22.5	MKP1G036805I	15	26	31.5	27.5	MKP1J036806F
	11	21	31.5	27.5	MKP1G036806B	13	24	41.5	37.5	MKP1J036807C
1.0 µF	13	24	31.5	27.5	MKP1G041006D	17	29	31.5	27.5	MKP1J041006G
	13	24	41.5	37.5	MKP1G041007C	15	26	41.5	37.5	MKP1J041007D
1.5 "	17	29	31.5	27.5	MKP1G041506G	20	39.5	31.5	27.5	MKP1J041506J
	13	24	41.5	37.5	MKP1G041507C	19	32	41.5	37.5	MKP1J041507F
2.2 "	20	39.5	31.5	27.5	MKP1G042206J	20	39.5	41.5	37.5	MKP1J042207G
	17	29	41.5	37.5	MKP1G042207E					
3.3 "	20	39.5	41.5	37.5	MKP1G043307G	24	45.5	41.5	37.5	MKP1J043307H
4.7 "	20	39.5	41.5	37.5	MKP1G044707G	35	50	41.5	37.5	MKP1J044707J
6.8 "	24	45.5	41.5	37.5	MKP1G046807H	40	55	41.5	37.5	MKP1J046807K
						35	50	57	52.5	MKP1J046809F
10 µF	35	50	41.5	37.5	MKP1G051007J	45	55	57	52.5	MKP1J051009H
	35	50	57	52.5	MKP1G051009F					
15 "	40	55	41.5	37.5	MKP1G051507K					
	35	50	57	52.5	MKP1G051509F					
22 "	45	65	57	52.5	MKP1G052209J					

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

* Admissible AC voltage 280 VAC.

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:

Version code: 2-pin = 00
4-pin = D4
Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: 6-2 = SD

Taped version see page 149.

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	850 VDC/450 VAC*					1000 VDC/600 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	10	7.5	MKP1M011002C	4	9	10	7.5	MKP1O111002C
	4	9	13	10	MKP1M011003C	4	9	13	10	MKP1O111003C
1500 "	4	9	10	7.5	MKP1M011502C	4	9	10	7.5	MKP1O111502C
	4	9	13	10	MKP1M011503C	4	9	13	10	MKP1O111503C
2200 "	4	9	10	7.5	MKP1M012202C	4	9	10	7.5	MKP1O112202C
	4	9	13	10	MKP1M012203C	4	9	13	10	MKP1O112203C
3300 "	4	9	10	7.5	MKP1M013302C	4	9	10	7.5	MKP1O113302C
	4	9	13	10	MKP1M013303C	4	9	13	10	MKP1O113303C
4700 "	4.5	9.5	10.3	7.5	MKP1M014702D	4.5	9.5	10.3	7.5	MKP1O114702D
	4	9	13	10	MKP1M014703C	4	9	13	10	MKP1O114703C
6800 "	5.7	12.5	10.3	7.5	MKP1M016802F	5.7	12.5	10.3	7.5	MKP1O116802F
	5	11	13	10	MKP1M016803F	5	11	13	10	MKP1O116803F
0.01 µF	5	11	13	10	MKP1M021003F	5	11	13	10	MKP1O121003F
	5	11	18	15	MKP1M021004B	5	11	18	15	MKP1O121004B
0.015 "	6	12	13	10	MKP1M021503G	6	12	13	10	MKP1O121503G
	5	11	18	15	MKP1M021504B	5	11	18	15	MKP1O121504B
0.022 "	6	12.5	18	15	MKP1M022204C	6	12.5	18	15	MKP1O122204C
	6	15	26.5	22.5	MKP1M022205B	6	15	26.5	22.5	MKP1O122205B
0.033 "	7	14	18	15	MKP1M023304D	7	14	18	15	MKP1O123304D
	6	15	26.5	22.5	MKP1M023305B	6	15	26.5	22.5	MKP1O123305B
0.047 "	8	15	18	15	MKP1M024704F	8	15	18	15	MKP1O124704F
	6	15	26.5	22.5	MKP1M024705B	6	15	26.5	22.5	MKP1O124705B
0.068 "	7	16.5	26.5	22.5	MKP1M026805D	7	16.5	26.5	22.5	MKP1O126805D
0.1 µF	8.5	18.5	26.5	22.5	MKP1M031005F	8.5	18.5	26.5	22.5	MKP1O131005F
	11	21	31.5	27.5	MKP1M031006B	11	21	31.5	27.5	MKP1O131006B
0.15 "	11	21	26.5	22.5	MKP1M031505I	11	21	26.5	22.5	MKP1O131505I
	11	21	31.5	27.5	MKP1M031506B	11	21	31.5	27.5	MKP1O131506B
0.22 "	11	21	31.5	27.5	MKP1M032206B	11	21	31.5	27.5	MKP1O132206B
0.33 "	13	24	31.5	27.5	MKP1M033306D	13	24	31.5	27.5	MKP1O133306D
	15	26	31.5	27.5	MKP1M033306F	15	26	31.5	27.5	MKP1O133306F
0.47 "	13	24	41.5	37.5	MKP1M033307C	13	24	41.5	37.5	MKP1O133307C
	17	29	31.5	27.5	MKP1M034706G	17	29	31.5	27.5	MKP1O134706G
0.68 "	13	24	41.5	37.5	MKP1M034707C	13	24	41.5	37.5	MKP1O134707C
	20	39.5	31.5	27.5	MKP1M036806J	20	39.5	31.5	27.5	MKP1O136806J
	17	29	41.5	37.5	MKP1M036807E	17	29	41.5	37.5	MKP1O136807E
1.0 µF	20	39.5	41.5	37.5	MKP1M041007G	20	39.5	41.5	37.5	MKP1O141007G
1.5 "	24	45.5	41.5	37.5	MKP1M041507H	24	45.5	41.5	37.5	MKP1O141507H
2.2 "	31	46	41.5	37.5	MKP1M042207I	31	46	41.5	37.5	MKP1O142207I
3.3 "	40	55	41.5	37.5	MKP1M043307K	40	55	41.5	37.5	MKP1O143307K
	35	50	57	52.5	MKP1M043309F	35	50	57	52.5	MKP1O143309F
4.7 "	45	55	57	52.5	MKP1M044709H	45	55	57	52.5	MKP1O144709H

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

New range

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:

Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 149.		

Rights reserved to amend design data without prior notification.

Continuation page 69

Continuation

General Data

Capacitance	1250 VDC/600 VAC*					1600 VDC/650 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	13	10	MKP1R011003C	4	9	13	10	MKP1T011003C
1500 "	4	9	13	10	MKP1R011503C	4	9	13	10	MKP1T011503C
2200 "	4	9	13	10	MKP1R012203C	4	9	13	10	MKP1T012203C
3300 "	4	9	13	10	MKP1R013303C	4	9	13	10	MKP1T013303C
4700 "	5	11	13	10	MKP1R014703F	5	11	13	10	MKP1T014703F
6800 "	6	12	13	10	MKP1R016803G	6	12	13	10	MKP1T016803G
	5	11	18	15	MKP1R016804B	5	11	18	15	MKP1T016804B
0.01 µF	5	11	18	15	MKP1R021004B	5	11	18	15	MKP1T021004B
0.015 "	6	12.5	18	15	MKP1R021504C	6	12.5	18	15	MKP1T021504C
	6	15	26.5	22.5	MKP1R021505B	6	15	26.5	22.5	MKP1T021505B
0.022 "	7	14	18	15	MKP1R022204D	7	14	18	15	MKP1T022204D
	6	15	26.5	22.5	MKP1R022205B	6	15	26.5	22.5	MKP1T022205B
0.033 "	8	15	18	15	MKP1R023304F	8	15	18	15	MKP1T023304F
	6	15	26.5	22.5	MKP1R023305B	6	15	26.5	22.5	MKP1T023305B
0.047 "	7	16.5	26.5	22.5	MKP1R024705D	7	16.5	26.5	22.5	MKP1T024705D
	9	19	31.5	27.5	MKP1R024706A	9	19	31.5	27.5	MKP1T024706A
0.068 "	10.5	19	26.5	22.5	MKP1R026805G	10.5	19	26.5	22.5	MKP1T026805G
	9	19	31.5	27.5	MKP1R026806A	9	19	31.5	27.5	MKP1T026806A
0.1 µF	11	21	26.5	22.5	MKP1R031005I	11	21	26.5	22.5	MKP1T031005I
	11	21	31.5	27.5	MKP1R031006B	11	21	31.5	27.5	MKP1T031006B
0.15 "	13	24	31.5	27.5	MKP1R031506D	13	24	31.5	27.5	MKP1T031506D
0.22 "	15	26	31.5	27.5	MKP1R032206F	15	26	31.5	27.5	MKP1T032206F
	13	24	41.5	37.5	MKP1R032207C	13	24	41.5	37.5	MKP1T032207C
0.33 "	17	34.5	31.5	27.5	MKP1R033306I	17	34.5	31.5	27.5	MKP1T033306I
	17	29	41.5	37.5	MKP1R033307E	17	29	41.5	37.5	MKP1T033307E
0.47 "	20	39.5	31.5	27.5	MKP1R034706J	20	39.5	31.5	27.5	MKP1T034706J
	19	32	41.5	37.5	MKP1R034707F	19	32	41.5	37.5	MKP1T034707F
0.68 "	20	39.5	41.5	37.5	MKP1R036807G	20	39.5	41.5	37.5	MKP1T036807G
1.0 µF	24	45.5	41.5	37.5	MKP1R041007H	24	45.5	41.5	37.5	MKP1T041007H
1.5 "	31	46	41.5	37.5	MKP1R041507I	31	46	41.5	37.5	MKP1T041507I
2.2 "	40	55	41.5	37.5	MKP1R042207K	40	55	41.5	37.5	MKP1T042207K
	35	50	57	52.5	MKP1R042209F	35	50	57	52.5	MKP1T042209F
3.3 "	45	65	57	52.5	MKP1R043309J	45	65	57	52.5	MKP1T043309J

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

■ New range

** PCM = Printed circuit module = pin spacing

Dims. in mm.


Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:


Version code: 2-pin = 00
4-pin = D4
Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: 6-2 = SD

Taped version see page 149.

2-pin version

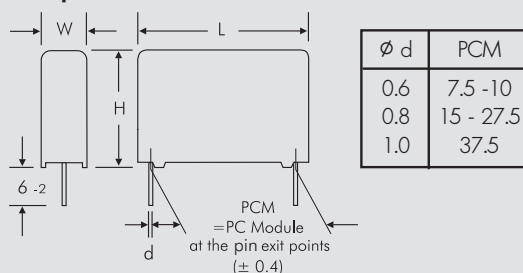

4-pin version

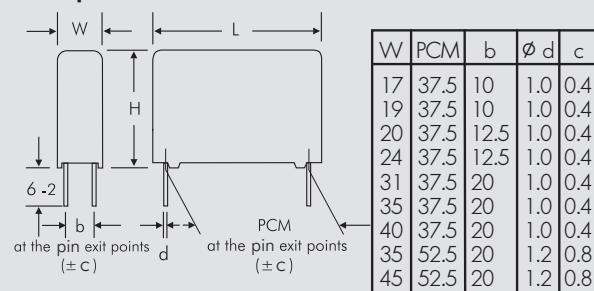

Rights reserved to amend design data without prior notification.

Continuation page 70

Continuation

General Data

Capacitance	2000 VDC/700 VAC*					2500 VDC/700 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	13	10	MKP1U011003C_____	5	11	18	15	MKP1V011004B_____
1500 "	4	9	13	10	MKP1U011503C_____	6	15	26.5	22.5	MKP1V011005B_____
2200 "	5	11	13	10	MKP1U012203F_____	5	11	18	15	MKP1V011504B_____
3300 "	5	11	18	15	MKP1U012204B_____	6	15	26.5	22.5	MKP1V011505B_____
4700 "	5	11	18	15	MKP1U013304B_____	5	11	18	15	MKP1V012204B_____
6800 "	6	15	26.5	22.5	MKP1U014704B_____	6	15	26.5	22.5	MKP1V012205B_____
	6	15	26.5	22.5	MKP1U014705B_____	5	11	18	15	MKP1V013304B_____
	6	12.5	18	15	MKP1U016804C_____	6	12.5	18	15	MKP1V013305B_____
	6	15	26.5	22.5	MKP1U016805B_____	6	15	26.5	22.5	MKP1V014704C_____
0.01 µF	7	14	18	15	MKP1U021004D_____	6	15	26.5	22.5	MKP1V014705B_____
0.015 "	8	15	18	15	MKP1U021504F_____	7	14	18	15	MKP1V016804D_____
0.022 "	9	16	18	15	MKP1U022204J_____	7	16.5	26.5	22.5	MKP1V016805D_____
0.033 "	8.5	18.5	26.5	22.5	MKP1U023305F_____	8.5	18.5	26.5	22.5	MKP1V021005F_____
0.047 "	9	19	31.5	27.5	MKP1U023306A_____	10.5	19	26.5	22.5	MKP1V021505G_____
0.068 "	10.5	19	26.5	22.5	MKP1U024705G_____	11	21	26.5	22.5	MKP1V022205I_____
	11	21	31.5	27.5	MKP1U024706B_____	11	21	26.5	22.5	MKP1V023305I_____
	11	21	26.5	22.5	MKP1U026805I_____	9	19	31.5	27.5	MKP1V023306A_____
	11	21	31.5	27.5	MKP1U026806B_____	11	21	31.5	27.5	MKP1V024706B_____
0.1 µF	13	24	31.5	27.5	MKP1U031006D_____	13	24	31.5	27.5	MKP1V026806D_____
0.15 "	15	26	31.5	27.5	MKP1U031506F_____	15	26	31.5	27.5	MKP1V031006F_____
0.22 "	17	34.5	31.5	27.5	MKP1U032206I_____	13	24	41.5	37.5	MKP1V031007C_____
0.33 "	17	29	41.5	37.5	MKP1U032207E_____	17	34.5	31.5	27.5	MKP1V031506I_____
0.47 "	19	32	41.5	37.5	MKP1U033307F_____	15	26	41.5	37.5	MKP1V031507D_____
0.68 "	20	39.5	41.5	37.5	MKP1U034707G_____	19	32	41.5	37.5	MKP1V032207F_____
1.0 µF	24	45.5	41.5	37.5	MKP1U036807H_____	24	45.5	41.5	37.5	MKP1V033307H_____
1.5 "	35	50	41.5	37.5	MKP1U041007J_____	31	46	41.5	37.5	MKP1V034707I_____
2.2 "	40	55	41.5	37.5	MKP1U041507K_____	35	50	41.5	37.5	MKP1V036807J_____
	35	50	57	52.5	MKP1U041509F_____	40	55	41.5	37.5	MKP1V041007K_____
	45	55	57	52.5	MKP1U042209H_____	35	50	57	52.5	MKP1V041009F_____
						45	55	57	52.5	MKP1V041509H_____

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:

Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 149.		

Rights reserved to amend design data without prior notification.

Continuation page 71

Continuation

General Data


Capacitance	W	H	L	PCM**	Part number	* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$ ** PCM = Printed circuit module = pin spacing Dims. in mm. The box sizes according to the main catalogue 2015 are still available on request Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.
0.01 μF	8.5	18.5	26.5	22.5	MKP1W021005F_	
0.015 "	10.5	19	26.5	22.5	MKP1W021505G_	
0.022 "	11	21	26.5	22.5	MKP1W022205I_	
0.033 "	11	21	26.5	22.5	MKP1W023305L_	
	9	19	31.5	27.5	MKP1W023306A_	
0.047 "	11	21	31.5	27.5	MKP1W024706B_	
0.068 "	13	24	31.5	27.5	MKP1W026806D_	
0.1 μF	15	26	31.5	27.5	MKP1W031006F_	
	13	24	41.5	37.5	MKP1W031007C_	
0.15 "	17	34.5	31.5	27.5	MKP1W031506I_	
	15	26	41.5	37.5	MKP1W031507D_	
0.22 "	19	32	41.5	37.5	MKP1W032207F_	
0.33 "	24	45.5	41.5	37.5	MKP1W033307H_	
0.47 "	31	46	41.5	37.5	MKP1W034707I_	
0.68 "	35	50	41.5	37.5	MKP1W036807J_	
1.0 μF	40	55	41.5	37.5	MKP1W041007K_	
	35	50	57	52.5	MKP1W041009F_	
1.5 "	45	55	57	52.5	MKP1W041509H_	

ϕd	PCM
0.6	7.5 - 10
0.8	15 - 27.5
1.0	37.5

W	PCM	b	ϕd	c
17	37.5	10	1.0	0.4
19	37.5	10	1.0	0.4
20	37.5	12.5	1.0	0.4
24	37.5	12.5	1.0	0.4
31	37.5	20	1.0	0.4
35	37.5	20	1.0	0.4
40	37.5	20	1.0	0.4
45	52.5	20	1.2	0.8
45	52.5	20	1.2	0.8

Rights reserved to amend design data without prior notification.

Permissible AC voltage
in relation to frequency
at 10° C internal temperature rise
(general guide).

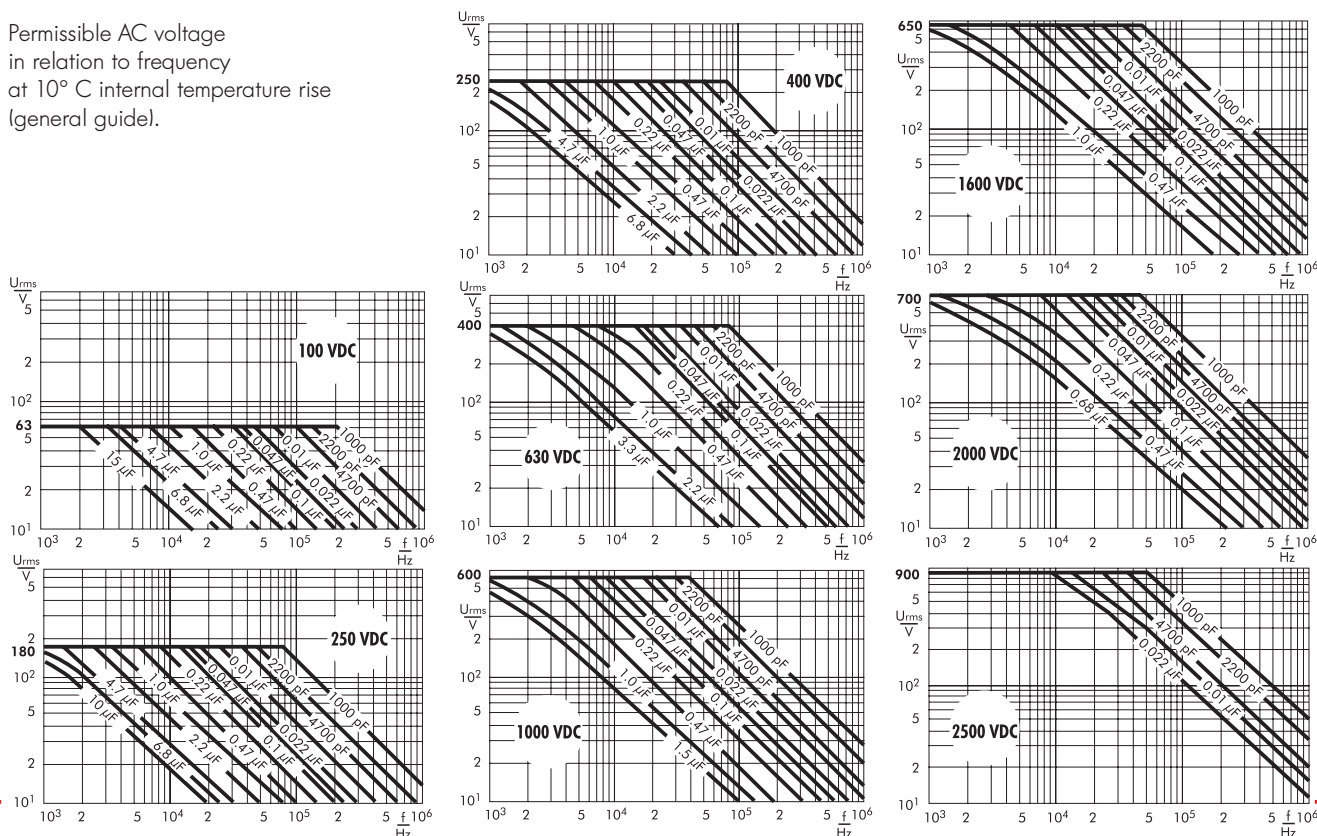

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$


Dwell time: $t < 5\text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\Sigma t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

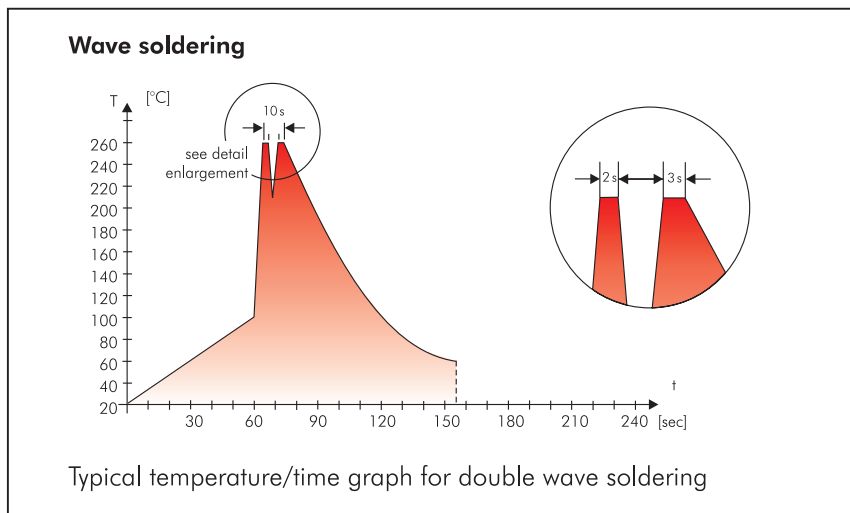

WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories by the infaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

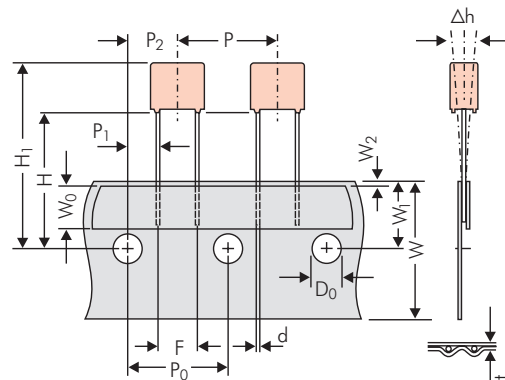


Diagram 1:
PCM 2.5/5/7.5mm

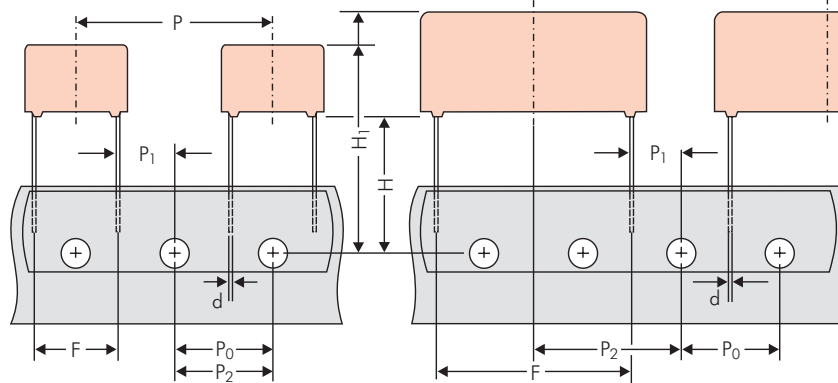


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 150)		ROLL/AMMO			AMMO			
		REEL ø 360 max. ø 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions		REEL ø 360 max. ø 30 ±1	52 ±2 58 ±2 or 66 ±2	REEL ø 500 max. ø 25 ±1	54 ±2 60 ±2 or 68 ±2 } depending on PCM and component dimensions
Unit		see details page 151.						

Dims in mm.

* Diameter of pins see General Data.


Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.


Position of components according to PCM 7.5 (sketch 1). P₀ = 12.7 or 15.0 is possible

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

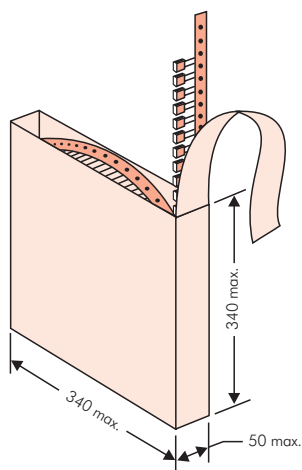

■ AMMO Packaging

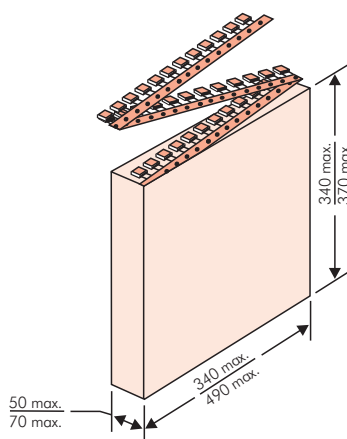

■ REEL Packaging

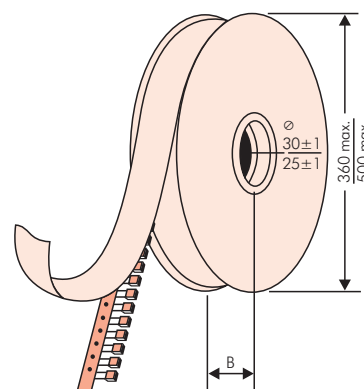

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made In Germany		Werk Unna	
Supplier-ID: 123456789	RoHS 2011/65/EU	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
		Gross Weight [g]: 1870	
WIMA Confirmation No.: 0001004053000100	WIMA Part No.: MKS2C034701C00K88D		
Handling Unit:	MKS 2	QTY: 5.000	COO: DE
	MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RM5		
1000067326	Standard 10% Loss - Standard Drühte 6-2		Week 03/2011
	Vorlage Debitor Inland		

BARCODE „Code 39“

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	H16.5	H18.5	ø 360	ø 500		340 × 340		490 × 370							
	W	H	L	Codes	S	N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000	2200		2500		–		2800		–	
	3	7.5	4.6	0C	5000	2000		2300		–		2300		–	
	3.8	8.5	4.6	0D	5000	1500		1800		–		1800		–	
	4.6	9	4.6	0E	5000	1200		1500		–		1500		–	
	5.5	10	4.6	0F	5000	900		1200		–		1200		–	
5 mm	2.5	6.5	7.2	1A	5000	2200		2500		–		2800		–	
	3	7.5	7.2	1B	5000	2000		2300		–		2300		–	
	3.5	8.5	7.2	1C	5000	1600		2000		–		2000		–	
	4.5	6	7.2	1D	6000	1300		1500		–		1500		–	
	4.5	9.5	7.2	1E	4000	1300		1500		–		1500		–	
	5	10	7.2	1F	3500	1100		1400		–		1400		–	
	5.5	7	7.2	1G	4000	1000		1200		–		1200		–	
	5.5	11.5	7.2	1H	2500	1000		1200		–		1200		–	
	6.5	8	7.2	1I	2500	800		1000		–		1000		–	
	7.2	8.5	7.2	1J	2500	700		1000		–		1000		–	
	7.2	13	7.2	1K	2000	700		950		–		1000		–	
	8.5	10	7.2	1L	2000	600		800		–		800		–	
	8.5	14	7.2	1M	1500	600		800		–		800		–	
	11	16	7.2	1N	1000	500		600		–		640		–	
7.5 mm	2.5	7	10	2A	5000	–		2500		4400		2500		–	
	3	8.5	10	2B	5000	–		2200		4300		2300		4150	
	4	9	10	2C	4000	–		1700		3200		1700		3100	
	4.5	9.5	10.3	2D	3500	–		1500		2900		1400		2700	
	5	10.5	10.3	2E	3000	–		1300		2500		1300		–	
	5.7	12.5	10.3	2F	2000	–		1000		2200		1100		–	
	7.2	12.5	10.3	2G	1500	–		900		1800		1000		–	
10 mm	3	9	13	3A	3000	–		1100		2200		–		1900	
	4	8.5	13.5	FA	3000	–		900		1600		–		1450	
	4	9	13	3C	3000	–		900		1600		–		1450	
	4	9.5	13	3D	3000	–		900		1600		–		1400	
	5	10	13.5	FB	2000	–		700		1300		–		1200	
	5	11	13	3F	3000	–		700		1300		–		1200	
	6	12	13	3G	2400	–		550		1100		–		1000	
	6	12.5	13	3H	2400	–		550		1100		–		1000	
	8	12	13	3I	2000	–		400		800		–		740	
15 mm	5	11	18	4B	2400	–		600		1200		–		1150	
	5	13	19	FC	1000	–		600		1200		–		1200	
	6	12.5	18	4C	2000	–		500		1000		–		1000	
	6	14	19	FD	1000	–		500		1000		–		1000	
	7	14	18	4D	1600	–		450		900		–		850	
	7	15	19	FE	1000	–		450		900		–		850	
	8	15	18	4F	1200	–		400		800		–		740	
	8	17	19	FF	500	–		400		800		–		740	
	9	14	18	4H	1200	–		350		700		–		650	
	9	16	18	4J	900	–		350		700		–		650	
	10	18	19	FG	500	–		300		650		–		590	
	11	14	18	4M	1000	–		300		600		–		540	
22.5 mm	5	14	26.5	5A	1200	–		–		800		–		770	
	6	15	26.5	5B	1000	–		–		700		–		640	
	7	16.5	26.5	5D	760	–		–		600		–		550	
	8	20	28	FH	500	–		–		500		–		480	
	8.5	18.5	26.5	5F	500	–		–		480		–		450	
	10	22	28	FI	570*	–		–		420		–		380	
	10.5	19	26.5	5G	594*	–		–		400		–		360	
	10.5	20.5	26.5	5H	594*	–		–		400		–		360	
	11	21	26.5	5I	561*	–		–		380		–		350	
	12	24	28	FJ	480*	–		–		350		–		310	

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	H16.5	H18.5	ø 360	ø 500		340 × 340	490 × 370								
	W	H	L	Codes	S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	567*	—	—	—	—	460/340*	—	—	—	—	420
	11	21	31.5	6B	459*	—	—	—	—	380/280*	—	—	—	—	350
	13	24	31.5	6D	378*	—	—	—	—	300	—	—	—	—	290
	13	25	33	FK	405*	—	—	—	—	—	—	—	—	—	—
	15	26	31.5	6F	324*	—	—	—	—	270	—	—	—	—	250
	15	26	33	FL	324*	—	—	—	—	—	—	—	—	—	—
	17	29	31.5	6G	198*	—	—	—	—	—	—	—	—	—	—
	17	34.5	31.5	6I	198*	—	—	—	—	—	—	—	—	—	—
	20	32	33	FM	162*	—	—	—	—	—	—	—	—	—	—
20	39.5	31.5	6J	162*	—	—	—	—	—	—	—	—	—	—	
37.5 mm	9	19	41.5	7A	441*	—	—	—	—	—	—	—	—	—	—
	11	22	41.5	7B	357*	—	—	—	—	—	—	—	—	—	—
	13	24	41.5	7C	294*	—	—	—	—	—	—	—	—	—	—
	15	26	41.5	7D	252*	—	—	—	—	—	—	—	—	—	—
	17	29	41.5	7E	154*	—	—	—	—	—	—	—	—	—	—
	19	32	41.5	7F	140*	—	—	—	—	—	—	—	—	—	—
	20	39.5	41.5	7G	126*	—	—	—	—	—	—	—	—	—	—
	24	45.5	41.5	7H	112*	—	—	—	—	—	—	—	—	—	—
	31	46	41.5	7I	84*	—	—	—	—	—	—	—	—	—	—
	35	50	41.5	7J	35*	—	—	—	—	—	—	—	—	—	—
	40	55	41.5	7K	28*	—	—	—	—	—	—	—	—	—	—
48.5 mm	19	31	56	8D	120*	—	—	—	—	—	—	—	—	—	—
	23	34	56	8E	80*	—	—	—	—	—	—	—	—	—	—
	27	37.5	56	8H	84*	—	—	—	—	—	—	—	—	—	—
	33	48	56	8J	25*	—	—	—	—	—	—	—	—	—	—
	37	54	56	8L	25*	—	—	—	—	—	—	—	—	—	—
52.5 mm	25	45	57	9D	70*	—	—	—	—	—	—	—	—	—	—
	30	45	57	9E	60*	—	—	—	—	—	—	—	—	—	—
	35	50	57	9F	25*	—	—	—	—	—	—	—	—	—	—
	45	55	57	9H	20*	—	—	—	—	—	—	—	—	—	—
	45	65	57	9J	20*	—	—	—	—	—	—	—	—	—	—

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

A WIMA part number consists of 18 digits and is composed as follows:

Field 1 - 4: Type description
 Field 5 - 6: Rated voltage
 Field 7 - 10: Capacitance
 Field 11 - 12: Size and PCM
 Field 13 - 14: Version code (e.g. Snubber versions)
 Field 15: Capacitance tolerance
 Field 16: Packing
 Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 μF				2.5x6.5x7.2		-		20%	bulk	6 -2	
Type description:				Rated voltage:		Capacitance:				Size:		Tolerance:		Packing:			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022				4.8x3.3x3 Size 1812 = KA		±20% = M		AMMO H16.5 340x340 = A			
SMD-PEN = SMDN				63 VDC = C0		47 pF = 0047				4.8x3.3x4 Size 1812 = KB		±10% = K		AMMO H16.5 490x370 = B			
SMD-PPS = SMDI				100 VDC = D0		100 pF = 0100				5.7x5.1x3.5 Size 2220 = QA		±5% = J		AMMO H18.5 340x340 = C			
FKP 02 = FKPO				250 VDC = F0		150 pF = 0150				5.7x5.1x4.5 Size 2220 = QB		±2.5% = H		AMMO H18.5 490x370 = D			
MKS 02 = MKS0				400 VDC = G0		220 pF = 0220				7.2x6.1x3 Size 2824 = TA		±1% = E		REEL H16.5 360 = F			
FKS 2 = FKS2				450 VDC = H0		330 pF = 0330				7.2x6.1x5 Size 2824 = TB		...		REEL H16.5 500 = H			
FKP 2 = FKP2				520 VDC = H2		470 pF = 0470				10.2x7.6x5 Size 4030 = VA				REEL H18.5 360 = I			
FKS 3 = FKS3				600 VDC = I0		680 pF = 0680				12.7x10.2x6 Size 5040 = XA				REEL H18.5 500 = J			
FKP 3 = FKPO				630 VDC = J0		1000 pF = 1100				15.3x13.7x7 Size 6054 = YA				ROLL H16.5 = N			
MKS 2 = MKS2				700 VDC = K0		1500 pF = 1150				2.5x7x4.6 PCM 2.5 = 0B				ROLL H18.5 = O			
MKP 2 = MKP2				800 VDC = L0		2200 pF = 1220				3x7.5x4.6 PCM 2.5 = 0C				BLISTER W12 180 = P			
MKS 4 = MKS4				850 VDC = M0		3300 pF = 1330				2.5x6.5x7.2 PCM 5 = 1A				BLISTER W12 330 = Q			
MKP 4C = MKPC				900 VDC = N0		4700 pF = 1470				3x7.5x7.2 PCM 5 = 1B				BLISTER W16 330 = R			
MKP 4 = MKP4				1000 VDC = O1		6800 pF = 1680				2.5x7x10 PCM 7.5 = 2A				BLISTER W24 330 = T			
MKP 10 = MKP1				1100 VDC = P0		0.01 μF = 2100				3x8.5x10 PCM 7.5 = 2B				Bulk/TPS Standard = S			
FKP 1 = FKPO				1200 VDC = Q0		0.022 μF = 2220				3x9x13 PCM 10 = 3A				...			
MKP-X2 = MKX2				1250 VDC = R0		0.047 μF = 2470				4x9x13 PCM 10 = 3C							
MKP-X1 R = MKX1				1500 VDC = S0		0.1 μF = 3100				5x11x18 PCM 15 = 4B							
MKP-Y2 = MKY2				1600 VDC = T0		0.22 μF = 3220				6x12.5x18 PCM 15 = 4C							
MP 3-X2 = MPX2				2000 VDC = U0		0.47 μF = 3470				5x14x26.5 PCM 22.5 = 5A							
MP 3-X1 = MPX1				2500 VDC = V0		1 μF = 4100				6x15x26.5 PCM 22.5 = 5B							
MP 3-Y2 = MPY2				3000 VDC = W0		2.2 μF = 4220				9x19x31.5 PCM 27.5 = 6A							
MP 3R-Y2 = MPRY				4000 VDC = X0		4.7 μF = 4470				11x21x31.5 PCM 27.5 = 6B							
MKP 4F = MKPF				6000 VDC = Y0		10 μF = 5100				9x19x41.5 PCM 37.5 = 7A							
Snubber MKP = SNMP				250 VAC = 0V		22 μF = 5220				11x22x41.5 PCM 37.5 = 7B							
Snubber FKP = SNFP				275 VAC = 1W		47 μF = 5470				19x31x56 PCM 48.5 = 8D							
GTO MKP = GTOM				300 VAC = 2W		100 μF = 6100				25x45x57 PCM 52.5 = 9D							
DC-LINK MKP 3 = DCP3				305 VAC = AV		220 μF = 6220				...							
DC-LINK MKP 4 = DCP4				350 VAC = BV		1000 μF = 7100											
DC-LINK MKP 4S = DCP5				440 VAC = 4W		1500 μF = 7150											
DC-LINK MKP 5 = DCP5				500 VAC = 5W		...											
DC-LINK MKP 6 = DCP6				...													
DC-LINK HC = DCHC																	
DC-LINK HY = DCHY																	

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А