




Solid-Electrolyte TANTALEX® Capacitors, Hermetically Sealed, Axial-Lead, CECC Approved

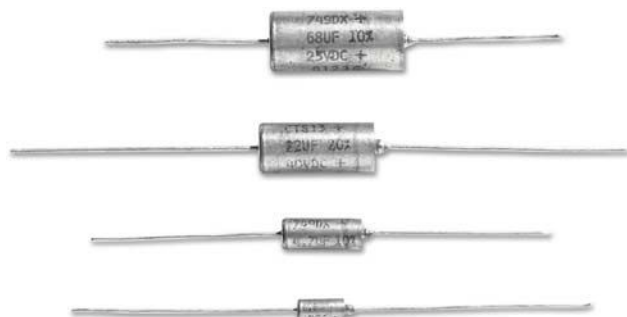

FEATURES

- Terminations: Tin/lead (SnPb), 100 % tin (RoHS compliant)
- Hermetically sealed metal case with plastic film insulation
- Extended capacitance range (type 749DX)
- High operational stability with both time and temperature
- Low leakage current
- Low dissipation factor
- Compliant to RoHS Directive 2011/65/EU



RoHS*
COMPLIANT

Note

* Pb containing terminations are not RoHS compliant, exemptions may apply

APPLICATIONS

Performance and reliability has been proven in a wide range of applications such as: filtering, by-pass, coupling, energy storage, timing circuits.

PERFORMANCE CHARACTERISTICS

Operating Temperature:

- 55 °C to + 85 °C (types CTS13)

- 55 °C to + 125 °C (types CTS1, 749DX)

SPECIFICATIONS

CECC

30201-001

30201-002 CTS1

30201-005 CTS13

30201-029 749DX

BS

749DX 9073-N001 749DX

ORDERING INFORMATION

CTS13 TYPE	105 CAPACITANCE	X0 CAPACITANCE TOLERANCE	040 DC VOLTAGE RATING AT + 85 °C	A CASE CODE	2 STYLE NUMBER	P PACKAGING	E3 RoHS COMPLIANT
Identifies the basic capacitor design CTS1 = CECC 30201-002 CTS13 = CECC 30201-005 749DX = CECC 30201-001/ CECC 30201-029	Expressed in picofarads. First two digits are significant. Third digit is the number of zeros following.	X0 = ± 20 % X9 = ± 10 % X5 = ± 5 % * * Special order	Expressed in volts. Where necessary, zeros precede the voltage rating to complete the 3 digit block 6R3 = 6.3 V	See Ratings and Case Codes table.	0 = Bare Case 2 = Plastic-film insulation	See Tape and Reel Packaging	E3 = 100 % tin termination (RoHS compliant) Blank = SnPb termination

DIMENSIONS in inches [millimeters]

CASE CODE	$L_1 \pm 0.031$ [0.79]	J max.	D max.	LEAD DIAMETER + 10 %, - 0.05
A	0.286 [7.26]	0.402 [10.2]	0.141 [3.6]	0.020 [0.5]
B	0.474 [12.04]	0.590 [15.0]	0.192 [4.9]	0.020 [0.5]
C	0.686 [17.42]	0.807 [20.5]	0.295 [7.5]	0.025 [0.6]
D	0.786 [19.96]	0.945 [24.0]	0.364 [9.1]	0.025 [0.6]

**RATINGS AND CASE CODES - TYPE CTS1**

C _R (μF)	RATED VOLTAGE U _R (+ 85 °C)						
	6.3 V	10 V	16 V	25 V	40 V	50 V	63 V
	CATEGORY VOLTAGE U _C (+ 125 °C)						
	4 V	6.3 V	10 V	13 V	25 V	33 V	40 V
0.10							A
0.12							A
0.15							A
0.18							A
0.22							A
0.27						A	A
0.33						A	A
0.39						A	A
0.47					A	A	A
0.56					A	A	A
0.68					A	A	A
0.82					A	A	B
1.0					A	A	B
1.2					A	B	B
1.5				A	B	B	B
1.8			A		B	B	B
2.2			A		B	B	B
2.7			A		B	B	B
3.3			A		B	B	B
3.9		A			B	B	B
4.7		A			B	B	C
5.6	A				B	C	C
6.8	A				B	C	C
8.2				B	C	C	C
10				B	C	C	C
12			B		C	C	D
15			B		C	C	D
18			B		C	C	D
22			B		C	D	
27		B		C	D		
33		B		C	D		
39	B		C		D		
47	B		C		D		
56	B		C	D			
68			C	D			
82		C	D				
100		C	D				
120	C		D				
150	C		D				
180		D					
220		D					
270	D						
330	D						

Note

- Preferred ratings are in bold characters.
Non-preferred ratings are available only with a capacitance tolerance of ± 10 % or ± 5 % (special order).

**RATINGS AND CASE CODES - TYPE CTS13**

C_R (μF)	RATED VOLTAGE U_R (+ 85 °C)							
	6.3 V	10 V	16 V	20 V	25 V	40 V	50 V	63 V
0.10								A
0.12								A
0.15								A
0.18								A
0.22								A
0.27							A	A
0.33							A	A
0.39							A	A
0.47						A	A	A
0.56						A	A	A
0.68						A	A	A
0.82						A	A	B
1.0						A	A	B
1.2					A	A	B	B
1.5					A	B	B	B
1.8				A		B	B	B
2.2				A		B	B	B
2.7			A			B	B	B
3.3			A			B	B	B
3.9		A				B	B	B
4.7		A				B	B	C
5.6	A					B	C	C
6.8	A					B	C	C
8.2					B	C	C	C
10					B	C	C	C
12				B		C	C	D
15				B		C	C	D
18			B			C	C	D
22			B			C	D	
27		B			C	D		
33		B			C	D		
39	B			C		D		
47	B			C		D		
56	B		C		D			
68			C		D			
82		C		D				
100		C		D				
120	C		D					
150	C		D					
180		D						
220		D						
270	D							
330	D							

Note

- Preferred ratings are in bold characters.
Non-preferred ratings are available only with a capacitance tolerance of $\pm 10\%$ or $\pm 5\%$ (special order).

**RATINGS AND CASE CODES - TYPE 749DX**

C _R (μ F)	RATED VOLTAGE U _R (+ 85 °C)								
	6.3 V	10 V	16 V	20 V	25 V	35 V	40 V	50 V	63 V
	CATEGORY VOLTAGE U _C (+ 125 °C)								
	4 V	6.3 V	10 V	13 V	16 V	23 V	25 V	33 V	40 V
0.068									
0.10						A	A		A
0.12						A	A		A
0.15						A	A		A
0.18						A	A		A
0.22						A	A		A
0.27						A	A		A
0.33						A	A		A
0.39						A	A		A
0.47						A	A		A
0.56						A	A		A
0.68						A	A		A
0.82						A	A	A	B
1.0						A	A	A	B
1.2					A	B	B	B	B
1.5					A	B	B	B	B
1.8				A		B	B	B	B
2.2				A		B	B	B	B
2.7			A			B	B	B	B
3.3			A			B	B	B	B
3.9		A				B	B	B	B
4.7		A				B	B	B	C
5.6	A					B	B	C	C
6.8	A					B	B	C	C
8.2					B	C	C	C	C
10					B	C	C	C	C
12				B		C	C	C	D
15				B		C	C	C	D
18			B			C	C	C	D
22			B			C	C	D	
27		B			C	D	D		
33		B			C	D	D		
39		B		C		D	D		
47	B			C		D			
56	B		C		D	D			
68			C		D				
82		C		D					
100		C		D					
120		C	D						
150	C		D						
180	C	D							
220		D							
270	D								
330	D								

Note

- Preferred ratings are in bold characters.
Non-preferred ratings are available only with a capacitance tolerance of $\pm 10\%$ or $\pm 5\%$ (special order).



STANDARD RATINGS/EXTENDED RATINGS - CTS1					
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. IMPEDANCE AT + 25 °C 100 kHz (Ω)
6.3 V_{DC} AT + 85 °C; 4 V_{DC} AT 125 °C					
5.6	A	CTS1565(1)6R3A(2)(3)	1.0	6	10
6.8	A	CTS1685(1)6R3A(2)(3)	1.0	6	10
39	B	CTS1396(1)6R3B(2)(3)	2.3	6	5
47	B	CTS1476(1)6R3B(2)(3)	2.8	6	5
56	B	CTS1566(1)6R3B(2)(3)	3.4	6	5
120	C	CTS1127(1)6R3C(2)(3)	7.2	6	2
150	C	CTS1157(1)6R3C(2)(3)	9.0	6	2
270	D	CTS1277(1)6R3D(2)(3)	16.2	6	1
330	D	CTS1337(1)6R3D(2)(3)	19.8	8	1
10 V_{DC} AT + 85 °C; 6.3 V_{DC} AT 125 °C					
3.9	A	CTS1395(1)010A(2)(3)	1.0	6	10
4.7	A	CTS1475(1)010A(2)(3)	1.0	6	10
27	B	CTS1276(1)010B(2)(3)	2.7	6	5
33	B	CTS1336(1)010B(2)(3)	3.3	6	5
82	C	CTS1826(1)010C(2)(3)	8.2	6	2
100	C	CTS1107(1)010C(2)(3)	10.0	6	2
180	D	CTS1187(1)010D(2)(3)	18.0	6	1
220	D	CTS1227(1)010D(2)(3)	22.0	8	1
16 V_{DC} AT + 85 °C; 10 V_{DC} AT + 125 °C					
1.8	A	CTS1185(1)016A(2)(3)	1.0	6	10
2.2	A	CTS1225(1)016A(2)(3)	1.0	6	10
2.7	A	CTS1275(1)016A(2)(3)	1.0	6	10
3.3	A	CTS1335(1)016A(2)(3)	1.0	6	10
12	B	CTS1126(1)016B(2)(3)	1.9	6	5
15	B	CTS1156(1)016B(2)(3)	2.4	6	5
18	B	CTS1186(1)016B(2)(3)	2.9	6	5
22	B	CTS1226(1)016B(2)(3)	3.5	6	5
39	C	CTS1396(1)016C(2)(3)	6.2	6	2
47	C	CTS1476(1)016C(2)(3)	7.5	6	2
56	C	CTS1566(1)016C(2)(3)	9.0	6	2
68	C	CTS1686(1)016C(2)(3)	10.9	6	2
82	D	CTS1826(1)016D(2)(3)	13.1	6	1
100	D	CTS1107(1)016D(2)(3)	16.0	6	1
120	D	CTS1127(1)016D(2)(3)	19.2	8	1
150	D	CTS1157(1)016D(2)(3)	24.0	8	1
25 V_{DC} AT + 85 °C; 16 V_{DC} AT + 125 °C					
1.5	A	CTS1155(1)025A(2)(3)	1.0	6	10
8.2	B	CTS1825(1)025B(2)(3)	2.1	6	5
10	B	CTS1106(1)025B(2)(3)	2.5	6	5
27	C	CTS1276(1)025C(2)(3)	6.8	6	2
33	C	CTS1336(1)025C(2)(3)	8.3	6	2
56	D	CTS1566(1)025D(2)(3)	14.0	6	1
68	D	CTS1686(1)025D(2)(3)	17.0	6	1

Note

- Part number definitions:
 - Capacitance tolerance code: X5, X9, X0
 - Style number: 0 or 2
 - Packaging code



STANDARD RATINGS/EXTENDED RATINGS - CTS1					
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. IMPEDANCE AT + 25 °C 100 kHz (Ω)
40 V _{DC} AT + 85 °C; 25 V _{DC} AT + 125 °C					
0.47	A	CTS1474(1)040A(2)(3)	1.0	6	10
0.56	A	CTS1564(1)040A(2)(3)	1.0	6	10
0.68	A	CTS1684(1)040A(2)(3)	1.0	6	10
0.82	A	CTS1824(1)040A(2)(3)	1.0	6	10
1.0	A	CTS1105(1)040A(2)(3)	1.0	6	10
1.2	A	CTS1125(1)040A(2)(3)	1.0	6	10
1.5	B	CTS1155(1)040B(2)(3)	1.0	6	5
1.8	B	CTS1185(1)040B(2)(3)	1.0	6	5
2.2	B	CTS1225(1)040B(2)(3)	1.0	6	5
2.7	B	CTS1275(1)040B(2)(3)	1.1	6	5
3.3	B	CTS1335(1)040B(2)(3)	1.3	6	5
3.9	B	CTS1395(1)040B(2)(3)	1.6	6	5
4.7	B	CTS1475(1)040B(2)(3)	1.9	6	5
5.6	B	CTS1565(1)040B(2)(3)	2.2	6	5
6.8	B	CTS1685(1)040B(2)(3)	2.7	6	5
8.2	C	CTS1825(1)040C(2)(3)	3.3	6	2
10	C	CTS1106(1)040C(2)(3)	4.0	6	2
12	C	CTS1126(1)040C(2)(3)	4.8	6	2
15	C	CTS1156(1)040C(2)(3)	6.0	6	2
18	C	CTS1186(1)040C(2)(3)	7.2	6	2
22	C	CTS1226(1)040C(2)(3)	8.8	6	2
27	D	CTS1276(1)040D(2)(3)	10.8	6	1
33	D	CTS1336(1)040D(2)(3)	13.2	6	1
39	D	CTS1396(1)040D(2)(3)	15.6	6	1
47	D	CTS1476(1)040D(2)(3)	18.8	6	1
50 V _{DC} AT + 85 °C; 33 V _{DC} AT + 125 °C					
0.27	A	CTS1274(1)050A(2)(3)	1.0	6	10
0.33	A	CTS1334(1)050A(2)(3)	1.0	6	10
0.39	A	CTS1394(1)050A(2)(3)	1.0	6	10
0.47	A	CTS1474(1)050A(2)(3)	1.0	6	10
0.56	A	CTS1564(1)050A(2)(3)	1.0	6	10
0.68	A	CTS1684(1)050A(2)(3)	1.0	6	10
0.82	A	CTS1824(1)050A(2)(3)	1.0	6	10
1.0	A	CTS1105(1)050A(2)(3)	1.0	6	10
1.2	B	CTS1125(1)050B(2)(3)	1.0	6	5
1.5	B	CTS1155(1)050B(2)(3)	1.0	6	5
1.8	B	CTS1185(1)050B(2)(3)	1.0	6	5
2.2	B	CTS1225(1)050B(2)(3)	1.1	6	5
2.7	B	CTS1275(1)050B(2)(3)	1.4	6	5
3.3	B	CTS1335(1)050B(2)(3)	1.7	6	5
3.9	B	CTS1395(1)050B(2)(3)	2.0	6	5

Note

- Part number definitions:
 - Capacitance tolerance code: X5, X9, X0
 - Style number: 0 or 2
 - Packaging code



STANDARD RATINGS/EXTENDED RATINGS - CTS1					
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. IMPEDANCE AT + 25 °C 100 kHz (Ω)
50 V _{DC} AT + 85 °C; 33 V _{DC} AT + 125 °C					
4.7	B	CTS1475(1)050B(2)(3)	2.4	6	5
5.6	C	CTS1565(1)050C(2)(3)	2.8	6	2
6.8	C	CTS1685(1)050C(2)(3)	3.4	6	2
8.2	C	CTS1825(1)050C(2)(3)	4.1	6	2
10	C	CTS1106(1)050C(2)(3)	5.0	6	2
12	C	CTS1126(1)050C(2)(3)	6.0	6	2
15	C	CTS1156(1)050C(2)(3)	7.5	6	2
18	C	CTS1186(1)050C(2)(3)	9.0	6	2
22	D	CTS1226(1)050D(2)(3)	11.0	6	1
63 V _{DC} AT + 85 °C; 40 V _{DC} AT + 125 °C					
0.10	A	CTS1104(1)063A(2)(3)	1.0	6	10
0.12	A	CTS1124(1)063A(2)(3)	1.0	6	10
0.15	A	CTS1154(1)063A(2)(3)	1.0	6	10
0.18	A	CTS1184(1)063A(2)(3)	1.0	6	10
0.22	A	CTS1224(1)063A(2)(3)	1.0	6	10
0.27	A	CTS1274(1)063A(2)(3)	1.0	6	10
0.33	A	CTS1334(1)063A(2)(3)	1.0	6	10
0.39	A	CTS1394(1)063A(2)(3)	1.0	6	10
0.47	A	CTS1474(1)063A(2)(3)	1.0	6	10
0.56	A	CTS1564(1)063A(2)(3)	1.0	6	10
0.68	A	CTS1684(1)063A(2)(3)	1.0	6	10
0.82	B	CTS1824(1)063B(2)(3)	1.0	6	5
1.0	B	CTS1105(1)063B(2)(3)	1.0	6	5
1.2	B	CTS1125(1)063B(2)(3)	1.0	6	5
1.5	B	CTS1155(1)063B(2)(3)	1.0	6	5
1.8	B	CTS1185(1)063B(2)(3)	1.1	6	5
2.2	B	CTS1225(1)063B(2)(3)	1.4	6	5
2.7	B	CTS1275(1)063B(2)(3)	1.7	6	5
3.3	B	CTS1335(1)063B(2)(3)	2.1	6	5
3.9	B	CTS1395(1)063B(2)(3)	2.5	6	5
4.7	C	CTS1475(1)063C(2)(3)	3.0	6	2
5.6	C	CTS1565(1)063C(2)(3)	3.5	6	2
6.8	C	CTS1685(1)063C(2)(3)	4.3	6	2
8.2	C	CTS1825(1)063C(2)(3)	5.2	6	2
10	C	CTS1106(1)063C(2)(3)	6.3	6	2
12	D	CTS1126(1)063D(2)(3)	7.6	6	1
15	D	CTS1156(1)063D(2)(3)	9.5	6	1
18	D	CTS1186(1)063D(2)(3)	11.3	6	1

Note

- Part number definitions:
 - Capacitance tolerance code: X5, X9, X0
 - Style number: 0 or 2
 - Packaging code



STANDARD RATINGS/EXTENDED RATINGS - CTS13					
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. IMPEDANCE AT + 25 °C 100 kHz (Ω)
6.3 V_{DC} AT + 85 °C					
5.6	A	CTS13565(1)6R3A(2)(3)	1.0	6	10
6.8	A	CTS13685(1)6R3A(2)(3)	1.0	6	10
39	B	CTS13396(1)6R3B(2)(3)	2.3	6	5
47	B	CTS13476(1)6R3B(2)(3)	2.8	6	5
56	B	CTS13566(1)6R3B(2)(3)	3.4	6	5
120	C	CTS13127(1)6R3C(2)(3)	7.2	6	2
150	C	CTS13157(1)6R3C(2)(3)	9.0	6	2
270	D	CTS13277(1)6R3D(2)(3)	16.2	6	1
330	D	CTS13337(1)6R3D(2)(3)	19.8	8	1
10 V_{DC} AT + 85 °C					
3.9	A	CTS13395(1)010A(2)(3)	1.0	6	10
4.7	A	CTS13475(1)010A(2)(3)	1.0	6	10
27	B	CTS13276(1)010B(2)(3)	2.7	6	5
33	B	CTS13336(1)010B(2)(3)	3.3	6	5
82	C	CTS13826(1)010C(2)(3)	8.2	6	2
100	C	CTS13107(1)010C(2)(3)	10.0	6	2
180	D	CTS13187(1)010D(2)(3)	18.0	6	1
220	D	CTS13227(1)010D(2)(3)	22.0	8	1
16 V_{DC} AT + 85 °C					
2.7	A	CTS13275(1)016A(2)(3)	1.0	6	10
3.3	A	CTS13335(1)016A(2)(3)	1.0	6	10
18	B	CTS13186(1)016B(2)(3)	2.9	6	5
22	B	CTS13226(1)016B(2)(3)	3.5	6	5
56	C	CTS13566(1)016C(2)(3)	9.0	6	2
68	C	CTS13686(1)016C(2)(3)	10.9	6	2
120	D	CTS13127(1)016D(2)(3)	19.2	8	1
150	D	CTS13157(1)016D(2)(3)	24.0	8	1
20 V_{DC} AT + 85 °C					
1.8	A	CTS13185(1)020A(2)(3)	1.0	6	10
2.2	A	CTS13225(1)020A(2)(3)	1.0	6	10
12	B	CTS13126(1)020B(2)(3)	2.4	6	5
15	B	CTS13156(1)020B(2)(3)	3.0	6	5
39	C	CTS13396(1)020C(2)(3)	7.8	6	2
47	C	CTS13476(1)020C(2)(3)	9.4	6	2
82	D	CTS13826(1)020D(2)(3)	16.4	6	1
100	D	CTS13107(1)020D(2)(3)	20.0	8	1
25 V_{DC} AT + 85 °C					
1.2	A	CTS13125(1)025A(2)(3)	1.0	6	10
1.5	A	CTS13155(1)025A(2)(3)	1.0	6	10
8.2	B	CTS13825(1)025B(2)(3)	2.1	6	5
10	B	CTS13106(1)025B(2)(3)	2.5	6	5
27	C	CTS13276(1)025C(2)(3)	6.8	6	2
33	C	CTS13336(1)025C(2)(3)	8.3	6	2
56	D	CTS13566(1)025D(2)(3)	14.0	6	1
68	D	CTS13686(1)025D(2)(3)	17.0	6	1

Note

- Part number definitions:
 - Capacitance tolerance code: X5, X9, X0
 - Style number: 0 or 2
 - Packaging code



STANDARD RATINGS/EXTENDED RATINGS - CTS13					
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. IMPEDANCE AT + 25 °C 100 kHz (Ω)
40 V _{DC} AT + 85 °C					
0.47	A	CTS13474(1)040A(2)(3)	1.0	6	10
0.56	A	CTS13564(1)040A(2)(3)	1.0	6	10
0.68	A	CTS13684(1)040A(2)(3)	1.0	6	10
0.82	A	CTS13824(1)040A(2)(3)	1.0	6	10
1.0	A	CTS13105(1)040A(2)(3)	1.0	6	10
1.2	A	CTS13125(1)040A(2)(3)	1.0	6	10
1.5	B	CTS13155(1)040B(2)(3)	1.0	6	5
1.8	B	CTS13185(1)040B(2)(3)	1.0	6	5
2.2	B	CTS13225(1)040B(2)(3)	1.0	6	5
2.7	B	CTS13275(1)040B(2)(3)	1.1	6	5
3.3	B	CTS13335(1)040B(2)(3)	1.3	6	5
3.9	B	CTS13395(1)040B(2)(3)	1.6	6	5
4.7	B	CTS13475(1)040B(2)(3)	1.9	6	5
5.6	B	CTS13565(1)040B(2)(3)	2.2	6	5
6.8	B	CTS13685(1)040B(2)(3)	2.7	6	5
8.2	C	CTS13825(1)040C(2)(3)	3.3	6	2
10	C	CTS13106(1)040C(2)(3)	4.0	6	2
12	C	CTS13126(1)040C(2)(3)	4.8	6	2
15	C	CTS13156(1)040C(2)(3)	6.0	6	2
18	C	CTS13186(1)040C(2)(3)	7.2	6	2
22	C	CTS13226(1)040C(2)(3)	8.8	6	2
27	D	CTS13276(1)040D(2)(3)	10.8	6	1
33	D	CTS13336(1)040D(2)(3)	13.2	6	1
39	D	CTS13396(1)040D(2)(3)	15.6	6	1
47	D	CTS13476(1)040D(2)(3)	18.8	6	1
50 V _{DC} AT + 85 °C					
0.27	A	CTS13274(1)050A(2)(3)	1.0	6	10
0.33	A	CTS13334(1)050A(2)(3)	1.0	6	10
0.39	A	CTS13394(1)050A(2)(3)	1.0	6	10
0.47	A	CTS13474(1)050A(2)(3)	1.0	6	10
0.56	A	CTS13564(1)050A(2)(3)	1.0	6	10
0.68	A	CTS13684(1)050A(2)(3)	1.0	6	10
0.82	A	CTS13824(1)050A(2)(3)	1.0	6	10
1.0	A	CTS13105(1)050A(2)(3)	1.0	6	10
1.2	B	CTS13125(1)050B(2)(3)	1.0	6	5
1.5	B	CTS13155(1)050B(2)(3)	1.0	6	5
1.8	B	CTS13185(1)050B(2)(3)	1.0	6	5
2.2	B	CTS13225(1)050B(2)(3)	1.1	6	5
2.7	B	CTS13275(1)050B(2)(3)	1.4	6	5
3.3	B	CTS13335(1)050B(2)(3)	1.7	6	5
3.9	B	CTS13395(1)050B(2)(3)	2.0	6	5

Note

- Part number definitions:
 - Capacitance tolerance code: X5, X9, X0
 - Style number: 0 or 2
 - Packaging code

**STANDARD RATINGS/EXTENDED RATINGS - CTS13**

CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. IMPEDANCE AT + 25 °C 100 kHz (Ω)
50 V_{DC} AT + 85 °C					
4.7	B	CTS13475(1)050B(2)(3)	2.4	6	5
5.6	C	CTS13565(1)050C(2)(3)	2.8	6	2
6.8	C	CTS13685(1)050C(2)(3)	3.4	6	2
8.2	C	CTS13825(1)050C(2)(3)	4.1	6	2
10	C	CTS13106(1)050C(2)(3)	5.0	6	2
12	C	CTS13126(1)050C(2)(3)	6.0	6	2
15	C	CTS13156(1)050C(2)(3)	7.5	6	2
18	C	CTS13186(1)050C(2)(3)	9.0	6	2
22	D	CTS13226(1)050D(2)(3)	11.0	6	1
63 V_{DC} AT + 85 °C					
0.10	A	CTS13104(1)063A(2)(3)	1.0	6	10
0.12	A	CTS13124(1)063A(2)(3)	1.0	6	10
0.15	A	CTS13154(1)063A(2)(3)	1.0	6	10
0.18	A	CTS13184(1)063A(2)(3)	1.0	6	10
0.22	A	CTS13224(1)063A(2)(3)	1.0	6	10
0.27	A	CTS13274(1)063A(2)(3)	1.0	6	10
0.33	A	CTS13334(1)063A(2)(3)	1.0	6	10
0.39	A	CTS13394(1)063A(2)(3)	1.0	6	10
0.47	A	CTS13474(1)063A(2)(3)	1.0	6	10
0.56	A	CTS13564(1)063A(2)(3)	1.0	6	10
0.68	A	CTS13684(1)063A(2)(3)	1.0	6	10
0.82	B	CTS13824(1)063B(2)(3)	1.0	6	5
1.0	B	CTS13105(1)063B(2)(3)	1.0	6	5
1.2	B	CTS13125(1)063B(2)(3)	1.0	6	5
1.5	B	CTS13155(1)063B(2)(3)	1.0	6	5
1.8	B	CTS13185(1)063B(2)(3)	1.1	6	5
2.2	B	CTS13225(1)063B(2)(3)	1.4	6	5
2.7	B	CTS13275(1)063B(2)(3)	1.7	6	5
3.3	B	CTS13335(1)063B(2)(3)	2.1	6	5
3.9	B	CTS13395(1)063B(2)(3)	2.5	6	5
4.7	C	CTS13475(1)063C(2)(3)	3.0	6	2
5.6	C	CTS13565(1)063C(2)(3)	3.5	6	2
6.8	C	CTS13685(1)063C(2)(3)	4.3	6	2
8.2	C	CTS13825(1)063C(2)(3)	5.2	6	2
10	C	CTS13106(1)063C(2)(3)	6.3	6	2
12	D	CTS13126(1)063D(2)(3)	7.6	6	1
15	D	CTS13156(1)063D(2)(3)	9.5	6	1
18	D	CTS13186(1)063D(2)(3)	11.3	6	1

Note

- Part number definitions:
 - Capacitance tolerance code: X5, X9, X0
 - Style number: 0 or 2
 - Packaging code



STANDARD RATINGS/EXTENDED RATINGS - 749DX					
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. IMPEDANCE AT + 25 °C 100 kHz (Ω)
6.3 V _{DC} AT + 85 °C; 4 V _{DC} AT 125 °C					
5.6	A	749DX565(1)6R3A(2)(3)	1.0	6	10
6.8	A	749DX685(1)6R3A(2)(3)	1.0	6	10
47	B	749DX476(1)6R3B(2)(3)	2.8	6	5
56	B	749DX566(1)6R3B(2)(3)	3.4	6	5
150	C	749DX157(1)6R3C(2)(3)	9.0	8	2
180	C	749DX187(1)6R3C(2)(3)	10.8	8	2
270	D	749DX277(1)6R3D(2)(3)	16.2	8	1
330	D	749DX337(1)6R3D(2)(3)	19.8	8	1
10 V _{DC} AT + 85 °C; 6.3 V _{DC} AT 125 °C					
3.9	A	749DX395(1)010A(2)(3)	1.0	6	10
4.7	A	749DX475(1)010A(2)(3)	1.0	6	10
27	B	749DX276(1)010B(2)(3)	2.7	6	5
33	B	749DX336(1)010B(2)(3)	3.3	6	5
39	B	749DX396(1)010B(2)(3)	3.9	6	5
82	C	749DX826(1)010C(2)(3)	8.2	6	2
100	C	749DX107(1)010C(2)(3)	10.0	6	2
120	C	749DX127(1)010C(2)(3)	12.0	8	2
180	D	749DX187(1)010D(2)(3)	18.0	8	1
220	D	749DX227(1)010D(2)(3)	22.0	8	1
16 V _{DC} AT + 85 °C; 10 V _{DC} AT + 125 °C					
2.7	A	749DX275(1)016A(2)(3)	1.0	6	10
3.3	A	749DX335(1)016A(2)(3)	1.0	6	10
18	B	749DX186(1)016B(2)(3)	2.9	6	5
22	B	749DX226(1)016B(2)(3)	3.5	6	5
56	C	749DX566(1)016C(2)(3)	9.0	6	2
68	C	749DX686(1)016C(2)(3)	10.9	6	2
120	D	749DX127(1)016D(2)(3)	19.2	8	1
150	D	749DX157(1)016D(2)(3)	24.0	8	1
20 V _{DC} AT + 85 °C; 13 V _{DC} AT + 125 °C					
1.8	A	749DX185(1)020A(2)(3)	1.0	6	10
2.2	A	749DX225(1)020A(2)(3)	1.0	6	10
12	B	749DX126(1)020B(2)(3)	2.4	6	5
15	B	749DX156(1)020B(2)(3)	3.0	6	5
39	C	749DX396(1)020C(2)(3)	7.8	6	2
47	C	749DX476(1)020C(2)(3)	9.4	6	2
82	D	749DX826(1)020D(2)(3)	16.4	6	1
100	D	749DX107(1)020D(2)(3)	20.0	6	1
25 V _{DC} AT + 85 °C; 16 V _{DC} AT + 125 °C					
1.2	A	749DX125(1)025A(2)(3)	1.0	6	10
1.5	A	749DX155(1)025A(2)(3)	1.0	6	10
8.2	B	749DX825(1)025B(2)(3)	2.1	6	5

Note

- Part number definitions:
 - Capacitance tolerance code: X5, X9, X0
 - Style number: 0 or 2
 - Packaging code



STANDARD RATINGS/EXTENDED RATINGS - 749DX					
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. IMPEDANCE AT + 25 °C 100 kHz (Ω)
25 V _{DC} AT + 85 °C; 16 V _{DC} AT + 125 °C					
10	B	749DX106(1)025B(2)(3)	2.5	6	5
27	C	749DX276(1)025C(2)(3)	6.8	6	2
33	C	749DX336(1)025C(2)(3)	8.3	6	2
56	D	749DX566(1)025D(2)(3)	14.0	6	1
68	D	749DX686(1)025D(2)(3)	17.0	6	1
35 V _{DC} AT + 85 °C; 23 V _{DC} AT + 125 °C					
0.10	A	749DX104(1)035A(2)(3)	1.0	6	10
0.12	A	749DX124(1)035A(2)(3)	1.0	6	10
0.15	A	749DX154(1)035A(2)(3)	1.0	6	10
0.18	A	749DX184(1)035A(2)(3)	1.0	6	10
0.22	A	749DX224(1)035A(2)(3)	1.0	6	10
0.27	A	749DX274(1)035A(2)(3)	1.0	6	10
0.33	A	749DX334(1)035A(2)(3)	1.0	6	10
0.39	A	749DX394(1)035A(2)(3)	1.0	6	10
0.47	A	749DX474(1)035A(2)(3)	1.0	6	10
0.56	A	749DX564(1)035A(2)(3)	1.0	6	10
0.68	A	749DX684(1)035A(2)(3)	1.0	6	10
0.82	A	749DX824(1)035A(2)(3)	1.0	6	10
1.0	A	749DX105(1)035A(2)(3)	1.0	6	10
1.2	B	749DX125(1)035B(2)(3)	1.0	6	5
1.5	B	749DX155(1)035B(2)(3)	1.0	6	5
1.8	B	749DX185(1)035B(2)(3)	1.0	6	5
2.2	B	749DX225(1)035B(2)(3)	1.0	6	5
2.7	B	749DX275(1)035B(2)(3)	1.0	6	5
3.3	B	749DX335(1)035B(2)(3)	1.2	6	5
3.9	B	749DX395(1)035B(2)(3)	1.4	6	5
4.7	B	749DX475(1)035B(2)(3)	1.6	6	5
5.6	B	749DX565(1)035B(2)(3)	2.0	6	5
6.8	B	749DX685(1)035B(2)(3)	2.4	6	5
8.2	C	749DX825(1)035C(2)(3)	2.9	6	2
10	C	749DX106(1)035C(2)(3)	3.5	6	2
12	C	749DX126(1)035C(2)(3)	4.2	6	2
15	C	749DX156(1)035C(2)(3)	5.3	6	2
18	C	749DX186(1)035C(2)(3)	6.3	6	2
22	C	749DX226(1)035C(2)(3)	7.7	6	2
27	D	749DX276(1)035D(2)(3)	9.5	6	1
33	D	749DX336(1)035D(2)(3)	11.6	6	1
39	D	749DX396(1)035D(2)(3)	13.7	6	1
47	D	749DX476(1)035D(2)(3)	16.5	6	1
56	D	749DX566(1)035D(2)(3)	19.6	6	1

Note

- Part number definitions:
 - Capacitance tolerance code: X5, X9, X0
 - Style number: 0 or 2
 - Packaging code



STANDARD RATINGS/EXTENDED RATINGS - 749DX					
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. IMPEDANCE AT + 25 °C 100 kHz (Ω)
40 V _{DC} AT + 85 °C; 25 V _{DC} AT + 125 °C					
0.10	A	749DX104(1)040A(2)(3)	1.0	6	10
0.12	A	749DX124(1)040A(2)(3)	1.0	6	10
0.15	A	749DX154(1)040A(2)(3)	1.0	6	10
0.18	A	749DX184(1)040A(2)(3)	1.0	6	10
0.22	A	749DX224(1)040A(2)(3)	1.0	6	10
0.27	A	749DX274(1)040A(2)(3)	1.0	6	10
0.33	A	749DX334(1)040A(2)(3)	1.0	6	10
0.39	A	749DX394(1)040A(2)(3)	1.0	6	10
0.47	A	749DX474(1)040A(2)(3)	1.0	6	10
0.56	A	749DX564(1)040A(2)(3)	1.0	6	10
0.68	A	749DX684(1)040A(2)(3)	1.0	6	10
0.82	A	749DX824(1)040A(2)(3)	1.0	6	10
1.0	A	749DX105(1)040A(2)(3)	1.0	6	10
1.2	B	749DX125(1)040B(2)(3)	1.0	6	5
1.5	B	749DX155(1)040B(2)(3)	1.0	6	5
1.8	B	749DX185(1)040B(2)(3)	1.0	6	5
2.2	B	749DX225(1)040B(2)(3)	1.0	6	5
2.7	B	749DX275(1)040B(2)(3)	1.1	6	5
3.3	B	749DX335(1)040B(2)(3)	1.3	6	5
3.9	B	749DX395(1)040B(2)(3)	1.6	6	5
4.7	B	749DX475(1)040B(2)(3)	1.9	6	5
5.6	B	749DX565(1)040B(2)(3)	2.2	6	5
6.8	B	749DX685(1)040B(2)(3)	2.7	6	5
8.2	C	749DX825(1)040C(2)(3)	3.3	6	2
10	C	749DX106(1)040C(2)(3)	4.0	6	2
12	C	749DX126(1)040C(2)(3)	4.8	6	2
15	C	749DX156(1)040C(2)(3)	6.0	6	2
18	C	749DX186(1)040C(2)(3)	7.2	6	2
22	C	749DX226(1)040C(2)(3)	8.8	6	2
27	D	749DX276(1)040D(2)(3)	10.8	6	1
33	D	749DX336(1)040D(2)(3)	13.2	6	1
39	D	749DX396(1)040D(2)(3)	15.6	6	1
50 V _{DC} AT + 85 °C; 33 V _{DC} AT + 125 °C					
0.82	A	749DX824(1)050A(2)(3)	1.0	6	10
1.0	A	749DX105(1)050A(2)(3)	1.0	6	10
1.2	B	749DX125(1)050B(2)(3)	1.0	6	5
1.5	B	749DX155(1)050B(2)(3)	1.0	6	5
1.8	B	749DX185(1)050B(2)(3)	1.0	6	5
2.2	B	749DX225(1)050B(2)(3)	1.1	6	5
2.7	B	749DX275(1)050B(2)(3)	1.4	6	5
3.3	B	749DX335(1)050B(2)(3)	1.7	6	5

Note

- Part number definitions:
 - Capacitance tolerance code: X5, X9, X0
 - Style number: 0 or 2
 - Packaging code







STANDARD RATINGS/EXTENDED RATINGS - 749DX					
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. IMPEDANCE AT + 25 °C 100 kHz (Ω)
50 V _{DC} AT + 85 °C; 33 V _{DC} AT + 125 °C					
3.9	B	749DX395(1)050B(2)(3)	2.0	6	5
4.7	B	749DX475(1)050B(2)(3)	2.4	6	5
5.6	C	749DX565(1)050C(2)(3)	2.8	6	2
6.8	C	749DX685(1)050C(2)(3)	3.4	6	2
8.2	C	749DX825(1)050C(2)(3)	4.1	6	2
10	C	749DX106(1)050C(2)(3)	5.0	6	2
12	C	749DX126(1)050C(2)(3)	6.0	6	2
15	C	749DX156(1)050C(2)(3)	7.5	6	2
18	C	749DX186(1)050C(2)(3)	9.0	6	2
22	D	749DX226(1)050D(2)(3)	11.0	6	1
63 V _{DC} AT + 85 °C; 40 V _{DC} AT + 125 °C					
0.10	A	749DX104(1)063A(2)(3)	1.0	6	10
0.12	A	749DX124(1)063A(2)(3)	1.0	6	10
0.15	A	749DX154(1)063A(2)(3)	1.0	6	10
0.18	A	749DX184(1)063A(2)(3)	1.0	6	10
0.22	A	749DX224(1)063A(2)(3)	1.0	6	10
0.27	A	749DX274(1)063A(2)(3)	1.0	6	10
0.33	A	749DX334(1)063A(2)(3)	1.0	6	10
0.39	A	749DX394(1)063A(2)(3)	1.0	6	10
0.47	A	749DX474(1)063A(2)(3)	1.0	6	10
0.56	A	749DX564(1)063A(2)(3)	1.0	6	10
0.68	A	749DX684(1)063A(2)(3)	1.0	6	10
0.82	B	749DX824(1)063B(2)(3)	1.0	6	5
1.0	B	749DX105(1)063B(2)(3)	1.0	6	5
1.2	B	749DX125(1)063B(2)(3)	1.0	6	5
1.5	B	749DX155(1)063B(2)(3)	1.0	6	5
1.8	B	749DX185(1)063B(2)(3)	1.1	6	5
2.2	B	749DX225(1)063B(2)(3)	1.4	6	5
2.7	B	749DX275(1)063B(2)(3)	1.7	6	5
3.3	B	749DX335(1)063B(2)(3)	2.1	6	5
3.9	B	749DX395(1)063B(2)(3)	2.5	6	5
4.7	C	749DX475(1)063C(2)(3)	3.0	6	2
5.6	C	749DX565(1)063C(2)(3)	3.5	6	2
6.8	C	749DX685(1)063C(2)(3)	4.3	6	2
8.2	C	749DX825(1)063C(2)(3)	5.2	6	2
10	C	749DX106(1)063C(2)(3)	6.3	6	2
12	D	749DX126(1)063D(2)(3)	7.6	6	1
15	D	749DX156(1)063D(2)(3)	9.5	6	1
18	D	749DX186(1)063D(2)(3)	11.3	6	1

Note

- Part number definitions:
 - Capacitance tolerance code: X5, X9, X0
 - Style number: 0 or 2
 - Packaging code



TYPICAL CURVES RIPPLE VOLTAGE AT + 25 °C

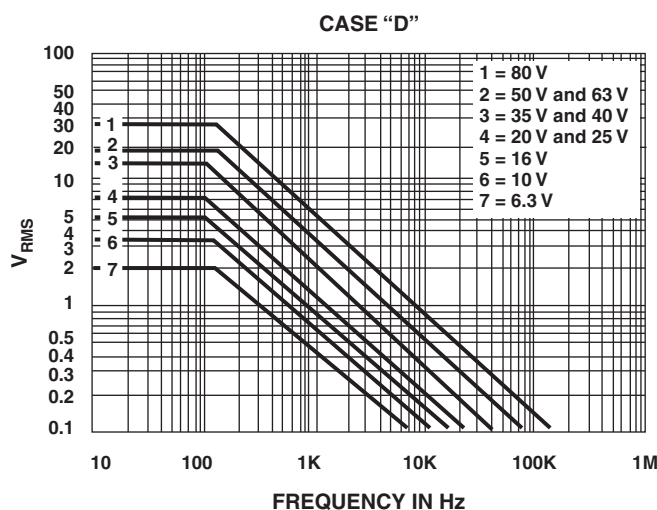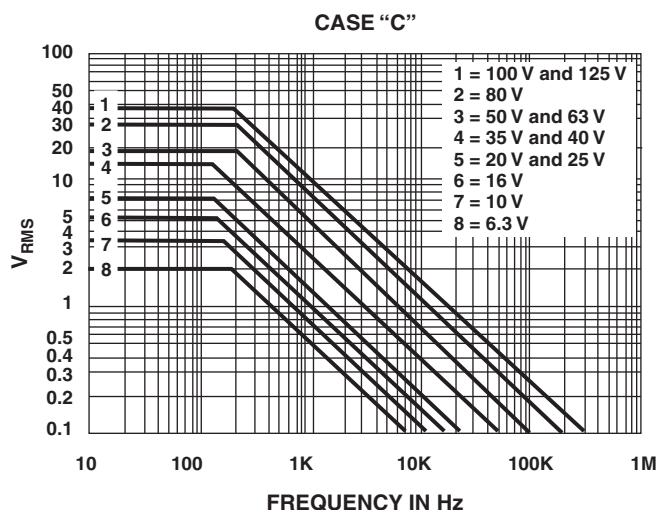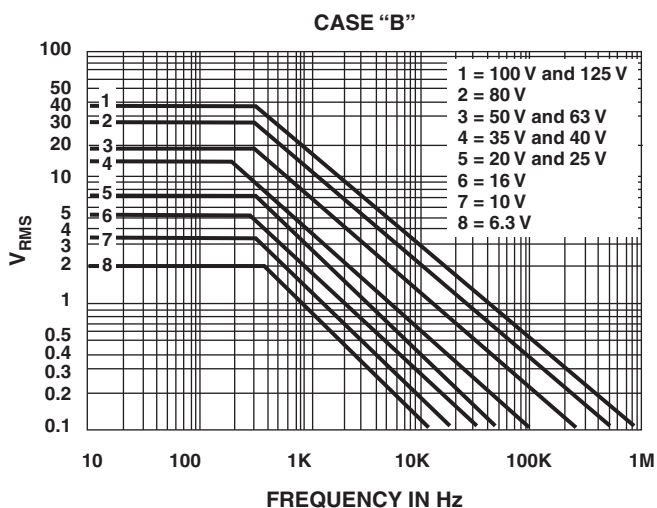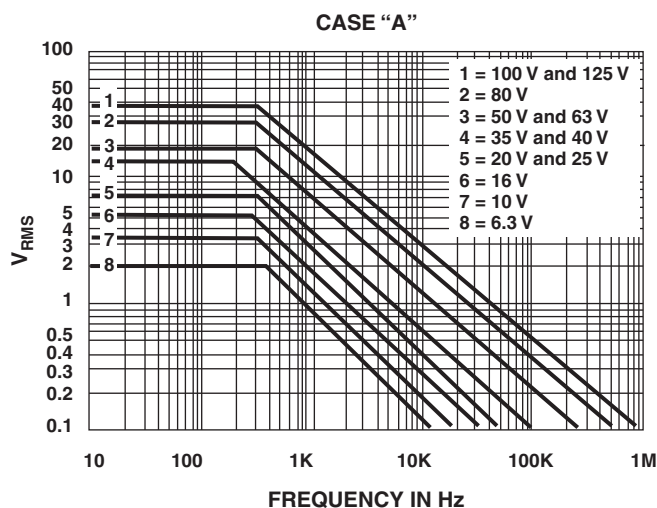

**PERFORMANCE CHARACTERISTICS****1. Operating temperature:**

- 55 °C to + 85 °C with rated DC voltage U_R applied,
+ 85 °C to + 125 °C with linear voltage derating
to category voltage U_C (only for types CTS1, 749DX).

2. Capacitance and tolerance:

Capacitance measured at 100 Hz and + 25 °C shall be
within the specified tolerance limits of the nominal rating.
Capacitance measurement shall be made by means of a
polarized capacitance bridge. The polarizing voltage shall
be of 2.2 V. The maximum voltage applied during
measurements shall be 1.0 V_{RMS} at 100 Hz and + 25 °C.

3. Reverse voltage:

These capacitors are capable of withstanding peak
voltage in the reverse direction equal to: 15 % of the rated
DC voltage at + 25 °C, 5 % of the rated DC voltage at
+ 85 °C.

4. Surge voltage:**Table 1**

PRODUCT TYPE	SURGE VOLTAGE AT + 85 °C	SURGE VOLTAGE AT + 125 °C
CTS13	1.30 U_R	-
749DX/CTS1	1.30 U_R	1.30 U_C

Capacitors shall withstand the surge voltage applied in
series with a 1000 W resistor, at the rate of 1.5 min on,
5.5 min off, for 1000 successive test cycles at + 85 °C or
at + 125 °C. After test, dissipation factor and leakage
current shall meet the initial requirements at + 25 °C (see
below), capacitance change shall not exceed ± 10 % of
initial value at + 25 °C.

5. Leakage current:

Rated voltage U_R shall be applied to capacitors during
five minutes with a resistor of 1000 W in series with
each capacitor, before making DC leakage current
measurements. The leakage current shall not exceed the
following limits:

Table 2

TEMPERATURE	CTS1/CTS13/749DX
+ 25 °C	0.01 $C_R \times U_R$ or 1 μA whichever is greater
+ 85 °C	0.1 $C_R \times U_R$ or 10 μA whichever is greater
+ 125 °C	0.125 $C_R \times U_R$ or 12.5 μA whichever is greater

6. Dissipation factor:

The dissipation factor, when measured at 100 Hz, shall
not exceed the values below:

Table 3

TEMP.	CTS1/CTS13		749DX	
	$C_R U_R \leq 1900$	$C_R U_R > 1900$	$C_R \leq 100$	$C_R > 100$
- 55 °C	9 %	11 %	8 %	10 %
+ 25 °C	6 %	8 %	6 %	8 %
+ 85 °C	9 %	11 %	-	-
+ 125 °C ⁽¹⁾	12 %	14 %	10 %	11 %

Note

⁽¹⁾ Not applicable for CTS13

7. Stability at low and high temperature:

Capacitance change with temperature shall not exceed
the limits of the following table, leakage current and
dissipation factor shall be within the limits specified in
Tables 2 and 3.

Table 4

TEMPERATURE	CTS1/CTS13/749DX
- 55 °C	- 10 %
+ 85 °C	+ 12 %
+ 125 °C ⁽¹⁾	+ 15 %

Note

⁽¹⁾ Not applicable for CTS13

8. Impedance:

The impedance measured at 100 kHz and 25 °C shall not
exceed the following values:

Table 5

CASE CODE	Z (W) ⁽¹⁾
A	10
B	5
C	2
D	1

Note

⁽¹⁾ Not applicable for $C_R \leq 0.68 \mu F$

9. Life test:

After 2000 h at + 85 °C with rated DC voltage applied,
or after 2000 h at + 125 °C with category DC voltage
applied (for types CTS1, 749DX only) capacitors shall
meet the requirements in Table 6.

Table 6

PRODUCT TYPE	CAPACITANCE CHANGE	DISSIPATION FACTOR	DC LEAKAGE CURRENT
CTS1 CTS13 749DX	Within ± 10 % of initial value at + 25 °C	Within initial requirement at + 25 °C	Within 125 % of initial requirements at + 25 °C

**PERFORMANCE CHARACTERISTICS (Continued)****10. Humidity test:**

After 56 days (1350 h) at + 40 °C, 90 % to 95 % of relative humidity (per IEC 68-2-3) with no voltage applied, capacitors shall meet the requirements in Table 7 below.

Table 7

CAPACITANCE CHANGE	Within ± 3 % of initial value
DC LEAKAGE CURRENT	Within initial requirement at + 25 °C - Table 2
DISSIPATION FACTOR	Within initial requirement at + 25 °C - Table 3

Table 8

CAPACITANCE CHANGE	Within ± 5 % of initial value at + 25 °C
DC LEAKAGE CURRENT	Within initial requirement at + 25 °C - Table 2
DISSIPATION FACTOR	Within initial requirement at + 25 °C - Table 3

Typical values of charge-discharge current (per above test conditions).

RATED VOLTAGE U_R (V)	CHARGE-DISCHARGE CURRENT (A)
6.3	13
10	20
16	32
25	50
40	80
50	100
63	126

11. Insulation test:

For capacitors with insulating sleeves, a DC voltage of 100 V shall be applied for one minute between the case of the capacitor and a metal "V" block in intimate contact with the insulating sleeve. The insulating resistance measured in these conditions shall be at least 100 MΩ.

12. Lead pull test:

Leads shall withstand the following test (IEC 68-2-2): Tensile stress of 5N (cases A and B) or 10N (cases C and D) for 10 s in any direction

One bend in each direction

Two consecutive rotations of 180°

GUIDE TO APPLICATION**1. AC ripple current:**

The maximum allowable ripple current shall be determined from the formula:

$$I_{RMS} = \sqrt{\frac{P}{R_{ESR}}}$$

where,

P = Power dissipation in W at + 25 °C as given below

R_{ESR} = The capacitor Equivalent Series Resistance at the specified frequency.

2. AC ripple voltage:

The maximum allowable ripple voltage shall be determined from the formula:

$$V_{RMS} = \sqrt{\frac{P}{R_{ESR}}} \times Z$$

where,

Z = The capacitor impedance at the specified frequency.

The calculations are summarized on the graphs in table "Typical Curves Ripple Voltage at + 25 °C" giving the maximum available ripple voltage as a function of frequency.

However, the sum of the peak AC voltage plus the DC voltage shall not exceed the rated DC voltage at + 85 °C of the capacitor. The sum of the negative peak AC voltage plus the DC voltage shall not allow a voltage reversal exceeding 15 % of the rated DC voltage.

3. AC ripple current or voltage derating factor:

If these capacitors are to be operated at temperatures above + 25 °C, the permissible RMS ripple current or voltage shall be calculated using the derating factors in the table below:

TEMPERATURE	DERATING FACTOR
+ 25 °C	1.0
+ 55 °C	0.8
+ 85 °C	0.6
+ 125 °C	0.4

4. Power dissipation:

Power dissipation will be affected by the heat sinking capability of the mounting surface. Non-sinusoidal ripple current may produce heating effects which differ from those shown in the following table. It is important that the equivalent I_{RMS} value be established when calculating permissible operating levels.


CASE CODE	POWER DISSIPATION AT + 25 °C (W)
A	0.115
B	0.145
C	0.185
D	0.225



TAPE AND REEL PACKAGING

MEETS IEC 286-1

$L_1 - L_2 = 1.5 \text{ mm max.}$
S = Component spacing (cumulative tolerance on 20 units = 4 mm)
b = Tape spacing
c = Overall length

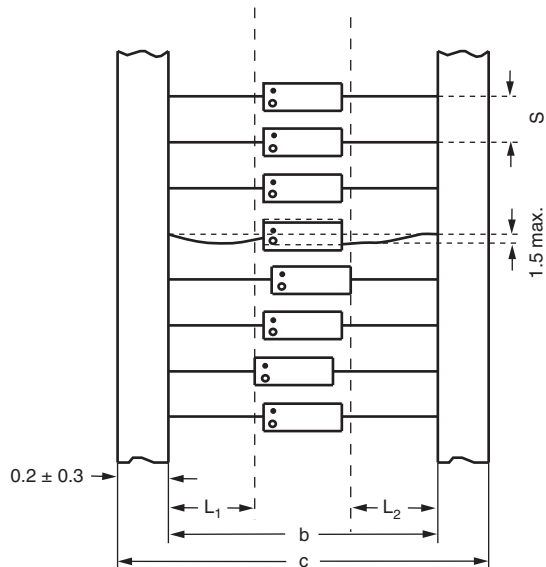

DIMENSIONS in millimeters

CASE SIZE	REEL AND AMMO S	REEL PACK					AMMO PACK			BULK
		OPTION P		OPTION R		QTY PER REEL	OPTION G		QTY PER BOX	QTY PER PACK
		B	C MAX.	B	C MAX.		B	C MAX.		
A	5.0 ± 0.3	63 ± 2	78	53 ± 2	68	1000	53 ± 2	68	500	100
B	5.0 ± 0.3	63 ± 2	78	53 ± 2	68	1000	53 ± 2	68	500	75
C	10.0 ± 0.3	63 ± 2	78	63 ± 2	78	500	53 ± 2	68	250	50
D	10.0 ± 0.3	63 ± 2	78	63 ± 2	78	500	53 ± 2	68	250	25
PACKAGING CODE		P		R			G			B

MARKING

Capacitors shall be marked with Sprague and/or the registered trademark 2 at vendor's option; the type number; rated capacitance and tolerance (with a letter code, if different from $\pm 20\%$, K = $\pm 10\%$; J = $\pm 5\%$); rated DC voltage at + 85 °C and the date code of manufacture.

Capacitors shall be marked on one end with a "plus" sign (+) to identify the positive terminal.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А