

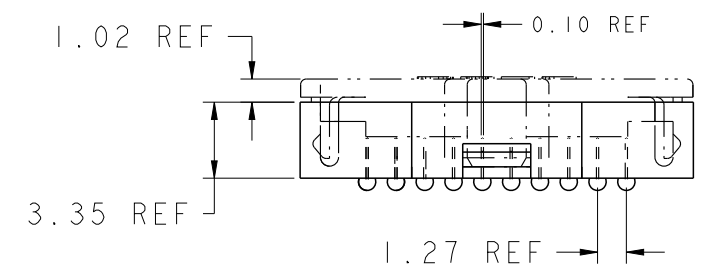
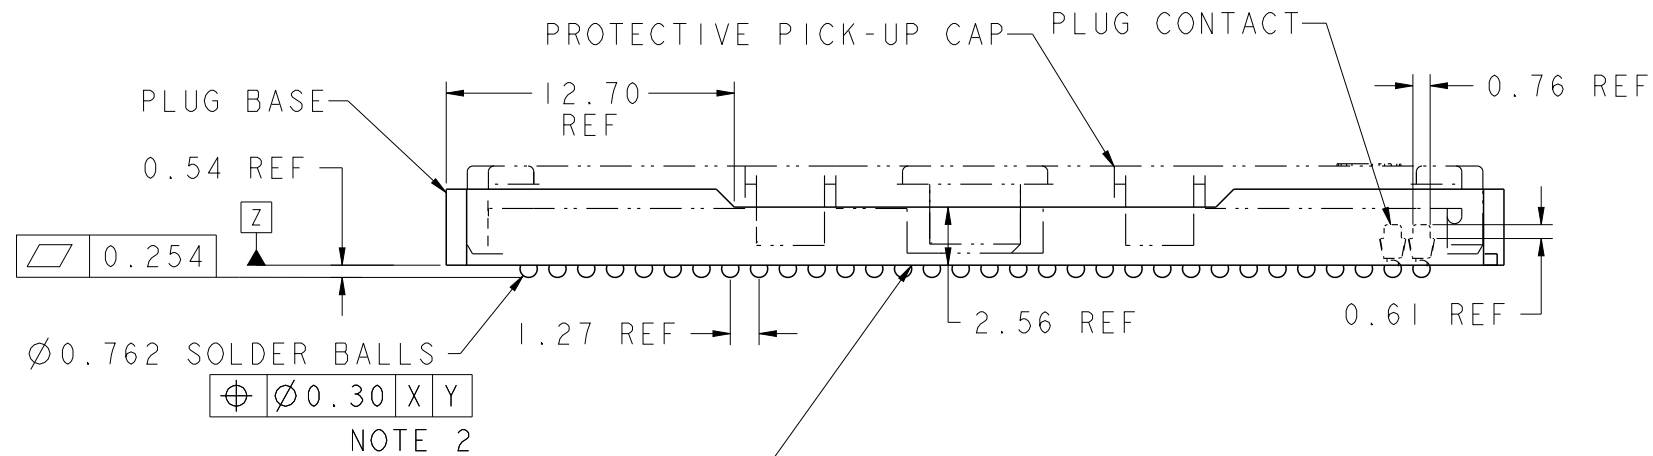
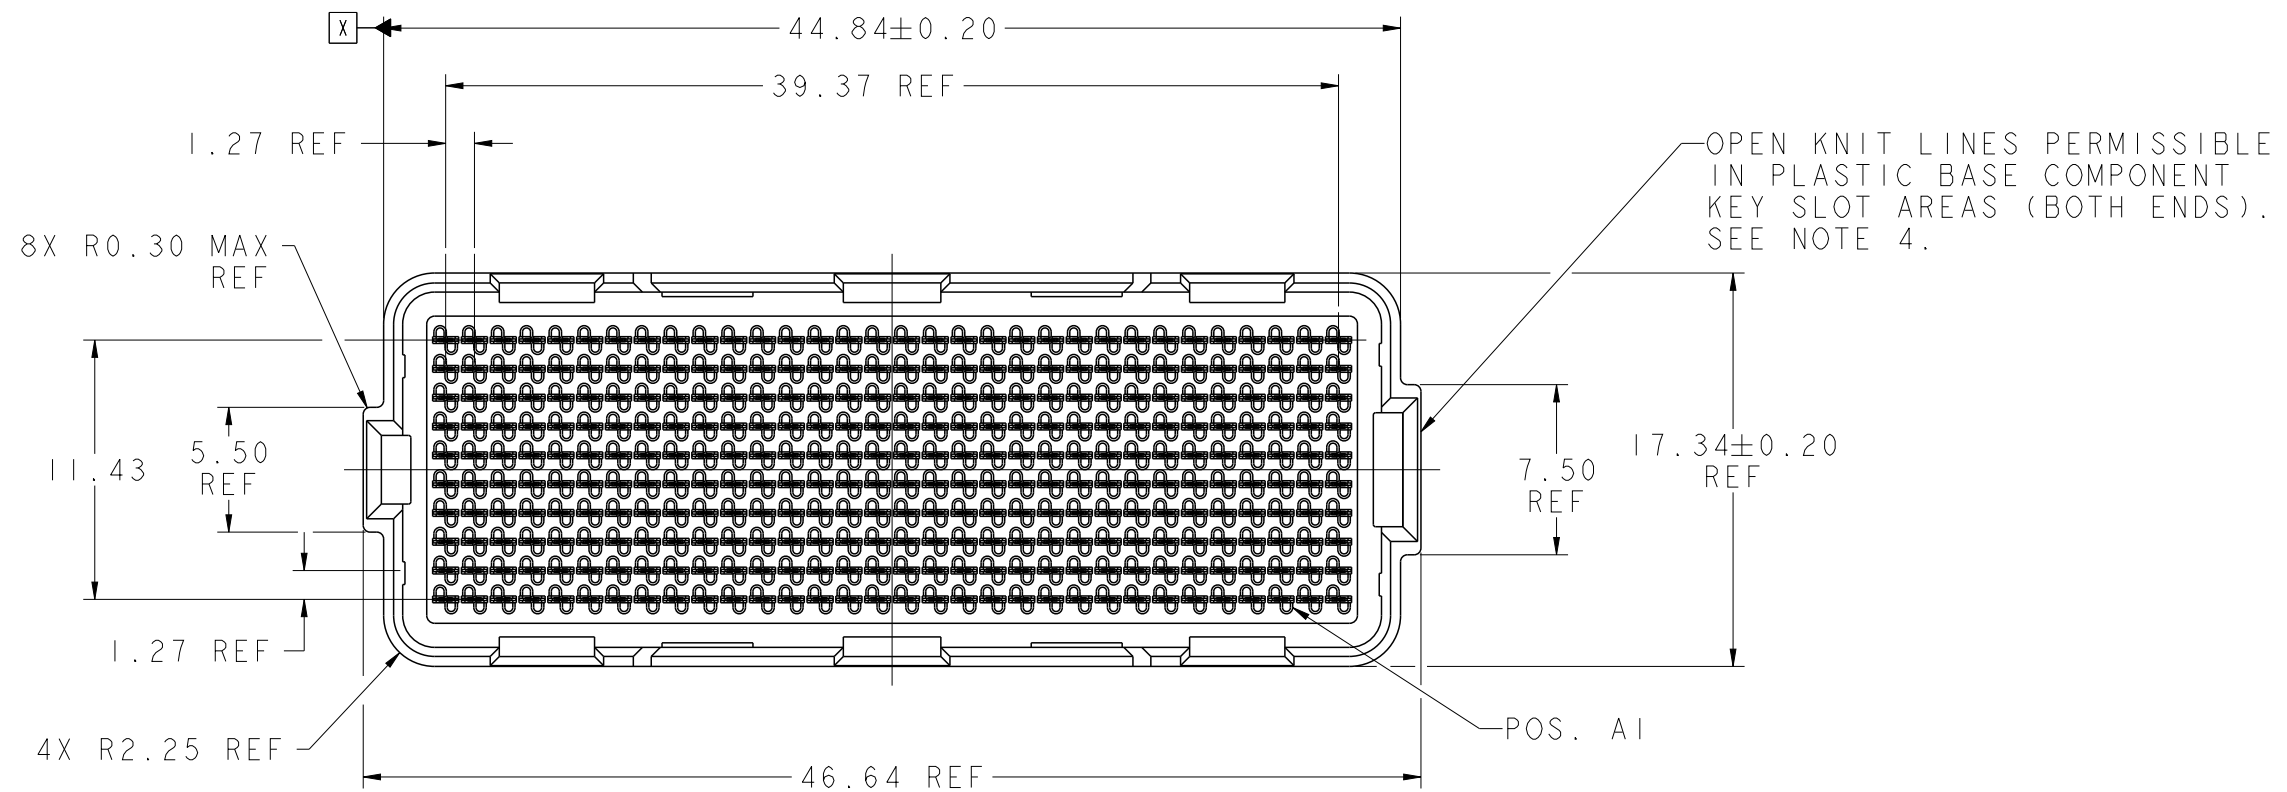


PRODUCT NUMBER
SEE SHEET 5




CONTINUOUS OPEN KNIT LINE CRACKS (TRAVERSING THE ENTIRE BODY LENGTH OF THE CONNECTOR) WHICH CAUSE CRITICAL-TO-FUNCTION DIMENSIONAL CHANGES THAT AFFECT THE CONNECTOR'S MECHANICAL ALIGNMENT FEATURES ARE NOT PERMISSIBLE. SEE NOTE 4.

spec ref -				dr Dave Horchler		2013/01/22		projection				size A3		scale 3:1	
tolerance std ASME Y14.5 - TOLERANCES UNLESS OTHERWISE SPECIFIED				eng M Srinivasan		2013/07/15						ecn no ELX-V-15184-1			
				chr -		-									
				appr R Marshall		2013/07/15						product family MEG-ARRAY			
surface ✓ ASME Y14.5		linear		0.X ±0.3				title 0mm PLUG ASSEMBLY 10 x 32 = 320 POSITIONS				dwg no 10123981		rev B	
				0.XX ±0.13											
				0.XXX ±0.051											
angular		0° ±0°		www.fci.com		cat. no.				Product - Customer Drw				sheet 1 of 5	




Copyright FCI.

PRODUCT NUMBER
SEE SHEET 5

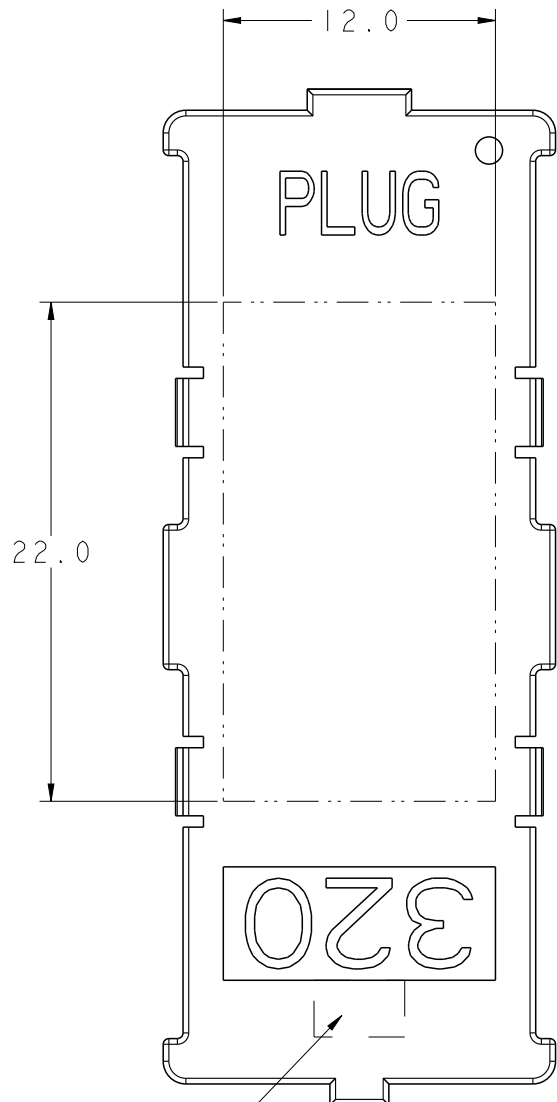


NOTE 6


FLAT AREA FOR
PICK-UP CAP

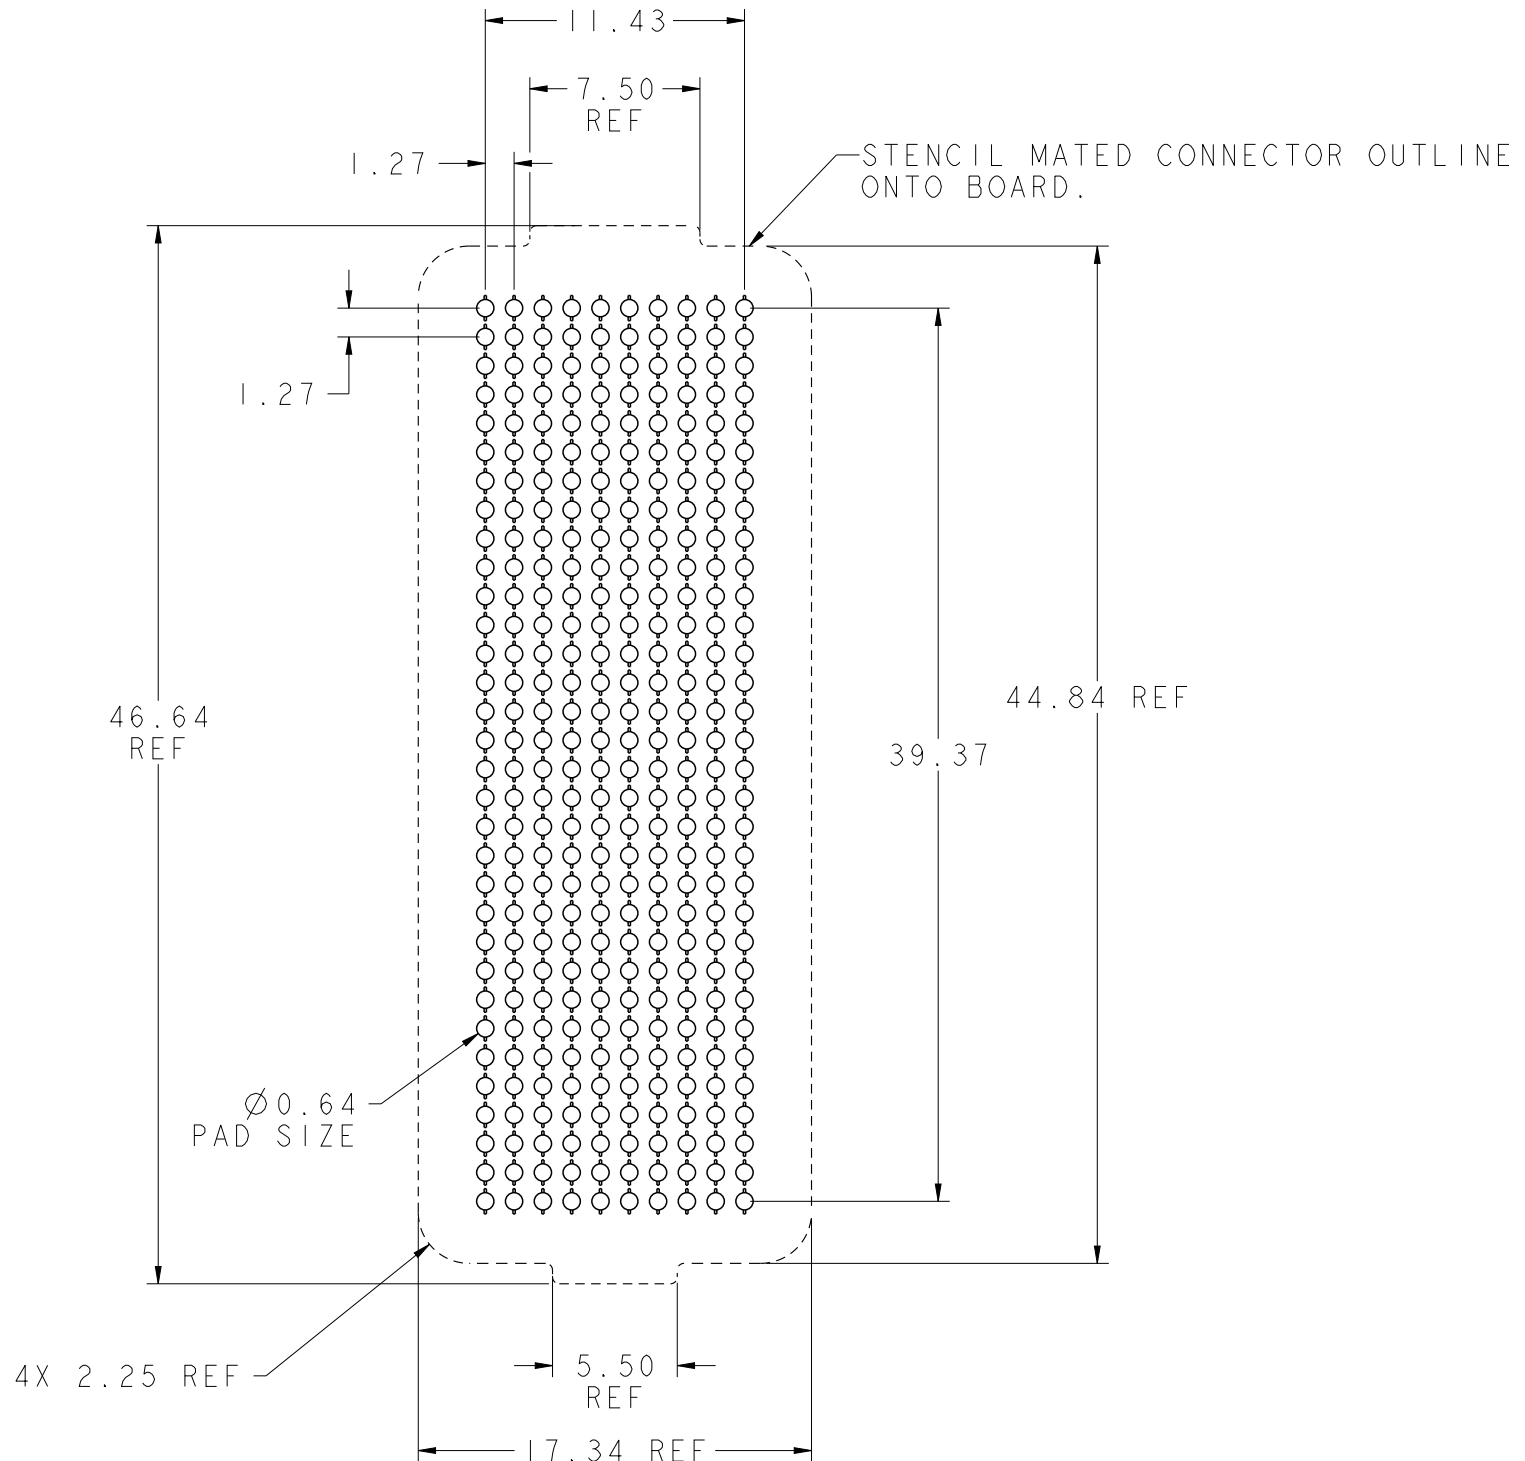

BOARD PATTERN

spec ref -				dr Dave Horchler		2013/01/22		projection 	mm 	size A3	scale 3:1
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng M Srinivasan		2013/07/15				ecn no ELX-V-15184-1	
				chr -		-					
				appr R Marshall		2013/07/15		product family MEG-ARRAY		rel level Released	
surface  ASME Y14.5	linear	0.X ±0.3			title 0mm PLUG ASSEMBLY 10 x 32 = 320 POSITIONS				dwg no 10123981	rev B	
		0.XX ±0.13									
		0.XXX ±0.051									
angular 0° ±0°		www.fci.com		cat. no.				Product - Customer Drw		sheet 2 of 5	

PRODUCT NUMBER
SEE SHEET 5

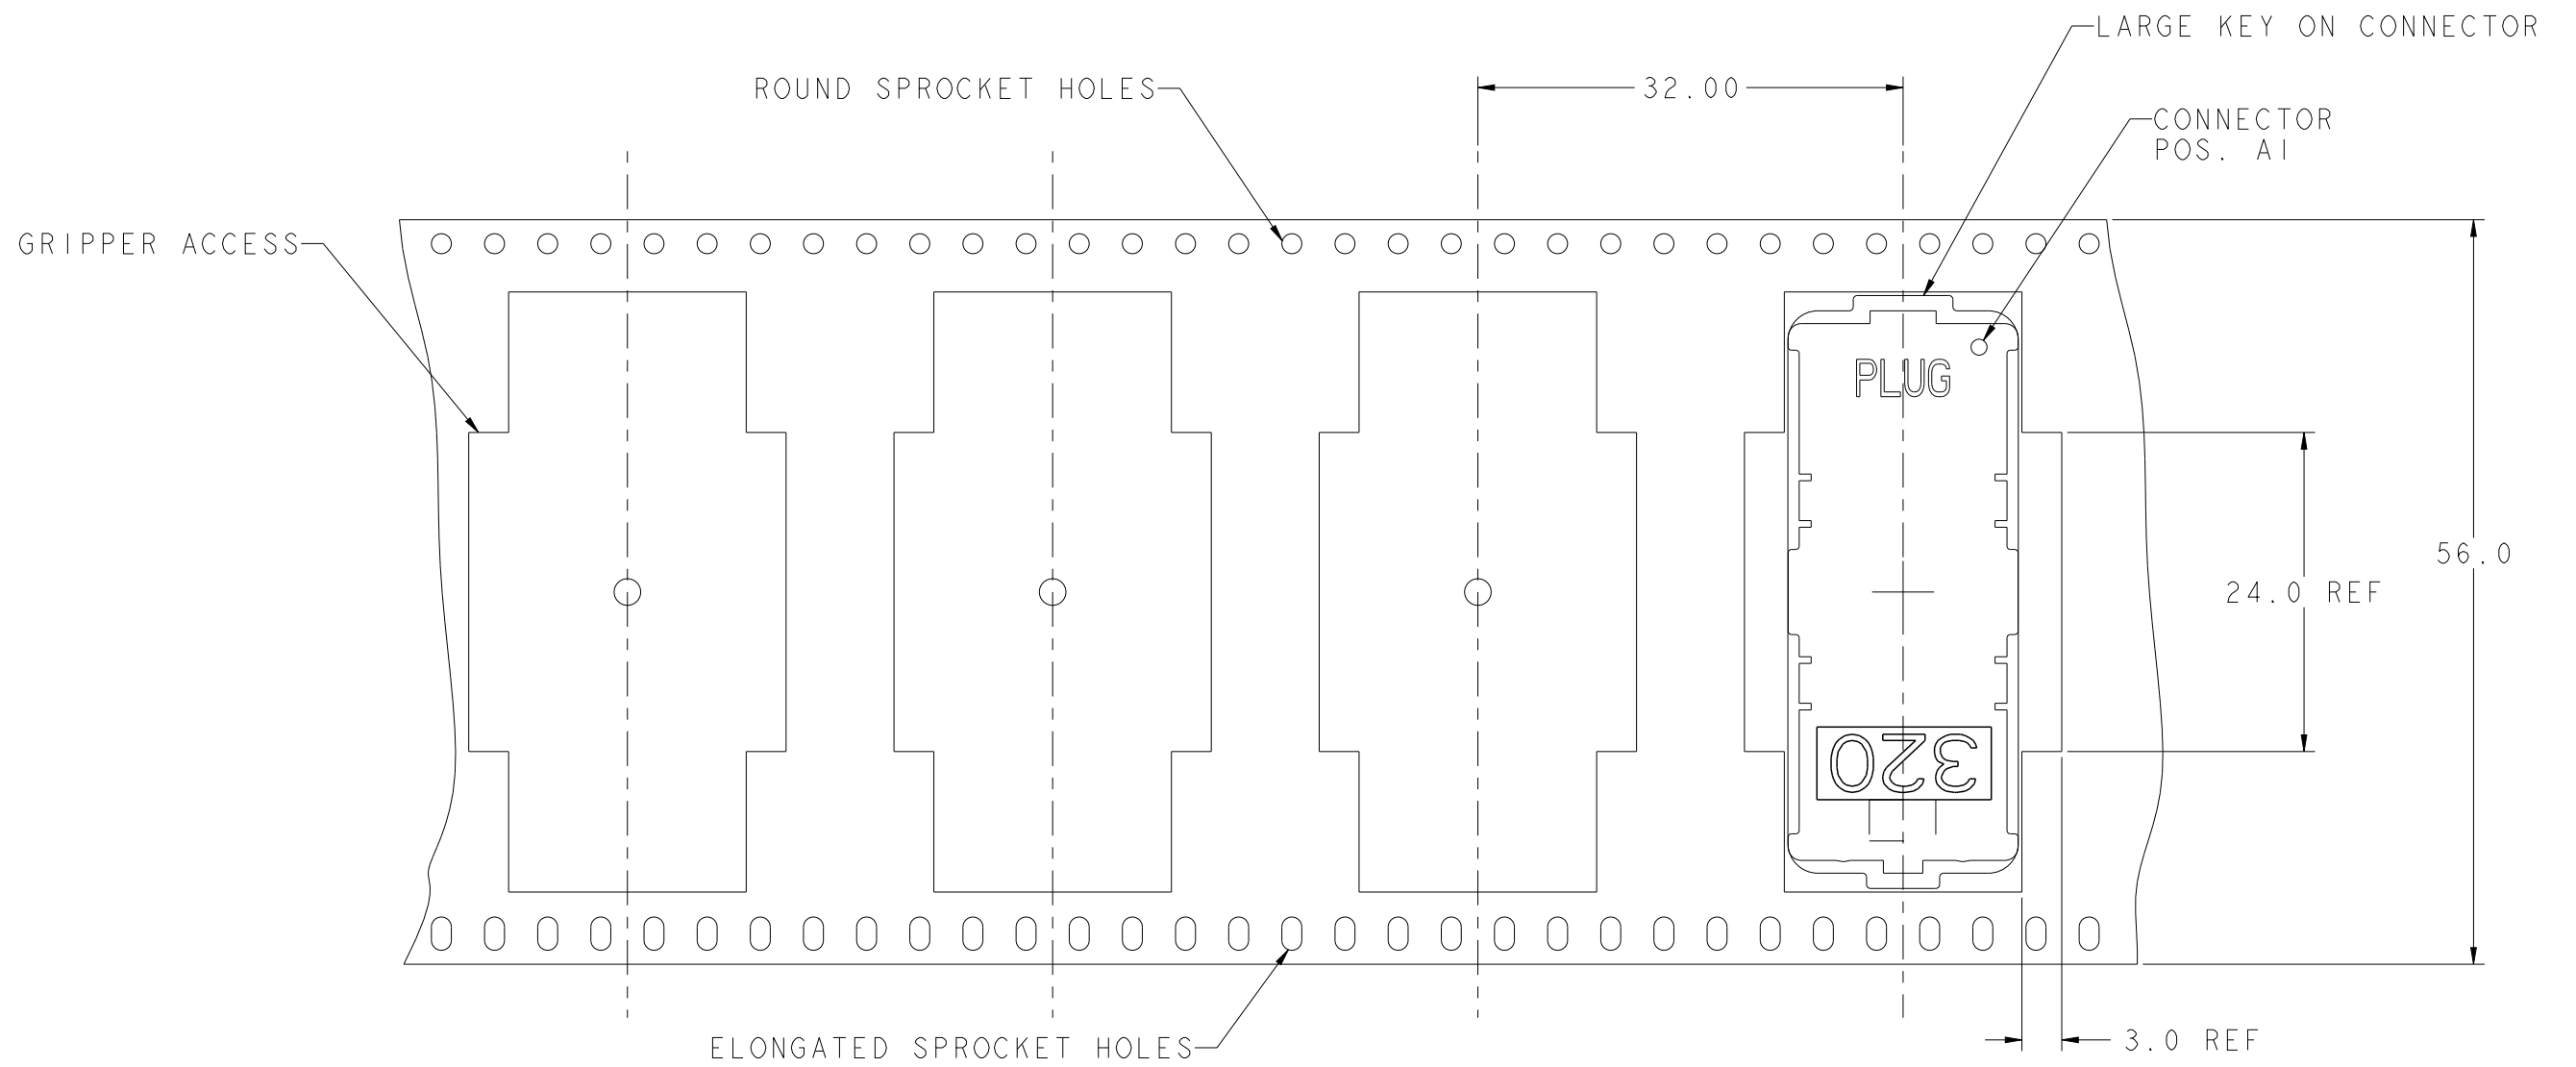

DIE - REEL DIRECTION


TAPE & REEL PACKAGING
PER EIA 481 - 3
SCALE NONE

spec ref -				dr	Dave Horchler	2013/01/22	projection 	mm 	size	A3	scale	3:1	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	M Srinivasan	2013/07/15			ecn no	ELX-V-15184-1			
ASME Y14.5				chr	-	-							
-				appr	R Marshall	2013/07/15	product family		MEG-ARRAY		rel level		Released
surface ✓	linear	0.X	±0.3		title 0mm PLUG ASSEMBLY 10 x 32 = 320 POSITIONS				dwg no	10123981		rev	B
		0.XX	±0.13										
		0.XXX	±0.051										
ASME Y14.5	angular	0°	±0°	www.fci.com	cat. no.			Product - Customer Drw			sheet 3 of 5		

PRODUCT NUMBER
SEE SHEET 5


PLUG ASSY
P/N 10123981-XXX

DIM "A" REF
MATED HEIGHT
AFTER REFLOW
SEE NOTE 3

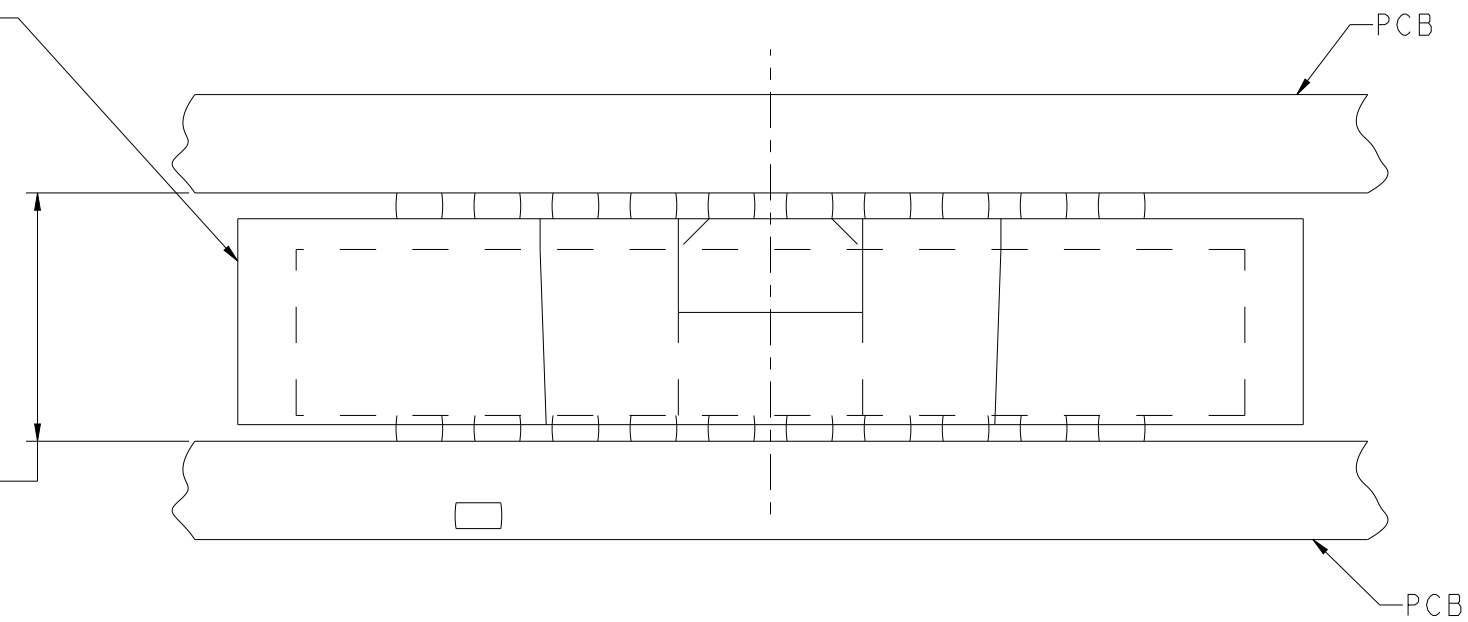

MATED HEIGHT AFTER REFLOW IS BASED ON Ø0.64mm PAD (METAL-DEFINED)
AND 0.13mm SOLDER PASTE STENCIL THICKNESS. SEE NOTE 3

END VIEW - MATED CONNECTORS
SCALE NONE

spec ref -				dr Dave Horchler		2013/01/22		projection				size A3		scale 3:1			
tolerance std ASME Y14.5 -				TOLERANCES UNLESS OTHERWISE SPECIFIED				eng M Srinivasan		2013/07/15						ecn no ELX-V-15184-1	
chr -		-						rel level Released									
appr R Marshall								2013/07/15		product family MEG-ARRAY							
surface ✓ ASME Y14.5		linear		0.X ±0.3				title 0mm PLUG ASSEMBLY 10 x 32 = 320 POSITIONS				dwg no 10123981		rev B			
				0.XX ±0.13													
				0.XXX ±0.051													
angular		0° ±0°		www.fci.com		cat. no.				Product - Customer Drw				sheet 4 of 5			



Copyright FCI.

A

B

C

D

PRODUCT NUMBER	PICK-UP CAP (NATURAL OR BLACK IN COLOR)	CONTACT PLATING AND THICKNESS	SOLDER BALL	NOTES
10123981-002	YES	15u" (.38um) Au	SnPb	
10123981-002LF	YES	15u" (.38um) Au	LEAD FREE	4 AND 5
10123981-092	YES	15u" (.38um) GXT	SnPb	
10123981-092LF	YES	15u" (.38um) GXT	LEAD FREE	4 AND 5
10123981-102	YES	30u" (.76um) Au	SnPb	
10123981-102LF	YES	30u" (.76um) Au	LEAD FREE	4 AND 5
10123981-192	YES	30u" (.76um) GXT	SnPb	
10123981-192LF	YES	30u" (.76um) GXT	LEAD FREE	4 AND 5
10123981-202	YES	50u" (1.27um) Au SPECIAL	SnPb	8
10123981-202LF	YES	50u" (1.27um) Au SPECIAL	LEAD FREE	4, 5 AND 8
10123981-292	YES	50u" (1.27um) GXT SPECIAL	SnPb	8
10123981-292LF	YES	50u" (1.27um) GXT SPECIAL	LEAD FREE	4, 5 AND 8
10123981-A02	YES	30u" (.76um) Au SPECIAL	SnPb	CUSTOMER SPECIAL
10123981-A02LF	YES	30u" (.76um) Au SPECIAL	LEAD FREE	CUSTOMER SPECIAL

NOTES:

- ① MATERIAL:
HOUSING: LCP-NATURAL
CONTACT: COPPER ALLOY
- PLATING:
CONTACT: 15μ" (0.38μm) GXT OVER Ni UNDERPLATE
SOLDER BALL: LEAD FREE
95.5Sn/4Ag/0.5Cu
- ② SOLDER BALLS WILL NOT HAVE PERFECT SPHERICAL SHAPES DUE TO REFLOW ATTACHMENT.
- ③ MATED HEIGHT EFFECTED BY CUSTOMER'S PCB PAD SIZE, PLATING, SOLDER REFLOW PROFILE, & SOLDER PASTE.
- ④ FOR PROPER APPLICATION FOLLOW FCI APPLICATION SPECIFICATION GS-20-033 LEAD FREE SOLDER BALLS WILL NOT SOLDER PROPERLY IN A LEADED SOLDER PROCESS DUE TO A HIGHER REFLOW TEMPERATURE. LEAD FREE PRODUCT IS THEREFORE NOT BACKWARDS COMPATIBLE WITH LEADED OR SOME SOLDERING APPLICATIONS. REFERENCE FCI APPLICATION SPECIFICATION.
- ⑤ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004 PRODUCT MEETING THIS DIRECTIVE IS IDENTIFIED IN THE LOT CODE NUMBER MARKED ON EACH PART BY HAVING AN "X" IN THE SEVENTH CHARACTER POSITION.
- ⑥ CURRENT COMPANY LOGO TO BE VISIBLE IN APPROXIMATE AREA SHOWN.
7. SEE PRODUCT SPEC GS-12-100 PER TEST AND PERFORMANCE INFORMATION.
- ⑧ PLATING FOR INDICATED -2XX SERIES NUMBERS MEET THE REQUIREMENTS OF GR-1217-CORE, CENTRAL OFFICE ENVIROMENT, (25 YEARS LIFE EXPECTANCY). THIS SERIES HAS SPECIAL CONTACT GEOMETRY.

spec ref -		dr Dave Horchler		2013/01/22		projection 	mm 	size A3	scale 3:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng M Srinivasan	2013/07/15		ecn no ELX-V-15184-1				
ASME Y14.5		chr -	-		rel level Released				
-		appr R Marshall		2013/07/15		product family MEG-ARRAY			
surface  ASME Y14.5	linear	0.X	±0.3		title 0mm PLUG ASSEMBLY 10 x 32 = 320 POSITIONS			dwg no 10123981	rev B
		0.XX	±0.13						
		0.XXX	±0.051						
	angular	0°	±0°	www.fci.com	cat. no.		Product - Customer Drw		sheet 5 of 5

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А