

# DF3A6.8FUT1

Preferred Device

## Zener Transient Voltage Suppressor

### Dual Common Anode Zeners for ESD Protection

These dual monolithic silicon zener diodes are designed for applications requiring transient overvoltage protection capability. They are intended for use in voltage and ESD sensitive equipment such as computers, printers, business machines, communication systems, medical equipment and other applications. Their dual junction common anode design protects two separate lines using only one package. These devices are ideal for situations where board space is at a premium.

#### Features

- Pb-Free Package is Available
- SC-70 Package Allows Two Separate Unidirectional Configurations
- Low Leakage < 1.0  $\mu$ A @ 5.0 V
- Breakdown Voltage: 6.4–7.2 V @ 5.0 mA
- ESD Protection Meeting: 16 kV Human Body Model  
30 kV Contact = IEC61000–4–2
- Peak Power: 24 W @ 1.0 ms (Unidirectional), per Figure 1
- Peak Power: 150 W @ 20  $\mu$ s (Unidirectional), per Figure 2

#### Mechanical Characteristics

- Void Free, Transfer-Molded, Thermosetting Plastic Case
- Corrosion Resistant Finish, Easily Solderable
- Package Designed for Optimal Automated Board Assembly
- Small Package Size for High Density Applications

#### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Steady State Power Dissipation Derate above 25°C (Note 1)	$P_D$	200 1.6	mW mW/°C
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	618	°C/W
Operating Junction and Storage Temperature Range	$T_J, T_{stg}$	- 55 to +150	°C
Peak Power Dissipation @ 1.0 ms (Note 2) @ $T_A = 25^\circ\text{C}$	$P_{PK}$	20	W
Peak Power Dissipation @ 20 $\mu$ s (Note 3) @ $T_A = 25^\circ\text{C}$	$P_{PK}$	150	W
ESD Discharge MIL STD 883C – Method 3015–6 IEC61000–4–2, Air Discharge IEC61000–4–2, Contact Discharge	$V_{PP}$	16 30 30	kV



Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

1. Mounted on FR-5 Board = 1.0 X 0.75 X 0.062 in.
2. Non-repetitive pulse per Figure 1.
3. Non-repetitive pulse per Figure 2.




ON Semiconductor®

<http://onsemi.com>



SC-70/SOT-323  
CASE 419  
STYLE 4

#### MARKING DIAGRAM



68 = Specific Device Code  
M = Date Code

#### ORDERING INFORMATION

Device	Package	Shipping†
DF3A6.8FUT1	SC-70	3000/Tape & Reel
DF3A6.8FUT1G	SC-70 (Pb-Free)	3000/Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

Preferred devices are recommended choices for future use and best overall value.


# DF3A6.8FUT1

## ELECTRICAL CHARACTERISTICS

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**UNIDIRECTIONAL** (Circuit tied to Pins 1 and 3 or 2 and 3)

Symbol	Parameter
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$
$Z_{ZT}$	Maximum Zener Impedance @ $I_{ZT}$
$Z_{ZK}$	Maximum Zener Impedance @ $I_{ZK}$

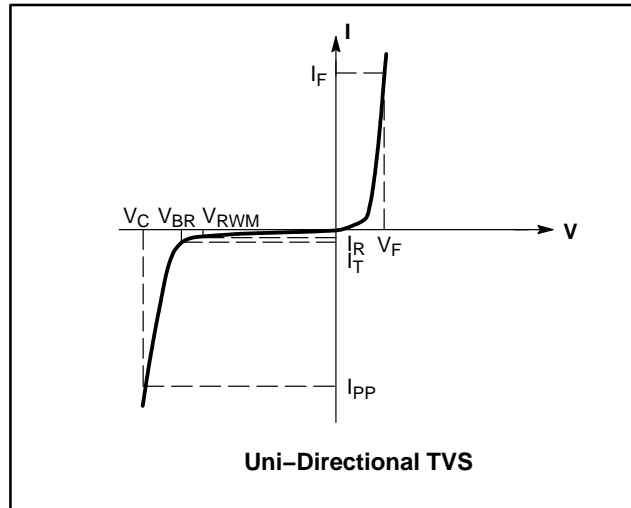

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**UNIDIRECTIONAL** (Circuit tied to Pins 1 and 3 or 2 and 3)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward Voltage	$V_F$	$I_F = 10 \text{ mA}$		0.8	0.9	V
Zener Voltage (Note 4)	$V_Z$	$I_{ZT} = 5 \text{ mA}$	6.4	6.8	7.2	V
Operating Resistance (Note 5)	$Z_{ZK}$	$I_{ZK} = 0.5 \text{ mA}$			200	$\Omega$
	$Z_{ZT}$	$I_{ZT} = 5 \text{ mA}$			50	$\Omega$
Reverse Current	$I_{R1}$	$V_{RWM} = 5 \text{ V}$			0.5	$\mu\text{A}$
Clamping Voltage	$V_C$	$I_{PP} = 2.0 \text{ A}$ (Figure 1)			9.6	V
		$I_{PP} = 9.37 \text{ A}$ (Figure 2)			16	V
ESD Protection	Human Body Model (HBM) Contact – IEC61000-4-2 Air Discharge				16	kV
					30	
					30	

4.  $V_Z$  measured at pulse test current  $I_{ZT}$  at an ambient temperature of  $25^\circ\text{C}$ .

5.  $Z_{ZT}$  and  $Z_{ZK}$  is measured by dividing the AC voltage drop across the device by the AC current supplied. AC frequency = 1.0 kHz.

# DF3A6.8FUT1

## TYPICAL CHARACTERISTICS

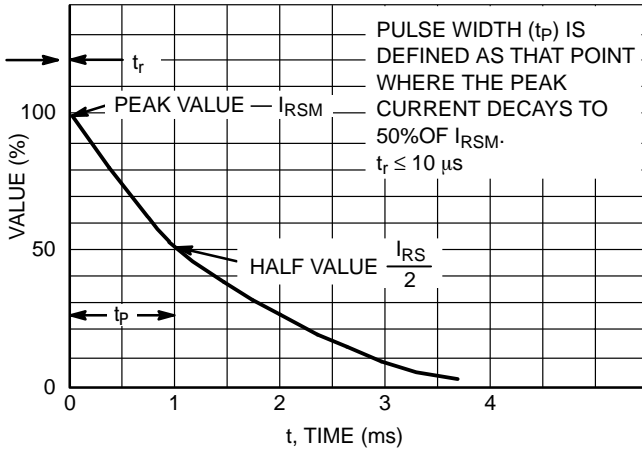


Figure 1. 10 × 1000 μs Pulse Waveform

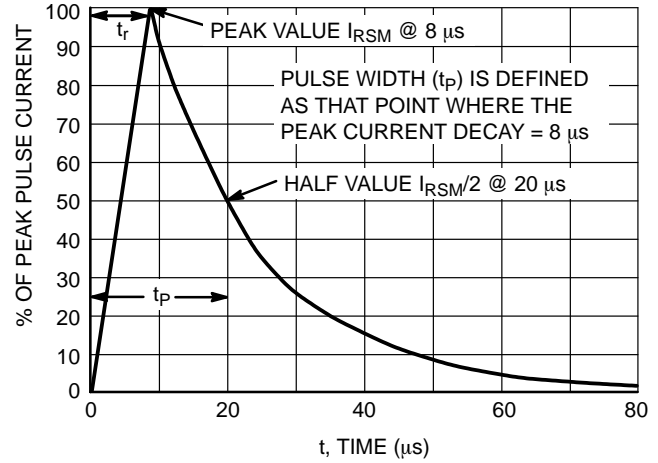


Figure 2. 8 × 20 μs Pulse Waveform

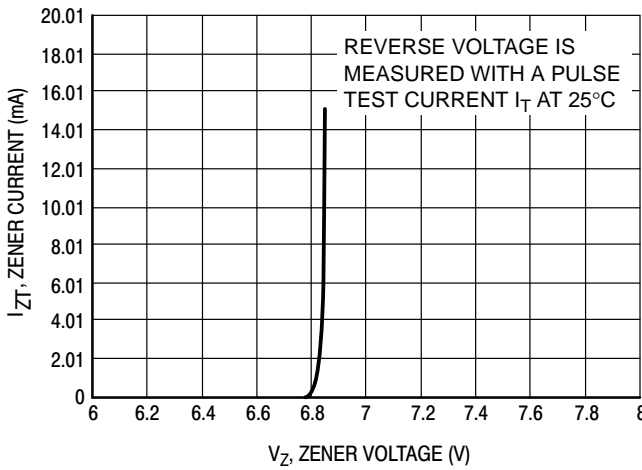


Figure 3. Zener Voltage vs. Zener Current

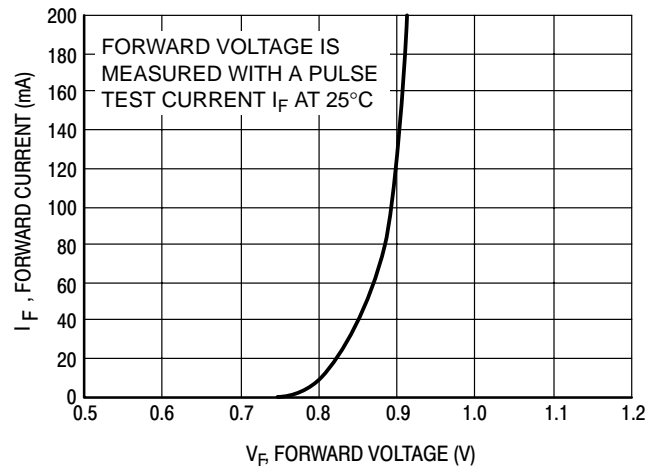


Figure 4. Forward Voltage vs. Forward Current

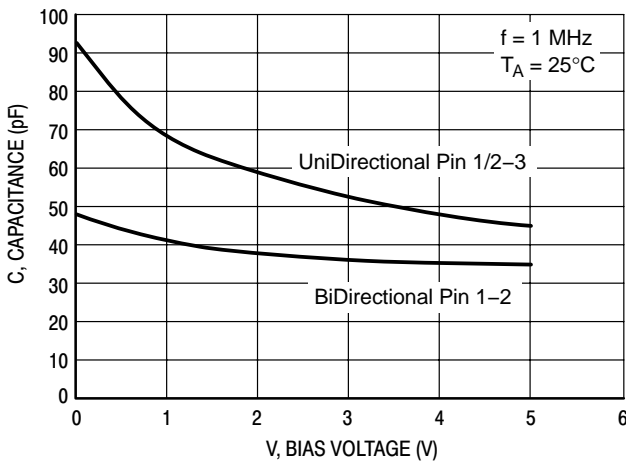


Figure 5. Capacitance vs. Bias Voltage


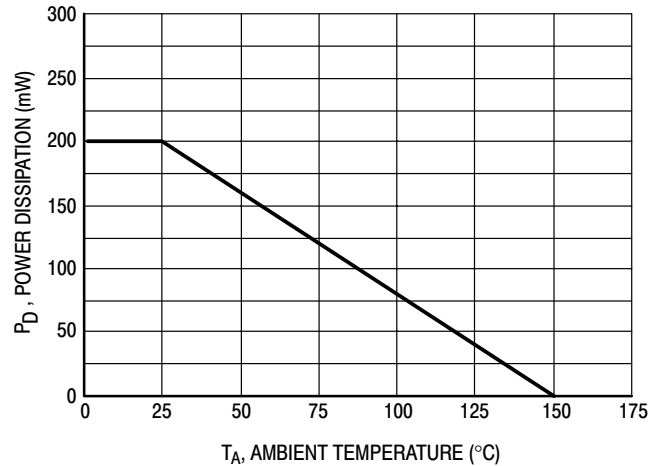


Figure 6. Steady State Power Derating Curve

# DF3A6.8FUT1

## PACKAGE DIMENSIONS

SC-70 (SOT-323)  
CASE 419-04  
ISSUE L

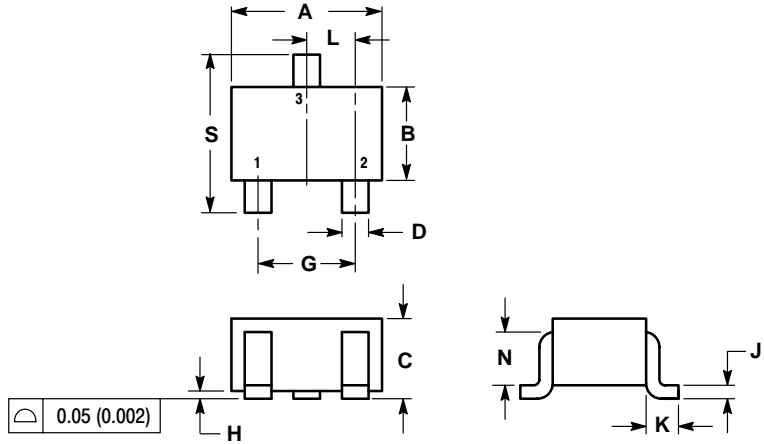

**NOTES:**


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.071	0.087	1.80	2.20
B	0.045	0.053	1.15	1.35
C	0.032	0.040	0.80	1.00
D	0.012	0.016	0.30	0.40
G	0.047	0.055	1.20	1.40
H	0.000	0.004	0.00	0.10
J	0.004	0.010	0.10	0.25
K	0.017 REF		0.425 REF	
L	0.026 BSC		0.650 BSC	
N	0.028 REF		0.700 REF	
S	0.079	0.095	2.00	2.40

**STYLE 4:**

- PIN 1. CATHODE
- CATHODE
- ANODE

### SOLDERING FOOTPRINT\*

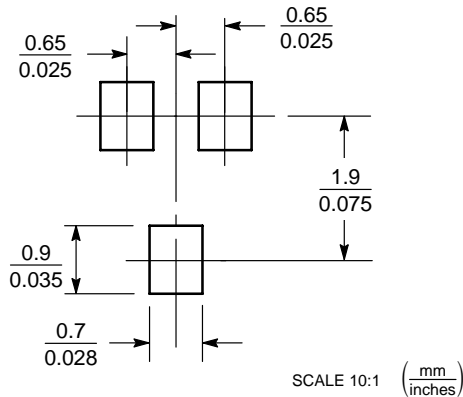

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**

Literature Distribution Center for ON Semiconductor  
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA  
**Phone:** 480-829-7710 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 480-829-7709 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**Japan:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

**Order Literature:** <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А