

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT — By —

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	ECR-16-014363	11OCT2016	FL	SY

NOTE:

1. MATERIAL:

HOUSING (SEE TABLE): PA46 OR PA9T, UL94 V-0, COLOR: BLACK.

CONTACTS: PHOSPHOR BRONZE.

BOARDLOCK: BRASS.

2. FINISH:

2.1 CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
2.54um [100u"] MIN. MATTE-TIN ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27um [50u"] MIN. NICKEL.

2.2 BOARDLOCK: 2.54um [100u"] MATTE-TIN PLATING ALL OVER
NICKEL 1.27um[50u"] MIN. UNDERPLATED OVERALL.

3. WAVE SOLDER CAPABLE TO 265°C MAX. PER TE SPEC. 109-202, CONDITION B.

4. WEIGHT:





36 POS.: 2.55 GRAMS

64 POS.: 3.90 GRAMS

98 POS.: 5.50 GRAMS

164 POS.: 8.80 GRAMS

5. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC. TEC-109-201, CONDITION B.

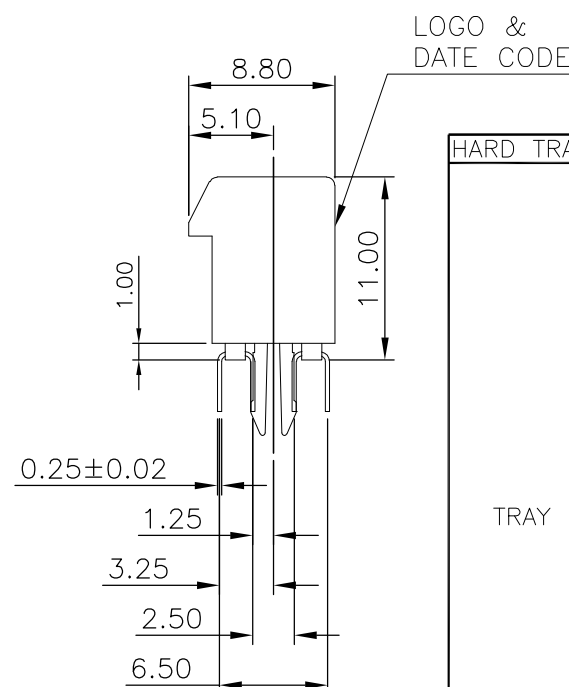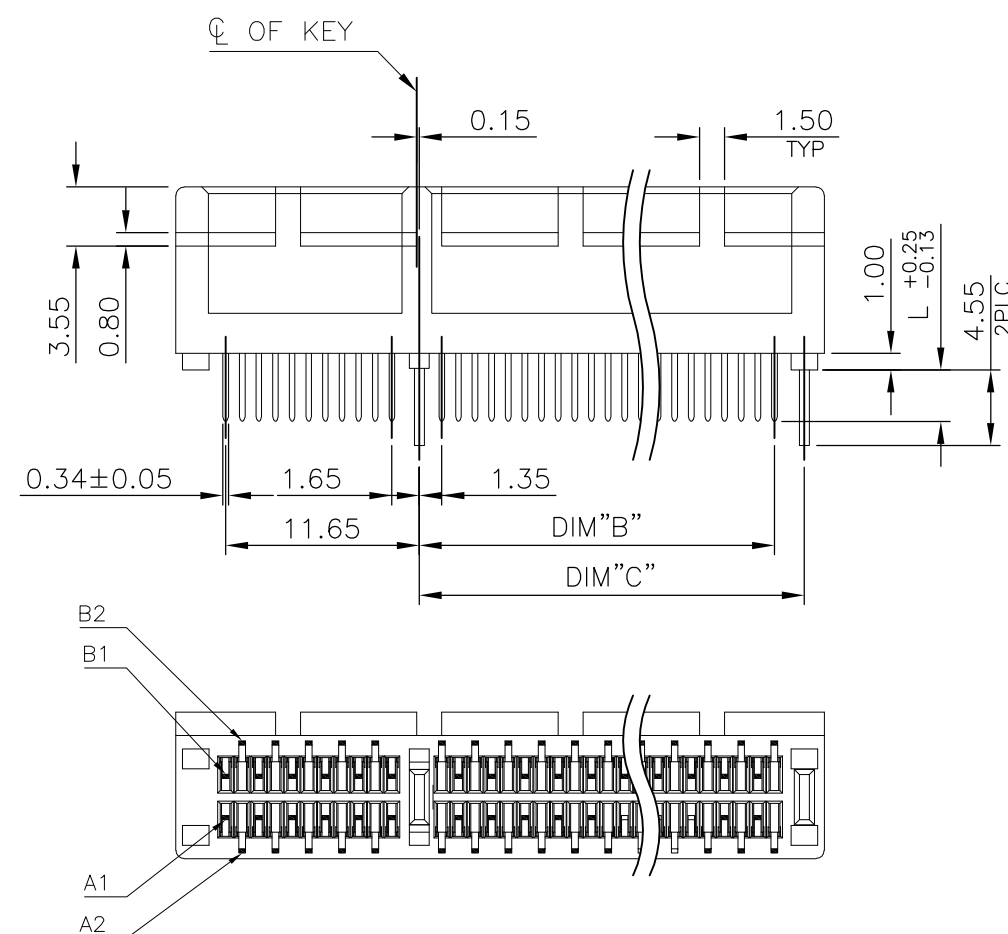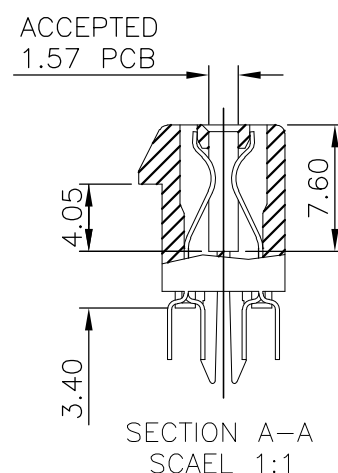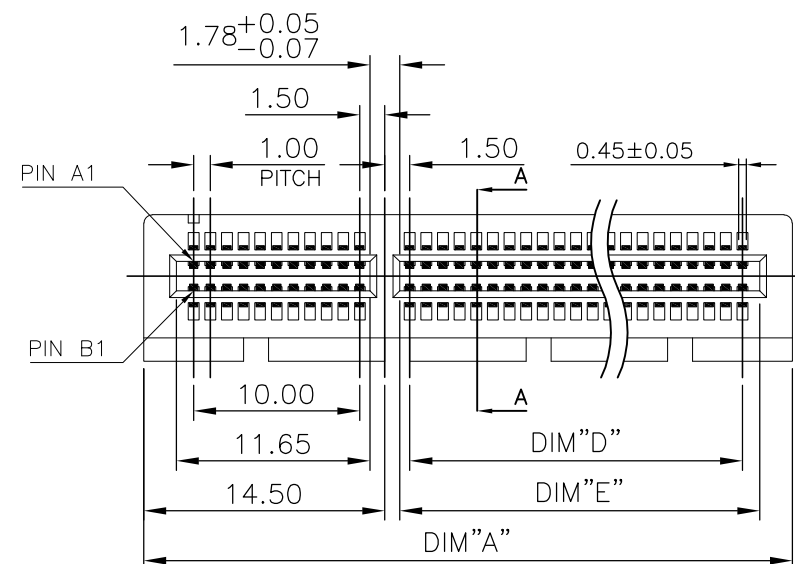

HARD TRAY	NOTE 3 & 5	PA9T	2.30	0.381μm[15μ"] MIN.	71.65	70.0	73.15	71.35	89.0	164	6—	—2
TRAY	NOTE 3	PA46	3.10	0.762μm[30μ"] MIN.	71.65	70.0	73.15	71.35	89.0	164	5—	—2
				0.381μm[15μ"] MIN.							4—	—6
				GOLD FLASH							4—	—5
			2.30	0.762μm[30μ"] MIN.	71.65	70.0	73.15	71.35	89.0	164	4—	—4
				0.381μm[15μ"] MIN.							4—	—3
				GOLD FLASH							4—	—2
			3.10	0.762μm[30μ"] MIN.	38.65	37.0	40.15	38.35	56.0	98	3—	—6
				0.381μm[15μ"] MIN.							3—	—5
				GOLD FLASH							3—	—4
			2.30	0.762μm[30μ"] MIN.	38.65	37.0	40.15	38.35	56.0	98	3—	—3
				0.381μm[15μ"] MIN.							3—	—2
				GOLD FLASH							3—	—1
			3.10	0.762μm[30μ"] MIN.	21.65	20.0	23.15	21.35	39.0	64	2—	—6
				0.381μm[15μ"] MIN.							2—	—5
				GOLD FLASH							2—	—4
			2.30	0.762μm[30μ"] MIN.	21.65	20.0	23.15	21.35	39.0	64	2—	—3
				0.381μm[15μ"] MIN.							2—	—2
				GOLD FLASH							2—	—1
			3.10	0.762μm[30μ"] MIN.	7.65	6.0	9.15	7.35	25.0	36	1—	—6
				0.381μm[15μ"] MIN.							1—	—5
				GOLD FLASH							1—	—4
			2.30	0.762μm[30μ"] MIN.	7.65	6.0	9.15	7.35	25.0	36	1—	—3
				0.381μm[15μ"] MIN.							1—	—2
				GOLD FLASH							1—1775801—1	
			PACKAGING	SOLDER CAPACITY	HOUSING MATERIAL	DIM L	GOLD PLATING	DIM E	DIM D	DIM C	DIM B	DIM A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN B. HSING 21MAY2009

CHK S. CHIEN 21MAY2009

APVD W. KODAMA 21MAY2009

PRODUCT SPEC

108-57375

APPLICATION SPEC

—

WEIGHT 0

CUSTOMER DRAWING

STE TE Connectivity

PCI EXPRESS CARD EDGE CONNECTOR
VERTICAL, DIP TYPE,(BOARD-LOCK FUNCTION)

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A300779 C-1775801

SCALE 1:1

SHEET 1 OF 4

REV D




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

D


C

B

A

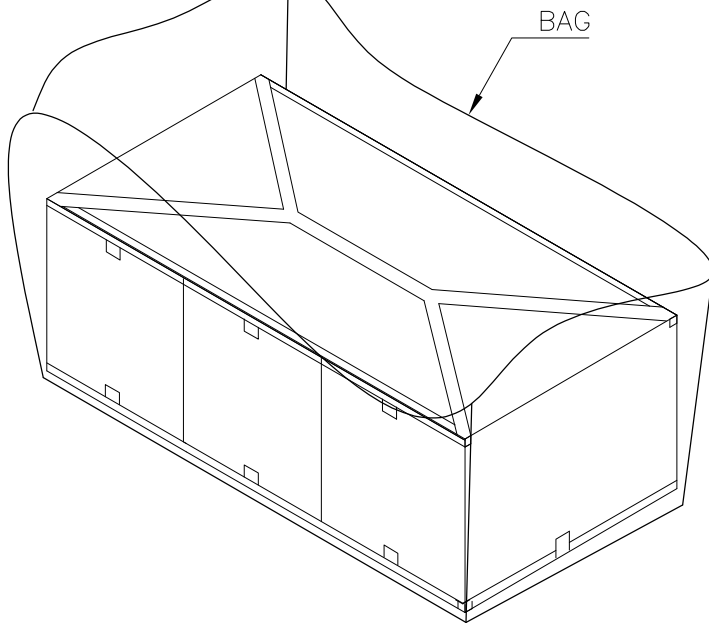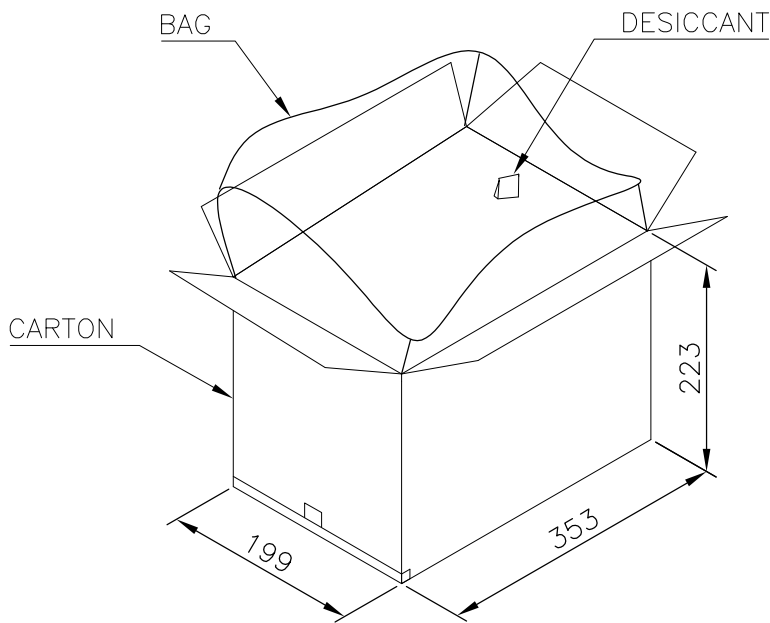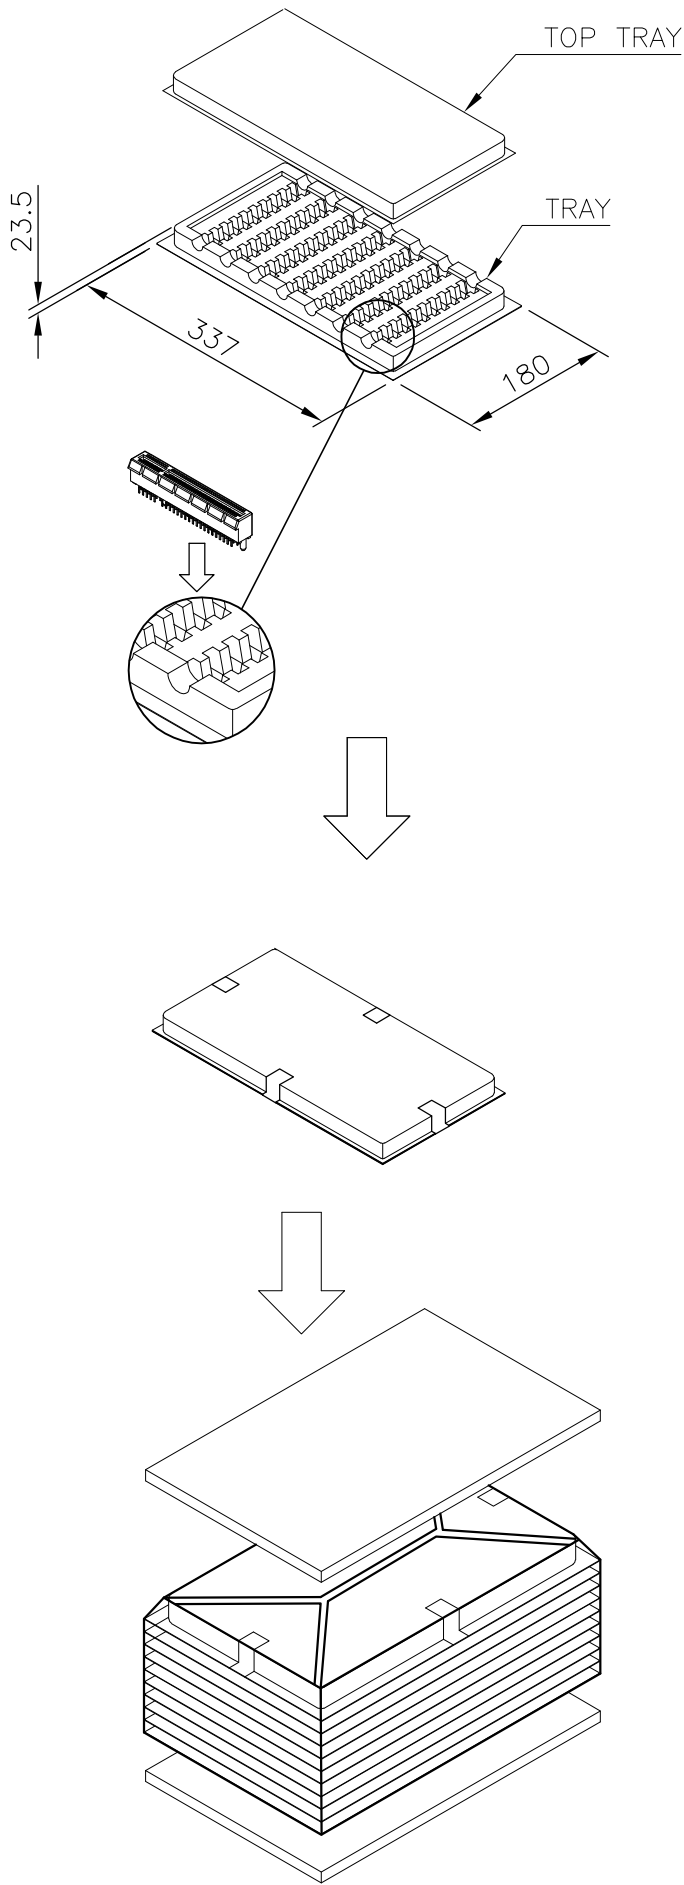

- NOTES :
- MATERIAL :
TRAY : PVC, COLOR: TRANSPARENT.
CARTON: CORRUGATED FIBER
BOX: CORRUGATED FIBER
 - DIMENSION :
TRAY: SEE DRAWING
CARTON: SEE DRAWING
BOX : SEE DRAWING
 - QUANTITY : SEE TABLE
 - WEIGHT : SEE TABLE


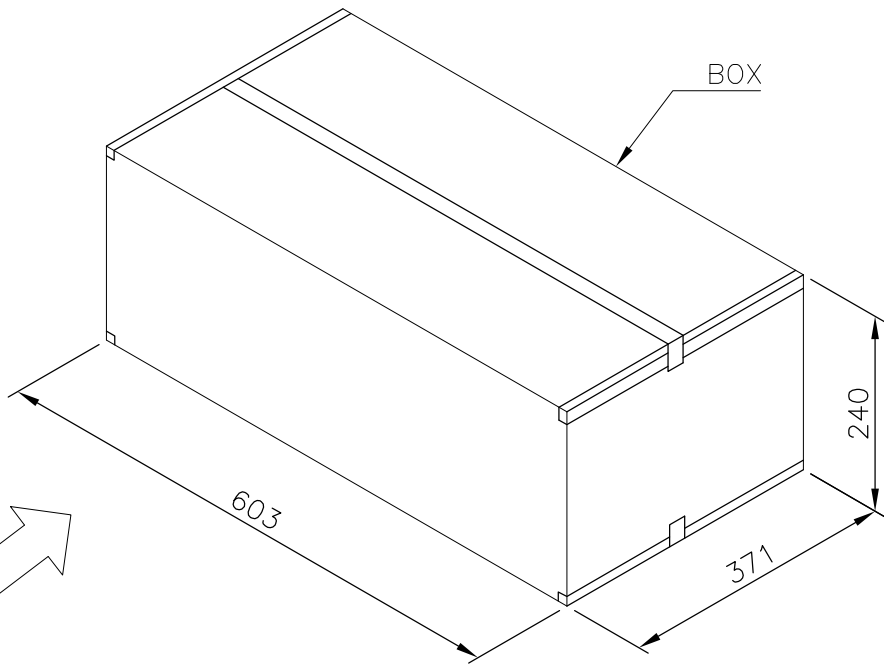


9.6 KG	7.6 KG	30	10	3	900	164
8.5 KG	6.5 KG	40	10	3	1200	98
9.1 KG	7.1 KG	60	10	3	1800	64
7.7 KG	5.7 KG	70	10	3	2100	36
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ CARTON	CARTON/ BOX	PCS/ BOX	POS


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING	21MAY2009	 TE Connectivity		
		CHK S. CHIEN	21MAY2009			
		APVD W. KODAMA	21MAY2009	NAME		
		PRODUCT SPEC		PCI EXPRESS CARD EDGE CONNECTOR VERTICAL, DIP TYPE,(BOARD-LOCK FUNCTION)		
		APPLICATION SPEC		—		
		WEIGHT	0	SIZE	CAGE CODE	DRAWING NO
		CUSTOMER DRAWING		A3	00779	C-1775801
				SCALE	1:1	SHEET
				3 OF 4		REV
				D		

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

- NOTES :
- PACKING MATERIAL MET TE SPEC TEC-138-702.
- * CADMIUM AND CADMIUM COMPOUNDS CONTENT:
5 PPM UNDER (PLASTIC, RUBBER, INK, PIGMENT, PAINT)
 - * LEAD, CADMIUM, CHROM VI AND MERCURY IN PACKAGING MATERIALS CONTENT: 100 PPM (COMBINED) UNDER.
1. MATERIAL :
- TRAY: HIPS, COLOR: BLACK.
- CARTON: CORRUGATED FIBER
- BOX: CORRUGATED FIBER
- TRANSPARENT BAG: PE, SIZE: 500mm*380mm*0.06mm
640mm*510mm*0.06mm
2. EACH BAG SHALL BE INCLUDED:
- * DESICCANT

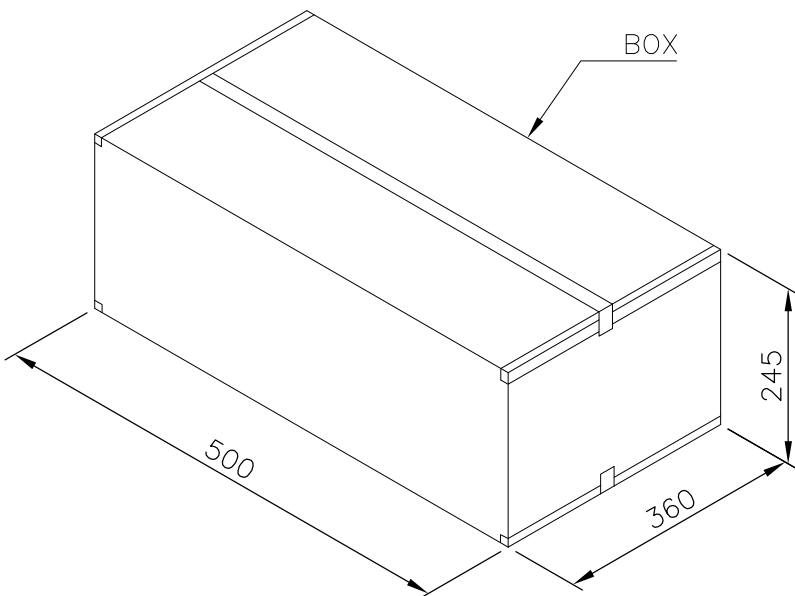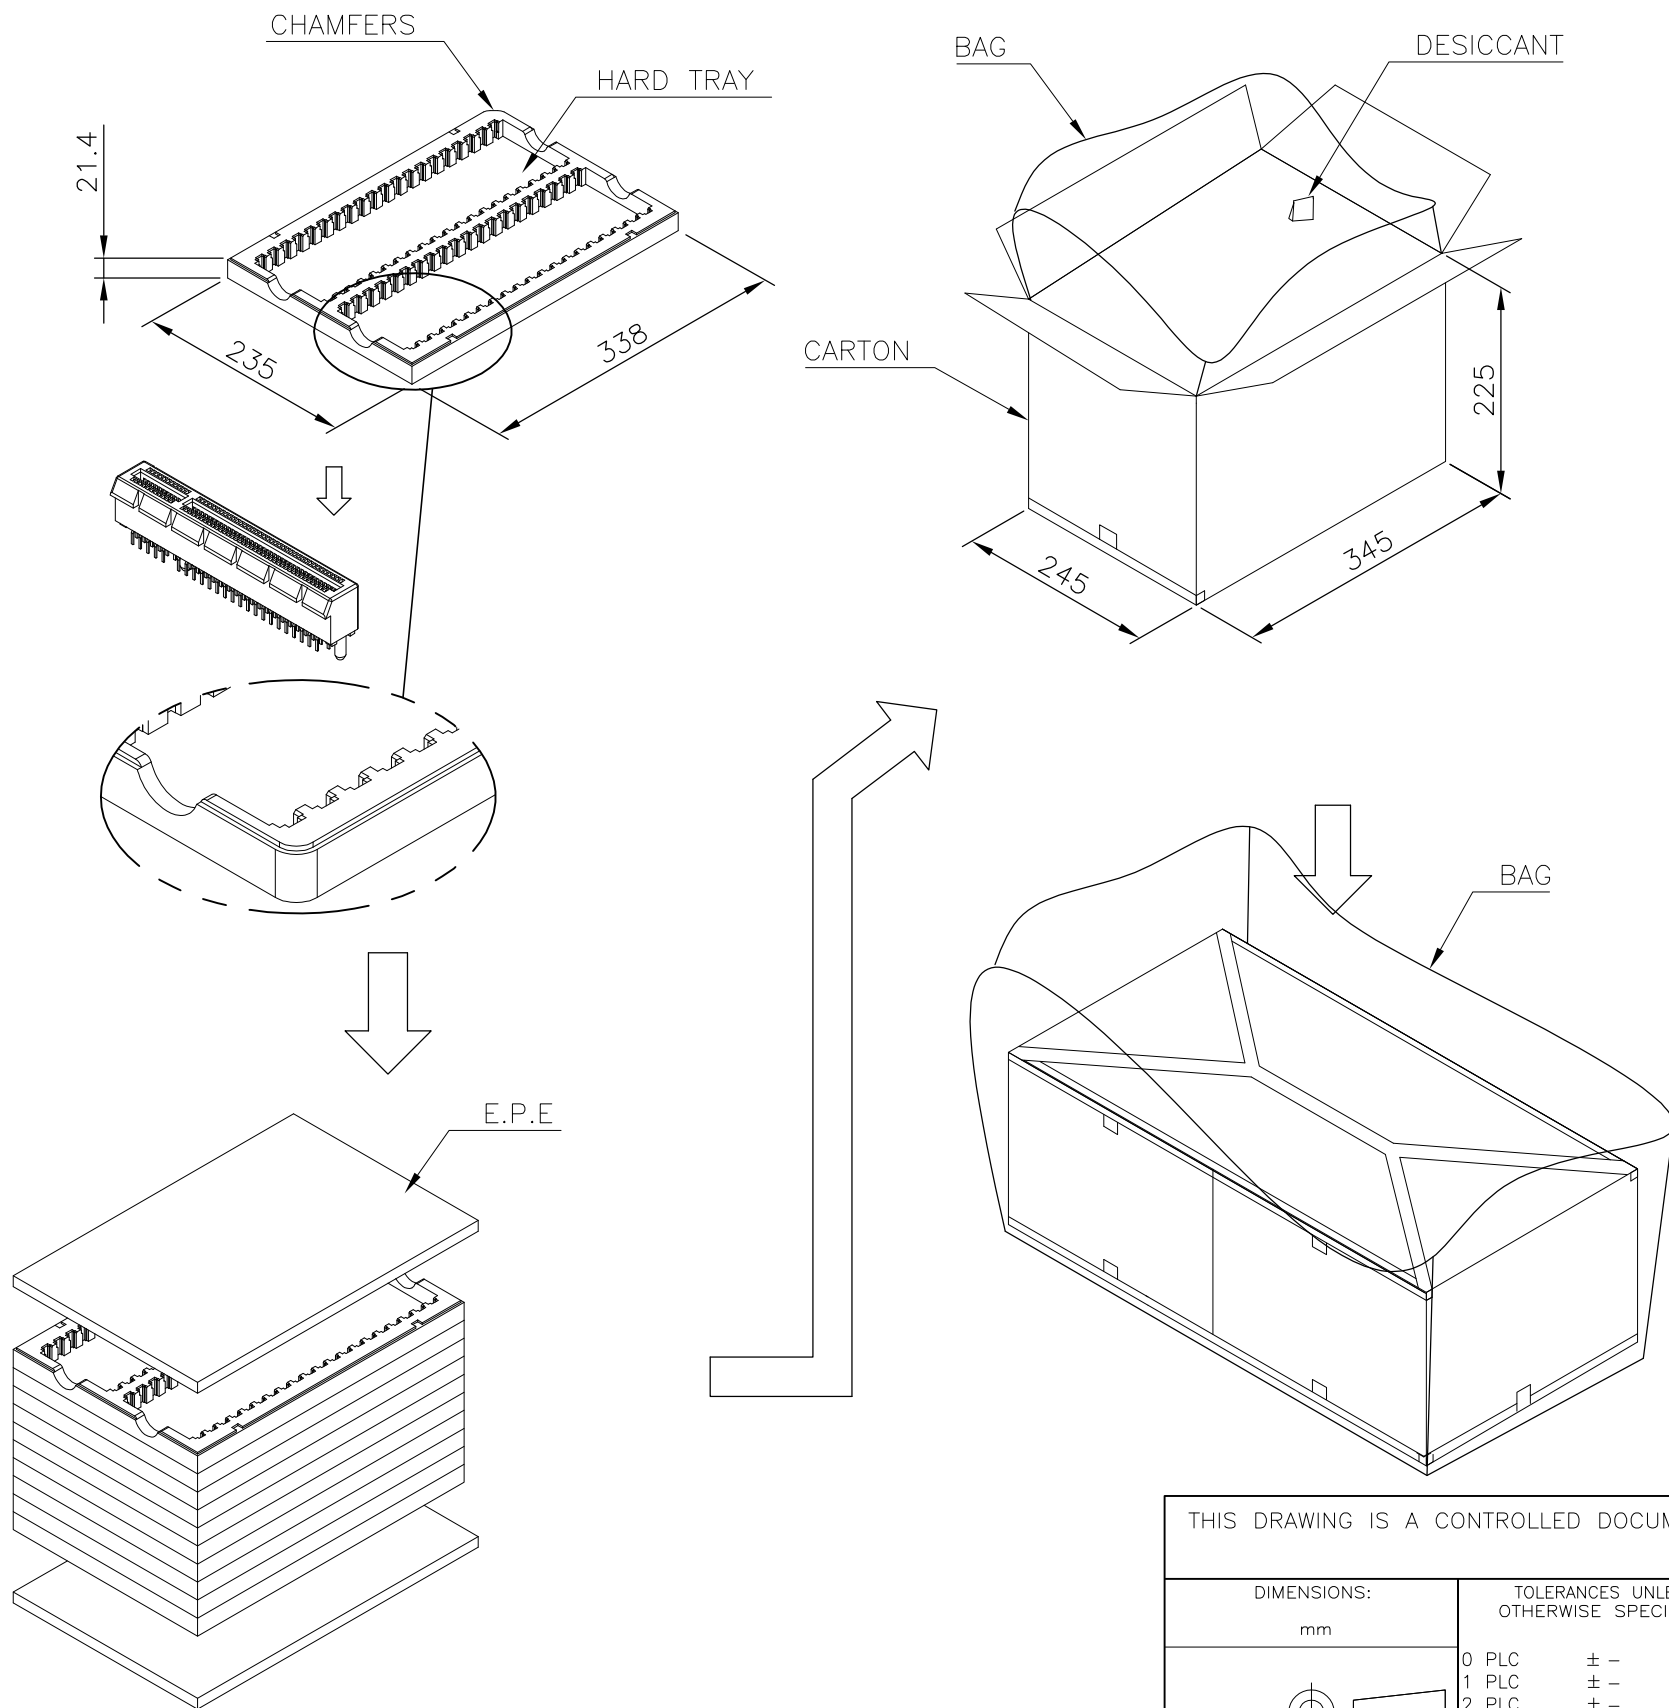

11.5 Kg	7.0 Kg	40	10	2	800	164
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ CARTON	CARTON/ BOX	PCS/ BOX	POS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING	21MAY2009	 TE Connectivity			
		CHK S. CHIEN	21MAY2009				
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD W. KODAMA	21MAY2009	NAME PCI EXPRESS CARD EDGE CONNECTOR VERTICAL, DIP TYPE,(BOARD-LOCK FUNCTION) -			
		PRODUCT SPEC -					
MATERIAL -		APPLICATION SPEC -	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		WEIGHT 0	A3	00779	C-1775801	-	
		CUSTOMER DRAWING			SCALE 1:1	SHEET 4 of 4	REV D

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А