

GSX A 01 A 1 A - 1

CONDUIT OPENING	
CODE	DESCRIPTION
A	1/2" NPT
B	PG 13.5
C	20 MM
D	PF 1/2

BASIC SWITCH	
CODE	DESCRIPTION
01	SNAP ACTION, 1 NC - 1 NO
03	SLOW ACTION, 1 NC - 1 NO, BREAK BEFORE MAKE
04	SLOW ACTION, 1 NC - 1 NO, MAKE BEFORE BREAK
05	SLOW ACTION, 2 NO
06	SLOW ACTION, 2 NC
07	SNAP ACTION, 1 NC - 1 NO, GOLD
20	SNAP ACTION, 2 NC - 2 NO
22	SNAP ACTION, 2 NC - 2 NO, GOLD
33	SLOW ACTION, 1 NC - 1 NO, BREAK BEFORE MAKE, GOLD
34	SLOW ACTION, 1 NC - 1 NO, MAKE BEFORE BREAK, GOLD
35	SLOW ACTION, 2 NO, GOLD
36	SLOW ACTION, 2 NC, GOLD
40	SLOW ACTION, 4 NC
41	SLOW ACTION, 4 NC, GOLD
42	SLOW ACTION, 2 NC - 1 NO, BREAK BEFORE MAKE
43	SLOW ACTION, 2 NC - 1 NO, BREAK BEFORE MAKE, GOLD
44	SLOW ACTION, 2 NC - 2 NO, BREAK BEFORE MAKE
45	SLOW ACTION, 2 NC - 2 NO, BREAK BEFORE MAKE, GOLD
46	SLOW ACTION, 3 NC - 1 NO, BREAK BEFORE MAKE
47	SLOW ACTION, 3 NC - 1 NO, BREAK BEFORE MAKE, GOLD

HEAD	
CODE	DESCRIPTION
A	SIDE ROTARY MOMENTARY
B	TOP PIN PLUNGER
C	TOP ROLLER PLUNGER
D	TOP ROLLER LEVER

HEAD CODE RESTRICTIONS:

- HEAD CODE A USES MODIFICATION CODES 1, 2, 3, 4 & 5
- UNITS WITH HEAD CODES B, C & D DO NOT USE ACTUATOR CODE.

ACTUATOR	
CODE	DESCRIPTION
1	STD. FIXED LENGTH ROLLER
3	YOKE ROLLER
5	OFFSET ROLLER

ACTUATOR CODE RESTRICTIONS:

- ACTUATOR CODES 1, 3, & 5 USED WITH HEAD CODE A ONLY.
- ACTUATOR & MODIFICATION CODES DO NOT HAVE TO BE USED (UNLESS OTHERWISE NOTED ABOVE), BUT MODIFICATION CODE CAN BE USED WITHOUT ACTUATOR CODE. IN THAT CASE, THE "DASH" FOLLOWS THE HEAD CODE, FOLLOWED BY THE MODIFICATION CODE. IF NEITHER ACTUATOR OR MODIFICATION CODE IS USED, CATALOG LISTING ENDS WITH A HEAD CODE.

ROLLER	
CODE	DESCRIPTION
A	19 X 6.35 (3/4 X 1/4) NYLON ROLLER
C	25.4 X 12.7 (1 X 1/2) NYLON ROLLER
D	38.1 X 6.35 (1 1/2 X 1/4) NYLON ROLLER
E	19 X 6.35 (3/4 X 1/4) BRONZE ROLLER
W	40 X 12.7 (1 1/2 X 1/2) RUBBER ROLLER
Y	50.9 X 12.7 (2 X 1/2) RUBBER ROLLER

MODIFICATIONS/ SPECIALS	
CODE	DESCRIPTION
1	CLOCKWISE ROTATION
2	COUNTER CLOCKWISE ROTATION
3	HEAD ASSEMBLED WITH ACTUATOR TO RIGHT SIDE
4	HEAD ASSEMBLED WITH ACTUATOR TO LEFT SIDE
5	HEAD ASSEMBLED WITH ACTUATOR TO MOUNTING SURFACE
6	ROLLER PERPENDICULAR TO MOUNTING SURFACE
C	PRE-LEAD CABLE
Q	CONNECTOR

- HEAD CODE A STANDARD ROTATION IS CLOCKWISE AND COUNTER CLOCKWISE ROTATION
- STANDARD ORIENTATION IS HEAD ASSEMBLED WITH ACTUATOR TOWARD FRONT
- HEAD CODE D STANDARD HEAD ORIENTATION:
ROLLER TO LEFT - HINGE TO RIGHT
- HEAD CODE D MODIFICATION CODE 5 HEAD ORIENTATION:
ROLLER TO FRONT - HINGE TO REAR.
- HEAD CODE D MODIFICATION CODE 6 HEAD ORIENTATION:
ROLLER TO REAR - HINGE TO FRONT.
- HEAD CODE D MODIFICATION CODE 4 HEAD ORIENTATION:
ROLLER TO RIGHT - HINGE TO LEFT


ELECTRICAL RATING 				ENVIRONMENTAL RATING	APPROVALS
AC		DC		IP 67	UL 508 LISTED
A600 U _e (VOLTS)	AC15 I _e (AMPS)	Q300 U _e (VOLTS)	DC13 I _e (AMPS)	NEMA 1, 3, 4, 12 AND 13	IEC 60947-5-1
				NEMA TYPE 7, CLASS I FLAMABLE GASES OR VAPORS - GROUP B, C, D	LOW VOLTAGE DIRECTIVE LVD EN60947-1, EN60947-5-1
120	6	24	2.8	NEMA TYPE 9, CLASS II COMBUSTABLE DUSTS - GROUP E, F, G	SIRA 08ATEX1073X IECEX SIR 08.0021X
240	3	125	.55	Ex d IIC T6 ta -40°C TO +70°C Gb / Ex t IIIC T85°C Db	  0518  II2GD
380	1.9	250	.27		
480	1.5				
500	1.4				
600	1.2				

NOTES


- 1 - CONSTRUCTED IN ACCORDANCE WITH EN-50014/EN-50016 GROUP II C.
2 - EXPLOSION PROOF-UNDERWRITERS LAB INC. LISTED FOR HAZARDOUS
LOCATIONS CLASS I, GROUPS B, C AND D; CLASS II GROUPS E, F, AND G.
3 - APPROVED DRAWING. NO MODIFICATIONS PERMITTED
WITHOUT PRIOR APPROVAL FROM CERTIFICATION BODY.
4 - T-15 TAMPER PROOF TORX DRIVER BIT PROVIDED.
5 - HEAD MAY BE INDEXED IN 90° INCREMENTS.
6 - LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY
ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
△ - FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041.
△ - THE MAXIMUM VOLTAGE, V_e OF "06" AND "36" BASIC SWITCH CODE IS 500V (A500).

DESIGN UNITS: MM			DRAWN		SJS		10JAN08		Honeywell									
TOLERANCES UNLESS NOTED:			CHECK		SS		10JAN08											
NO PLACES			X		±		1.000		TITLE		ASSEMBLY, LIMIT SWITCH							
ONE PLACE			.X		±		0.400											
TWO PLACE			.XX		±		0.150											
THREE PLACE			.XXX		±		0.005											
ANGLES			X		±		3.0°											
THIRD ANGLE PROJECTION			INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY						SIZE		TYPE		CAGE CODE		DRAWING NAME		REV	
			PRO/ENGINEER 3D						D		I		-		GSX_SERIES.CHART.1		D	
			SCALE						1 : 1		SHEET 1 OF 3							

D

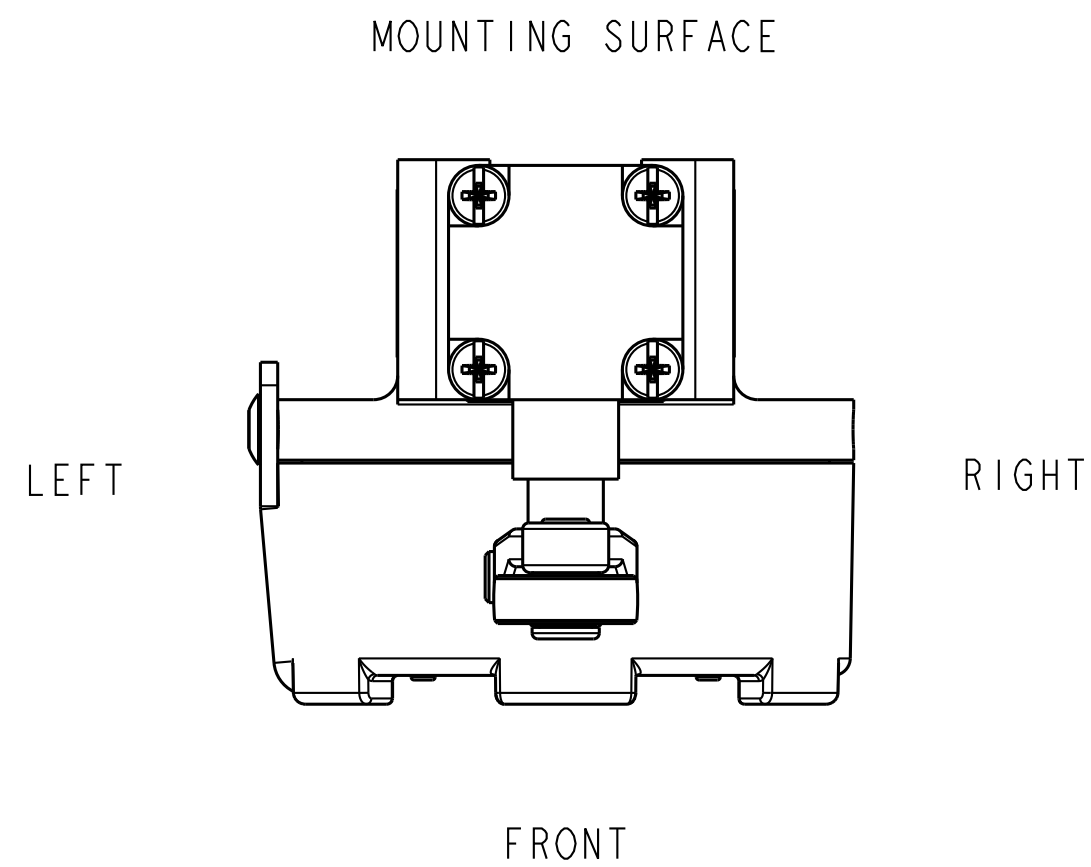


ACTUATOR CODE	LEVER	ROLLER MATL	"X" DIM Ø	"Y" DIM	("Z") DIM WIDTH
1A	GLZ51A	NYLON	19,0 [.75]	55,9 [2.20]	6,4 [.25]
1C	GLZ51C	NYLON	25,4 [1.00]	59,2 [2.33]	12,7 [.50]
1D		NYLON	38,1 [1.50]	55,9 [2.20]	6,4 [.25]
1E	GLZ51D	BRONZE	19,0 [.75]	55,9 [2.20]	6,4 [.25]
1W		RUBBER	38,1 [1.50]	59,2 [2.33]	12,7 [.50]
1Y	GLZ51Y	RUBBER	50,0 [1.97]	57,7 [2.27]	9,9 [.39]
3A	GLZ53A	NYLON	19,0 [.75]	55,9 [2.20]	6,4 [.25]
3C		NYLON	25,4 [1.00]	59,2 [2.33]	12,7 [.50]
3D		NYLON	38,1 [1.50]	55,9 [2.20]	6,4 [.25]
3E	GLZ53C	BRONZE	50,0 [1.97]	55,9 [2.20]	6,4 [.25]
3W		RUBBER	38,1 [1.50]	59,2 [2.33]	12,7 [.50]
3Y		RUBBER	50,0 [1.97]	57,7 [2.27]	9,9 [.39]
5A	GLZ55A	NYLON	50,0 [1.97]	55,9 [2.20]	6,4 [.25]
5C		NYLON	25,4 [1.00]	59,2 [2.33]	12,7 [.50]
5D		NYLON	38,1 [1.50]	55,9 [2.20]	6,4 [.25]
5E	GLZ55C	BRONZE	50,0 [1.97]	55,9 [2.20]	6,4 [.25]
5W		RUBBER	38,1 [1.50]	59,2 [2.33]	12,7 [.50]
5Y		RUBBER	50,0 [1.97]	57,7 [2.27]	9,9 [.39]


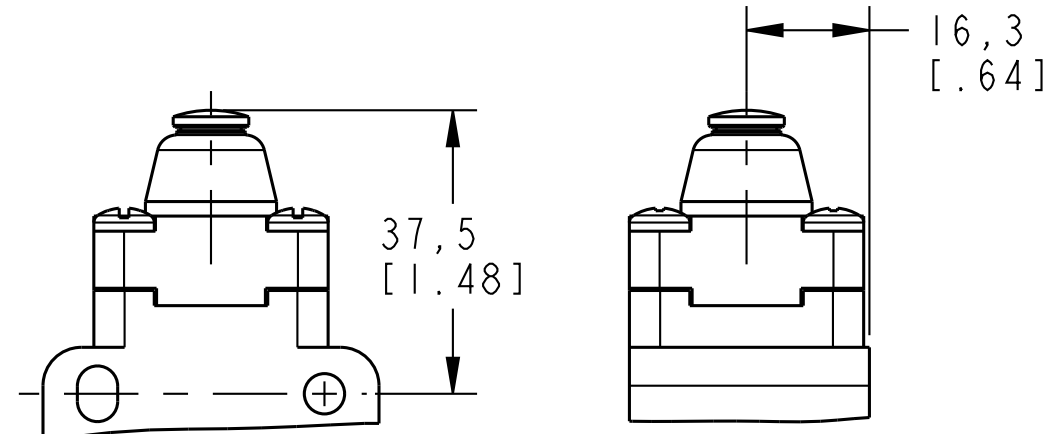


HEAD CODE B
TOP PIN PLUNGER HEAD

C

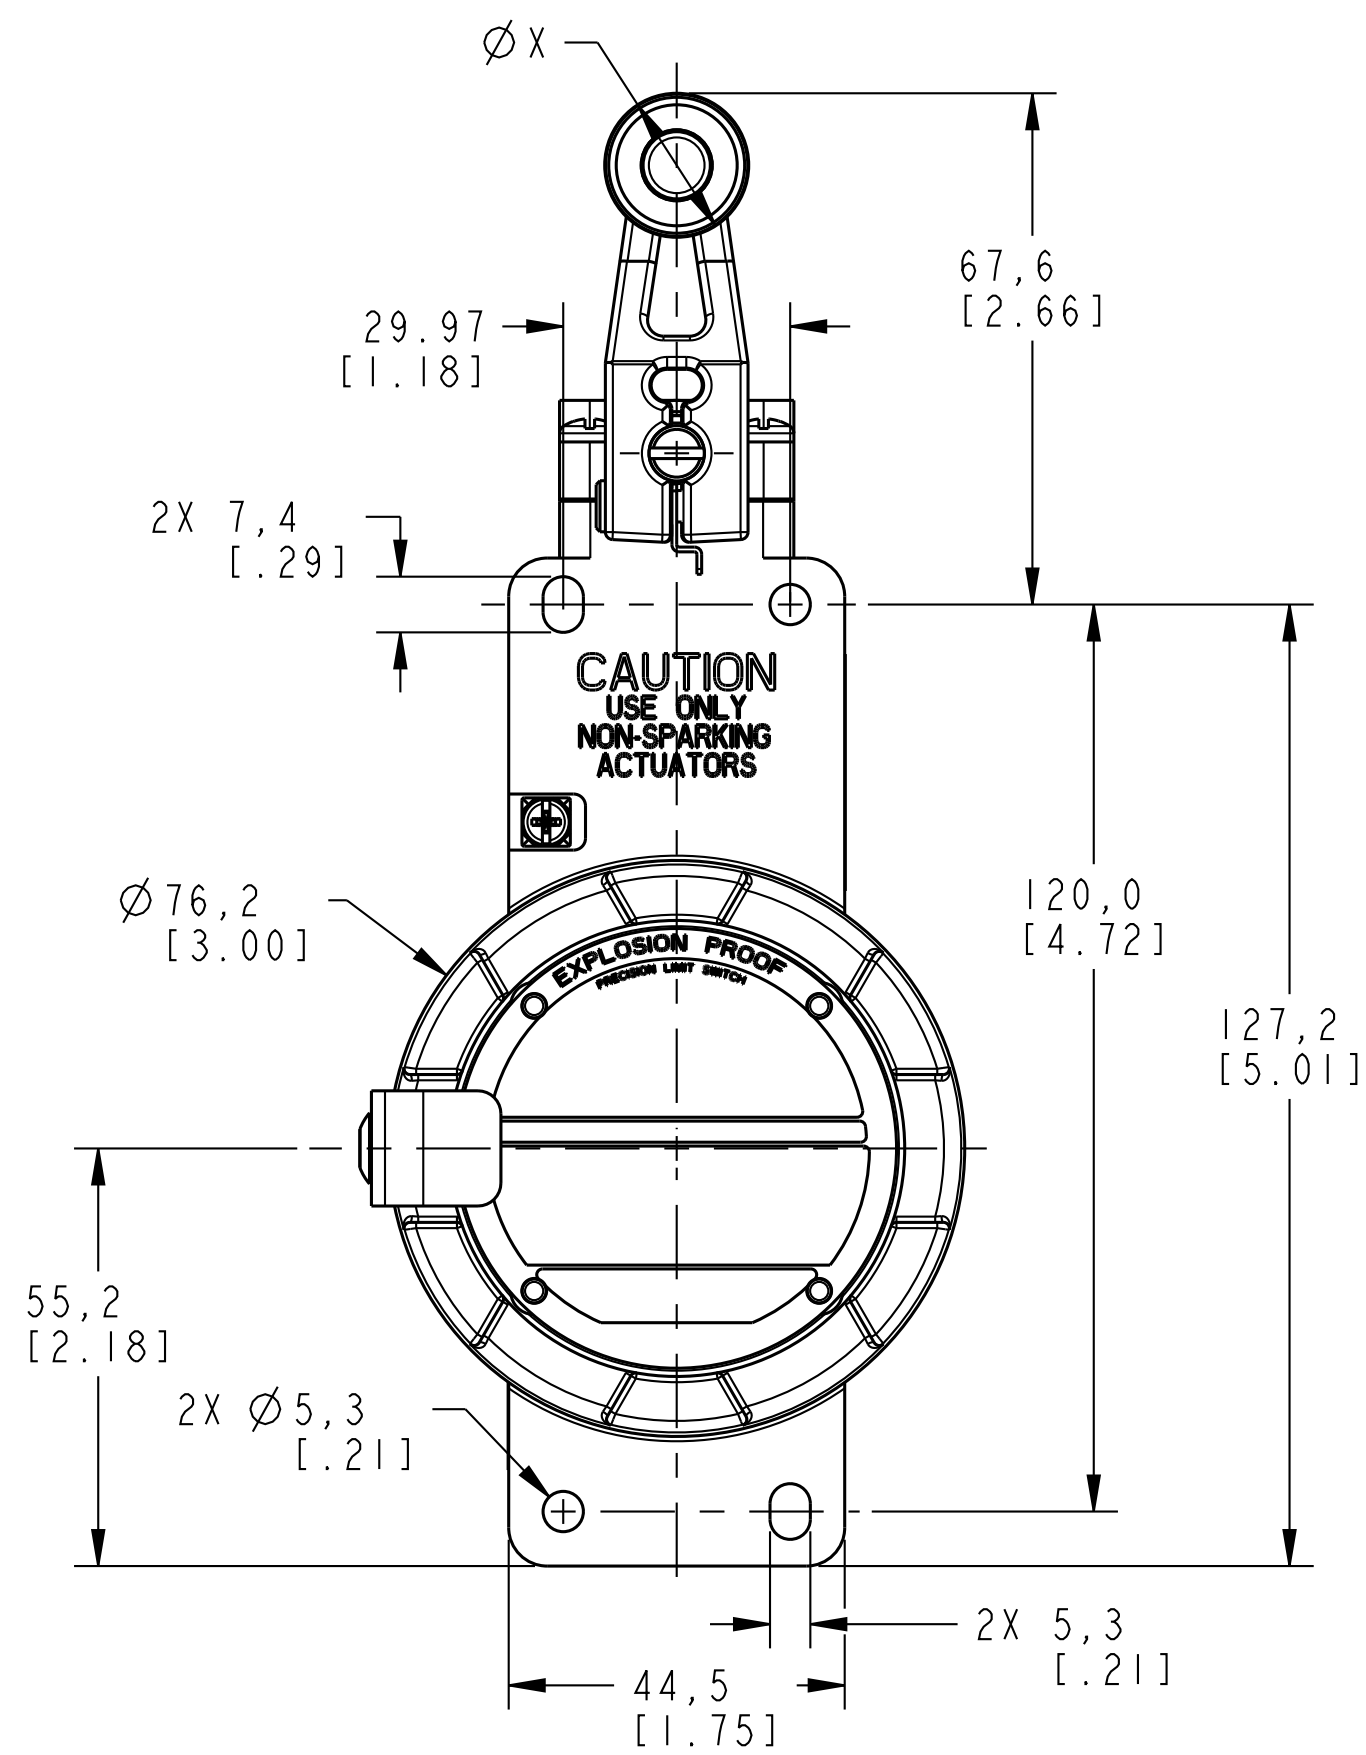


HEAD CODE A
SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

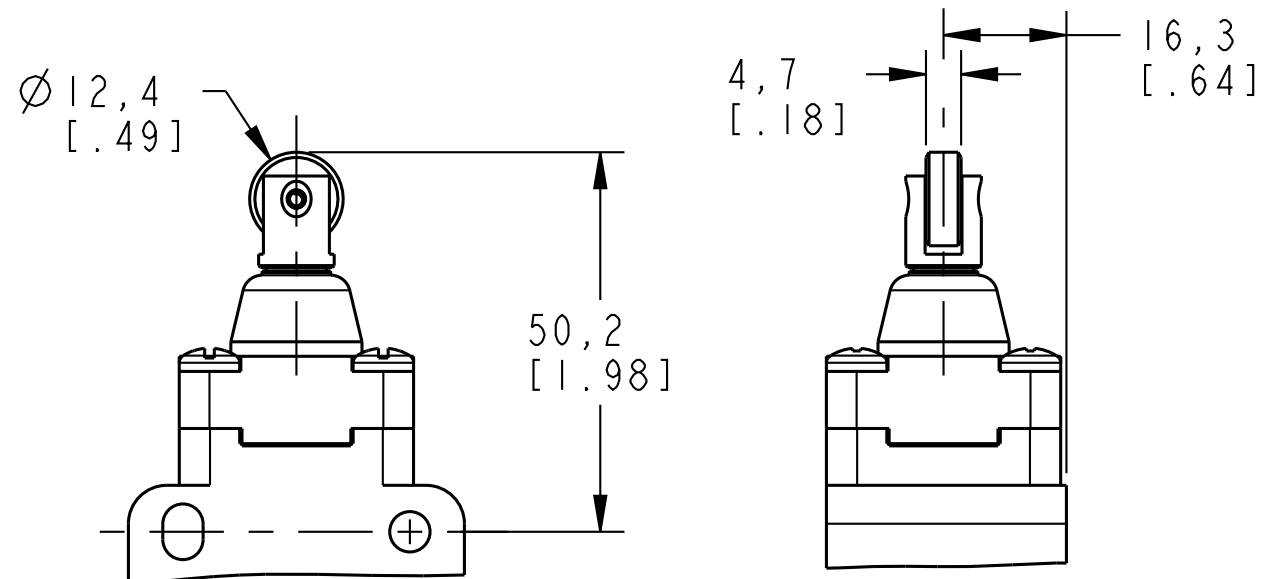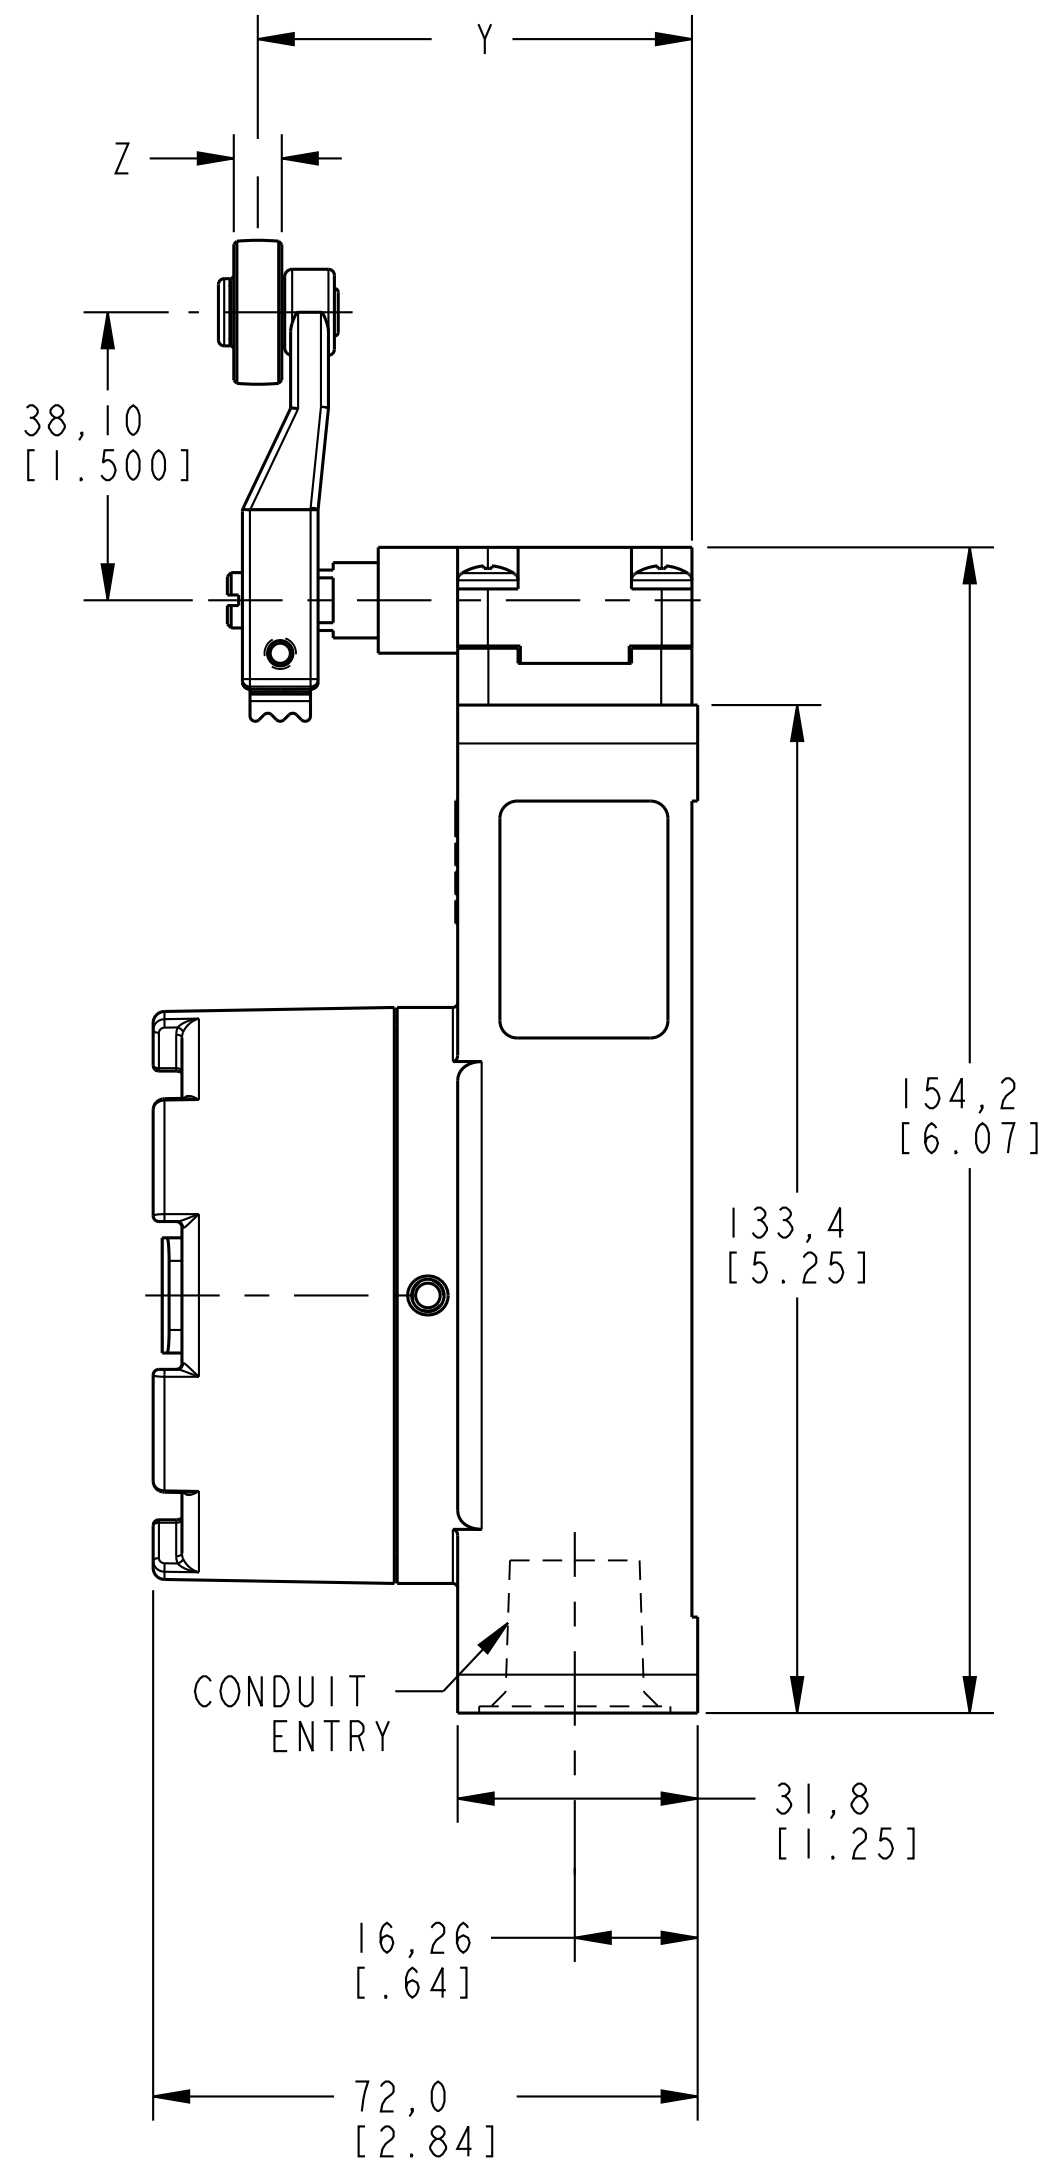

HEAD CODE C
TOP ROLLER PLUNGER HEAD

B

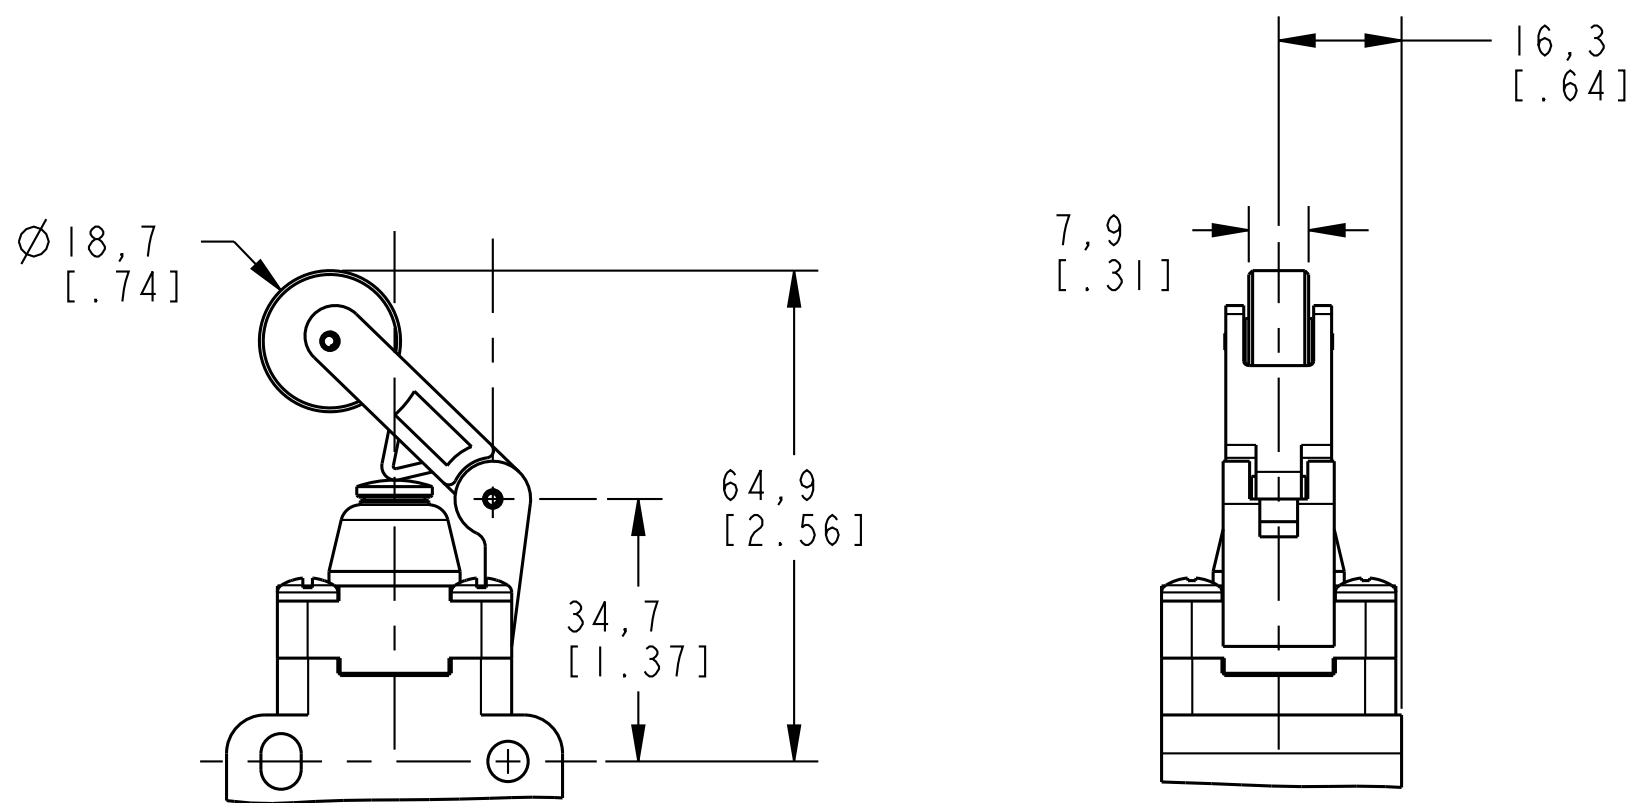

HEAD CODE D
TOP ROLLER LEVER HEAD

A

FO-55113-C		8	7		6	5	4	3	2	1							
HEAD STYLE		CATALOG LISTING	FP FREE POSITION mm[in]	OP1 OPERATE POINT NC CONTACTS mm[in]	OP2 OPERATE POINT NO CONTACTS mm[in]	DT DIFFERENTIAL TRAVEL mm[in]	FOT FULL OVER TRAVEL	POSITIVE BREAK TO IEC 947-5-1 mm[in]	MAX OPERATE TORQUE/FORCE N·m[lb·in] / N[lb]	MAX DISCONNECT TORQUE/FORCE N·m[lb·in] / N[lb]	MAX OPERATE VELOCITY m/s [in/s]	MIN OPERATE VELOCITY m/s [in/s]	MAX OPERATE FREQUENCY OPS/MIN	CIRCUIT DIAGRAMS AND CHARACTERISTICS			
A		GSX*01A GSX*07A	0°	26°	26°	12°	85°	55°	0,3 [2.6]	0,4 [3.5]	1290 */SEC	13 */SEC	250	01 07			D
		GSX*03A GSX*33A	0°	26°	38°	N/A	85°	26°	0,3 [2.6]	0,4 [3.5]	1290 */SEC	13 */SEC	250				
		GSX*04A GSX*34A	0°	38°	26°	N/A	85°	38°	0,3 [2.6]	0,4 [3.5]	1290 */SEC	13 */SEC	250				
		GSX*05A GSX*35A	0°	N/A°	38°	N/A	85°	N/A	0,3 [2.6]	0,4 [3.5]	1290 */SEC	13 */SEC	250				
		GSX*06A GSX*36A	0°	26°	N/A	N/A	85°	26°	0,3 [2.6]	0,4 [3.5]	1290 */SEC	13 */SEC	250				
		GSX*20A GSX*22A	0°	26°	26°	12°	85°	55°	0,3 [2.6]	0,4 [3.5]	1290 */SEC	13 */SEC	250				
		GSX*40A GSX*41A	0°	26°	N/A	N/A	85°	26°	0,3 [2.6]	0,4 [3.5]	1290 */SEC	13 */SEC	250				
		GSX*42A GSX*43A	0°	26°	38°	N/A	85°	26°	0,3 [2.6]	0,4 [3.5]	1290 */SEC	13 */SEC	250				
		GSX*44A GSX*45A	0°	26°	38°	N/A	85°	26°	0,3 [2.6]	0,4 [3.5]	1290 */SEC	13 */SEC	250				
		GSX*46A GSX*47A	0°	26°	38°	N/A	85°	26°	0,3 [2.6]	0,4 [3.5]	1290 */SEC	13 */SEC	250				
		A		GSX*01A GSX*07A	0	20,0 [1.79]	20,0 [1.79]	12,0 [1.47]	N/A	56,0 [2.20]	9,7 [2.2]	11,4 [2.6]	8,5 [334.6]				
GSX*03A GSX*33A	0			20,0 [1.79]	32,0 [1.26]	N/A	N/A	20,0 [1.79]	9,7 [2.2]	11,4 [2.6]	8,5 [334.6]	8,5 [1.33]	250				
GSX*04A GSX*34A	0			32,0 [1.26]	20,0 [1.79]	N/A	N/A	32,0 [1.26]	9,7 [2.2]	11,4 [2.6]	8,5 [334.6]	8,5 [1.33]	250				
GSX*05A GSX*35A	0			N/A	32,0 [1.26]	N/A	N/A	N/A	9,7 [2.2]	11,4 [2.6]	8,5 [334.6]	8,5 [1.33]	250				
GSX*06A GSX*36A	0			20,0 [1.79]	N/A	N/A	N/A	20,0 [1.79]	9,7 [2.2]	11,4 [2.6]	8,5 [334.6]	8,5 [1.33]	250				
GSX*20A GSX*22A	0			20,0 [1.79]	20,0 [1.79]	12,0 [1.47]	N/A	56,0 [2.20]	9,7 [2.2]	11,4 [2.6]	8,5 [334.6]	8,5 [1.33]	250				
GSX*40A GSX*41A	0			20,0 [1.79]	N/A	N/A	N/A	20,0 [1.79]	9,7 [2.2]	11,4 [2.6]	8,5 [334.6]	8,5 [1.33]	250				
GSX*42A GSX*43A	0			20,0 [1.79]	32,0 [1.26]	N/A	N/A	20,0 [1.79]	9,7 [2.2]	11,4 [2.6]	8,5 [334.6]	8,5 [1.33]	250				
GSX*44A GSX*45A	0			20,0 [1.79]	32,0 [1.26]	N/A	N/A	20,0 [1.79]	9,7 [2.2]	11,4 [2.6]	8,5 [334.6]	8,5 [1.33]	250				
GSX*46A GSX*47A	0			20,0 [1.79]	32,0 [1.26]	N/A	N/A	20,0 [1.79]	9,7 [2.2]	11,4 [2.6]	8,5 [334.6]	8,5 [1.33]	250				
GSX*01B GSX*07B	37,5 [1.48]			35,0 [1.38]	35,0 [1.38]	0,9 [0.04]	30,5 [1.20]	33,0 [1.30]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
GSX*03B GSX*33B	37,5 [1.48]			35,0 [1.38]	34,0 [1.34]	N/A	30,5 [1.20]	35,0 [1.38]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
C		GSX*04B GSX*34B	37,5 [1.48]	34,0 [1.34]	35,0 [1.38]	N/A	30,5 [1.20]	34,0 [1.34]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250	06 36			C
		GSX*05B GSX*35B	37,5 [1.48]	N/A	34,0 [1.34]	N/A	30,5 [1.20]	N/A	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*06B GSX*36B	37,5 [1.48]	35,0 [1.38]	N/A	N/A	30,5 [1.20]	35,0 [1.38]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*20B GSX*22B	37,5 [1.48]	35,0 [1.38]	35,0 [1.38]	0,9 [0.04]	30,5 [1.20]	33,0 [1.30]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*40B GSX*41B	37,5 [1.48]	35,0 [1.38]	N/A	N/A	30,5 [1.20]	35,0 [1.38]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*42B GSX*43B	37,5 [1.48]	35,0 [1.38]	34,0 [1.34]	N/A	30,5 [1.20]	35,0 [1.38]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*44B GSX*45B	37,5 [1.48]	35,0 [1.38]	34,0 [1.34]	N/A	30,5 [1.20]	35,0 [1.38]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*46B GSX*47B	37,5 [1.48]	35,0 [1.38]	34,0 [1.34]	N/A	30,5 [1.20]	35,0 [1.38]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*01C GSX*07C	50,5 [1.99]	48,0 [1.89]	48,0 [1.89]	0,9 [0.04]	43,5 [1.71]	46,0 [1.81]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*03C GSX*33C	50,5 [1.99]	48,0 [1.89]	47,0 [1.85]	N/A	43,5 [1.71]	48,0 [1.89]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*04C GSX*34C	50,5 [1.99]	47,0 [1.85]	48 MM	N/A	43,5 [1.71]	47,0 [1.85]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*05C GSX*35C	50,5 [1.99]	N/A	47,0 [1.85]	N/A	43,5 [1.71]	N/A	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
C		GSX*06C GSX*36C	50,5 [1.99]	48,0 [1.89]	N/A	N/A	43,5 [1.71]	48,0 [1.89]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250	20 22			C
		GSX*20C GSX*22C	50,5 [1.99]	48,0 [1.89]	48,0 [1.89]	0,9 [0.04]	43,5 [1.71]	46,0 [1.81]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*40C GSX*41C	50,5 [1.99]	48,0 [1.89]	N/A	N/A	43,5 [1.71]	48,0 [1.89]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*42C GSX*43C	50,5 [1.99]	48,0 [1.89]	47,0 [1.85]	N/A	43,5 [1.71]	48,0 [1.89]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*44C GSX*45C	50,5 [1.99]	48,0 [1.89]	47,0 [1.85]	N/A	43,5 [1.71]	48,0 [1.89]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*46C GSX*47C	50,5 [1.99]	48,0 [1.89]	47,0 [1.85]	N/A	43,5 [1.71]	48,0 [1.89]	16,0 [3.6]	27,0 [6.0]	0,1 [3.9]	1,0 [0.04]	250				
		GSX*01C GSX*07C	0	15,0 [1.59]	15,0 [1.59]	1,8 [0.07]	N/A	18, 3 [1.72]	9,3 [2.1]	15,6 [3.5]	0,2 [7.9]	2,0 [1.08]	250				
		GSX*03C GSX*33C	0	15,0 [1.59]	16,8 [1.66]	N/A	N/A	15,0 [1.59]	9,3 [2.1]	15,6 [3.5]	0,2 [7.9]	2,0 [1.08]	250				
		GSX*04C GSX*34C	0	16,8 [1.66]	15,0 [1.59]	N/A	N/A	16,8 [1.66]	9,3 [2.1]	15,6 [3.5]	0,2 [7.9]	2,0 [1.08]	250				
		GSX*05C GSX*35C	0	N/A	16,8 [1.66]	N/A	N/A	N/A	9,3 [2.1]	15,6 [3.5]	0,2 [7.9]	2,0 [1.08]	250				
		GSX*06C GSX*36C	0	15,0 [1.59]	N/A	N/A	N/A	15,0 [1.59]	9,3 [2.1]	15,6 [3.5]	0,2 [7.9]	2,0 [1.08]	250				
		B		GSX*20C GSX*22C	0	15,0 [1.59]	15,0 [1.59]	1,8 [0.07]	N/A	18, 3 [1.72]	9,3 [2.1]	15,6 [3.5]	0,2 [7.9]				
GSX*40C GSX*41C	0			15,0 [1.59]	N/A	N/A	N/A	15,0 [1.59]	9,3 [2.1]	15,6 [3.5]	0,2 [7.9]	2,0 [1.08]	250				
GSX*42C GSX*43C	0			15,0 [1.59]	16,8 [1.66]	N/A	N/A	15,0 [1.59]	9,3 [2.1]	15,6 [3.5]	0,2 [7.9]	2,0 [1.08]	250				
GSX*44C GSX*45C	0			15,0 [1.59]	16,8 [1.66]	N/A	N/A	15,0 [1.59]	9,3 [2.1]	15,6 [3.5]	0,2 [7.9]	2,0 [1.08]	250				
GSX*46C GSX*47C	0			15,0 [1.59]	16,8 [1.66]	N/A	N/A	15,0 [1.59]	9,3 [2.1]	15,6 [3.5]	0,2 [7.9]	2,0 [1.08]	250				
GSX*01D GSX*07D	65,2 [2.57]			61,0 [2.40]	61,0 [2.40]	1,7 [1.07]	52,0 [2.05]	56,9 [2.24]	9,5 [2.1]	12,7 [2.9]	0,2 [7.9]	2,0 [1.08]	250				
GSX*03D GSX*33D	65,2 [2.57]			61,0 [2.40]	59,1 [2.33]	N/A	52,0 [2.05]	61,0 [2.40]	9,5 [2.1]	12,7 [2.9]	0,2 [7.9]	2,0 [1.08]	250				
GSX*04D GSX*34D	65,2 [2.57]			59,1 [2.33]	61,0 [2.40]	N/A	52,0 [2.05]	59,1 [2.33]	9,5 [2.1]	12,7 [2.9]	0,2 [7.9]	2,0 [1.08]	250				
GSX*05D GSX*35D	65,2 [2.57]			N/A	59,1 [2.33]	N/A	52,0 [2.05]	N/A	9,5 [2.1]	12,7 [2.9]	0,2 [7.9]	2,0 [1.08]	250				
GSX*06D GSX*36D	65,2 [2.57]			61,0 [2.40]	N/A	N/A	52,0 [2.05]	61,0 [2.40]	9,5 [2.1]	12,7 [2.9]	0,2 [7.9]	2,0 [1.08]	250				
GSX*20D GSX*22D	65,2 [2.57]			61,0 [2.40]	61,0 [2												

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А