



# Inventek Systems

Embedding Connectivity Everywhere

## Inventek Systems

**Wi-Fi Dual Band Antennas  
2.4 & 5 Ghz**

**P/N: W2.4-5P-U**



## Table of Contents

1	General Description .....	3
2	Part Number Detail Description.....	3
2.1	Ordering Information .....	3
3	General Features .....	3
4	Applications .....	3
5	Electrical Specifications.....	4
5.1	2400-2500 MHz Band.....	4
5.2	4900-5900 MHz Band.....	4
5.3	Return Loss ( $S_{11}$ ).....	5
5.4	Smith Chart ( $S_{11}$ ).....	5
6	Antenna Dimensions (unit: mm).....	6
7	Radiation Pattern.....	7
7.1	2400-2500 MHz Band.....	7
7.1.1	3D Gain Pattern at 2442 MHz .....	7
7.1.2	Efficiency Table .....	8
7.1.3	Efficiency vs. Frequency.....	8
7.2	4900-5900 MHz Band.....	9
7.2.1	3D Gain Pattern at 5150 MHz .....	9
7.2.2	3D Gain Pattern at 5350 MHz .....	10
7.2.3	3D Gain Pattern at 5700 MHz .....	11
7.2.4	3D Gain Pattern at 5850 MHz .....	12
7.2.5	Efficiency Table .....	13
7.2.6	Efficiency vs. Frequency.....	13
8	RoHS.....	14
9	Revision Control .....	14
10	Contact Information .....	14

## 1 General Description

The [Inventek](#) 2400-2500 and 4900-5900 MHz Dual Band Wi-Fi PCB (40 x 6.0 mm) antennas let you integrate Wi-Fi functionality into your product quickly and easily. It's suitable for a wide range of applications and recommended for use with Inventek eS-Wi-Fi modules.

## 2 Part Number Detail Description

### 2.1 Ordering Information

Device	Description	Ordering Number
W2.4-5P-U	2400-2500 & 4900-5900 MHz Dual Band Wi-Fi PCB antenna with U.FI connector and 90 mm cable length	W2.4-5P-U

## 3 General Features

- Stable and reliable in performances
- PCB antenna has excellent sensitivity to consistently provide high signal reception efficiency
- Compact size
- RoHS compliance

## 4 Applications

- IEEE802.11 (b/g/n).
- Hand-held devices when WiFi (802.11 b/g/n) functions are needed.

## 5 Electrical Specifications


### 5.1 2400-2500 MHz Band

Characteristics		Specifications	Unit
Outline Dimensions		40 x 6.0 x 0.5	mm
Center Frequency		2442	MHz
Bandwidth		100 min.	MHz
VSWR		2 max.	
Impedance		50	$\Omega$
Polarization		Linear Polarization	
Gain	Peak	2.6 (typical)	dBi
	Efficiency	79 (typical)	%


### 5.2 4900-5900 MHz Band

Characteristics		Specifications	Unit
Center Frequency		5400	MHz
Bandwidth		1000 min.	MHz
VSWR		2 max.	
Impedance		50	$\Omega$
Polarization		Linear Polarization	
Gain	Peak	3.3 (typical)	dBi
	Efficiency	79 (typical)	%

### 5.3 Return Loss ( $S_{11}$ )

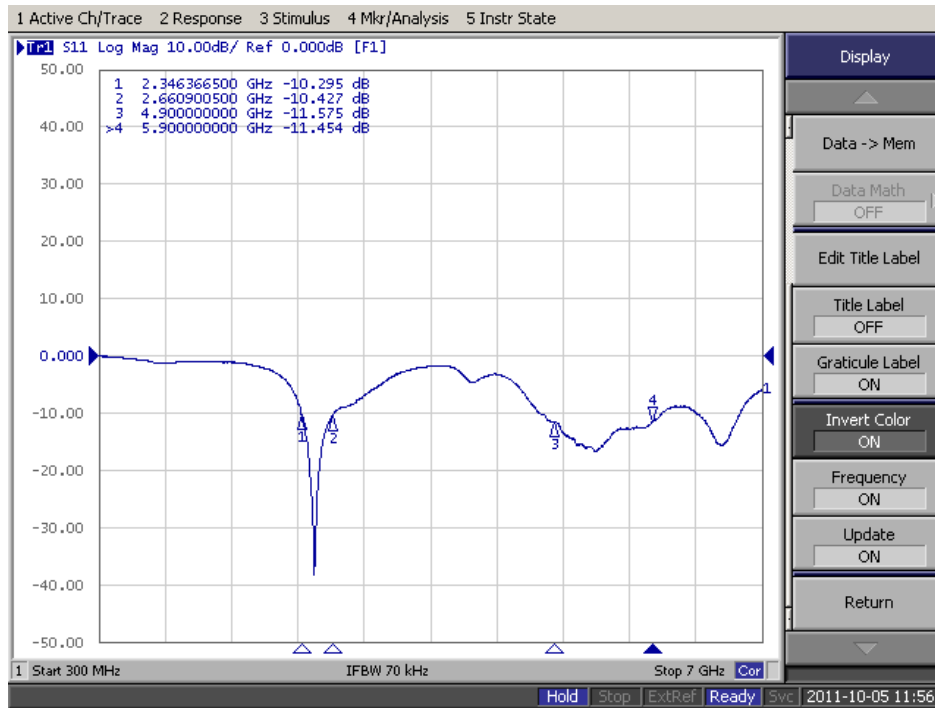


### 5.4 Smith Chart ( $S_{11}$ )

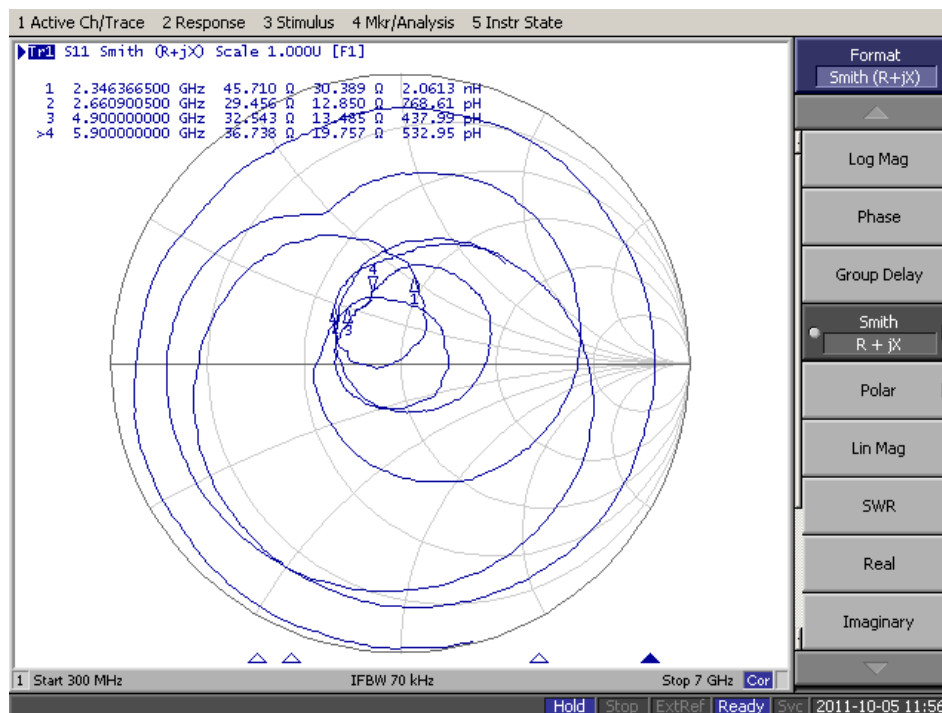

## 6 Antenna Dimensions (unit: mm)



Our standard cable length is 90mm long. Custom cable lengths can be special order by request.

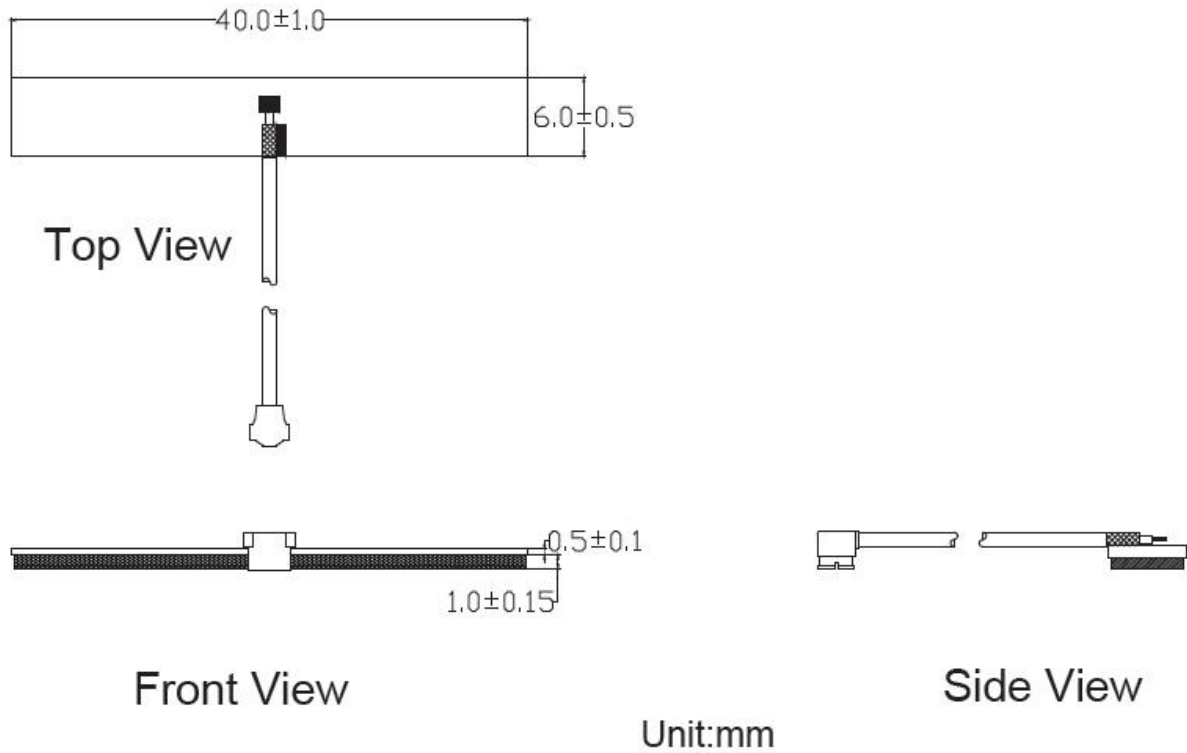

## 7 Radiation Pattern

### 7.1 2400-2500 MHz Band


#### 7.1.1 3D Gain Pattern at 2442 MHz

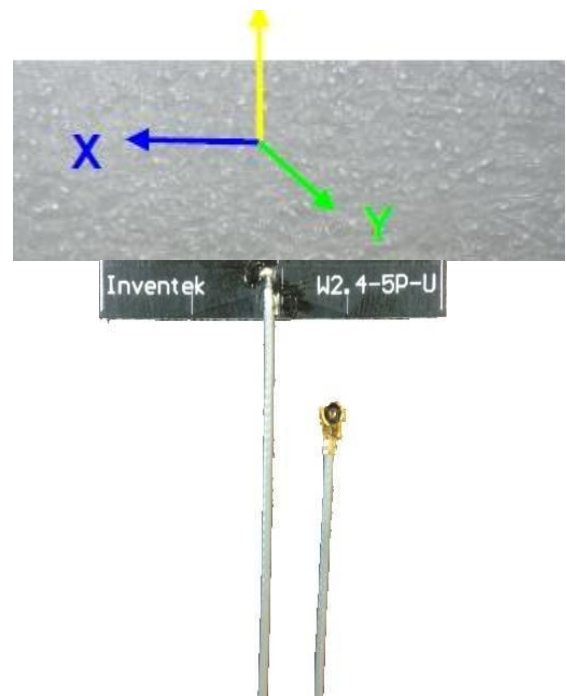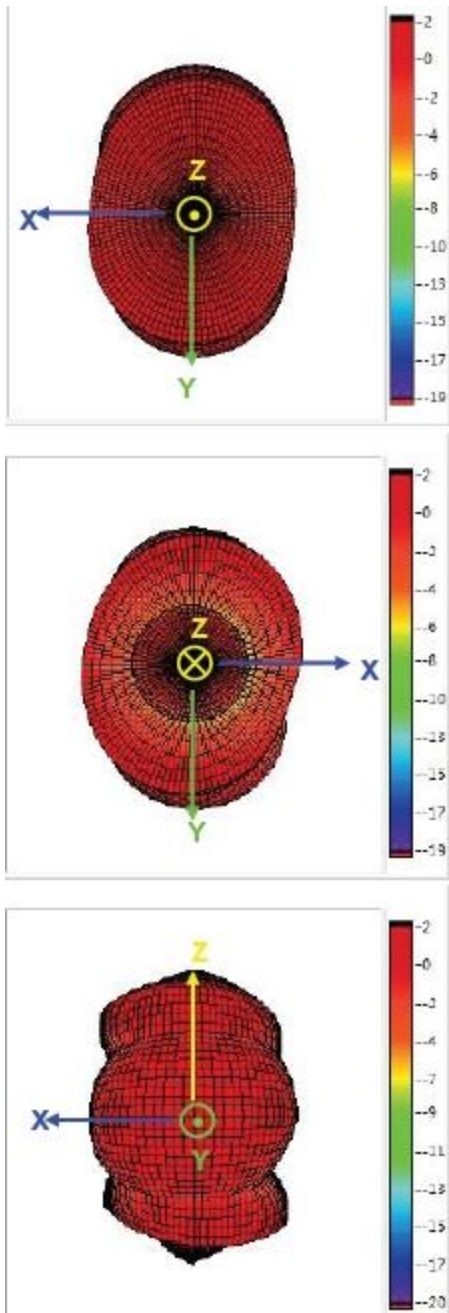

### 7.1.2 Efficiency Table

Frequency(GHz)	2.400	2.412	2.417	2.422	2.427	2.432	2.437	2.442	2.447	2.452	2.457	2.462	2.467	2.472	2.484
Efficiency(dB)	-1.49	-1.45	-1.32	-1.44	-1.36	-1.15	-1.11	-0.97	-1.06	-1.02	-0.89	-0.69	-0.71	-0.89	-0.75
Efficiency (%)	70.96	71.61	73.79	71.78	73.11	76.74	77.45	79.98	78.31	79.10	81.51	85.26	84.83	81.51	84.20
Gain(dBi)	2.11	2.21	2.34	2.26	2.33	2.49	2.52	2.68	3.07	3.21	3.50	3.73	3.69	3.39	3.42



### 7.1.3 Efficiency vs. Frequency

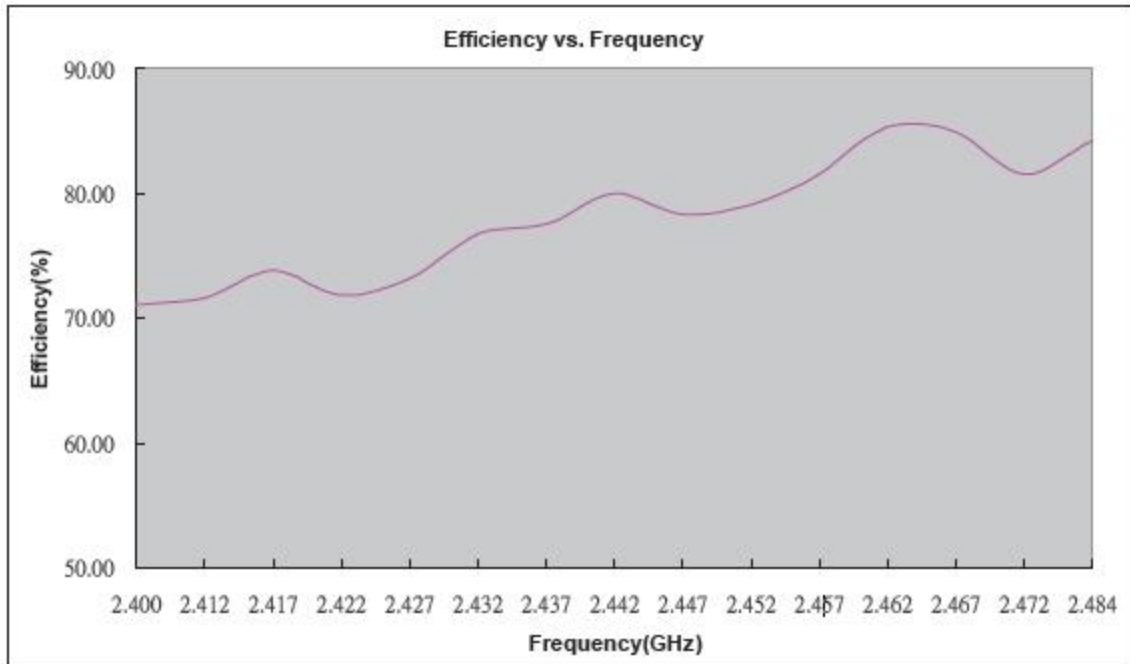







## 7.2 4900-5900 MHz Band

### 7.2.1 3D Gain Pattern at 5150 MHz

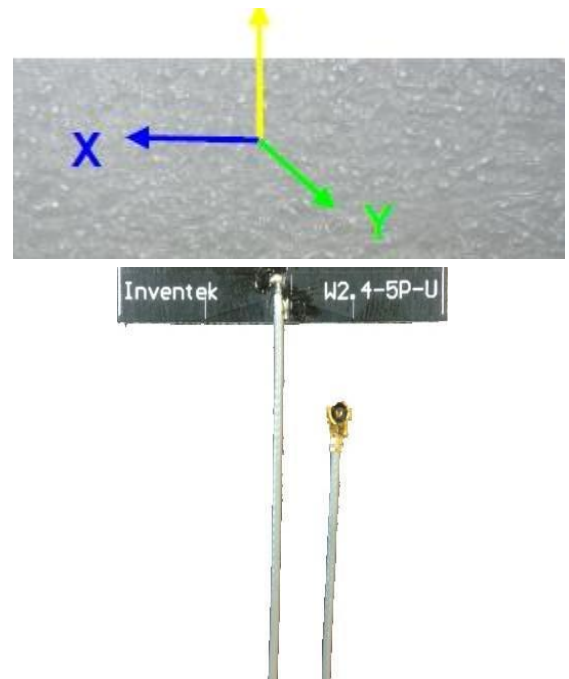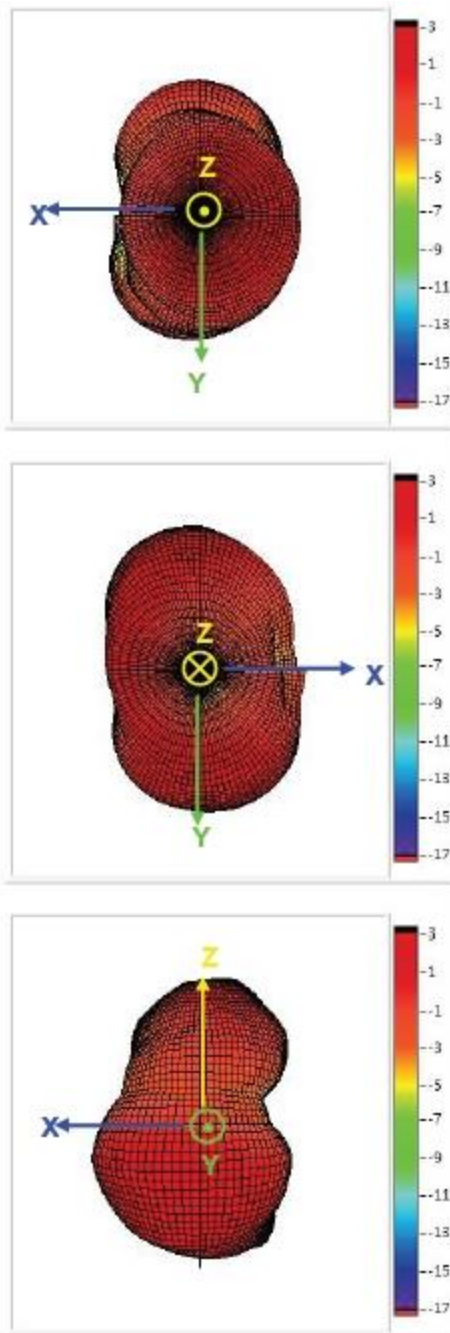



### 7.2.2 3D Gain Pattern at 5350 MHz

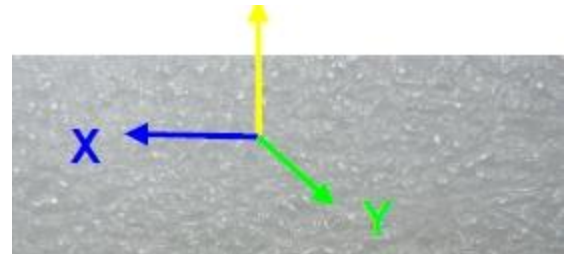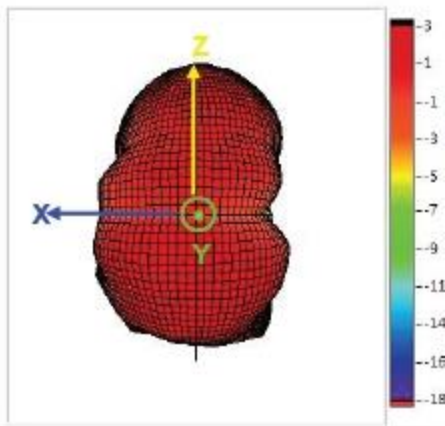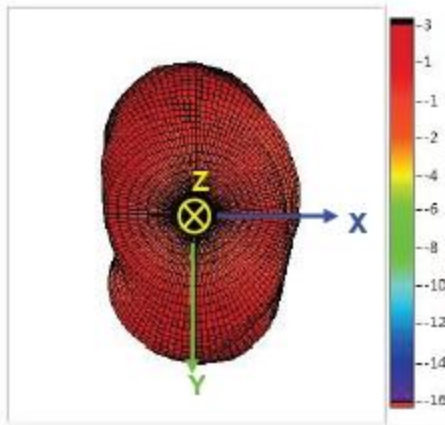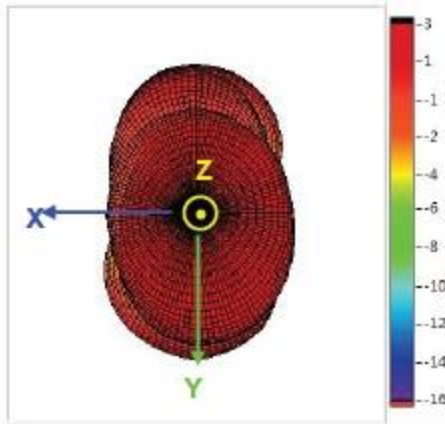



Inventek W2, 4-5P-U



### 7.2.3 3D Gain Pattern at 5700 MHz

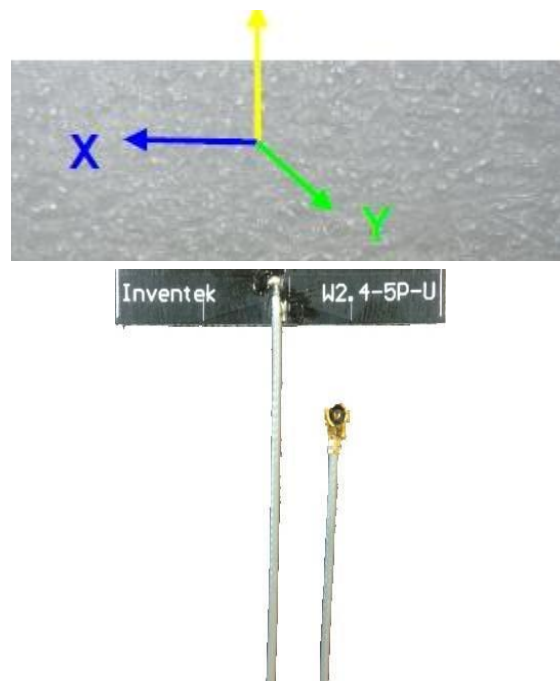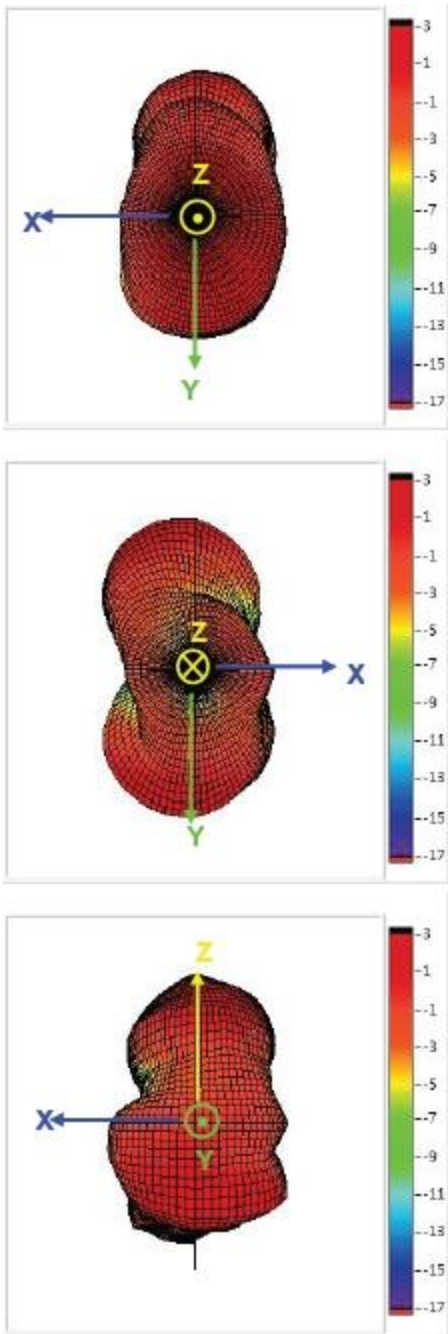

### 7.2.4 3D Gain Pattern at 5850 MHz

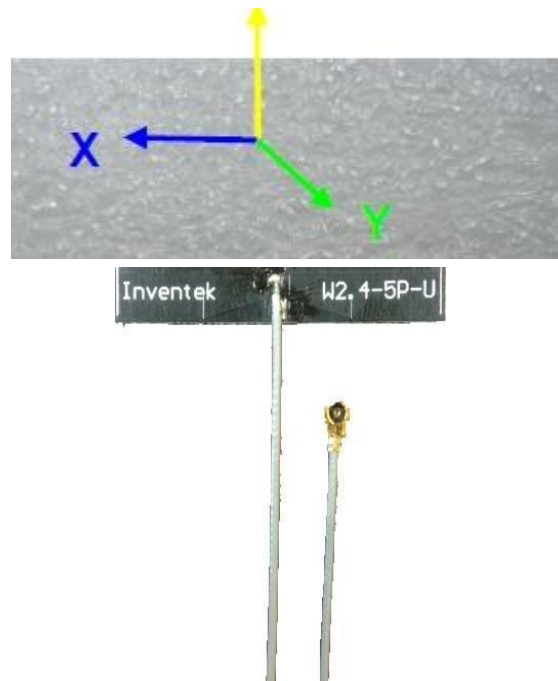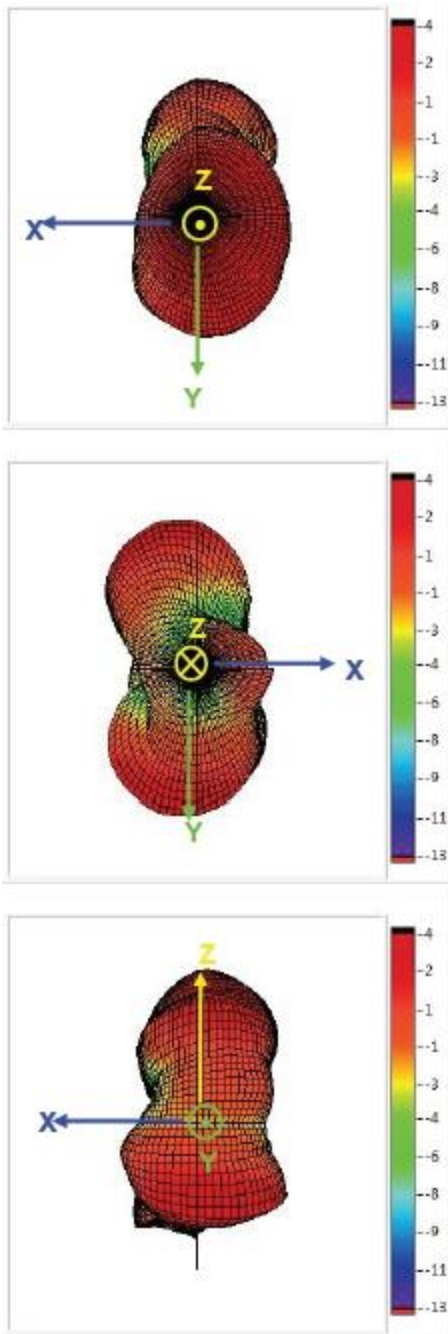


### 7.2.5 Efficiency Table

Frequency(GHz)	4.900	4.950	5.000	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400
Efficiency(dB)	-1.02	-1.25	-1.45	-1.41	-1.44	-1.15	-0.97	-1.07	-1.11	-0.66	-0.99
Efficiency (%)	79.07	74.99	71.61	72.28	71.78	76.74	79.98	78.10	77.50	85.95	76.62
Gain(dBi)	3.23	2.74	2.30	2.56	2.83	3.20	3.46	3.72	3.30	3.39	3.36

Frequency(GHz)	5.450	5.500	5.550	5.600	5.650	5.700	5.750	5.800	5.850	5.900
Efficiency(dB)	-1.81	-1.87	-1.41	-1.26	-1.93	-1.85	-1.53	-1.33	-0.80	-1.23
Efficiency (%)	65.92	65.01	72.28	74.82	64.09	65.37	70.31	73.62	83.11	75.34
Gain(dBi)	2.47	2.97	3.49	3.79	2.60	3.06	3.74	3.91	5.18	3.98

### 7.2.6 Efficiency vs. Frequency

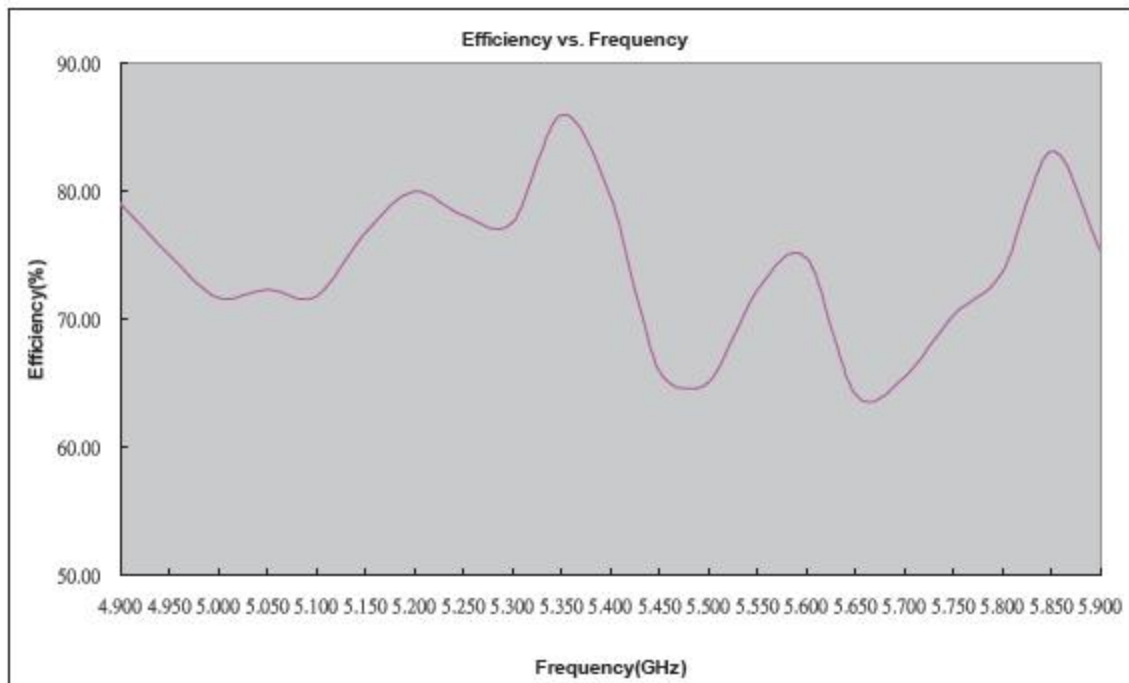

## 8 RoHS

Restriction of Hazardous Substances (RoHS) directive has come into force since 1st July 2006 all electronic products sold in the EU must be free of hazardous materials, such as lead.

## 9 Revision Control

Document : W2.4-5P-U	2.4_5GHz Dual Band Wi-Fi antenna
Internal Release	DOC-DS-20080

Date	Author	Revision	Comment
7/16/2014	KMT	1.0	Preliminary

## 10 Contact Information

Inventek Systems  
 2 Republic Road  
 Billerica Ma, 01862  
 Tel: 978-667-1962  
[Sales@inventeksys.com](mailto:Sales@inventeksys.com)

[www.inventeksys.com](http://www.inventeksys.com)

Inventek Systems reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. The information contained within is believed to be accurate and reliable. However Inventek Systems does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А