



UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

MAX4162/MAX4163/MAX4164

General Description


The MAX4162/MAX4163/MAX4164 are single/dual/quad, micropower operational amplifiers that combine an exceptional bandwidth to power consumption ratio with true rail-to-rail inputs and outputs. They consume a mere 25µA quiescent current per amplifier, yet achieve 200kHz gain-bandwidth product and are unity-gain stable while driving any capacitive load. The MAX4162/MAX4163/MAX4164 operate from either a single supply (2.5V to 10V) or dual supplies ($\pm 1.25V$ to $\pm 5V$), with an input common-mode voltage range that extends 250mV beyond either supply rail. These amplifiers use a proprietary architecture to achieve a very high input common-mode rejection ratio without the midswing nonlinearities present in other rail-to-rail op amps. This architecture also maintains high open-loop gain and output swing while driving substantial loads.

The combination of excellent bandwidth/power performance, single-supply operation, and miniature footprint makes these op amps ideal for portable equipment and other low-power, single-supply applications. The single MAX4162 is available in 8-pin SO and space-saving 5-pin SOT23 packages. The MAX4163 is available in an 8-pin ultra chip-scale package (UCSP™) and an 8-pin µMAX® or SO package. The MAX4164 is available in a 14-pin SO package.

Applications

- | | |
|----------------------------------|----------------------|
| Battery-Powered Devices | Medical Instruments |
| pH Probes | Ionization Detectors |
| Portable Equipment | Cellular Phones |
| Low-Power, Low-Voltage Equipment | |

Pin Configurations

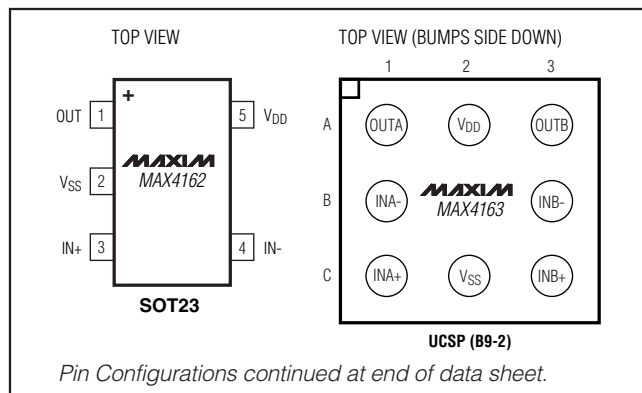

UCSP is a trademark and µMAX is a registered trademark of Maxim Integrated Products, Inc.

Features

- ◆ UCSP Package (MAX4163)
- ◆ 1.0pA Typical Input Bias Current
- ◆ Single-Supply Operation from 2.5V to 10V
- ◆ Input Common-Mode Voltage Range Extends 250mV Beyond Either Supply Rail
- ◆ Rail-to-Rail Output Swing
- ◆ 200kHz Gain-Bandwidth Product
- ◆ 25µA Quiescent Current per Amplifier
- ◆ Excellent CMRR, PSRR, and Gain Linearity
- ◆ No Phase Reversal for Overdriven Inputs
- ◆ Unity-Gain Stable
- ◆ Stable with Any Capacitive Load
- ◆ Internally Short-Circuit Protected to Either Rail


Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE | TOP MARK |
|---------------|----------------|-------------|----------|
| MAX4162ESA+ | -40°C to +85°C | 8 SO | — |
| MAX4162EUK+ | -40°C to +85°C | 5 SOT23 | AABX |
| MAX4163EBL+T* | -40°C to +85°C | 8 UCSP | AAX |
| MAX4163ESA+ | -40°C to +85°C | 8 SO | — |
| MAX4163EUA+ | -40°C to +85°C | 8 µMAX | — |
| MAX4164ESD+ | -40°C to +85°C | 14 SO | — |

+ Denotes a lead(Pb)-free/RoHS-compliant package.
T = Tape and reel.

*UCSP reliability is integrally linked to the user's assembly methods, circuit board material, and environment. Refer to the UCSP Reliability Notice in the UCSP Reliability section of this data sheet for more information.

Typical Application Circuit

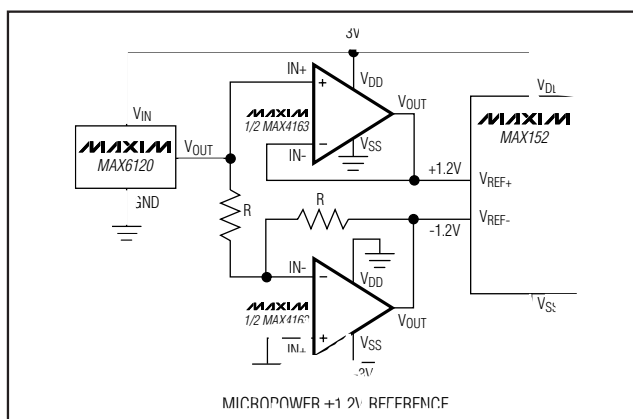

UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

ABSOLUTE MAXIMUM RATINGS

| | | | |
|---|------------|--|-----------------|
| Supply Voltage (V_{DD} to V_{SS})..... | 11V | 8-Pin μ MAX (derate 4.8mW/°C above +70°C)..... | 387mW |
| IN+, IN-, OUT Voltage.....($V_{DD} + 0.3V$) to ($V_{SS} - 0.3V$)..... | | 14-Pin SO (derate 12.3mW/°C above +70°C)..... | 987mW |
| Short-Circuit Duration (to either rail)..... | Continuous | Operating Temperature Range..... | -40°C to +85°C |
| Continuous Power Dissipation ($T_A = +70^\circ\text{C}$) | | Storage Temperature Range..... | -65°C to +150°C |
| 5-Pin SOT23 (derate 3.9mW/°C above +70°C)..... | 312mW | Junction Temperature..... | +150°C |
| 8-Pin SO (derate 7.4mW/°C above +70°C)..... | 588mW | Lead Temperature (soldering, 10s)..... | +300°C |
| 8-Pin UCSP (derate 4.7mW/°C above +70°C)..... | 379mW | Soldering Temperature (reflow, UCSP)..... | +260°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS: 3V Operation

($V_{DD} = 3V$, $V_{SS} = 0V$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, R_L connected to $V_{DD}/2$, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$, unless otherwise noted. Typical values are at $T_A = +25^\circ\text{C}$.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS | |
|---------------------------------|------------|---|--|-----------|-----------------|------------------------------|----|
| Operating Voltage Range | V_{DD} | Inferred from PSRR test | 2.5 | | 10.0 | V | |
| Supply Current (Per Amplifier) | I_{DD} | | | 25 | 40 | μA | |
| Input Bias Current (Note 2) | I_B | | | 1.0 | 100 | pA | |
| Input Offset Voltage | V_{OS} | MAX4162 | $T_A = +25^\circ\text{C}$ | ± 0.5 | ± 3 | mV | |
| | | | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | | ± 4 | | |
| | | MAX4163 | $T_A = +25^\circ\text{C}$ | ± 0.5 | ± 4 | | |
| | | | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | | ± 5 | | |
| | | MAX4164 | $T_A = +25^\circ\text{C}$ | ± 0.5 | ± 5 | | |
| | | | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | | ± 6 | | |
| Input Offset Voltage Tempco | TCV_{OS} | | | 2 | | $\mu\text{V}/^\circ\text{C}$ | |
| Differential Input Resistance | R_{IN} | | | >10 | | $\text{T}\Omega$ | |
| Input Common-Mode Voltage Range | V_{CM} | Inferred from CMRR test | $V_{SS} - 0.25$ | | $V_{DD} + 0.25$ | V | |
| Common-Mode Rejection Ratio | CMRR | $V_{CM} = (V_{SS} - 0.25V)$ to $(V_{DD} + 0.25V)$ | 70 | 100 | | dB | |
| Large-Signal Voltage Gain | A_V | $R_L = 10\text{k}\Omega$ | 85 | 120 | | dB | |
| Output Voltage Swing | V_{OUT} | $R_L = 10\text{k}\Omega$ | $V_{DD} - V_{OH}$ | | 30 | 180 | mV |
| | | | $V_{OL} - V_{SS}$ | | 30 | 180 | |
| | | $R_L = 100\text{k}\Omega$ | $V_{DD} - V_{OH}$ | | 3 | 25 | |
| | | | $V_{OL} - V_{SS}$ | | 3 | 25 | |
| Output Short-Circuit Current | I_{SC} | To either supply rail | | 15 | | mA | |
| Closed-Loop Output Resistance | R_{OUT} | $A_V = 1V/V$ | | 0.1 | | Ω | |
| Power-Supply Rejection Ratio | PSRR | $V_{DD} = 2.5V$ to $10V$ | 80 | 110 | | dB | |
| Gain-Bandwidth Product | GBWP | | | 200 | | kHz | |
| Phase Margin | ϕ_M | | | 60 | | degrees | |
| Gain Margin | GM | | | 12 | | dB | |
| Total Harmonic Distortion | THD | $f = 1\text{kHz}$, $V_{OUT} = 2V_{P-P}$, $R_L = 100\text{k}\Omega$, $A_V = 1V/V$ | | 0.02 | | % | |
| Slew Rate | SR | | | 115 | | V/ms | |
| Settling Time to 0.1% | | $V_{OUT} = 1V$ to $2V$ step | | 50 | | μs | |
| Turn-On Time | t_{ON} | $V_{DD} = 0$ to $3V$ step, $V_{IN} = V_{DD}/2$, $A_V = 1V/V$ | | 20 | | μs | |

UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

MAX4162/MAX4163/MAX4164

ELECTRICAL CHARACTERISTICS: 3V Operation (continued)

($V_{DD} = 3V$, $V_{SS} = 0V$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, R_L connected to $V_{DD}/2$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}C$.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--------------------------------|--------|------------|-----|-----|-----|----------------|
| Input Voltage-Noise Density | e_n | $f = 1kHz$ | | 80 | | nV/\sqrt{Hz} |
| Differential Input Capacitance | | | | 0.7 | | pF |
| Input Common-Mode Capacitance | | | | 1.5 | | pF |
| Internal Charge-Pump Frequency | | | | 700 | | kHz |
| Charge-Pump Output Feedthrough | | | | 100 | | μV_{P-P} |

ELECTRICAL CHARACTERISTICS: 5V Operation

($V_{DD} = 5V$, $V_{SS} = 0V$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, R_L connected to $V_{DD}/2$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}C$.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------|-----------|---|--|-----------|-----------------|-------------------|
| Operating Voltage Range | V_{DD} | Inferred from PSRR test | 4.5 | | 10.0 | V |
| Supply Current (Per Amplifier) | I_{DD} | | | 25 | 45 | μA |
| Input Bias Current (Note 2) | I_B | | | 1.0 | 100 | pA |
| Input Offset Voltage | V_{OS} | MAX4162 | $T_A = +25^{\circ}C$ | ± 0.5 | ± 3 | mV |
| | | | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | | ± 4 | |
| | | MAX4163 | $T_A = +25^{\circ}C$ | ± 0.5 | ± 4 | |
| | | | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | | ± 5 | |
| | | MAX4164 | $T_A = +25^{\circ}C$ | ± 0.5 | ± 5 | |
| | | | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | | ± 6 | |
| Input Offset Voltage Tempco | | | | 2 | | $\mu V/^{\circ}C$ |
| Differential Input Resistance | | | | >10 | | $T\Omega$ |
| Input Common-Mode Voltage Range | V_{CM} | Inferred from CMRR test | $V_{SS} - 0.25$ | | $V_{DD} + 0.25$ | V |
| Common-Mode Rejection Ratio | CMRR | $V_{CM} = (V_{SS} - 0.25V)$ to $(V_{DD} + 0.25V)$ | 70 | 100 | | dB |
| Large-Signal Voltage Gain | A_V | $R_L = 10k\Omega$ | 85 | 120 | | dB |
| Output Voltage Swing | V_{OUT} | $R_L = 10k\Omega$ | $V_{DD} - V_{OH}$ | 50 | 300 | mV |
| | | | $V_{OL} - V_{SS}$ | 50 | 300 | |
| | | $R_L = 100k\Omega$ | $V_{DD} - V_{OH}$ | 5 | 40 | |
| | | | $V_{OL} - V_{SS}$ | 5 | 40 | |
| Output Short-Circuit Current | I_{SC} | To either supply rail | | 15 | | mA |
| Closed-Loop Output Resistance | R_{OUT} | $A_V = 1V/V$ | | 0.1 | | Ω |
| Power-Supply Rejection Ratio | PSRR | $V_{DD} = 4.5V$ to $10V$ | 80 | 110 | | dB |
| Gain-Bandwidth Product | GBWP | | | 200 | | kHz |
| Phase Margin | ϕ_M | | | 60 | | degrees |
| Gain Margin | GM | | | 12 | | dB |

UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

ELECTRICAL CHARACTERISTICS: 5V Operation (continued)

($V_{DD} = 5V$, $V_{SS} = 0V$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, R_L connected to $V_{DD}/2$, $T_A = -40^\circ C$ to $+85^\circ C$, unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Note 1)


| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--------------------------------|----------|---|-----|------|-----|----------------|
| Total Harmonic Distortion | THD | $f = 1kHz$, $V_{OUT} = 2V_{P-P}$, $R_L = 100k\Omega$, $A_V = 1V/V$ | | 0.02 | | % |
| Slew Rate | SR | | | 115 | | V/ms |
| Settling Time to 0.1% | | $V_{OUT} = 1V$ to $2V$ step | | 70 | | μs |
| Turn-On Time | t_{ON} | $V_{DD} = 0$ to $3V$ step, $V_{IN} = V_{DD}/2$, $A_V = 1V/V$ | | 40 | | μs |
| Input Voltage-Noise Density | e_n | $f = 1kHz$ | | 80 | | nV/\sqrt{Hz} |
| Differential Input Capacitance | | | | 0.7 | | pF |
| Input Common-Mode Capacitance | | | | 1.5 | | pF |
| Internal Charge-Pump Frequency | | | | 700 | | kHz |
| Charge-Pump Output Feedthrough | | | | 100 | | μV_{P-P} |

Note 1: All device specifications are 100% tested at $T_A = +25^\circ C$. Limits over the extended temperature range are guaranteed by design, not production tested.

Note 2: Input bias current guaranteed by design, not production tested.

Typical Operating Characteristics

($V_{DD} = 5V$, $V_{SS} = 0V$, $V_{CM} = V_{DD}/2$, $T_A = +25^\circ C$, unless otherwise noted.)

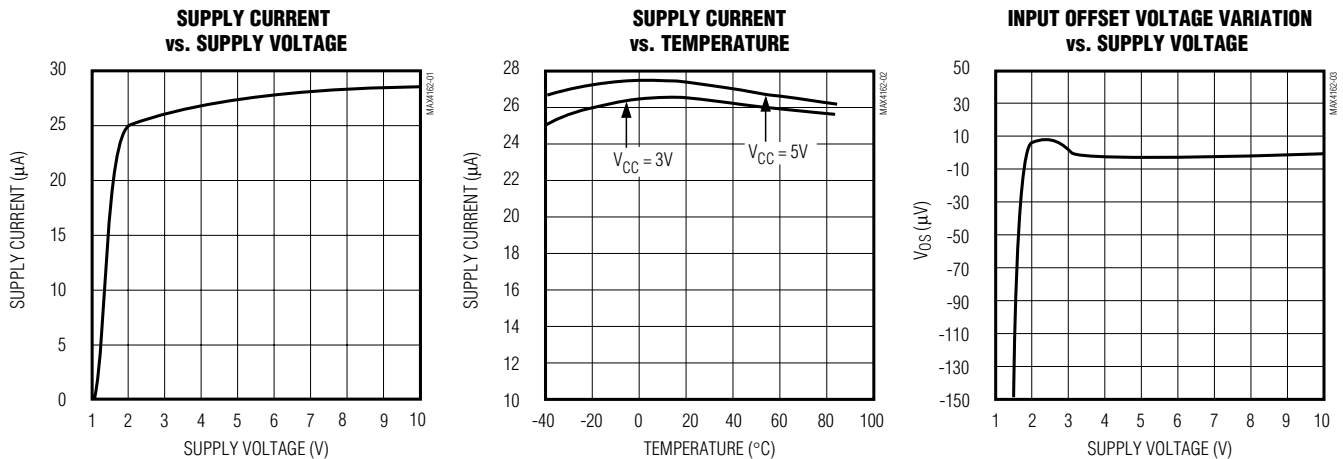


UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

Typical Operating Characteristics (continued)


($V_{DD} = 5V$, $V_{SS} = 0V$, $V_{CM} = V_{DD}/2$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX4162/MAX4163/MAX4164


INPUT OFFSET VOLTAGE vs. TEMPERATURE

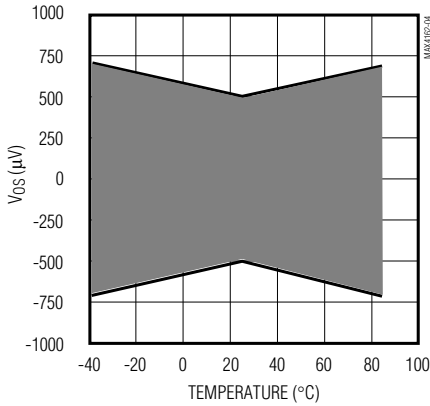


INPUT OFFSET VOLTAGE VARIATION vs. COMMON-MODE VOLTAGE

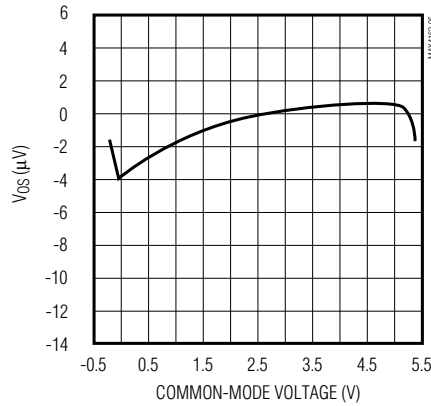


POWER-SUPPLY REJECTION RATIO vs. FREQUENCY

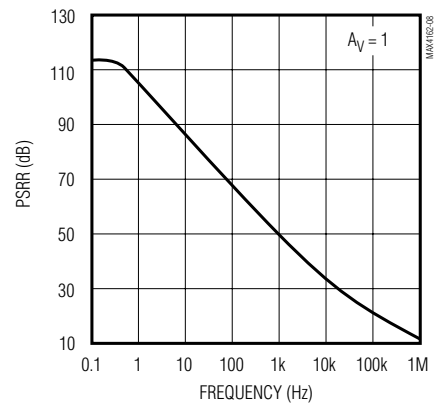


POWER-SUPPLY REJECTION RATIO vs. TEMPERATURE

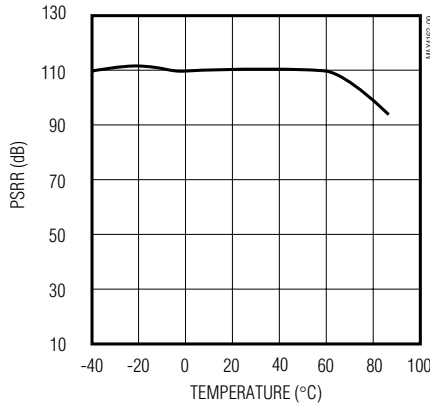


COMMON-MODE REJECTION vs. TEMPERATURE

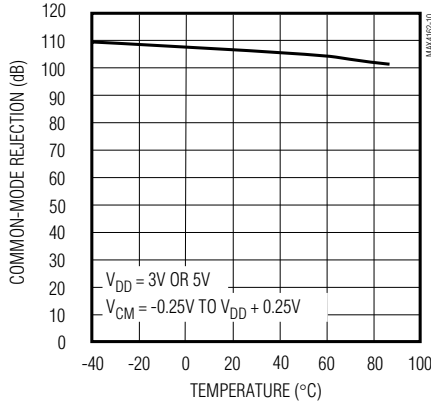


OPEN-LOOP GAIN vs. TEMPERATURE

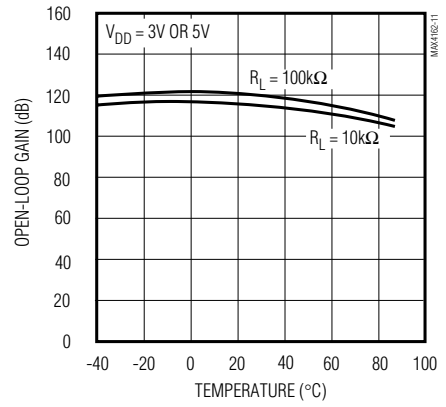


OUTPUT IMPEDANCE vs. FREQUENCY

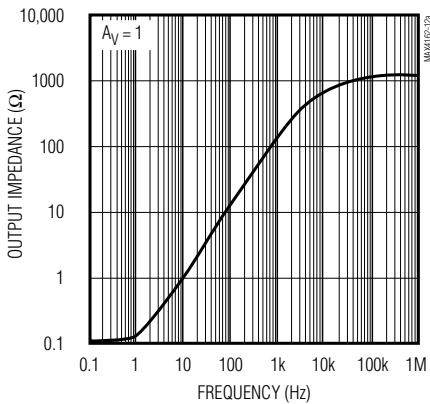

COMMON-MODE INPUT CAPACITANCE vs. COMMON-MODE VOLTAGE

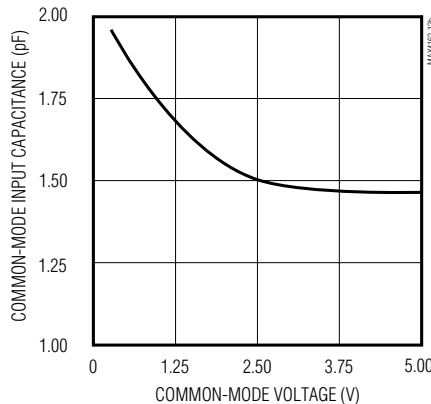










SHORT-CIRCUIT OUTPUT CURRENT vs. TEMPERATURE

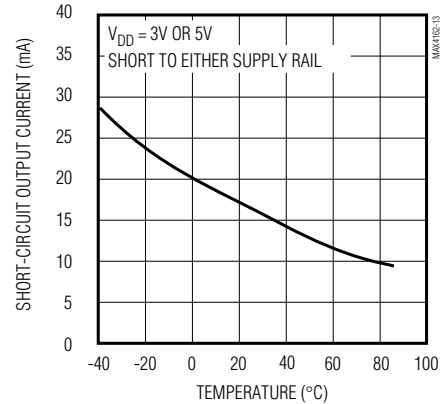

UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

Typical Operating Characteristics (continued)






($V_{DD} = 5V$, $V_{SS} = 0V$, $V_{CM} = V_{DD}/2$, $T_A = +25^\circ C$, unless otherwise noted.)

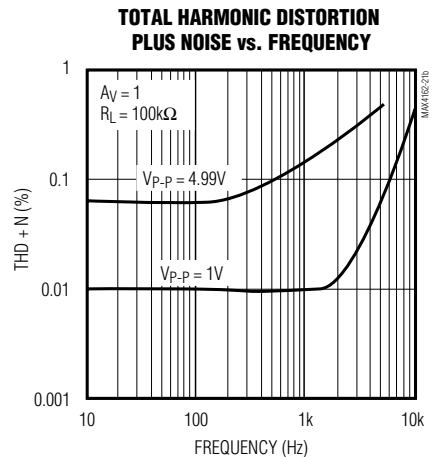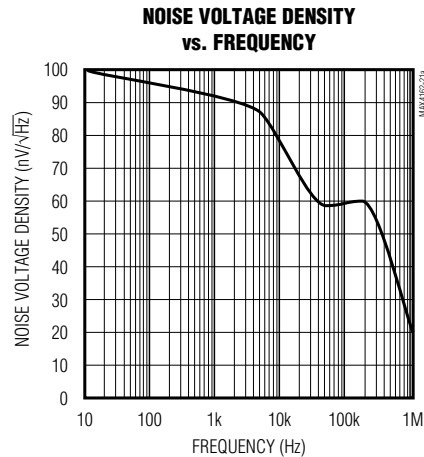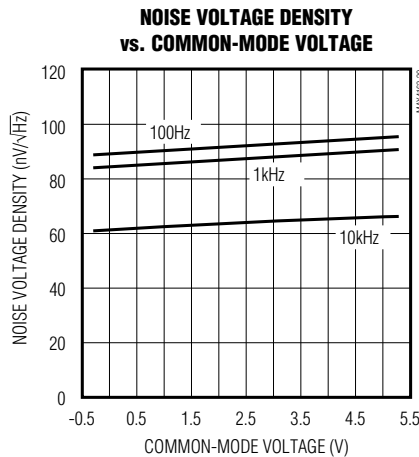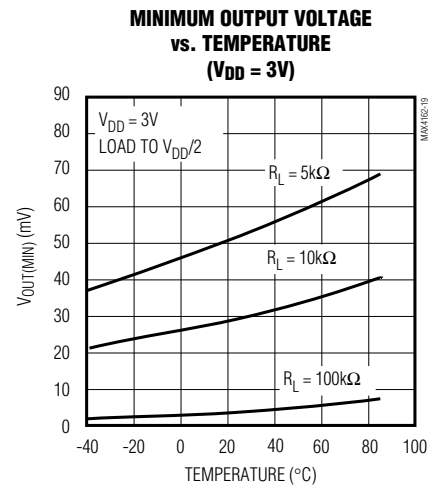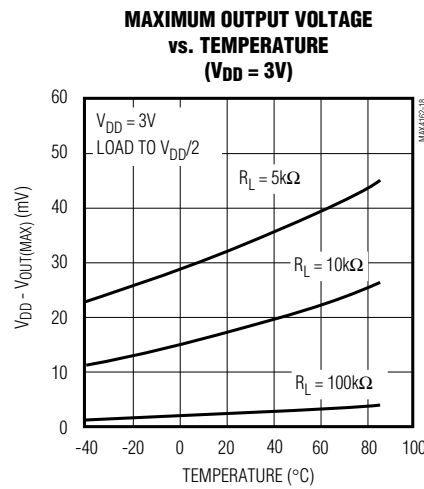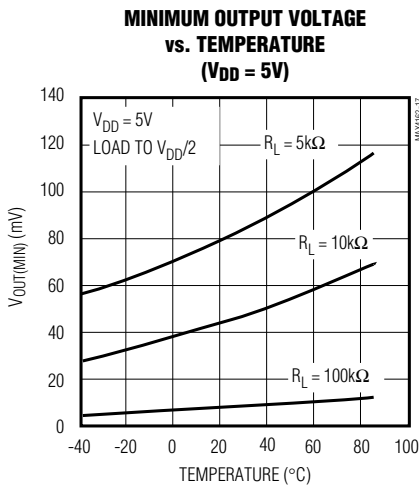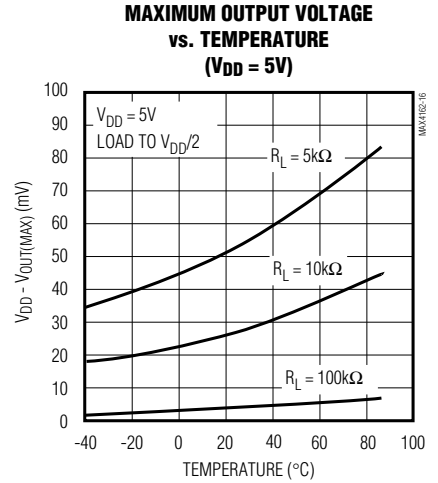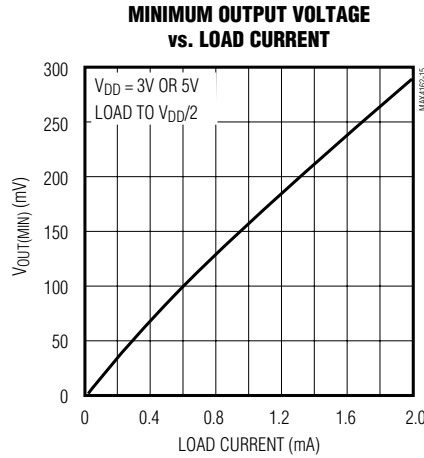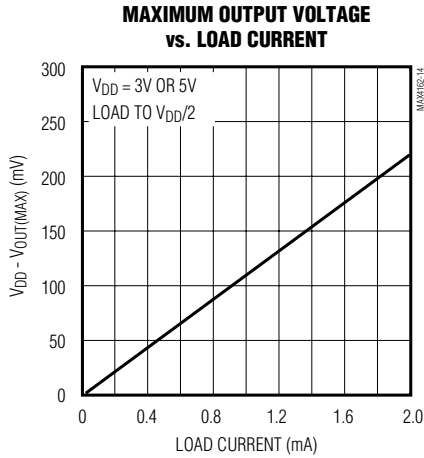


UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

Typical Operating Characteristics (continued)

($V_{DD} = 5V$, $V_{SS} = 0V$, $V_{CM} = V_{DD}/2$, $T_A = +25^\circ C$, unless otherwise noted.)

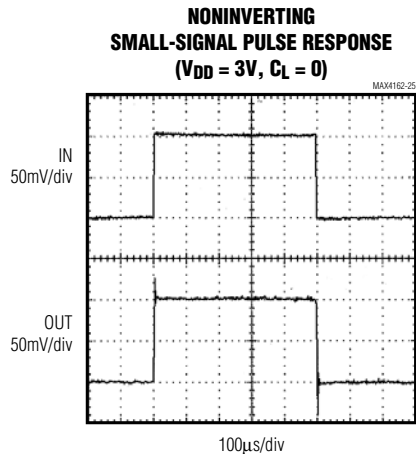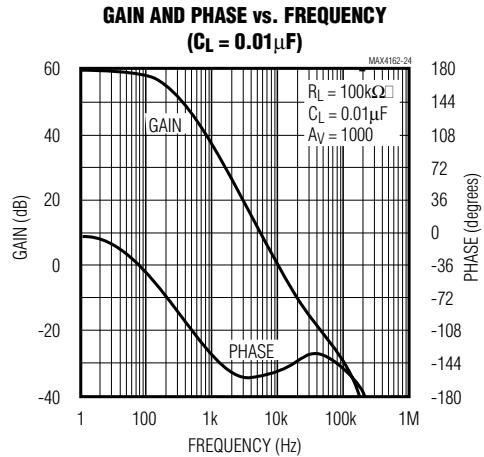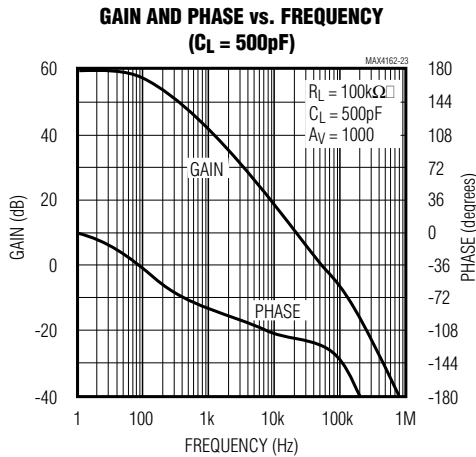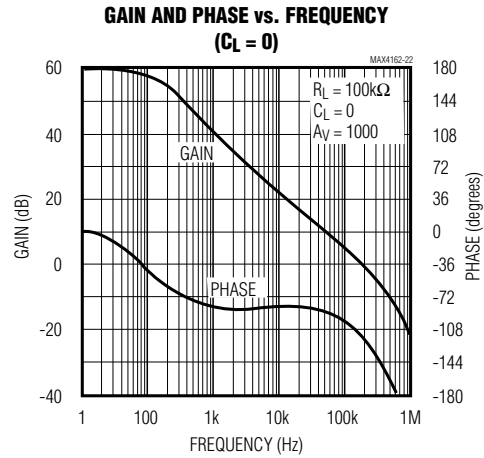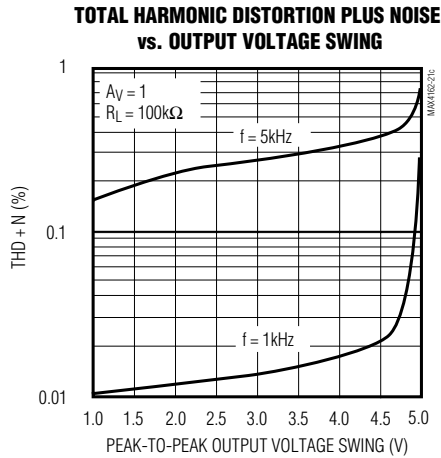

$V_{DD} = 3V$, $V_{IN} = 100mV$, $R_L = 100k\Omega$ to $V_{DD}/2$, $C_L = 0$

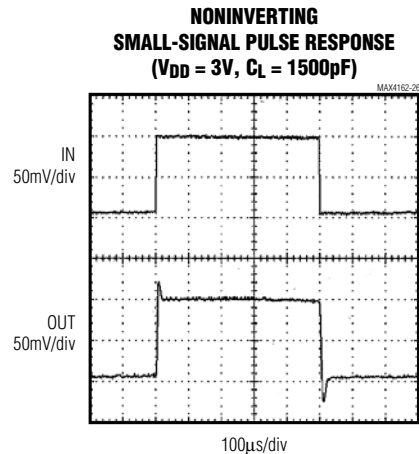

$V_{DD} = 3V$, $V_{IN} = 100mV$, $R_L = 100k\Omega$ to $V_{DD}/2$, $C_L = 1500pF$


MAX4162/MAX4163/MAX4164

UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

Typical Operating Characteristics (continued)


($V_{DD} = 5V$, $V_{SS} = 0V$, $V_{CM} = V_{DD}/2$, $T_A = +25^\circ C$, unless otherwise noted.)

**NONINVERTING
SMALL-SIGNAL PULSE RESPONSE
($V_{DD} = 5V$, $C_L = 0$)**

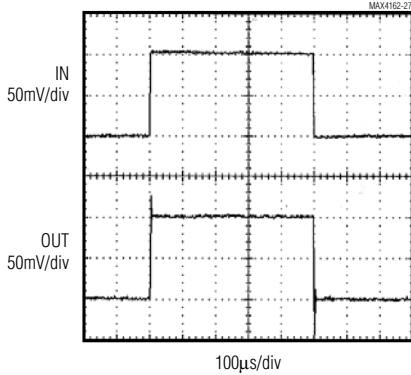


$V_{DD} = 5V$, $V_{IN} = 100mV$, $R_L = 100k\Omega$ to $V_{DD}/2$, $C_L = 0$

**NONINVERTING
SMALL-SIGNAL PULSE RESPONSE
($V_{DD} = 5V$, $C_L = 1500pF$)**

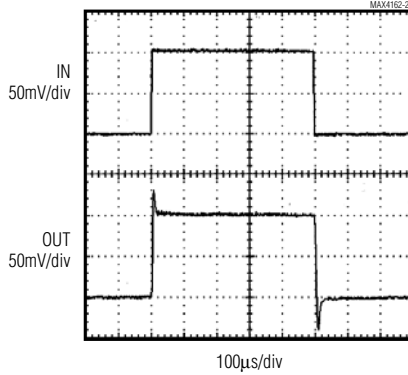


$V_{DD} = 5V$, $V_{IN} = 100mV$, $R_L = 100k\Omega$ to $V_{DD}/2$, $C_L = 1500pF$

**NONINVERTING
LARGE-SIGNAL PULSE RESPONSE
($V_{DD} = 3V$, $C_L = 0$)**

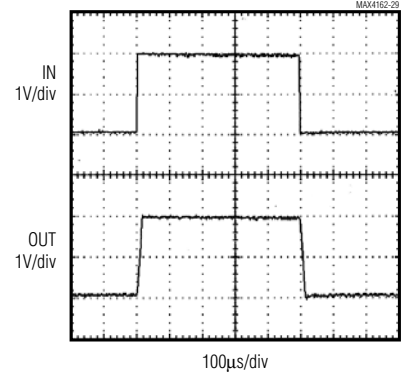


$V_{DD} = 3V$, $V_{IN} = 2V$, $R_L = 100k\Omega$ to $V_{DD}/2$, $C_L = 0$

**NONINVERTING
LARGE-SIGNAL PULSE RESPONSE
($V_{DD} = 3V$, $C_L = 1500pF$)**

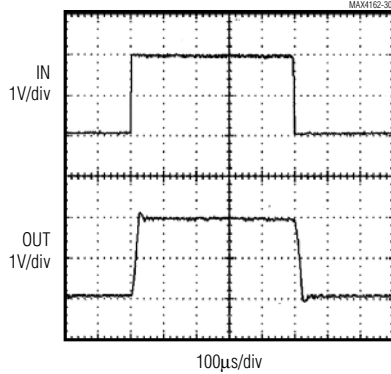

$V_{DD} = 3V$, $V_{IN} = 2V$, $R_L = 100k\Omega$ to $V_{DD}/2$, $C_L = 1500pF$

**NONINVERTING
LARGE-SIGNAL PULSE RESPONSE
($V_{DD} = 5V$, $C_L = 0$)**


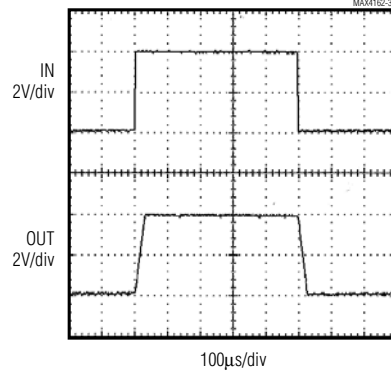


$V_{DD} = 5V$, $V_{IN} = 4V$, $R_L = 100k\Omega$ to $V_{DD}/2$, $C_L = 0$

UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

Typical Operating Characteristics (continued)

($V_{DD} = 5V$, $V_{SS} = 0V$, $V_{CM} = V_{DD}/2$, $T_A = +25^\circ C$, unless otherwise noted.)

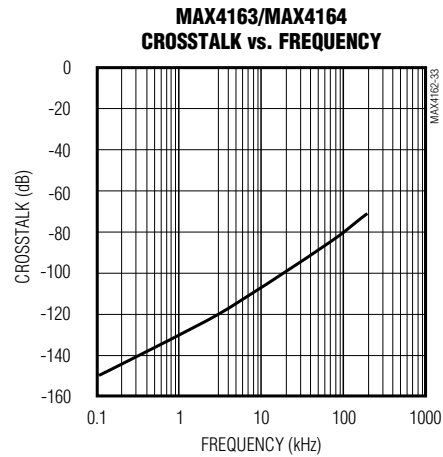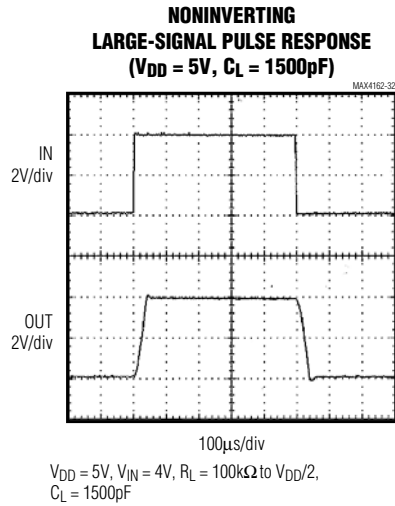

Pin Description

| PIN | | | | | NAME | FUNCTION |
|---------|-------|---------------|------|---------|----------|--|
| MAX4162 | | MAX4163 | | MAX4164 | | |
| SO | SOT23 | SO/ μ MAX | UCSP | SO | | |
| 1, 5, 8 | — | — | — | — | N.C. | No Connection. Not internally connected. |
| 2 | 4 | — | — | — | IN- | Amplifier Inverting Input |
| 3 | 3 | — | — | — | IN+ | Amplifier Noninverting Input |
| 4 | 2 | 4 | C2 | 11 | V_{SS} | Negative Power Supply |
| 6 | 1 | — | — | — | OUT | Amplifier Output |
| 7 | 5 | 8 | A2 | 4 | V_{DD} | Positive Power Supply |
| — | — | 1 | A1 | 1 | OUTA | Amplifier A Output |
| — | — | 2 | B1 | 2 | INA- | Amplifier A Inverting Input |
| — | — | 3 | C1 | 3 | INA+ | Amplifier A Noninverting Input |
| — | — | 5 | C3 | 5 | INB+ | Amplifier B Noninverting Input |
| — | — | 6 | B3 | 6 | INB- | Amplifier B Inverting Input |
| — | — | 7 | A3 | 7 | OUTB | Amplifier B Output |
| — | — | — | — | 8 | OUTC | Amplifier C Output |
| — | — | — | — | 9 | INC- | Amplifier C Inverting Input |
| — | — | — | — | 10 | INC+ | Amplifier C Noninverting Input |
| — | — | — | — | 12 | IND+ | Amplifier D Noninverting Input |
| — | — | — | — | 13 | IND- | Amplifier D Inverting Input |
| — | — | — | — | 14 | OUTD | Amplifier D Output |

MAX4162/MAX4163/MAX4164

UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

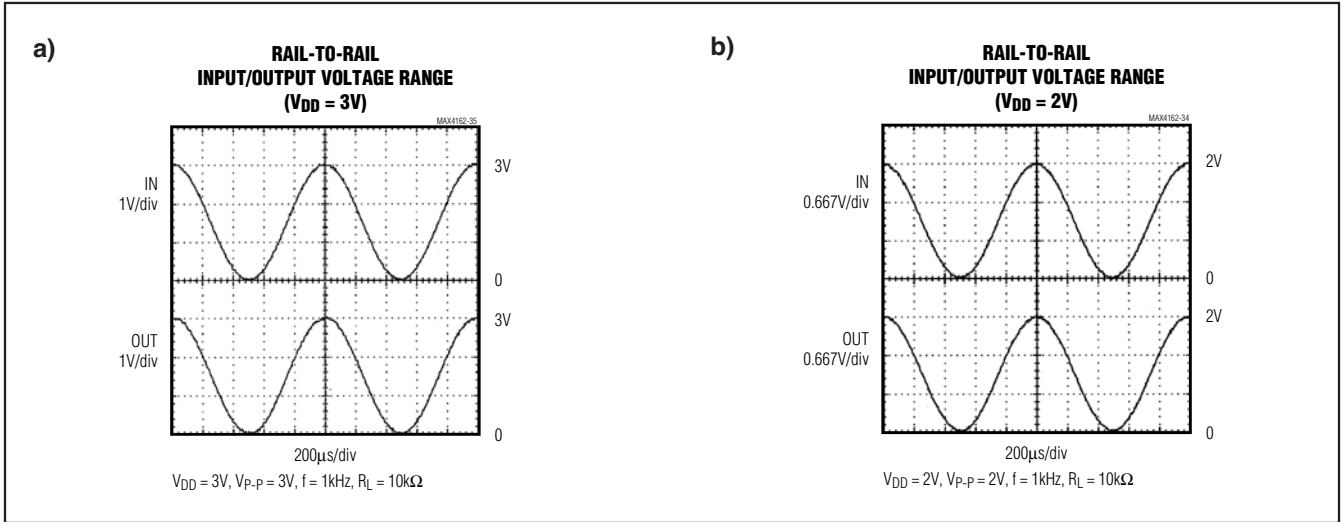


Figure 1. Rail-to-Rail I/O: a) V_{DD} = 3V; b) V_{DD} = 2V

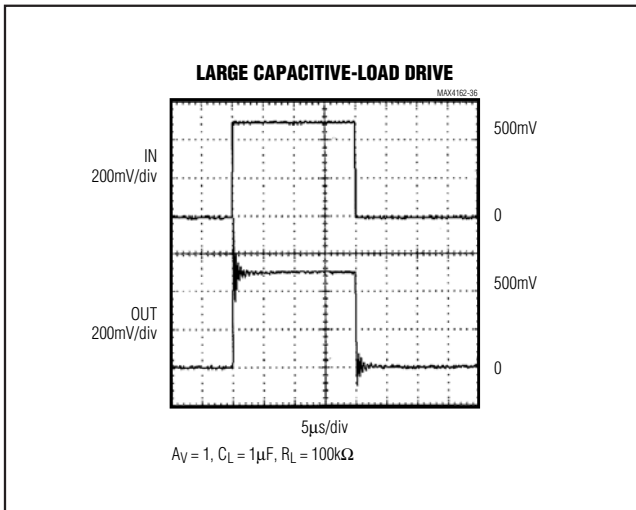


Figure 2. Large Capacitive-Load Drive

Applications Information

Rail-to-Rail Inputs and Outputs

The MAX4162/MAX4163/MAX4164 input common-mode range extends 250mV beyond each of the supply rails, providing a substantial increase in dynamic range over other op amps (even many of those referred to as rail-to-rail). Although the minimum operating voltage is specified at 2.5V, the devices typically provide full rail-to-rail operation below 2.0V (Figure 1). These amplifiers do not

suffer from midswing common-mode-rejection degradation or crossover nonlinearity often encountered in other rail-to-rail op amps. Extremely low, 1.0pA input bias current makes these devices ideal for applications such as pH probes, electrometers, and ionization detectors. They are also protected against phase reversal (inferred from CMRR test) and latchup for input signals extending beyond the supply rails. The output stage achieves a lower output impedance than traditional rail-to-rail output stages, providing an output voltage range that typically swings within 150mV of the supply rails for 1mA loads. This architecture also maintains high open-loop gain and output swing while driving substantial loads.

Output Loading and Stability

These devices drive 1mA loads to within 150mV of the supply rails while consuming only 25µA of quiescent current. Internal compensation allows these amplifiers to remain unity-gain stable while driving any capacitive load (Figure 2).

Internal Charge Pump

An internal charge pump provides two internal supplies typically 2V beyond each rail. These internal rails allow the MAX4162/MAX4163/MAX4164 to achieve true rail-to-rail inputs and outputs, while providing excellent common-mode rejection, power-supply rejection ratios, and gain linearity.

These charge pumps require no external components, and in most applications are entirely transparent to the user. Two characteristics may be visible to the user, depending on the application:

UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

MAX4162/MAX4163/MAX4164

- 1) The on-board charge pumps generate a small amount of 700kHz switching noise at the op amp's output. The amplitude of this noise is typically 100 μ Vp-p. The noise is **not** referred to the input, and is independent of amplifier gain. The charge-pump switching frequency is well beyond the amplifier's 200kHz bandwidth, and is therefore unnoticeable in most applications.
- 2) The charge pumps typically require up to 20 μ s on power-up to fully energize the internal supply rails (Figure 3).

Power Supplies and Layout

The MAX4162/MAX4163/MAX4164 are guaranteed to operate from a single 2.5V to 10.0V power supply, but full rail-to-rail operation typically extends below 2V. For single-supply operation, bypass the power supply with a 1 μ F capacitor in parallel with a 0.1 μ F ceramic capacitor. If operating from dual supplies, bypass each supply to ground.

Good layout improves performance by decreasing the amount of stray capacitance at the op amp's inputs and output. To decrease stray capacitance, minimize both trace and external component lead lengths, and place external components close to the op amp's pins.

UCSP Package Consideration

For general UCSP package information and PC layout considerations, please refer to the Maxim Application Note (Wafer-Level Ultra-Chip-Board-Scale-Package).

UCSP Reliability

The UCSP represents a unique packaging form factor that may not perform equally to a packaged product through traditional mechanical reliability tests. UCSP reliability is integrally linked to the user's assembly methods, circuit board material, and usage environment. The user should closely review these areas when considering use of a UCSP. Performance through operating life test and moisture resistance remains uncompromised as it is primarily determined by the wafer-fabrication process. Mechanical stress performance is a greater consideration for a UCSP package. UCSPs are attached through direct solder contact to the user's PC board, foregoing the inherent stress relief of a packaged product lead frame. Solder joint contact integrity must be considered.

Table 1 shows the testing done to characterize the UCSP reliability performance. In conclusion, the UCSP is capable of performing reliably through environmental stresses as indicated by the results in the table. Additional usage data and recommendations are detailed in the UCSP application note, which can be found on Maxim's website at www.maxim-ic.com.

Table 1. Reliability Test Data

| TEST | CONDITIONS | DURATION | NO. OF FAILURES PER SAMPLE SIZE |
|---------------------------------|---------------------------------|------------------------|---------------------------------|
| Temperature Cycle | -35°C to +85°C, -40°C to +100°C | 150 cycles, 900 cycles | 0/10, 0/200 |
| Operating Life | T _A = +70°C | 240h | 0/10 |
| Moisture Resistance | -20°C to +60°C, 90% RH | 240h | 0/10 |
| Low-Temperature Storage | -20°C | 240h | 0/10 |
| Low-Temperature Operational | -10°C | 24h | 0/10 |
| Solderability | 8h steam age | — | 0/15 |
| ESD | ±2000V, Human Body Model | — | 0/5 |
| High-Temperature Operating Life | T _J = +150°C | 168h | 0/45 |

UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps


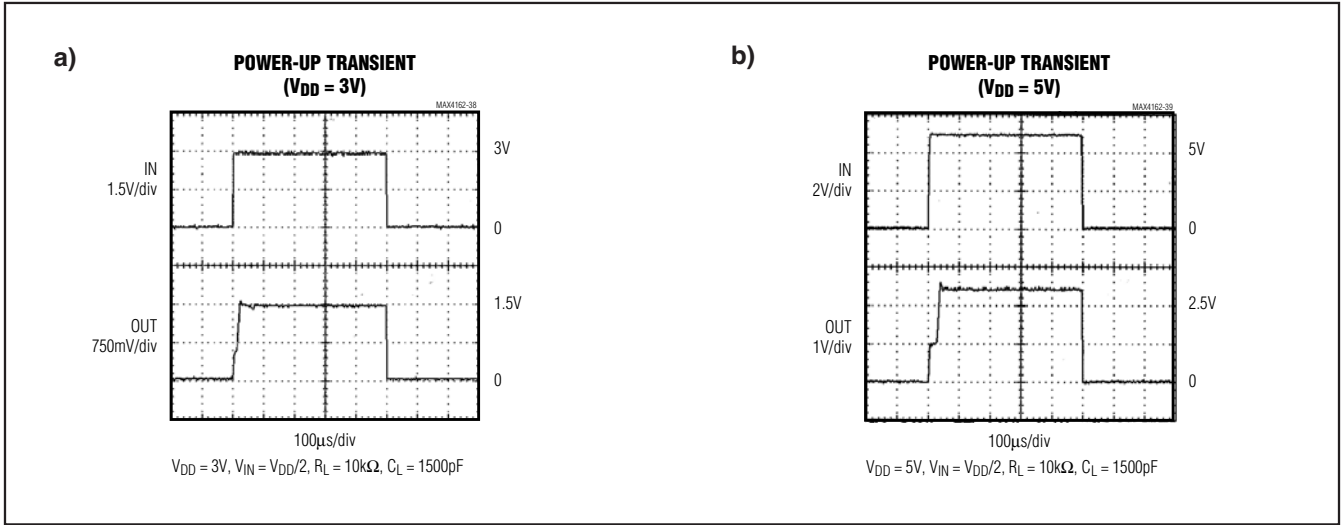


Figure 3. Power-Up Transient: a) $V_{DD} = 3V$; b) $V_{DD} = 5V$

Pin Configurations (continued)

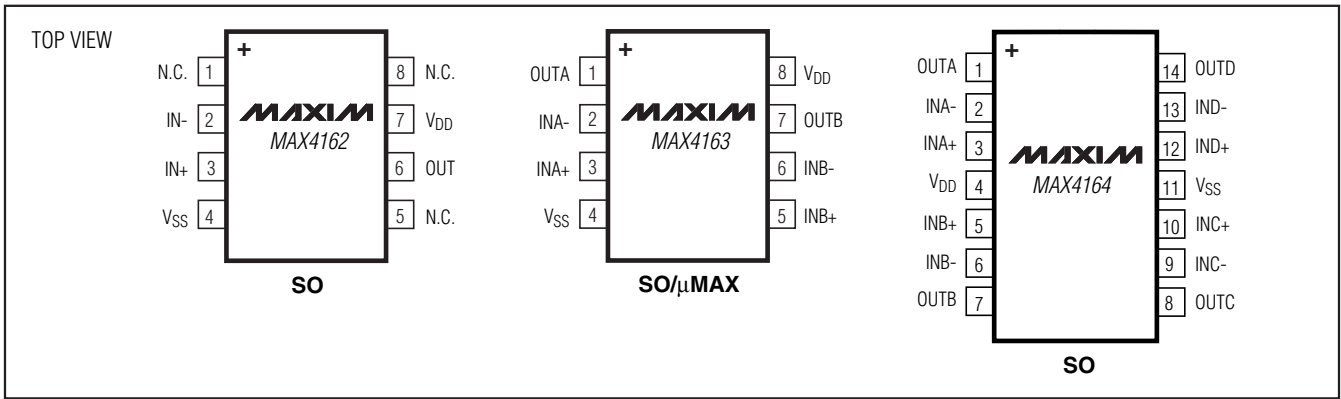

Chip Information

PROCESS: BiCMOS

Package Information

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | DOCUMENT NO. |
|--------------|--------------|-------------------------|
| 8 SO | S8-2, S8-4 | 21-0041 |
| 5 SOT23 | U5-1 | 21-0057 |
| 8 UCSP | B9-5 | 21-0093 |
| 8 µMAX | U8-1 | 21-0036 |
| 14 SO | S14M-5 | 21-0041 |

UCSP, Micropower, Single-Supply, 10V, Rail-to-Rail I/O Op Amps

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|--|-----------------|
| 2 | 5/09 | Changed operating supply voltage from 2.7V to 2.5V | 1, 2, 3, 10, 11 |
| 3 | 1/10 | Updated PSRR condition for 5V operation, added lead-free designation to <i>Ordering Information</i> , and added UCSP soldering temperature | 1-9, 12 |

MAX4162/MAX4163/MAX4164

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 _____ 13

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А