


### P6SMB Series



#### Agency Approvals

| AGENCY  | AGENCY FILE NUMBER |
|---|--------------------|
|  | E230531            |


#### Maximum Ratings and Thermal Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

| Parameter  | Symbol                            | Value      | Unit |
|--|-----------------------------------|------------|------|
| Peak Pulse Power Dissipation at T <sub>A</sub> =25°C by 10x1000µs Waveform (Fig.2)(Note 1), (Note 2) | P <sub>PPM</sub>                  | 600        | W    |
| Power Dissipation on Infinite Heat Sink at T <sub>A</sub> =50°C                                      | P <sub>M(AV)</sub>                | 5.0        | W    |
| Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)                                     | I <sub>FSM</sub>                  | 100        | A    |
| Maximum Instantaneous Forward Voltage at 50A for Unidirectional Only (Note 4)                        | V <sub>F</sub>                    | 3.5V/5.0   | V    |
| Operating Junction and Storage Temperature Range   | T <sub>J</sub> , T <sub>STG</sub> | -65 to 150 | °C   |
| Typical Thermal Resistance Junction to Lead  | R <sub>UJL</sub>                  | 20         | °C/W |
| Typical Thermal Resistance Junction to Ambient   | R <sub>UJA</sub>                  | 100        | °C/W |

#### Notes:

1. Non-repetitive current pulse, per Fig. 4 and derated above T<sub>A</sub> = 25°C per Fig. 3.
2. Mounted on copper pad area of 0.2x0.2" (5.0 x 5.0mm) to each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum.
4. V<sub>F</sub><3.5V for V<sub>BR</sub> ≤ 200V and V<sub>F</sub><5.0V for V<sub>BR</sub> ≥ 201V.

#### Functional Diagram

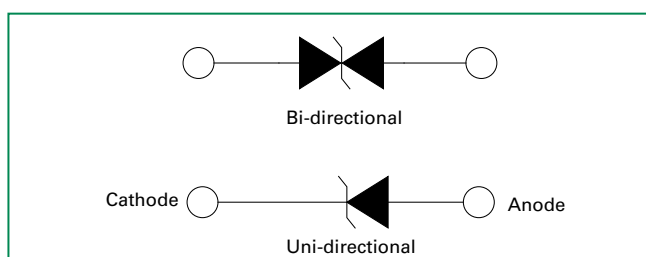

#### Description

The P6SMB series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

#### Features

- Excellent clamping capability
- Low incremental surge resistance
- Typical I<sub>R</sub> less than 1µA above 12V
- For surface mounted applications to optimize board space
- Low profile package
- Typical failure mode is short from over-specified voltage or current
- Whisker test is conducted based on JEDEC JESD201A per its table 4a and 4c
- IEC-61000-4-2 ESD 15kV(Air), 8kV (Contact)
- ESD protection of data lines in accordance with IEC 61000-4-2 (IEC801-2)
- EFT protection of data lines in accordance with IEC 61000-4-4 (IEC801-4)
- Built-in strain relief
- 600W peak pulse power capability at 10x1000µs waveform, repetition rate (duty cycles):0.01%
- Fast response time: typically less than 1.0ps from 0V to BV min
- Typical maximum temperature coefficient ΔV<sub>BR</sub> = 0.1% × V<sub>BR</sub>@25°C × ΔT
- Glass passivated chip junction
- High temperature soldering guaranteed: 260°C/40 seconds at terminals
- Plastic package has underwriters laboratory flammability 94V-0
- Matte tin lead-free plated
- Halogen free and RoHS compliant

#### Applications

TVS devices are ideal for the protection of I/O Interfaces, V<sub>CC</sub> bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

### Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Marking |      | Reverse Stand off Voltage $V_R$ (Volts) | Breakdown Voltage $V_{BR}$ (Volts) @ $I_T$ |        | Test Current $I_T$ (mA) | Maximum Clamping Voltage $V_C$ @ $I_{pp}$ (V) | Maximum Peak Pulse Current $I_{pp}$ (A) | Maximum Reverse Leakage $I_R$ @ $V_R$ ( $\mu\text{A}$ ) | Agency Approval  |
|-------------------|------------------|---------|------|---|--|--------|-------------------------|---|---|---|---|
|                   |                  | UNI     | BI   |   | MIN  | MAX    |                         |   |   |   |   |
| P6SMB6.8A         | P6SMB6.8CA       | 6V8A    | 6V8C | 5.80                                    | 6.45                                       | 7.14   | 10                      | 10.5  | 58.1                                    | 1000  | X   |
| P6SMB7.5A         | P6SMB7.5CA       | 7V5A    | 7V5C | 6.40                                    | 7.13                                       | 7.88   | 10                      | 11.3  | 54.0                                    | 500   | X   |
| P6SMB8.2A         | P6SMB8.2CA       | 8V2A    | 8V2C | 7.02                                    | 7.79                                       | 8.61   | 10                      | 12.1  | 50.4                                    | 200   | X   |
| P6SMB9.1A         | P6SMB9.1CA       | 9V1A    | 9V1C | 7.78                                    | 8.65                                       | 9.55   | 1                       | 13.4  | 45.5                                    | 50  | X   |
| P6SMB10A          | P6SMB10CA        | 10A     | 10C  | 8.55                                    | 9.50                                       | 10.50  | 1                       | 14.5  | 42.1                                    | 10  | X   |
| P6SMB11A          | P6SMB11CA        | 11A     | 11C  | 9.40                                    | 10.50                                      | 11.60  | 1                       | 15.6  | 39.1                                    | 5   | X   |
| P6SMB12A          | P6SMB12CA        | 12A     | 12C  | 10.20                                   | 11.40                                      | 12.60  | 1                       | 16.7  | 36.5                                    | 5   | X   |
| P6SMB13A          | P6SMB13CA        | 13A     | 13C  | 11.10                                   | 12.40                                      | 13.70  | 1                       | 18.2  | 33.5                                    | 1   | X   |
| P6SMB15A          | P6SMB15CA        | 15A     | 15C  | 12.80                                   | 14.30                                      | 15.80  | 1                       | 21.2  | 28.8                                    | 1   | X   |
| P6SMB16A          | P6SMB16CA        | 16A     | 16C  | 13.60                                   | 15.20                                      | 16.80  | 1                       | 22.5  | 27.1                                    | 1   | X   |
| P6SMB18A          | P6SMB18CA        | 18A     | 18C  | 15.30                                   | 17.10                                      | 18.90  | 1                       | 25.5  | 24.2                                    | 1   | X   |
| P6SMB20A          | P6SMB20CA        | 20A     | 20C  | 17.10                                   | 19.00                                      | 21.00  | 1                       | 27.7  | 22.0                                    | 1   | X   |
| P6SMB22A          | P6SMB22CA        | 22A     | 22C  | 18.80                                   | 20.90                                      | 23.10  | 1                       | 30.6  | 19.9                                    | 1   | X   |
| P6SMB24A          | P6SMB24CA        | 24A     | 24C  | 20.50                                   | 22.80                                      | 25.20  | 1                       | 33.2  | 18.4                                    | 1   | X   |
| P6SMB27A          | P6SMB27CA        | 27A     | 27C  | 23.10                                   | 25.70                                      | 28.40  | 1                       | 37.5  | 16.3                                    | 1   | X   |
| P6SMB30A          | P6SMB30CA        | 30A     | 30C  | 25.60                                   | 28.50                                      | 31.50  | 1                       | 41.4  | 14.7                                    | 1   | X   |
| P6SMB33A          | P6SMB33CA        | 33A     | 33C  | 28.20                                   | 31.40                                      | 34.70  | 1                       | 45.7  | 13.3                                    | 1   | X   |
| P6SMB36A          | P6SMB36CA        | 36A     | 36C  | 30.80                                   | 34.20                                      | 37.80  | 1                       | 49.9  | 12.2                                    | 1   | X   |
| P6SMB39A          | P6SMB39CA        | 39A     | 39C  | 33.30                                   | 37.10                                      | 41.00  | 1                       | 53.9  | 11.3                                    | 1   | X   |
| P6SMB43A          | P6SMB43CA        | 43A     | 43C  | 36.80                                   | 40.90                                      | 45.20  | 1                       | 59.3  | 10.3                                    | 1   | X   |
| P6SMB47A          | P6SMB47CA        | 47A     | 47C  | 40.20                                   | 44.70                                      | 49.40  | 1                       | 64.8  | 9.4                                     | 1   | X   |
| P6SMB51A          | P6SMB51CA        | 51A     | 51C  | 43.60                                   | 48.50                                      | 53.60  | 1                       | 70.1  | 8.7                                     | 1   | X   |
| P6SMB56A          | P6SMB56CA        | 56A     | 56C  | 47.80                                   | 53.20                                      | 58.80  | 1                       | 77.0  | 7.9                                     | 1   | X   |
| P6SMB58A          | P6SMB58CA        | 58A     | 58C  | 52.78                                   | 55.10                                      | 60.90  | 1                       | 79.8  | 7.7                                     | 1   | X   |
| P6SMB62A          | P6SMB62CA        | 62A     | 62C  | 53.00                                   | 58.90                                      | 65.10  | 1                       | 85.0  | 7.2                                     | 1   | X   |
| P6SMB68A          | P6SMB68CA        | 68A     | 68C  | 58.10                                   | 64.60                                      | 71.40  | 1                       | 92.0  | 6.6                                     | 1   | X   |
| P6SMB75A          | P6SMB75CA        | 75A     | 75C  | 64.10                                   | 71.30                                      | 78.80  | 1                       | 103.0   | 5.9                                     | 1   | X   |
| P6SMB82A          | P6SMB82CA        | 82A     | 82C  | 70.10                                   | 77.90                                      | 86.10  | 1                       | 113.0   | 5.4                                     | 1   | X   |
| P6SMB91A          | P6SMB91CA        | 91A     | 91C  | 77.80                                   | 86.50                                      | 95.50  | 1                       | 125.0   | 4.9                                     | 1   | X   |
| P6SMB100A         | P6SMB100CA       | 100A    | 100C | 85.50                                   | 95.00                                      | 105.00 | 1                       | 137.0   | 4.5                                     | 1   | X   |
| P6SMB110A         | P6SMB110CA       | 110A    | 110C | 94.00                                   | 105.00                                     | 116.00 | 1                       | 152.0   | 4.0                                     | 1   | X   |
| P6SMB120A         | P6SMB120CA       | 120A    | 120C | 102.00                                  | 114.00                                     | 126.00 | 1                       | 165.0   | 3.7                                     | 1   | X   |
| P6SMB130A         | P6SMB130CA       | 130A    | 130C | 111.00                                  | 124.00                                     | 137.00 | 1                       | 179.0   | 3.4                                     | 1   | X   |
| P6SMB150A         | P6SMB150CA       | 150A    | 150C | 128.00                                  | 143.00                                     | 158.00 | 1                       | 207.0   | 2.9                                     | 1   | X   |
| P6SMB160A         | P6SMB160CA       | 160A    | 160C | 136.00                                  | 152.00                                     | 168.00 | 1                       | 219.0   | 2.8                                     | 1   | X   |
| P6SMB170A         | P6SMB170CA       | 170A    | 170C | 145.00                                  | 162.00                                     | 179.00 | 1                       | 234.0   | 2.6                                     | 1   | X   |
| P6SMB180A         | P6SMB180CA       | 180A    | 180C | 154.00                                  | 171.00                                     | 189.00 | 1                       | 246.0   | 2.5                                     | 1   | X   |
| P6SMB200A         | P6SMB200CA       | 200A    | 200C | 171.00                                  | 190.00                                     | 210.00 | 1                       | 274.0   | 2.2                                     | 1   | X   |
| P6SMB220A         | P6SMB220CA       | 220A    | 220C | 185.00                                  | 209.00                                     | 231.00 | 1                       | 328.0   | 1.9                                     | 1   | X   |
| P6SMB250A         | P6SMB250CA       | 250A    | 250C | 214.00                                  | 237.00                                     | 263.00 | 1                       | 344.0   | 1.8                                     | 1   | X   |
| P6SMB300A         | P6SMB300CA       | 300A    | 300C | 256.00                                  | 285.00                                     | 315.00 | 1                       | 414.0   | 1.5                                     | 1   | X   |
| P6SMB350A         | P6SMB350CA       | 350A    | 350C | 300.00                                  | 332.00                                     | 368.00 | 1                       | 482.0   | 1.3                                     | 1   | X   |
| P6SMB400A         | P6SMB400CA       | 400A    | 400C | 342.00                                  | 380.00                                     | 420.00 | 1                       | 548.0   | 1.1                                     | 1   | X   |
| P6SMB440A         | P6SMB440CA       | 440A    | 440C | 376.00                                  | 418.00                                     | 462.00 | 1                       | 602.0   | 1.0                                     | 1   | X   |
| P6SMB480A         | P6SMB480CA       | 480A    | 480C | 408.00                                  | 456.00                                     | 504.00 | 1                       | 658.0   | 0.9                                     | 1   |   |
| P6SMB510A         | P6SMB510CA       | 510A    | 510C | 434.00                                  | 485.00                                     | 535.00 | 1                       | 698.0   | 0.9                                     | 1   |   |
| P6SMB530A         | P6SMB530CA       | 530A    | 530C | 477.00                                  | 503.50                                     | 556.50 | 1                       | 725.0   | 0.8                                     | 1   |   |
| P6SMB540A         | P6SMB540CA       | 540A    | 540C | 486.00                                  | 513.00                                     | 567.00 | 1                       | 740.0   | 0.8                                     | 1   |   |
| P6SMB550A         | P6SMB550CA       | 550A    | 550C | 495.00                                  | 522.50                                     | 577.50 | 1                       | 760.0   | 0.8                                     | 1   |   |

For bidirectional type having  $V_R$  of 10 volts and less, the  $I_R$  limit is double.

For parts without A  $V_{BR}$  is  $\pm 10\%$  and  $V_C$  is 5% higher than with A parts.

## I-V Curve Characteristics



**P<sub>PPM</sub> Peak Pulse Power Dissipation** – Max power dissipation

**V<sub>R</sub> Stand-off Voltage** – Maximum voltage that can be applied to the TVS without operation

**V<sub>BR</sub> Breakdown Voltage** – Maximum current that flows through the TVS at a specified test current (I<sub>T</sub>)

**V<sub>C</sub> Clamping Voltage** – Peak voltage measured across the suppressor at a specified I<sub>ppm</sub> (peak impulse current)

**I<sub>R</sub> Reverse Leakage Current** – Current measured at V<sub>R</sub>

**V<sub>F</sub> Forward Voltage Drop for Uni-directional**

## Ratings and Characteristic Curves (T<sub>A</sub>=25°C unless otherwise noted)

**Figure 1 - TVS Transients Clamping Waveform**




**Figure 2 - Peak Pulse Power Rating**



continues on next page.

**Ratings and Characteristic Curves** ( $T_A=25^\circ\text{C}$  unless otherwise noted) (Continued)


**Figure 3 - Peak Pulse Power or Current Derating Curve**

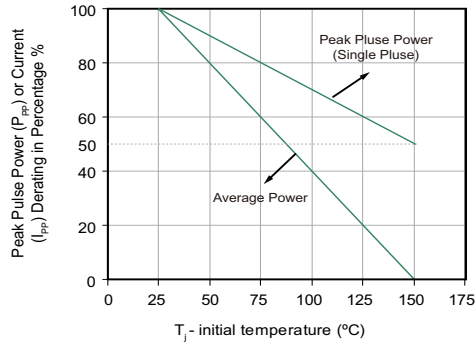


**Figure 4 - Pulse Waveform**




**Figure 5 - Typical Junction Capacitance**

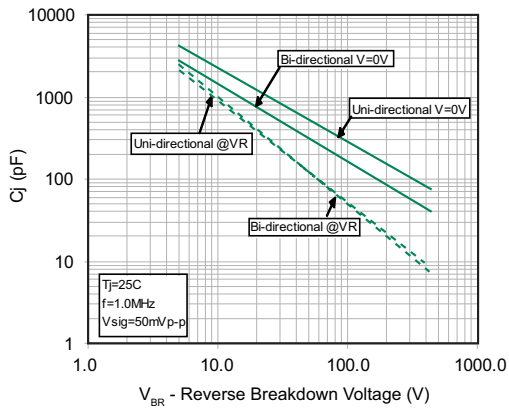

**Figure 6 - Steady State Power Dissipation Derating Curve**

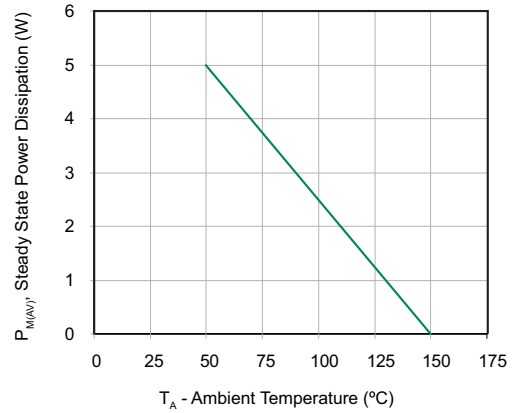

**Figure 7 - Maximum Non-Repetitive Peak Forward Surge Current Uni-Directional Only**

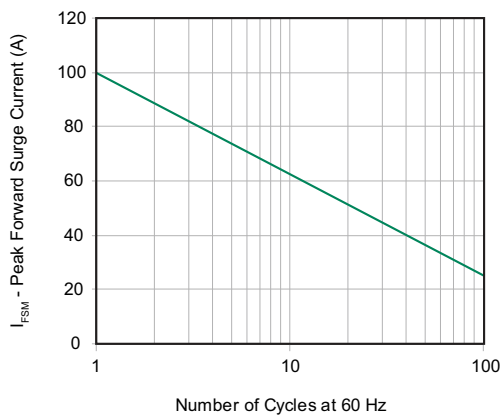

### Soldering Parameters

|  |                                    |                         |
|--|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Lead-free assembly      |
| Pre Heat   | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|  | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|  | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 3°C/second max          |
| Reflow   | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|  | - Time (min to max) ( $t_s$ )      | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate   |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |
| Do not exceed  |                                    | 280°C                   |



### Physical Specifications

|                 |   |
|-----------------|---|
| <b>Weight</b>   | 0.003 ounce, 0.093 grams  |
| <b>Case</b>     | JEDEC DO214AA. Molded plastic body over glass passivated junction |
| <b>Polarity</b> | Color band denotes cathode except Bidirectional.                  |
| <b>Terminal</b> | Matte Tin-plated leads, Solderable per JESD22-B102D               |

### Environmental Specifications

|                           |              |
|---------------------------|--------------|
| <b>Temperature Cycle</b>  | JESD22-A104  |
| <b>Pressure Cooker</b>    | JESD 22-A102 |
| <b>High Temp. Storage</b> | JESD22-A103  |
| <b>HTRB</b>               | JESD22-A108  |
| <b>Thermal Shock</b>      | JESD22-A106  |

### Dimensions

DO-214AA (SMB J-Bend)



| Dimensions | Inches |       | Millimeters |       |
|------------|--------|-------|-------------|-------|
|            | Min    | Max   | Min         | Max   |
| A          | 0.077  | 0.086 | 1.950       | 2.200 |
| B          | 0.160  | 0.180 | 4.060       | 4.570 |
| C          | 0.130  | 0.155 | 3.300       | 3.940 |
| D          | 0.084  | 0.096 | 2.130       | 2.440 |
| E          | 0.030  | 0.060 | 0.760       | 1.520 |
| F          | -      | 0.008 | -           | 0.203 |
| G          | 0.205  | 0.220 | 5.210       | 5.590 |
| H          | 0.006  | 0.016 | 0.152       | 0.405 |
| I          | 0.089  | -     | 2.260       | -     |
| J          | 0.085  | -     | 2.160       | -     |
| K          | -      | 0.107 | -           | 2.740 |
| L          | 0.085  | -     | 2.160       | -     |

### Part Numbering System



### Part Marking System



### Packaging

| Part number | Component Package | Quantity | Packaging Option            | Packaging Specification |
|-------------|-------------------|----------|-----------------------------|-------------------------|
| P6SMBxxxXX  | DO-214AA          | 3000     | Tape & Reel – 12mm/13" tape | EIA STD RS-481          |

### Tape and Reel Specification



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А