


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0788320006](#)
Status: **Active**
Overview: [Micro Serial Attached SCSI Connectors \(Micro SAS\)](#)
Description: 0.80mm Signal Pitch, 1.27mm Power Pitch Micro SAS-3 Receptacle, Vertical, Surface Mount, 0.76µm Selective Gold (Au) Plating, 25 Circuits, for 1.00mm PCB Thickness, Halogen free, Lead-Free

Documents:
[3D Model](#) [Application Specification AS-78832-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [Packaging Specification PK-78832-001 \(PDF\)](#)
[Product Specification PS-78832-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	I/O Connectors
Series	78832
Application	Board-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	Micro Serial Attached SCSI Connectors (Micro SAS)
Product Name	Micro SAS 3.0
Type	N/A
UPC	887191534718

Physical	
Boot Color	N/A
Circuits (Loaded)	25
Circuits (maximum)	25
Circuits Detail	Signal 14, Power 9, Sideband 2
Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Gender	Female
Keying to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold over Nickel
Material - Plating Termination	Tin over Nickel
Material - Resin	High Temperature Thermoplastic
Net Weight	0.813/g
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Embossed Tape on Reel
Panel Mount	No
Pitch - Mating Interface	0.80mm, 1.27mm
Pitch - Termination Interface	0.80mm, 1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Temperature Range - Operating	0°C to +55°C

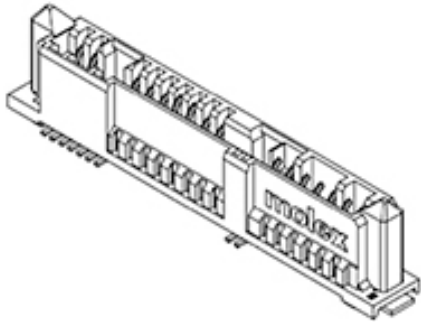

Series image - Reference only

EU ELV
Not Relevant

EU RoHS **China RoHS**
Compliant
REACH SVHC
Not Contained Per
-ED/79/2015 (17
December 2015)
Halogen-Free
Status
Low-Halogen
Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS Green Image
ELV Not Relevant

Search Parts in this Series
[78832 Series](#)

Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No
Electrical	
Current - Maximum per Contact	1.5A
Voltage - Maximum	30V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-78832-001
Electrical Model Document	EE-78832-002
Packaging Specification	PK-78832-001
Product Specification	PS-78832-001, RPS-78832-001
S-Parameter Model	SP-78832-002
Sales Drawing	SD-78832-001, SD-78832A-001

This document was generated on 06/13/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А