
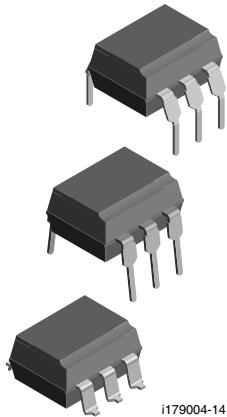


# Optocoupler, Phototransistor Output, no Base Connection

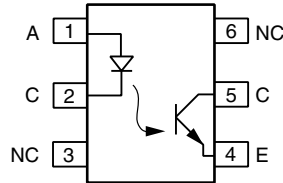

i179004-14


**FEATURES**

- Isolation test voltage, 5000 V<sub>RMS</sub>
- No base terminal connection for improved common mode interface immunity
- Long term stability
- Industry standard dual-in-line package
- Material categorization: For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


**RoHS**  
COMPLIANT

**AGENCY APPROVALS**

- UL file no. E52744
- cUL tested to CSA 22.2 bulletin 5A
- DIN EN 60747-5-5 (VDE 0884-5), available with option 1
- BSI: EN 60065, EN 60950-1
- FIMKO
- CQC

**DESCRIPTION**

The CNY17F is an optocoupler consisting of a gallium arsenide infrared emitting diode optically coupled to a silicon planar phototransistor detector in a plastic plug-in DIP-6 package.

The coupling device is suitable for signal transmission between two electrically separated circuits. The potential difference between the circuits to be coupled is not allowed to exceed the maximum permissible reference voltages.

In contrast to the CNY17 series, the base terminal of the F type is not connected, resulting in a substantially improved common-mode interference immunity.

| ORDERING INFORMATION   |                              |                              |                              |                              |
|--|------------------------------|------------------------------|------------------------------|------------------------------|
| <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">C</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">N</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">Y</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">1</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">7</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">F</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">-</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">#</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">X</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">0</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">#</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">#</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">T</div> </div> | PART NUMBER                  | CTR<br>BIN                   | PACKAGE OPTION               | TAPE<br>AND<br>REEL          |
|  |                              |                              |                              | Option 6<br>                 |
|  |                              |                              | Option 7<br>                 | Option 9<br>                 |
| AGENCY CERTIFIED/PACKAGE   | CTR (%)                      |                              |                              |                              |
| UL, cUL, BSI, FIMKO  | 40 to 80                     | 63 to 125                    | 100 to 200                   | 160 to 320                   |
| DIP-6  | CNY17F-1                     | CNY17F-2                     | CNY17F-3                     | CNY17F-4                     |
| DIP-6, 400 mil, option 6   | CNY17F-1X006                 | CNY17F-2X006                 | CNY17F-3X006                 | CNY17F-4X006                 |
| SMD-6, option 7  | CNY17F-1X007 <sup>(1)</sup>  | CNY17F-2X007T <sup>(1)</sup> | CNY17F-3X007T <sup>(1)</sup> | CNY17F-4X007T <sup>(1)</sup> |
| SMD-6, option 9  | CNY17F-1X009T <sup>(1)</sup> | CNY17F-2X009T <sup>(1)</sup> | CNY17F-3X009T <sup>(1)</sup> | CNY17F-4X009T <sup>(1)</sup> |
| VDE, UL, cUL, BSI, FIMKO   | 40 to 80                     | 63 to 125                    | 100 to 200                   | 160 to 320                   |
| DIP-6  | CNY17F-1X001                 | CNY17F-2X001                 | CNY17F-3X001                 | CNY17F-4X001                 |
| DIP-6, 400 mil, option 6   | CNY17F-1X016                 | CNY17F-2X016                 | CNY17F-3X016                 | CNY17F-4X016                 |
| SMD-6, option 7  | CNY17F-1X017 <sup>(1)</sup>  | CNY17F-2X017 <sup>(1)</sup>  | CNY17F-3X017 <sup>(1)</sup>  | CNY17F-4X017 <sup>(1)</sup>  |
| SMD-6, option 9  | CNY17F-1X019                 | CNY17F-2X019 <sup>(1)</sup>  | CNY17F-3X019 <sup>(1)</sup>  | -                            |

**Notes**

- Additional options may be possible, please contact sales office.
- <sup>(1)</sup> Also available in tubes; do not put T on end.



| <b>ABSOLUTE MAXIMUM RATINGS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |                                      |            |                |                    |
|--|--------------------------------------|------------|----------------|--------------------|
| PARAMETER  | TEST CONDITION                       | SYMBOL     | VALUE          | UNIT               |
| <b>INPUT</b>   |                                      |            |                |                    |
| Reverse voltage  |                                      | $V_R$      | 6              | V                  |
| DC forward current   |                                      | $I_F$      | 60             | mA                 |
| Surge forward current  | $t \leq 10\text{ }\mu\text{s}$       | $I_{FSM}$  | 2.5            | A                  |
| Power dissipation  |                                      | $P_{diss}$ | 70             | mW                 |
| <b>OUTPUT</b>  |                                      |            |                |                    |
| Collector emitter breakdown voltage  |                                      | $BV_{CEO}$ | 70             | V                  |
| Collector current  |                                      | $I_C$      | 50             | mA                 |
| Collector peak current   | $t_p/T = 0.5, t_p \leq 10\text{ ms}$ | $I_{CM}$   | 100            | mA                 |
| Output power dissipation   |                                      | $P_{diss}$ | 150            | mW                 |
| <b>COUPLER</b>   |                                      |            |                |                    |
| Isolation test voltage between emitter and detector  | $t = 1\text{ min}$                   | $V_{ISO}$  | 5000           | $V_{RMS}$          |
| Creepage distance  |                                      |            | $\geq 7$       | mm                 |
| Clearance distance   |                                      |            | $\geq 7$       | mm                 |
| Isolation thickness between emitter and detector   |                                      |            | $\geq 0.4$     | mm                 |
| Comparative tracking index per DIN IEC 112/VDE 0303, part 1  |                                      |            | $\geq 175$     |                    |
| Isolation resistance   | $V_{IO} = 500\text{ V}$              | $R_{IO}$   | $\geq 10^{11}$ | $\Omega$           |
| Storage temperature range  |                                      | $T_{stg}$  | - 55 to + 150  | $^{\circ}\text{C}$ |
| Ambient temperature range  |                                      | $T_{amb}$  | - 55 to + 110  | $^{\circ}\text{C}$ |
| Junction temperature   |                                      | $T_j$      | 100            | $^{\circ}\text{C}$ |
| Soldering temperature <sup>(1)</sup>   | 2 mm from case, $\leq 10\text{ s}$   | $T_{sld}$  | 260            | $^{\circ}\text{C}$ |
| Total power dissipation  |                                      | $P_{diss}$ | 220            | mW                 |

**Notes**

- Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability.
- Refer to reflow profile for soldering conditions for surface mounted parts (SMD). Refer to wave profile for soldering conditions for through hole parts (DIP).

| <b>ELECTRICAL CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |   |          |             |      |      |      |               |
|--|---|----------|-------------|------|------|------|---------------|
| PARAMETER  | TEST CONDITION                            | PART     | SYMBOL      | MIN. | TYP. | MAX. | UNIT          |
| <b>INPUT</b>   |   |          |             |      |      |      |               |
| Forward voltage  | $I_F = 60\text{ mA}$                      |          | $V_F$       |      | 1.39 | 1.65 | V             |
| Breakdown voltage  | $I_R = 10\text{ }\mu\text{A}$             |          | $V_{BR}$    | 6    |      |      | V             |
| Reverse current  | $V_R = 6\text{ V}$                        |          | $I_R$       |      | 0.01 | 10   | $\mu\text{A}$ |
| Capacitance  | $V_R = 0\text{ V}, f = 1\text{ MHz}$      |          | $C_O$       |      | 25   |      | pF            |
| <b>OUTPUT</b>  |   |          |             |      |      |      |               |
| Collector emitter capacitance  | $V_{CE} = 5\text{ V}, f = 1\text{ MHz}$   |          | $C_{CE}$    |      | 5.2  |      | pF            |
| Base collector capacitance   | $V_{CE} = 5\text{ V}, f = 1\text{ MHz}$   |          | $C_{BC}$    |      | 6.5  |      | pF            |
| Emitter base capacitance   | $V_{CE} = 5\text{ V}, f = 1\text{ MHz}$   |          | $C_{EB}$    |      | 7.5  |      | pF            |
| <b>COUPLER</b>   |   |          |             |      |      |      |               |
| Collector emitter, saturation voltage  | $I_F = 10\text{ mA}, I_C = 2.5\text{ mA}$ |          | $V_{CEsat}$ |      | 0.25 | 0.4  | V             |
| Coupling capacitance   |   |          | $C_C$       |      | 0.6  |      | pF            |
| Collector emitter, leakage current   | $V_{CE} = 10\text{ V}$                    | CNY17F-1 | $I_{CEO}$   |      | 2    | 50   | nA            |
|  |   | CNY17F-2 | $I_{CEO}$   |      | 2    | 50   | nA            |
|  |   | CNY17F-3 | $I_{CEO}$   |      | 5    | 100  | nA            |
|  |   | CNY17F-4 | $I_{CEO}$   |      | 5    | 100  | nA            |

**Note**

- Minimum and maximum values were tested requirements. Typical values are characteristics of the device and are the result of engineering evaluations. Typical values are for information only and are not part of the testing requirements.



| <b>CURRENT TRANSFER RATIO</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |                      |          |        |      |      |      |      |
|--|----------------------|----------|--------|------|------|------|------|
| PARAMETER  | TEST CONDITION       | PART     | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| $I_C/I_F$  | $I_F = 10\text{ mA}$ | CNY17F-1 | CTR    | 40   |      | 80   | %    |
|  |                      | CNY17F-2 | CTR    | 63   |      | 125  | %    |
|  |                      | CNY17F-3 | CTR    | 100  |      | 200  | %    |
|  |                      | CNY17F-4 | CTR    | 160  |      | 320  | %    |
|  | $I_F = 1\text{ mA}$  | CNY17F-1 | CTR    | 13   | 30   |      | %    |
|  |                      | CNY17F-2 | CTR    | 22   | 45   |      | %    |
|  |                      | CNY17F-3 | CTR    | 34   | 70   |      | %    |
|  |                      | CNY17F-4 | CTR    | 56   | 90   |      | %    |

**Note**


- Current transfer ratio  $I_C/I_F$  at  $V_{CE} = 5\text{ V}$ ,  $25\text{ }^{\circ}\text{C}$  and collector emitter leakage current by dash number.

| <b>SWITCHING CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |  |          |           |      |      |      |               |
|---|--|----------|-----------|------|------|------|---------------|
| PARAMETER   | TEST CONDITION   | PART     | SYMBOL    | MIN. | TYP. | MAX. | UNIT          |
| <b>LINEAR OPERATION</b> (without saturation)  |  |          |           |      |      |      |               |
| Turn-on time  | $I_F = 10\text{ mA}$ , $V_{CC} = 5\text{ V}$ ,<br>$R_L = 75\text{ }\Omega$ |          | $t_{on}$  |      | 3    |      | $\mu\text{s}$ |
| Rise time   | $I_F = 10\text{ mA}$ , $V_{CC} = 5\text{ V}$ ,<br>$R_L = 75\text{ }\Omega$ |          | $t_r$     |      | 2    |      | $\mu\text{s}$ |
| Turn-off time   | $I_F = 10\text{ mA}$ , $V_{CC} = 5\text{ V}$ ,<br>$R_L = 75\text{ }\Omega$ |          | $t_{off}$ |      | 2.3  |      | $\mu\text{s}$ |
| Fall time   | $I_F = 10\text{ mA}$ , $V_{CC} = 5\text{ V}$ ,<br>$R_L = 75\text{ }\Omega$ |          | $t_f$     |      | 2    |      | $\mu\text{s}$ |
| Cut-off frequency   | $I_F = 10\text{ mA}$ , $V_{CC} = 5\text{ V}$ ,<br>$R_L = 75\text{ }\Omega$ |          | $f_{CO}$  |      | 110  |      | kHz           |
| <b>SWITCHING OPERATION</b> (with saturation)  |  |          |           |      |      |      |               |
| Turn-on time  | $I_F = 20\text{ mA}$   | CNY17F-1 | $t_{on}$  |      | 3    |      | $\mu\text{s}$ |
|   | $I_F = 10\text{ mA}$   | CNY17F-2 | $t_{on}$  |      | 4.2  |      | $\mu\text{s}$ |
|   |  | CNY17F-3 | $t_{on}$  |      | 4.2  |      | $\mu\text{s}$ |
|   |  | CNY17F-4 | $t_{on}$  |      | 6    |      | $\mu\text{s}$ |
| Rise time   | $I_F = 20\text{ mA}$   | CNY17F-1 | $t_r$     |      | 2    |      | $\mu\text{s}$ |
|   | $I_F = 10\text{ mA}$   | CNY17F-2 | $t_r$     |      | 3    |      | $\mu\text{s}$ |
|   |  | CNY17F-3 | $t_r$     |      | 3    |      | $\mu\text{s}$ |
|   |  | CNY17F-4 | $t_r$     |      | 4.6  |      | $\mu\text{s}$ |
| Turn-off time   | $I_F = 20\text{ mA}$   | CNY17F-1 | $t_{off}$ |      | 18   |      | $\mu\text{s}$ |
|   | $I_F = 10\text{ mA}$   | CNY17F-2 | $t_{off}$ |      | 23   |      | $\mu\text{s}$ |
|   |  | CNY17F-3 | $t_{off}$ |      | 23   |      | $\mu\text{s}$ |
|   |  | CNY17F-4 | $t_{off}$ |      | 25   |      | $\mu\text{s}$ |
| Fall time   | $I_F = 20\text{ mA}$   | CNY17F-1 | $t_f$     |      | 11   |      | $\mu\text{s}$ |
|   | $I_F = 10\text{ mA}$   | CNY17F-2 | $t_f$     |      | 14   |      | $\mu\text{s}$ |
|   |  | CNY17F-3 | $t_f$     |      | 14   |      | $\mu\text{s}$ |
|   |  | CNY17F-4 | $t_f$     |      | 15   |      | $\mu\text{s}$ |



95 10804-3


Fig. 1 - Test Circuit, Non-Saturated Operation

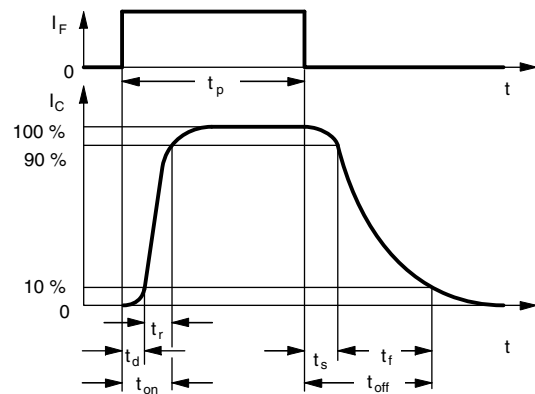

|                        |                |                         |               |
|------------------------|----------------|-------------------------|---------------|
| $t_p$                  | Pulse duration | $t_s$                   | Storage time  |
| $t_d$                  | Delay time     | $t_f$                   | Fall time     |
| $t_r$                  | Rise time      | $t_{off} (= t_s + t_f)$ | Turn-off time |
| $t_{on} (= t_d + t_r)$ | Turn-on time   |                         |               |

96 11698

Fig. 3 - Switching Times

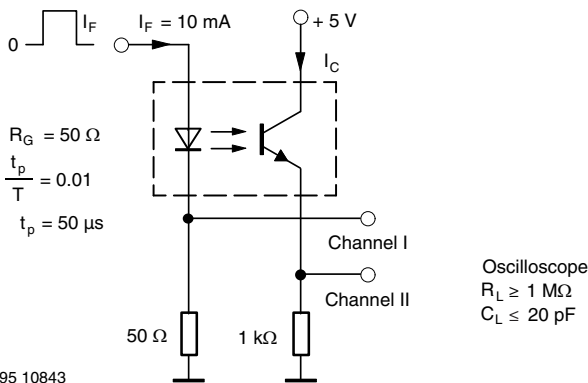

95 10843

Fig. 2 - Test Circuit, Saturated Operation

**TYPICAL CHARACTERISTICS** ( $T_{amb} = 25\text{ }^\circ\text{C}$ , unless otherwise specified)

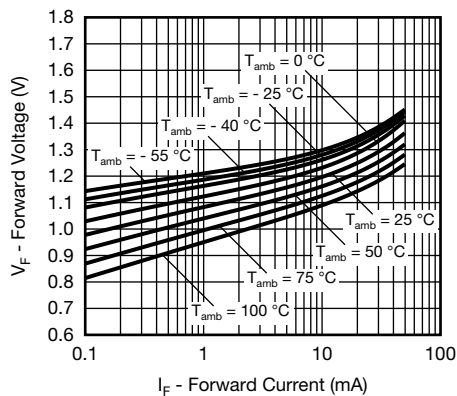


Fig. 4 - Forward Voltage vs. Forward Current

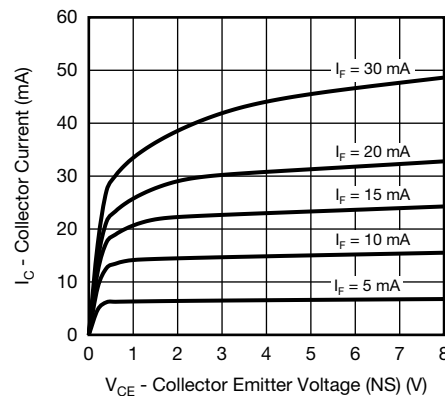


Fig. 5 - Collector Current vs. Collector Emitter Voltage (NS)

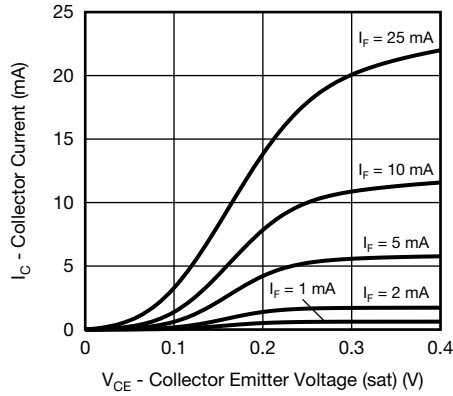


Fig. 6 - Collector Current vs. Collector Emitter Voltage (sat)

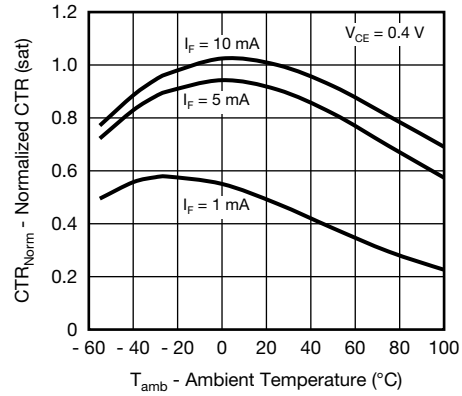


Fig. 9 - Normalized CTR (sat) vs. Ambient Temperature

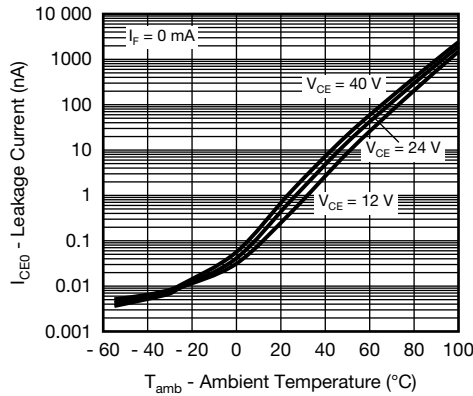


Fig. 7 - Leakage Current vs. Ambient Temperature

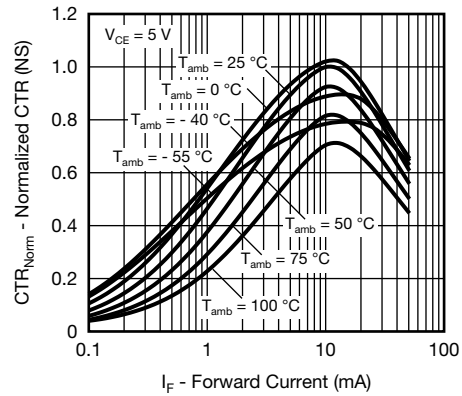


Fig. 10 - Normalized CTR (NS) vs. Forward Current

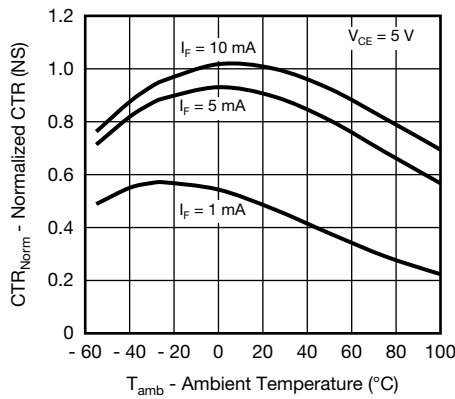


Fig. 8 - Normalized CTR (NS) vs. Ambient Temperature

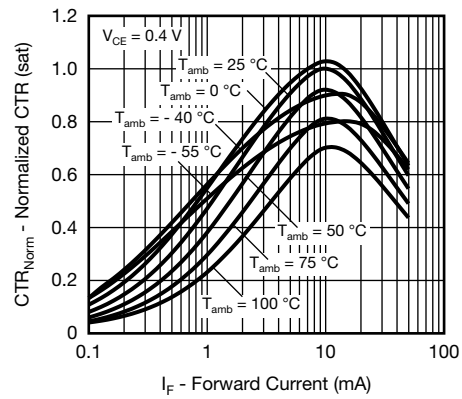


Fig. 11 - Normalized CTR (sat) vs. Forward Current



Fig. 12 - CTR Frequency vs. Phase Angle


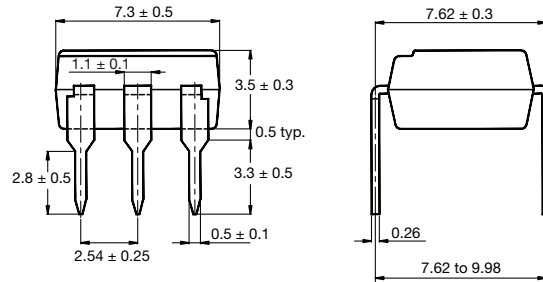


Fig. 13 - CTR Frequency vs. Collector Current




Fig. 14 - Switching Time vs. Load Resistance

**PACKAGE DIMENSIONS** in millimeters




22530




**Option 6**

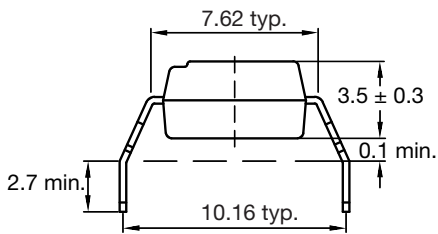

**Option 7**

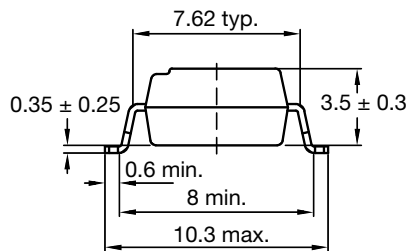

**Option 9**

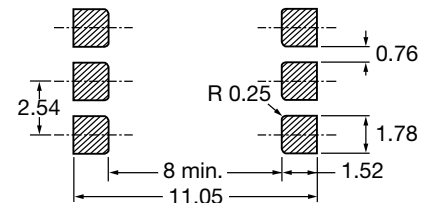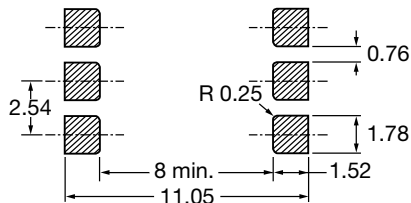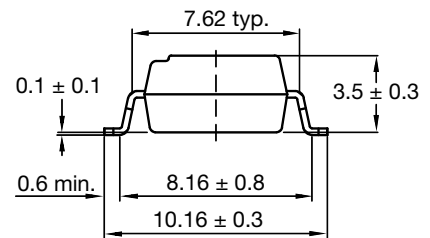

20802-34

**PACKAGE MARKING**



**Notes**

- VDE logo is only marked on option 1 parts. Option information is not marked on the part.
- Tape and reel suffix (T) is not part of the package marking.



**TUBE AND TAPE INFORMATION**

| DEVICES PER TUBE |            |           |           |
|------------------|------------|-----------|-----------|
| TYPE             | UNITS/TUBE | TUBES/BOX | UNITS/BOX |
| DIP-6            | 50         | 40        | 2000      |



Fig. 15 - Tape and Reel Drawing, 1000 Units per Reel





## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А