



### FEATURES

- Efficiency up to 84%
- MTBF > 1M Hours
- Reinforced Insulation rated for 300VAC Working Voltage
- UL/EN60601-1&EN60950-1 Safety Approval
- Operating Temperature Range -40°C to +85 °C
- High Isolation Voltage 4000VACrms
- Wide 2:1 Input Range
- Complies with EN5022 Class A
- Overload Protection
- Low Leakage Current
- 3 Years Product Warranty

The DM03S/D series are miniature, DIP Package, isolated 3W DC/DC converters with 4,000VACrms isolation. It offers short circuit protection and allows a wide operating temperature range of -40°C to +85°C. These isolated DC/DC converters are the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc. With creative design technology and optimization of component placement, these converters possess outstanding electrical and thermal performance, as well as extremely high reliability under highly stressful operating conditions..

### Model List

| Model Number | Input Voltage (Range)<br>VDC | Output Voltage<br>VDC | Output Current |            | Input Current          |                      | Reflected Ripple Current<br>mA (typ.) | Max. capacitive Load<br>uF | Efficiency (typ.)<br>@Max. Load<br>% |
|--------------|------------------------------|-----------------------|----------------|------------|------------------------|----------------------|---------------------------------------|----------------------------|--------------------------------------|
|              |                              |                       | Max.<br>mA     | Min.<br>mA | @Max. Load<br>mA(typ.) | @No Load<br>mA(typ.) |                                       |                            |                                      |
| DM03S0505A   | 5<br>(4.5 ~ 9)               | 5                     | 600            | 90         | 857                    | 40                   | 60                                    | 1000                       | 70                                   |
| DM03S0512A   |                              | 12                    | 250            | 37.5       | 800                    |                      |                                       | 470                        | 75                                   |
| DM03S0524A   |                              | 24                    | 125            | 18.8       | 800                    |                      |                                       | 470                        | 76                                   |
| DM03D0512A   |                              | ±12                   | ±125           | ±18.8      | 800                    |                      |                                       | 220*                       | 75                                   |
| DM03D0515A   |                              | ±15                   | ±100           | ±15        | 800                    |                      |                                       | 220*                       | 75                                   |
| DM03S1205A   | 12<br>(9 ~ 18)               | 5                     | 600            | 90         | 338                    | 30                   | 30                                    | 1000                       | 74                                   |
| DM03S1212A   |                              | 12                    | 250            | 37.5       | 313                    |                      |                                       | 470                        | 80                                   |
| DM03S1224A   |                              | 24                    | 125            | 18.8       | 313                    |                      |                                       | 470                        | 81                                   |
| DM03D1212A   |                              | ±12                   | ±125           | ±18.8      | 313                    |                      |                                       | 220*                       | 80                                   |
| DM03D1215A   |                              | ±15                   | ±100           | ±15        | 313                    |                      |                                       | 220*                       | 80                                   |
| DM03S2405A   | 24<br>(18 ~ 36)              | 5                     | 600            | 90         | 160                    | 20                   | 15                                    | 1000                       | 78                                   |
| DM03S2412A   |                              | 12                    | 250            | 37.5       | 151                    |                      |                                       | 470                        | 83                                   |
| DM03S2424A   |                              | 24                    | 125            | 18.8       | 151                    |                      |                                       | 470                        | 84                                   |
| DM03D2412A   |                              | ±12                   | ±125           | ±18.8      | 151                    |                      |                                       | 220*                       | 83                                   |
| DM03D2415A   |                              | ±15                   | ±100           | ±15        | 151                    |                      |                                       | 220*                       | 83                                   |
| DM03S4805A   | 48<br>(36 ~ 75)              | 5                     | 600            | 90         | 80                     | 10                   | 10                                    | 1000                       | 78                                   |
| DM03S4812A   |                              | 12                    | 250            | 37.5       | 75                     |                      |                                       | 470                        | 83                                   |
| DM03S4824A   |                              | 24                    | 125            | 18.8       | 75                     |                      |                                       | 470                        | 84                                   |
| DM03D4812A   |                              | ±12                   | ±125           | ±18.8      | 75                     |                      |                                       | 220*                       | 83                                   |
| DM03D4815A   |                              | ±15                   | ±100           | ±15        | 75                     |                      |                                       | 2208                       | 83                                   |

\* For each output



## Input Characteristics

| Parameter                         | Model            | Min.   | Typ. | Max. | Unit |
|-----------------------------------|------------------|--|------|------|------|
| Input Surge Voltage (1 sec. max.) | 5V Input Models  | -0.7   | ---  | 11   | VDC  |
|                                   | 12V Input Models | -0.7   | ---  | 25   |      |
|                                   | 24V Input Models | -0.7   | ---  | 50   |      |
|                                   | 48V Input Models | -0.7   | ---  | 100  |      |
| Start-Up Voltage                  | 5V Input Models  | 3.7  | 4    | 4.5  |      |
|                                   | 12V Input Models | 8  | 8.5  | 9    |      |
|                                   | 24V Input Models | 15   | 17   | 18   |      |
|                                   | 48V Input Models | 30   | 33   | 36   |      |
| Under Voltage Shutdown            | 5V Input Models  | ---  | ---  | 4    |      |
|                                   | 12V Input Models | ---  | ---  | 8.5  |      |
|                                   | 24V Input Models | ---  | ---  | 17   |      |
|                                   | 48V Input Models | ---  | ---  | 34   |      |
| Reverse Polarity Input Current    | All Models       | ---  | ---  | 0.3  | A    |
| Short Circuit Input Power         |                  | ---  | ---  | 2000 | mW   |
| Internal Power Dissipation        |                  | ---  | ---  | 2500 | mW   |
| Conducted EMI                     |                  | Compliance to EN 55022,class A and FCC part 15,class A |      |      |      |

## Output Characteristics

| Parameter                    | Conditions                    | Min. | Typ.  | Max.  | Unit              |
|------------------------------|-------------------------------|------|-------|-------|-------------------|
| Output Voltage Accuracy      |                               | ---  | ±0.5  | ±1.0  | %                 |
| Output Voltage Balance       | Dual Output, Balanced Loads   | ---  | ±0.5  | ±2.0  | %                 |
| Line Regulation              | V <sub>in</sub> =Min. to Max. | ---  | ±0.3  | ±0.5  | %                 |
| Load Regulation              | I <sub>o</sub> =25% to 100%   | ---  | ±0.5  | ±1.0  | %                 |
| Ripple & Noise (20MHz)       | 5V Output Models              | ---  | 75    | 100   | mV <sub>P-P</sub> |
|                              | Other Output Models           | ---  | 100   | 150   | mV <sub>P-P</sub> |
| Ripple & Noise (20MHz)       | Over Line, Load & Temp.       | ---  | ---   | 180   | mV <sub>P-P</sub> |
| Ripple & Noise (20MHz)       |                               | ---  | ---   | 15    | mV rms            |
| Transient Recovery Time      | 25% Load Step Change          | ---  | 150   | 500   | µS                |
| Transient Response Deviation |                               | ---  | ±3    | ±6    | %                 |
| Temperature Coefficient      |                               | ---  | ±0.02 | ±0.05 | %/°C              |
| Over Load Protection         | Foldback                      | 120  | 150   | ---   | %                 |
| Short Circuit Protection     | Continuous                    |      |       |       |                   |

## Isolation, Safety Approvals

| Parameter                     | Conditions                                       | Min. | Typ. | Max. | Unit            |
|-------------------------------|--|------|------|------|-----------------|
| I/O Isolation Voltage (rated) | 60 Seconds                                       | 4000 | ---  | ---  | VACrms          |
| I/O Isolation Test Voltage    | Flash tested for 1 Second                        | 6000 | ---  | ---  | V <sub>PK</sub> |
| Leakage Current               | 240VAC, 60Hz                                     | ---  | ---  | 2    | µA              |
| I/O Isolation Resistance      | 500 VDC  | 10   | ---  | ---  | GΩ              |
| I/O Isolation Capacitance     | 100KHz, 1V                                       | ---  | 7    | 13   | pF              |
| Safety Standards              | cUL/UL60950-1, CSA C22.2 No. 60950-1-03          |      |      |      |                 |
|                               | UL60601-1, CSA C22.2 No.601-1                    |      |      |      |                 |
|                               | IEC/EN 60950-1, IEC/EN 60601-1                   |      |      |      |                 |
| Safety Approvals              | IEC60950-1 CB report, cUL/UL 60950-1 certificate |      |      |      |                 |
|                               | UL60601-1 UL certificate                         |      |      |      |                 |

## General Characteristics

| Parameter           | Conditions                        | Min.      | Typ. | Max. | Unit  |
|---------------------|-----------------------------------|-----------|------|------|-------|
| Switching Frequency |                                   | ---       | 150  | ---  | KHz   |
| MTBF(calculated)    | MIL-HDBK-217F@25°C, Ground Benign | 1,000,000 | ---  | ---  | Hours |


## Recommended Input Fuse

| 5V Input Models       | 12V Input Models      | 24V Input Models     | 48V Input Models     |
|-----------------------|-----------------------|----------------------|----------------------|
| 2000mA Slow-Blow Type | 1000mA Slow-Blow Type | 500mA Slow-Blow Type | 250mA Slow-Blow Type |

## Environmental Specifications

| Parameter                                     | Conditions          | Min. | Max. | Unit     |
|---|---------------------|------|------|----------|
| Operating Temperature Range (with Derating)   | Ambient             | -40  | +85  | °C       |
| Case Temperature                              |                     | ---  | +95  | °C       |
| Storage Temperature Range                     |                     | -50  | +125 | °C       |
| Humidity (non condensing)                     |                     | ---  | 95   | % rel. H |
| Cooling                                       | Free-Air convection |      |      |          |
| Lead Temperature (1.5mm from case for 10Sec.) |                     | ---  | 260  | °C       |


## Power Derating Curve

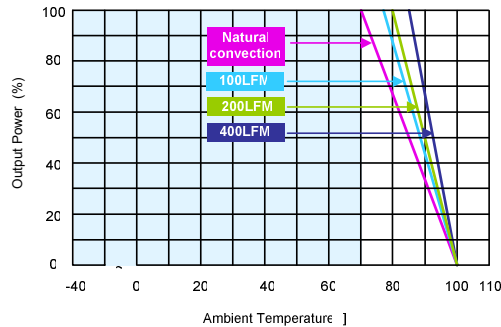

## Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 Ripple & Noise measurement bandwidth is 0-20 MHz.
- 4 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however, they may not meet all specifications listed.
- 5 All DC/DC converters should be externally fused at the front end for protection.
- 6 Specifications subject to change without notice.

## Mechanical Drawing
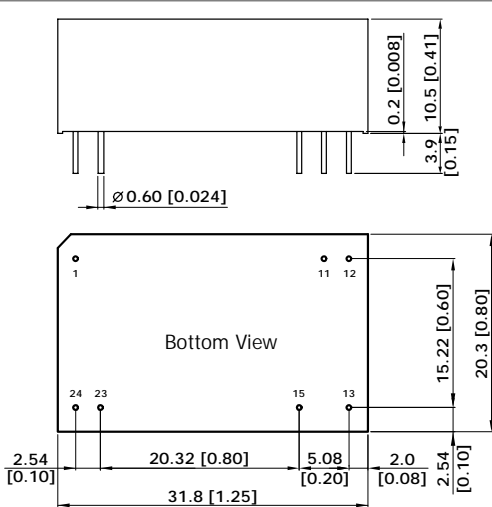
| Mechanical Dimensions  | Pin Connections   |               |               |             |   |      |      |    |        |        |    |       |        |    |       |       |    |        |       |    |      |      |    |      |      |
|--|---|---------------|---------------|-------------|---|------|------|----|--------|--------|----|-------|--------|----|-------|-------|----|--------|-------|----|------|------|----|------|------|
|  <p>Side View Dimensions:<br/>           Pin diameter: <math>\varnothing 0.60</math> [0.024]<br/>           Pin height: 0.2 [0.008]<br/>           Pin spacing: 10.5 [0.41]<br/>           Pin offset: 3.9 [0.15]</p> <p>Bottom View Dimensions:<br/>           Total width: 31.8 [1.25]<br/>           Pin 1 offset: 2.54 [0.10]<br/>           Pin 11 offset: 20.32 [0.80]<br/>           Pin 12 offset: 5.08 [0.20]<br/>           Pin 15 offset: 2.0 [0.08]<br/>           Pin 23 offset: 2.54 [0.10]<br/>           Pin 24 offset: 15.22 [0.60]<br/>           Total height: 20.3 [0.80]</p> | <table border="1"> <thead> <tr> <th>Pin</th> <th>Single Output</th> <th>Dual Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> <td>+Vin</td> </tr> <tr> <td>11</td> <td>No Pin</td> <td>Common</td> </tr> <tr> <td>12</td> <td>-Vout</td> <td>No Pin</td> </tr> <tr> <td>13</td> <td>+Vout</td> <td>-Vout</td> </tr> <tr> <td>15</td> <td>No Pin</td> <td>+Vout</td> </tr> <tr> <td>23</td> <td>-Vin</td> <td>-Vin</td> </tr> <tr> <td>24</td> <td>-Vin</td> <td>-Vin</td> </tr> </tbody> </table> | Pin           | Single Output | Dual Output | 1 | +Vin | +Vin | 11 | No Pin | Common | 12 | -Vout | No Pin | 13 | +Vout | -Vout | 15 | No Pin | +Vout | 23 | -Vin | -Vin | 24 | -Vin | -Vin |
|  | Pin   | Single Output | Dual Output   |             |   |      |      |    |        |        |    |       |        |    |       |       |    |        |       |    |      |      |    |      |      |
| 1  | +Vin  | +Vin          |               |             |   |      |      |    |        |        |    |       |        |    |       |       |    |        |       |    |      |      |    |      |      |
| 11   | No Pin  | Common        |               |             |   |      |      |    |        |        |    |       |        |    |       |       |    |        |       |    |      |      |    |      |      |
| 12   | -Vout   | No Pin        |               |             |   |      |      |    |        |        |    |       |        |    |       |       |    |        |       |    |      |      |    |      |      |
| 13   | +Vout   | -Vout         |               |             |   |      |      |    |        |        |    |       |        |    |       |       |    |        |       |    |      |      |    |      |      |
| 15   | No Pin  | +Vout         |               |             |   |      |      |    |        |        |    |       |        |    |       |       |    |        |       |    |      |      |    |      |      |
| 23   | -Vin  | -Vin          |               |             |   |      |      |    |        |        |    |       |        |    |       |       |    |        |       |    |      |      |    |      |      |
| 24   | -Vin  | -Vin          |               |             |   |      |      |    |        |        |    |       |        |    |       |       |    |        |       |    |      |      |    |      |      |
| <p>► All dimensions in mm (inches)</p> <p>► Tolerance: X.X±0.25 (X.XX±0.01)<br/>           X.XX±0.13 ( X.XXX±0.005)</p> <p>► Pin diameter <math>\varnothing 0.6 \pm 0.05</math> (0.024±0.002)</p>  |   |               |               |             |   |      |      |    |        |        |    |       |        |    |       |       |    |        |       |    |      |      |    |      |      |

## Physical Outline

|               |   |
|---------------|---|
| Case Size     | : 31.8x20.3x10.5mm (1.25x0.8x0.41 Inches)                       |
| Case Material | : Non-Conductive Black Plastic (flammability to UL 94V-0 rated) |
| Weight        | : 16.2g   |



| Part Numbering System |               |       |                   |               |                |                    |
|-----------------------|---------------|-------|-------------------|---------------|----------------|--------------------|
| D                     | M             | 03    | S                 | 05            | 05             | A                  |
| Form factor           | Family series | Watt  | Number of Outputs | Input Voltage | Output Voltage | Option Code        |
| D-DIP                 | A~Z           | 01:1W | S - Single        | 03:3.3V       | 03:3.3V        | A - Std. Functions |
| P-SIP                 |               | 02:2W | D- Dual           | 05: 5V        | 05: 5V         |                    |
| S-SMD                 |               | 03:3W |                   | 12:12V        | 12:12V         |                    |
|                       |               | 04:4W |                   | 24: 24V       | 15: 15V        |                    |
|                       |               | 06:6W |                   | 48:48V        | 24: 24V        |                    |

#### WARRANTY

Delta offers a three(3) years limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А