

Frequency Synthesizer

KSN-1932A-119+

50Ω 1832 to 1932 MHz

The Big Deal

- Fractional N synthesizer
- Low phase noise and spurious
- Robust design and construction
- Small size 0.800" x 0.584" x 0.240"



CASE STYLE: DK1182

Product Overview

The KSN-1932A-119+ is a Frequency Synthesizer, designed to operate from 1832 to 1932 MHz for WiMAX application. The KSN-1932A-119+ is packaged in a metal case (size of 0.800" x 0.584" x 0.240") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Low phase noise and spurious: • Phase Noise: -108 dBc/Hz typ. @10 kHz offset • Step Size Spurious: -87 dBc typ. • Comparison Spurious: -92 dBc typ. • Reference Spurious: -90 dBc typ.	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Robust design and construction	To enhance the robustness of KSN-1932A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.
Small size, 0.800" x 0.584" x 0.240"	The small size enables the KSN-1932A-119+ to be used in compact designs.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

50Ω 1832 to 1932 MHz

Features

- Fractional N synthesizer
- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+3V)
- Small size 0.800" x 0.584" x 0.240"

Applications

- WiMAX

General Description

The KSN-1932A-119+ is a Frequency Synthesizer, designed to operate from 1832 to 1932 MHz for WiMAX application. The KSN-1932A-119+ is packaged in a metal case (size of 0.800" x 0.584" x 0.240) to shield against unwanted signals and noise. To enhance the robustness of KSN-1932A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.




CASE STYLE: DK1182

PRICE: \$29.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Simplified Schematic

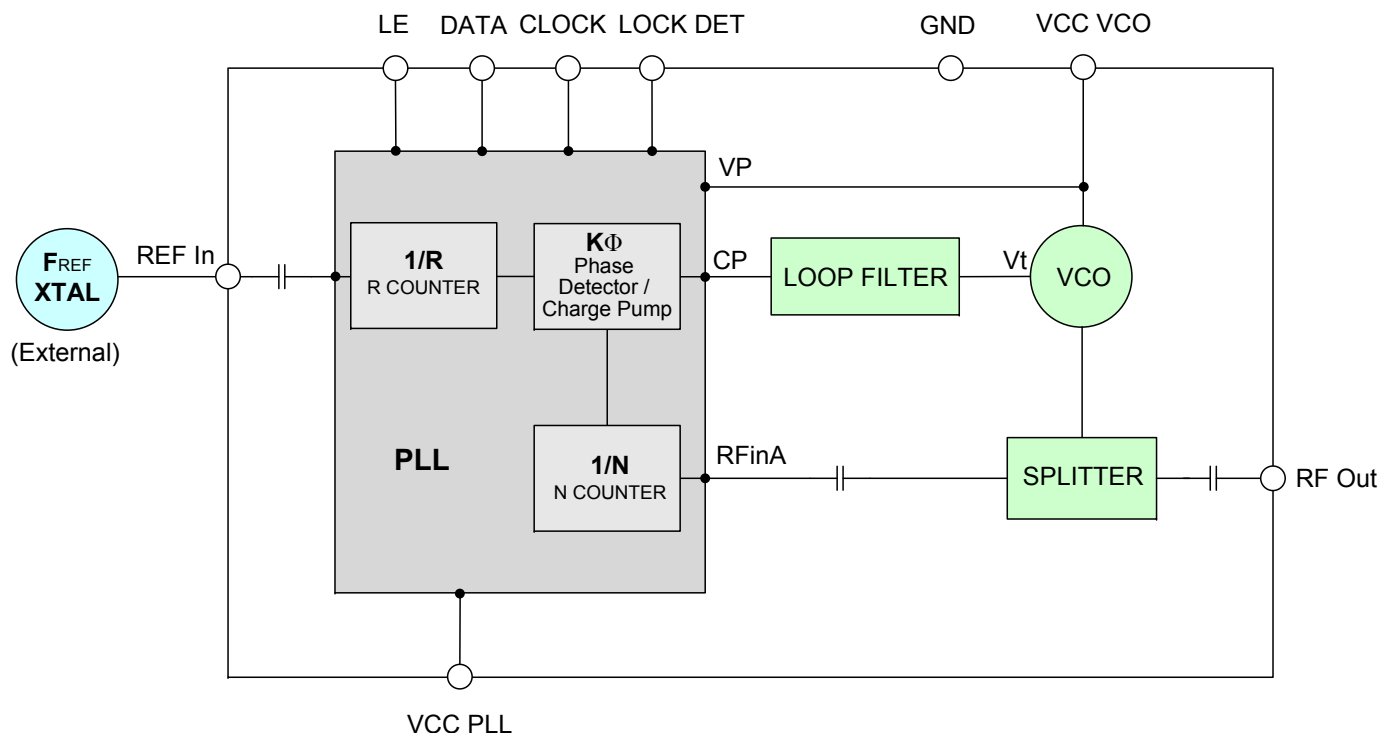

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M127257
EDR-8361/1F1
KSN-1932A-119+
Category-A3
RAV
100818
Page 2 of 13

Electrical Specifications (over operating temperature -40°C to +85°C)

Parameters	Test Conditions	Min.	Typ.	Max.	Units
Frequency Range	-	1832	-	1932	MHz
Step Size	-	-	125	-	kHz
Comparison Frequency	-	-	13	-	MHz
Settling Time	Within ± 1 kHz	-	25	-	mSec
Output Power	-	0	+3	+6	dBm
SSB Phase Noise	@ 100 Hz offset	-	-80	-	dBc/Hz
	@ 1 kHz offset	-	-87	-78	
	@ 10 kHz offset	-	-108	-100	
	@ 100 kHz offset	-	-130	-125	
	@ 1 MHz offset	-	-150	-145	
Integrated SSB Phase Noise	@ 100 Hz to 5MHz	-	-48	-	dBc
Step Size Spurious Suppression	Step Size 125 kHz	-	-87	-70	dBc
0.5 Step Size Spurious Suppression	0.5 Step Size 62.5 kHz	-	-85	-70	
Reference Spurious Suppression	Ref. Freq. 52 MHz	-	-90	-80	
Comparison Spurious Suppression	Comp. Freq. 13 MHz	-	-92	-80	
Non - Harmonic Spurious Suppression	-	-	-90	-	
Harmonic Suppression	-	-	-28	-20	V
VCO Supply Voltage	5.00	4.75	5.00	5.25	
PLL Supply Voltage	3.00	2.85	3.00	3.15	
VCO Supply Current	-	-	43	51	mA
PLL Supply Current	-	-	15	22	
Reference Input (External)	Frequency	52 (square wave)	-	52	MHz
	Amplitude	1	-	1	V _{P-P}
	Input impedance	-	-	100	K Ω
	Phase Noise @ 1 kHz offset	-	-	-130	dBc/Hz
RF Output port Impedance	-	-	50	-	Ω
Input Logic Level	Input high voltage	-	2.55	-	V
	Input low voltage	-	-	0.55	V
Digital Lock Detect	Locked	-	2.45	-	V
	Unlocked	-	-	0.40	V
Frequency Synthesizer PLL	-	ADF4153			
PLL Programming	-	3-wire serial 3V CMOS			
Register Map @ 1932 MHz	R0_Register	-	(MSB) 001001010000000100000000 (LSB)		
	R1_Register	-	(MSB) 000101010000000110100001 (LSB)		
	R2_Register	-	(MSB) 0000000000000001001100010 (LSB)		
	R3_Register	-	(MSB) 0000000000000001111000111 (LSB)		

Absolute Maximum Ratings

Parameters	Ratings
VCO Supply Voltage	5.8V
PLL Supply Voltage	4.0V
VCO Supply Voltage to PLL Supply Voltage	-0.3V to +5.8V
Reference Frequency Voltage	-0.3Vmin, VCC PLL +0.3Vmax
Data, Clock, LE Levels	-0.3Vmin, VCC PLL +0.3Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded



Typical Performance Data

FREQUENCY (MHz)	POWER OUTPUT (dBm)			VCO CURRENT (mA)			PLL CURENT (mA)		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
1832.00	2.53	2.94	2.95	40.53	43.04	44.51	12.68	14.64	16.76
1844.00	2.46	2.99	3.01	40.58	43.07	44.50	12.73	14.73	16.81
1856.00	2.65	2.96	3.02	40.57	43.03	44.44	12.82	14.82	16.90
1868.00	2.78	3.14	3.14	40.54	42.99	44.39	12.82	14.84	16.91
1880.00	2.80	3.17	3.23	40.54	42.95	44.33	12.88	14.90	16.96
1892.00	2.81	3.19	3.28	40.52	42.90	44.26	12.82	14.85	16.90
1904.00	2.85	3.22	3.26	40.46	42.81	44.16	12.92	14.96	17.00
1916.00	2.83	3.12	3.21	40.37	42.69	44.03	12.94	14.98	17.03
1928.00	2.90	3.14	3.17	40.23	42.53	43.89	12.88	14.91	16.96
1932.00	2.93	3.13	3.15	40.18	42.47	43.83	12.83	14.87	16.91

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2			F3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
1832.00	-38.64	-39.68	-38.81	-27.86	-27.68	-28.63
1844.00	-37.62	-39.28	-38.79	-27.49	-27.42	-28.58
1856.00	-36.70	-38.19	-37.46	-27.74	-26.89	-27.86
1868.00	-35.95	-38.42	-38.07	-28.12	-28.23	-29.17
1880.00	-35.63	-38.34	-39.42	-26.79	-27.33	-28.29
1892.00	-36.31	-38.69	-38.90	-27.78	-27.76	-28.46
1904.00	-35.52	-38.66	-39.33	-28.03	-28.35	-28.99
1916.00	-33.51	-37.04	-38.99	-27.56	-27.64	-28.15
1928.00	-33.63	-36.63	-40.75	-27.32	-26.99	-27.44
1932.00	-33.61	-36.67	-40.99	-27.60	-27.42	-27.78



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	+25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1832.00	-84.44	-89.89	-110.02	-133.28	-151.42
1844.00	-85.15	-90.77	-109.86	-133.05	-152.76
1856.00	-84.65	-89.61	-109.73	-132.81	-152.58
1868.00	-81.11	-89.06	-109.60	-132.83	-153.60
1880.00	-80.86	-87.99	-108.24	-132.47	-153.14
1892.00	-84.04	-87.01	-108.06	-132.55	-152.50
1904.00	-81.35	-89.77	-107.82	-132.07	-152.40
1916.00	-83.77	-89.32	-107.50	-131.71	-152.23
1928.00	-80.86	-88.06	-107.31	-130.52	-150.12
1932.00	-82.25	-87.53	-107.18	-130.33	-150.10

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	-45°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1832.00	-84.97	-92.64	-109.64	-133.29	-153.30
1844.00	-84.08	-90.48	-109.12	-133.24	-153.30
1856.00	-86.29	-90.55	-108.55	-132.87	-153.20
1868.00	-81.88	-91.46	-108.61	-132.63	-152.26
1880.00	-84.70	-90.89	-108.86	-133.15	-153.62
1892.00	-85.25	-90.71	-108.06	-133.17	-152.23
1904.00	-83.73	-90.07	-108.38	-133.26	-153.58
1916.00	-85.24	-89.56	-108.68	-132.87	-153.50
1928.00	-84.23	-88.42	-107.84	-131.86	-152.07
1932.00	-84.03	-88.32	-106.77	-131.09	-151.66

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	+85°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1832.00	-86.06	-88.60	-109.73	-132.32	-150.90
1844.00	-86.47	-88.13	-109.49	-131.88	-152.58
1856.00	-87.35	-88.31	-109.11	-131.78	-152.19
1868.00	-85.82	-88.19	-108.48	-131.07	-151.69
1880.00	-88.22	-87.65	-108.37	-131.38	-151.96
1892.00	-86.29	-86.81	-107.47	-131.19	-151.31
1904.00	-88.60	-86.51	-107.64	-130.85	-151.27
1916.00	-87.35	-86.05	-106.62	-130.33	-150.68
1928.00	-82.50	-84.99	-106.66	-129.51	-149.75
1932.00	-83.51	-83.45	-106.46	-129.24	-149.41



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

COMPARISON SPURIOUS ORDER	COMPARISON SPURIOUS @ Fcarrier 1832MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @ Fcarrier 1882MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @ Fcarrier 1932MHz+(n*Fcomparison) (dBc) note 1		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
-5	-94.91	-95.98	-107.30	-99.70	112.93	-107.84	-101.51	-115.01	-106.45
-4	-103.10	-105.16	-102.90	-101.66	99.70	-99.64	-98.14	-99.07	-104.95
-3	-113.39	-99.52	-98.25	-102.07	95.17	-97.68	-98.27	-101.35	-106.11
-2	-100.12	-100.40	-95.78	-95.98	92.36	-97.72	-98.99	-94.50	-107.14
-1	-96.48	-102.37	-96.71	-93.93	92.72	-99.47	-99.67	-92.15	-103.61
0 note 2	-	-	-	-	-	-	-	-	-
+1	-98.93	-99.68	-100.69	-98.81	94.28	-100.91	-103.25	-96.24	-104.88
+2	-99.02	-112.73	-98.00	-106.20	96.03	-97.56	-102.88	-95.45	-109.77
+3	-97.01	-113.36	-98.15	-100.98	101.80	-94.63	-96.07	-101.15	-102.97
+4	-97.09	-98.32	-93.66	-91.33	102.38	-92.88	-94.46	-98.61	-93.16
+5	-106.72	-99.64	-101.23	-94.98	106.75	-102.56	-96.25	-97.82	-96.90

Note 1: Comparison frequency 13 MHz

Note 2: All spurs are referenced to carrier signal (n=0).

REFERENCE SPURIOUS ORDER	REFERENCE SPURIOUS @ Fcarrier 1832MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @ Fcarrier 1882MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @ Fcarrier 1932MHz+(n*Freference) (dBc) note 3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
-5	-94.82	-105.09	-102.08	-101.67	-100.42	-93.46	-96.55	-99.34	-103.05
-4	-102.20	-97.34	-100.86	-92.70	-100.93	-98.33	-91.66	-92.95	-95.76
-3	-94.38	-101.44	-100.63	-95.31	-92.24	-91.21	-90.70	-98.95	-102.48
-2	-93.77	-98.34	-98.41	-104.07	-95.89	-96.09	-99.11	-95.44	-103.03
-1	-98.34	-104.63	-99.45	-101.81	-100.50	-99.60	-96.43	-99.60	-103.36
0 note 4	-	-	-	-	-	-	-	-	-
+1	-101.18	-98.85	-93.33	-89.96	-101.87	-91.14	-100.52	-98.46	-93.43
+2	-108.10	-97.76	-97.18	-101.76	-98.82	-109.69	-101.68	-95.57	-98.34
+3	-92.91	-95.69	-101.93	-92.68	-91.70	-99.02	-96.60	-103.67	-104.06
+4	-103.48	-99.84	-100.94	-99.98	-104.14	-109.77	-98.79	-105.10	-103.57
+5	-108.83	-114.85	-102.73	-107.48	-107.02	-104.35	-96.67	-102.53	-104.56

Note 3: Reference frequency 52 MHz

Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

STEP SIZE SPURIOUS ORDER	0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 1832MHz+(n*Fstep size) (dBc) note 5			0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 1882MHz+(n*Fstep size) (dBc) note 5			0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 1932MHz+(n*Fstep size) (dBc) note 5		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
-5.0	-112.64	-110.56	-108.09	-108.27	-110.99	-111.95	-112.59	-110.47	-113.61
-4.5	-108.08	-108.16	-112.49	-109.86	-112.44	-108.50	-109.74	-110.80	-111.64
-4.0	-111.46	-108.14	-105.08	-110.06	-109.02	-109.57	-107.47	-111.03	-107.12
-3.5	-109.44	-105.47	-109.71	-108.68	-108.59	-108.02	-107.10	-107.13	-110.14
-3.0	-106.13	-104.03	-107.36	-103.27	-104.98	-107.68	-107.06	-104.72	-107.96
-2.5	-101.54	-103.61	-102.07	-104.84	-103.60	-100.25	-100.66	-102.65	-101.52
-2.0	-96.92	-99.83	-100.49	-100.07	-100.30	-99.58	-98.58	-100.03	-95.72
-1.5	-94.26	-95.39	-95.76	-95.22	-95.48	-92.99	-95.11	-93.41	-95.77
-1.0	-87.55	-88.29	-89.85	-86.71	-89.38	-89.41	-86.10	-88.75	-88.02
-0.5	-86.05	-86.32	-85.97	-86.94	-86.09	-86.06	-86.43	-86.51	-85.94
0 note 6	-	-	-	-	-	-	-	-	-
+0.5	-86.36	-86.90	-86.11	-86.84	-85.94	-86.69	-85.18	-87.49	-85.97
+1.0	-86.37	-87.81	-88.88	-85.27	-89.04	-86.81	-87.85	-86.73	-89.61
+1.5	-94.26	-96.41	-93.34	-94.99	-94.63	-96.02	-93.86	-95.04	-94.53
+2.0	-99.59	-101.23	-99.84	-99.43	-101.70	-98.07	-100.84	-99.84	-97.50
+2.5	-100.78	-103.49	-96.56	-101.28	-102.62	-103.62	-102.17	-101.44	-104.25
+3.0	-103.00	-107.65	-106.72	-105.60	-109.58	-106.78	-105.05	-107.43	-107.18
+3.5	-110.13	-110.13	-103.65	-105.82	-108.96	-109.22	-107.95	-108.51	-109.53
+4.0	-111.34	-111.32	-109.32	-109.00	-110.74	-110.91	-111.31	-105.95	-111.21
+4.5	-112.40	-106.32	-112.16	-109.68	-110.88	-112.20	-108.11	-112.45	-108.61
+5.0	-111.11	-113.93	-110.79	-107.47	-110.03	-109.29	-112.63	-111.30	-111.60

Note 5: Step size 125 kHz

Note 6: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661






The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

Typical Performance Curves

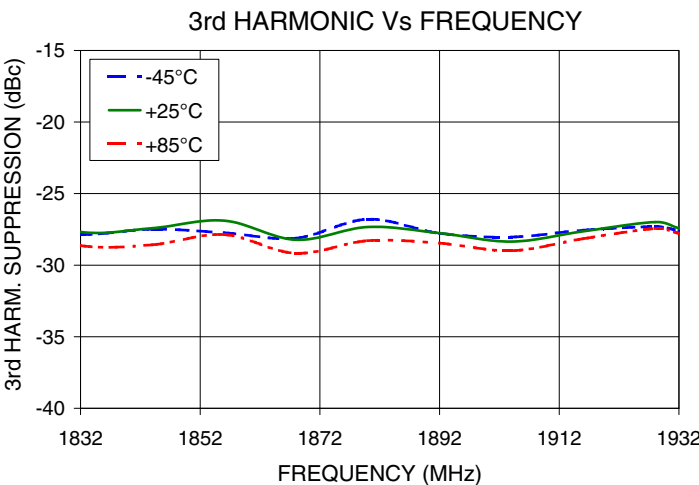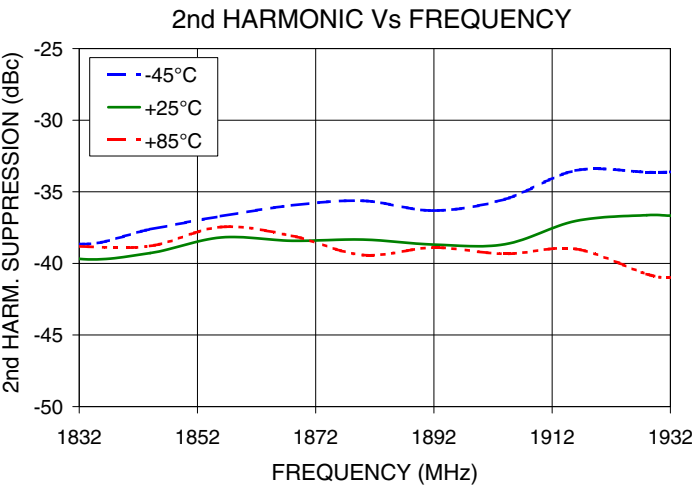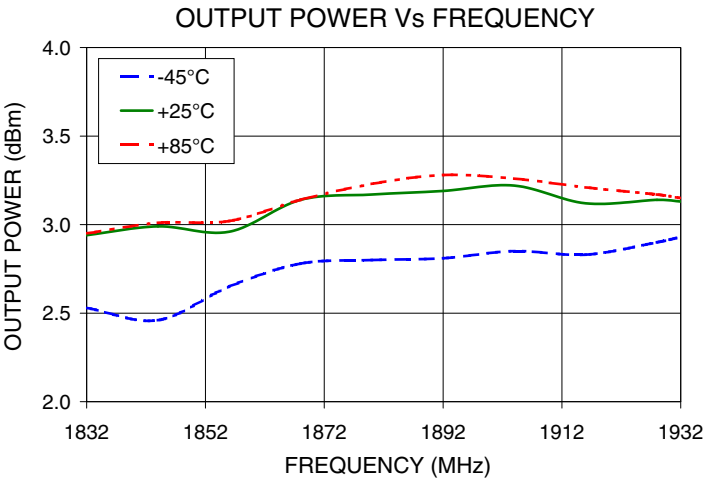

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.


PHASE NOISE @ 100Hz offset

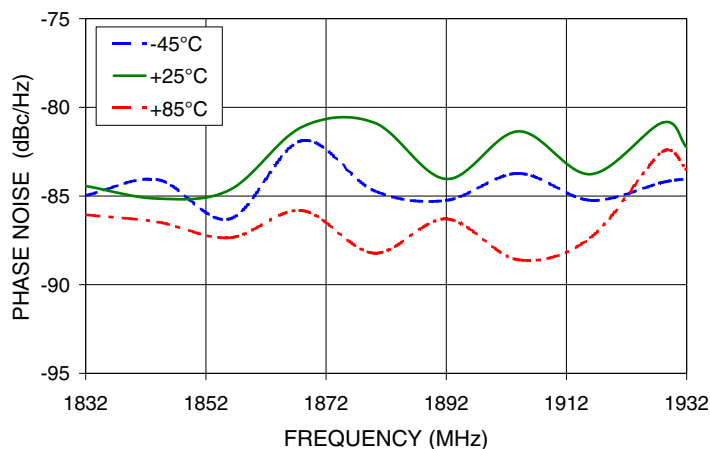


PHASE NOISE @ 1kHz offset

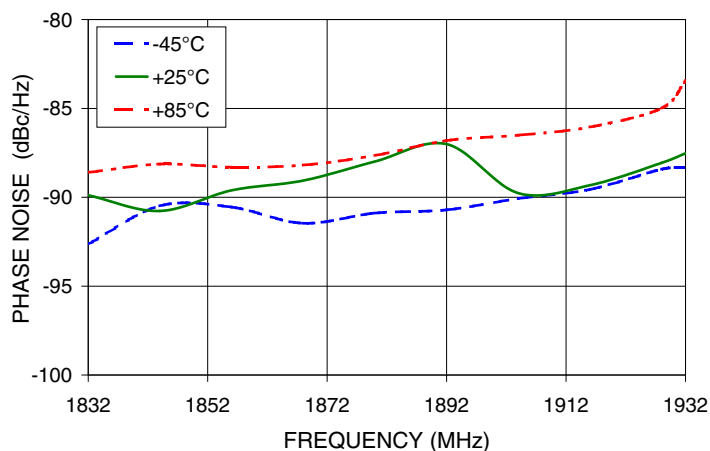


PHASE NOISE @ 10kHz offset

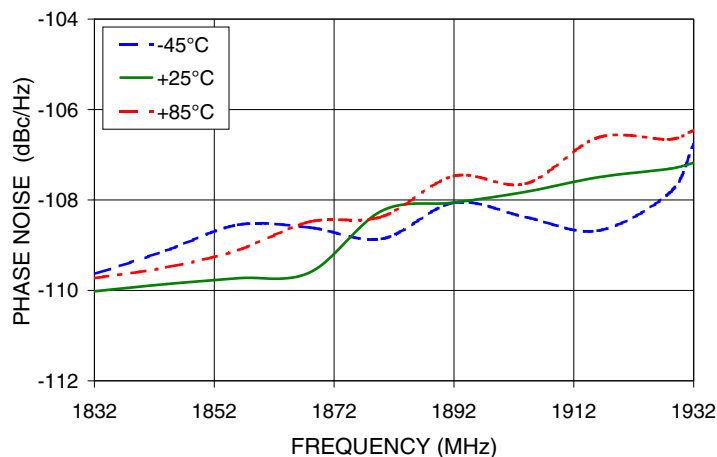

PHASE NOISE @ 100kHz offset

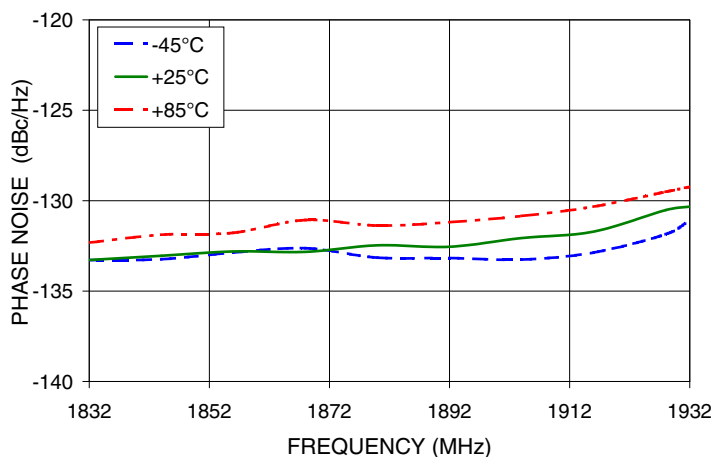

PHASE NOISE @ 1MHz offset

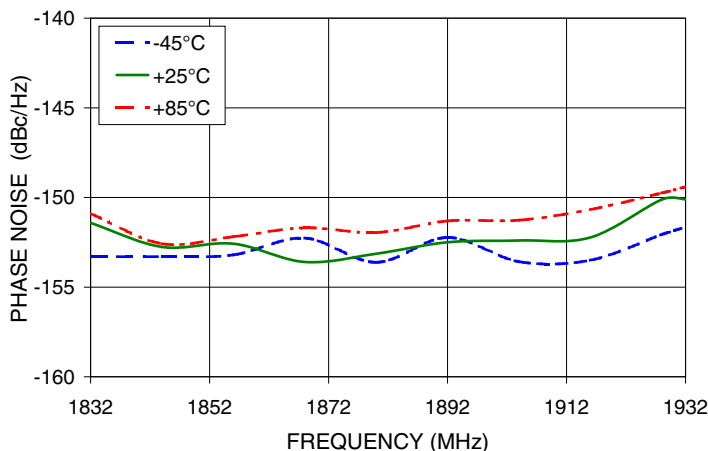

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.


COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 1832MHz

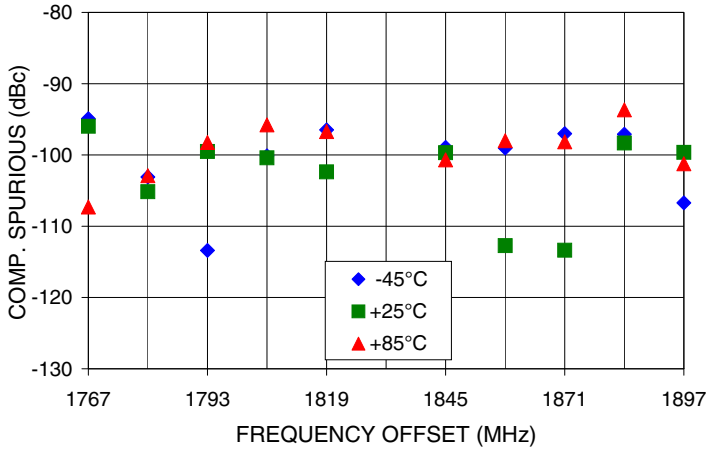


REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 1832MHz

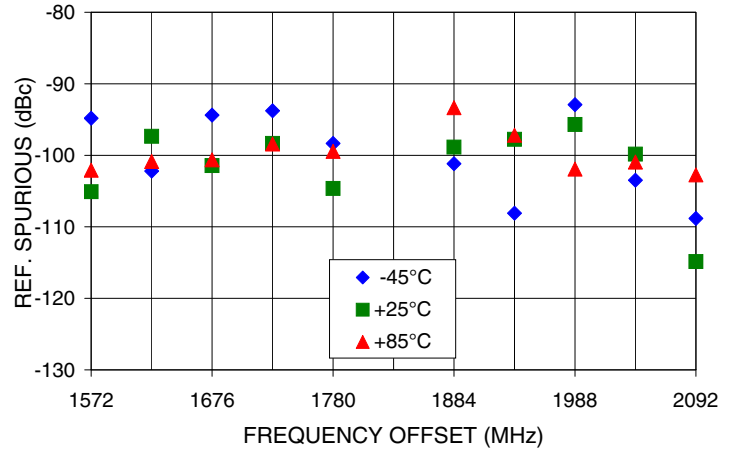


COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 1882MHz

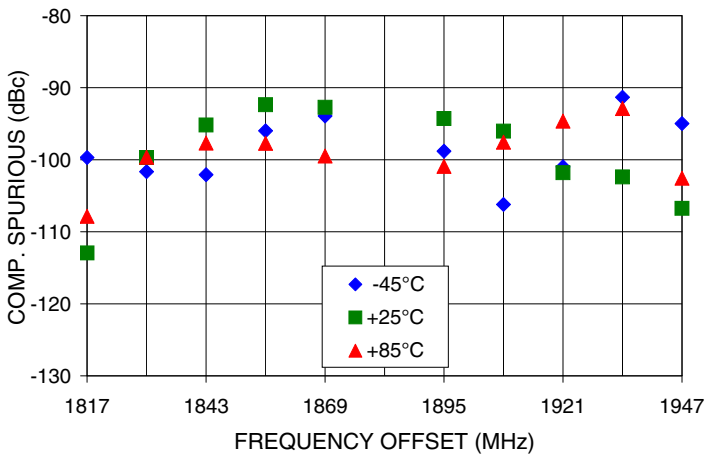


REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 1882MHz

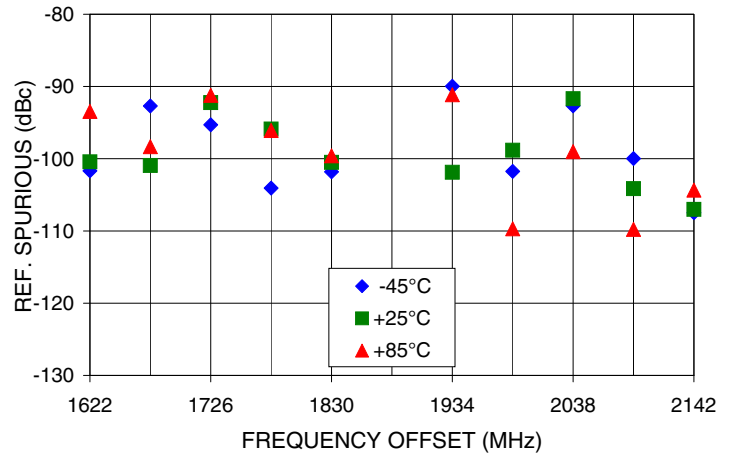

COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 1932MHz

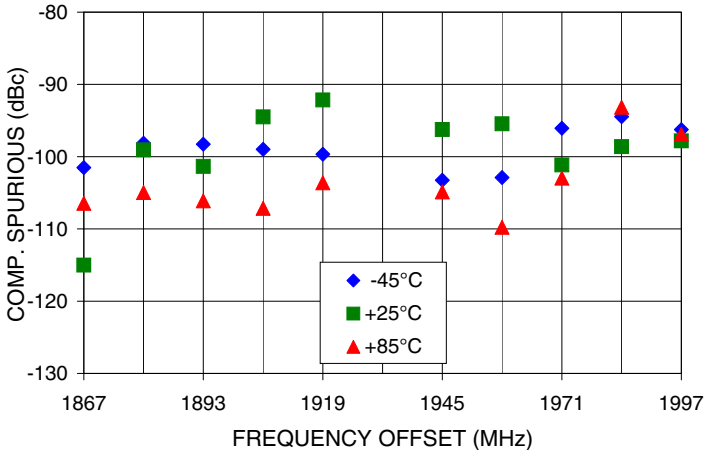




REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 1932MHz

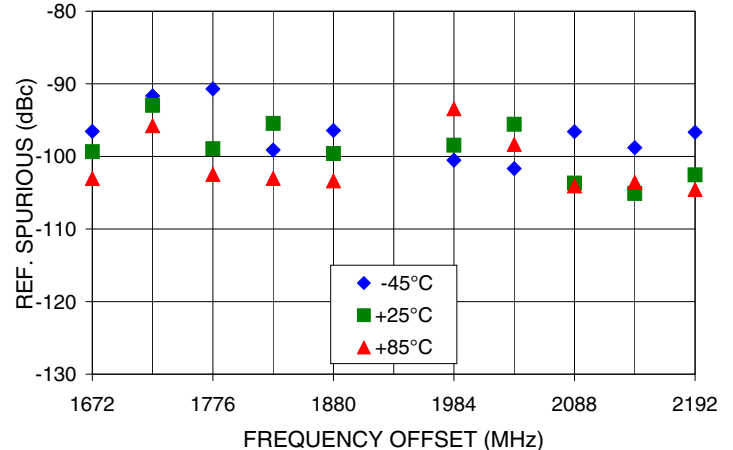

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

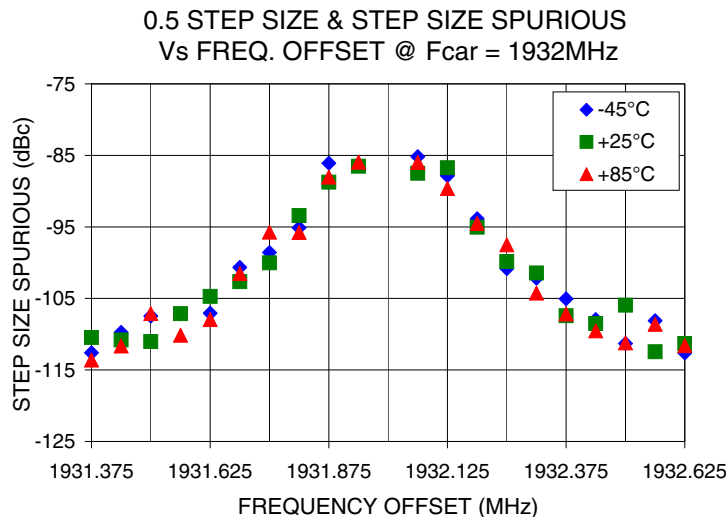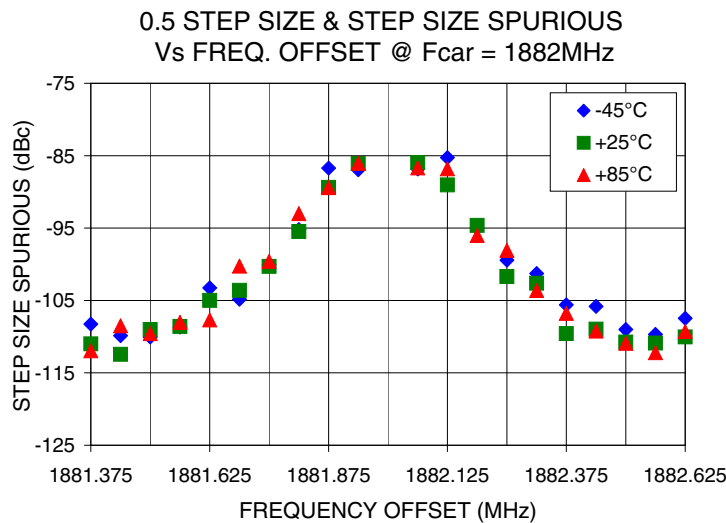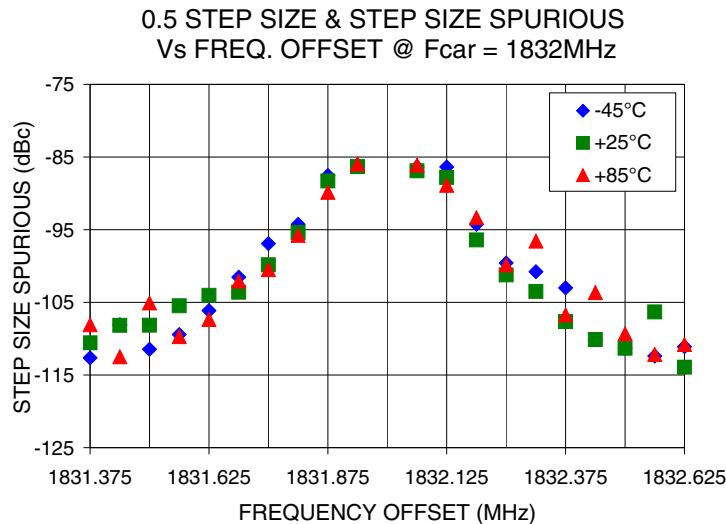

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

Pin Configuration

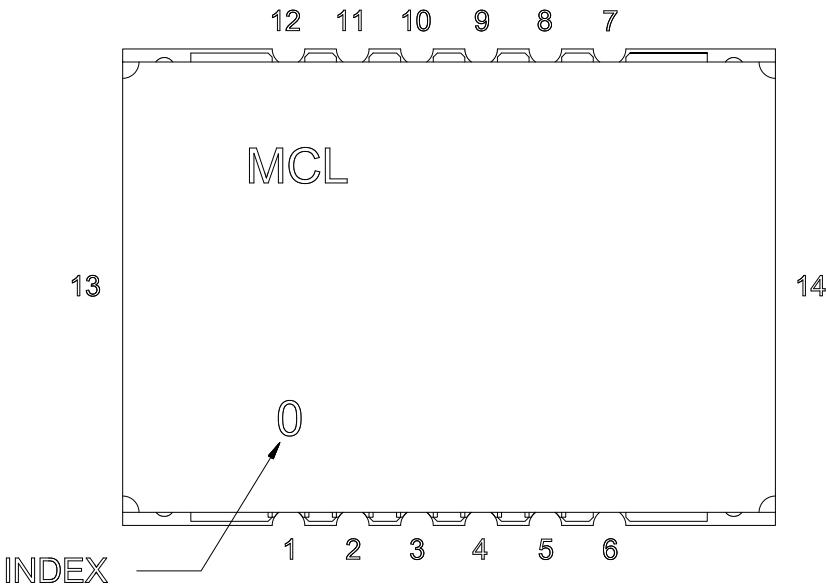


Pin Connection


Pin Number	Function
1	VCC PLL
2	GND
3	REF IN
4	GND
5	VCC VCO
6	GND
7	RF OUT
8	GND
9	LOCK DET
10	CLOCK
11	DATA
12	LE
13	GND
14	GND

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

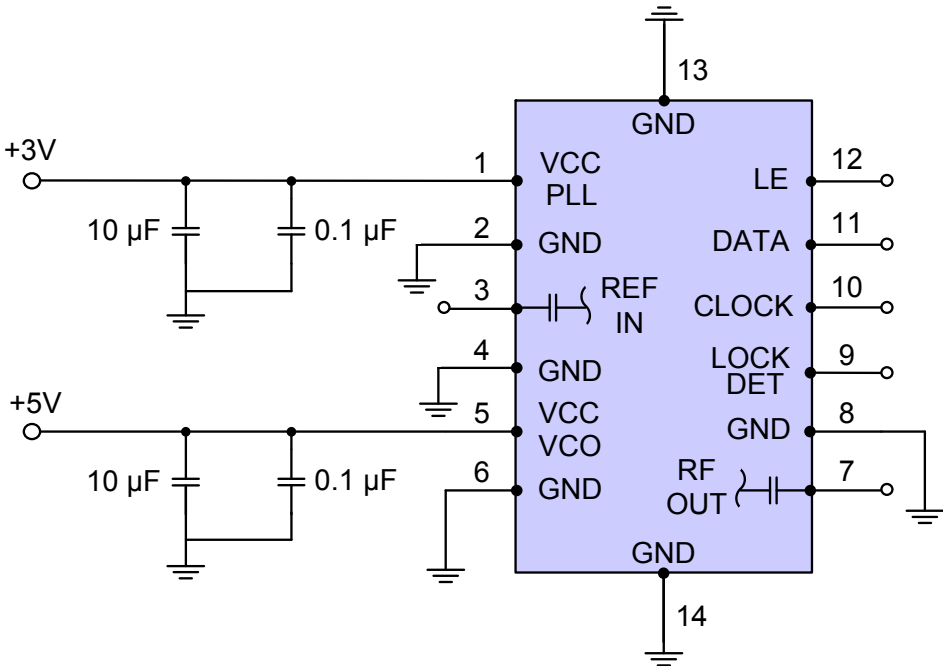

Device Marking

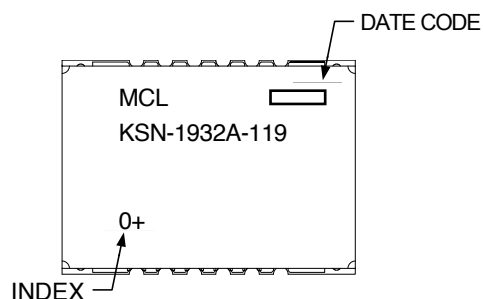

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: DK1182

Tape & Reel: TR-F28

Suggested Layout for PCB Design: PL-249

Evaluation Board: TB-567-2+

Environment Ratings: ENV03T2



IF/Rf MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А