

# Freescale Semiconductor

 MPX2010  
 Rev 13, 10/2008

## 10 kPa On-Chip Temperature Compensated and Calibrated Silicon Pressure Sensors

The MPX2010 series silicon piezoresistive pressure sensors provide a very accurate and linear voltage output directly proportional to the applied pressure. These sensors house a single monolithic silicon die with the strain gauge and thin film resistor network integrated. The sensor is laser trimmed for precise span, offset calibration and temperature compensation.

### Features

- Temperature Compensated over 0°C to +85°C
- Ratiometric to Supply Voltage
- Differential and Gauge Options
- Available in Easy-to-Use Tape & Reel

## MPX2010 Series

0 to 10 kPa (0 to 1.45 psi)  
 25 mV Full Scale  
 (Typical)


### Application Examples

- Respiratory Diagnostics
- Air Movement Control
- Controllers
- Pressure Switching


### ORDERING INFORMATION

| Device Name                                    | Package Options | Case No. | # of Ports |        |      | Pressure Type |              |          | Device Marking |
|--|-----------------|----------|------------|--------|------|---------------|--------------|----------|----------------|
|  |                 |          | None       | Single | Dual | Gauge         | Differential | Absolute |                |
| <b>Small Outline Package (MPXV2010 Series)</b> |                 |          |            |        |      |               |              |          |                |
| MPXV2010GP                                     | Tray            | 1369     |            | •      |      | •             |              |          | MPXV2010GP     |
| MPXV2010DP                                     | Tray            | 1351     |            |        | •    |               | •            |          | MPXV2010DP     |
| <b>Unibody Package (MPX2010 Series)</b>        |                 |          |            |        |      |               |              |          |                |
| MPX2010D                                       | Tray            | 344      | •          |        |      |               | •            |          | MPX2010D       |
| MPX2010DP                                      | Tray            | 344C     |            |        | •    |               | •            |          | MPX2010DP      |
| MPX2010GP                                      | Tray            | 344B     |            | •      |      | •             |              |          | MPX2010GP      |
| MPX2010GS                                      | Tray            | 344E     |            | •      |      | •             |              |          | MPX2010D       |
| MPX2010GSX                                     | Tray            | 344F     |            | •      |      | •             |              |          | MPX2010D       |
| <b>MPAK Package (MPXM2010 Series)</b>          |                 |          |            |        |      |               |              |          |                |
| MPXM2010D                                      | Rail            | 1320     | •          |        |      |               | •            |          | MPXM2010D      |
| MPXM2010DT1                                    | Tape and Reel   | 1320     | •          |        |      |               | •            |          | MPXM2010D      |
| MPXM2010GS                                     | Rail            | 1320A    |            | •      |      | •             |              |          | MPXM2010GS     |
| MPXM2010GST1                                   | Tape and Reel   | 1320A    |            | •      |      | •             |              |          | MPXM2010GS     |


### SMALL OUTLINE PACKAGES




MPXV2010GP  
CASE 1369-01



MPXV2010DP  
CASE 1351-01



MPXM2010D/DT1  
CASE 1320-02



MPXM2010GS/GST1  
CASE 1320A-02

### UNIBODY PACKAGES



MPX2010D  
CASE 344-15



MPX2010GP  
CASE 344B-01



MPX2010DP  
CASE 344C-01



MPX2010GS  
CASE 344E-01



MPX2010GSX  
CASE 344F-01

## Operating Characteristics

**Table 1. Operating Characteristics** ( $V_S = 10 V_{DC}$ ,  $T_A = 25^\circ C$  unless otherwise noted,  $P1 > P2$ )

| Characteristic   | Symbol              | Min  | Typ       | Max  | Units       |
|--|---------------------|------|-----------|------|-------------|
| Pressure Range <sup>(1)</sup>                              | $P_{OP}$            | 0    | —         | 10   | kPa         |
| Supply Voltage <sup>(2)</sup>                              | $V_S$               | —    | 10        | 16   | $V_{DC}$    |
| Supply Current   | $I_O$               | —    | 6.0       | —    | mAdc        |
| Full Scale Span <sup>(3)</sup>                             | $V_{FSS}$           | 24   | 25        | 26   | mV          |
| Offset <sup>(4)</sup>                                      | $V_{OFF}$           | -1.0 | —         | 1.0  | mV          |
| Sensitivity  | $\Delta V/\Delta P$ | —    | 2.5       | —    | mV/kPa      |
| Linearity  | —                   | -1.0 | —         | 1.0  | % $V_{FSS}$ |
| Pressure Hysteresis (0 to 10 kPa)                          | —                   | —    | $\pm 0.1$ | —    | % $V_{FSS}$ |
| Temperature Hysteresis ( $-40^\circ C$ to $+125^\circ C$ ) | —                   | —    | $\pm 0.5$ | —    | % $V_{FSS}$ |
| Temperature Coefficient on Full Scale Span                 | $TCV_{FSS}$         | -1.0 | —         | 1.0  | % $V_{FSS}$ |
| Temperature Coefficient on Offset                          | $TCV_{OFF}$         | -1.0 | —         | 1.0  | mV          |
| Input Impedance  | $Z_{IN}$            | 1300 | —         | 2550 | $\Omega$    |
| Output Impedance   | $Z_{OUT}$           | 1400 | —         | 3000 | $\Omega$    |
| Response Time <sup>(5)</sup> (10% to 90%)                  | $t_R$               | —    | 1.0       | —    | ms          |
| Warm-Up Time   | —                   | —    | 20        | —    | ms          |
| Offset Stability <sup>(6)</sup>                            | —                   | —    | $\pm 0.5$ | —    | % $V_{FSS}$ |

1. 1.0 kPa (kiloPascal) equals 0.145 psi.

2. Device is ratiometric within this specified excitation range. Operating the device at a different range may induce additional error due to device self-heating.

3. Full Scale Span ( $V_{FSS}$ ) is defined as the algebraic difference between the output voltage at full rated pressure and the output voltage at the minimum rated pressure.

4. Offset ( $V_{OFF}$ ) is defined as the output voltage at the minimum rated pressure.

5. Response Time is defined as the time for the incremental change in the output to go from 10% to 90% of its final value when subjected to a specified step change in pressure.

6. Offset stability is the product's output deviation when subjected to 1000 hours of Pulsed Pressure, Temperature Cycling with Bias Test.

## Maximum Ratings

**Table 2. Maximum Ratings<sup>(1)</sup>**


| Rating                     | Symbol      | Value       | Unit |
|----------------------------|-------------|-------------|------|
| Maximum Pressure (P1 > P2) | $P_{MAX}$   | 75          | kPa  |
| Burst Pressure (P1 > P2)   | $P_{BURST}$ | 100         | kPa  |
| Storage Temperature        | $T_{STG}$   | -40 to +125 | °C   |
| Operating Temperature      | $T_A$       | -40 to +125 | °C   |

1. Exposure beyond the specified limits may cause permanent damage or degradation to the device.

## Voltage Output versus Applied Differential Pressure

The output voltage of the differential or gauge sensor increases with increasing pressure applied to the pressure side (P1) relative to the vacuum side (P2). Similarly, output voltage increases as increasing vacuum is applied to the vacuum side (P2) relative to the pressure side (P1).

Figure 1. shows a block diagram of the internal circuitry on the stand-alone pressure sensor chip.

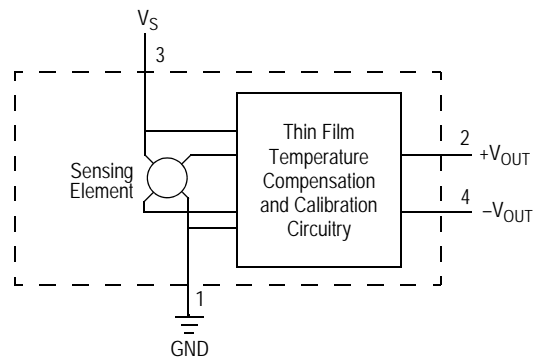

**Figure 1. Temperature Compensated and Calibrated Pressure Sensor Schematic**

## On-Chip Temperature Compensation and Calibration

Figure 2. shows the output characteristics of the MPX2010 series at 25°C. The output is directly proportional to the differential pressure and is essentially a straight line.

The effects of temperature on full scale span and offset are very small and are shown under Operating Characteristics.

This performance over temperature is achieved by having both the shear stress strain gauge and the thin-film resistor circuitry on the same silicon diaphragm. Each chip is dynamically laser trimmed for precise span and offset calibration and temperature compensation.

Figure 3. illustrates the differential/gauge die in the basic chip carrier (Case 344). A silicone gel isolates the die surface and wire bonds from the environment, while allowing the pressure signal to be transmitted to the silicon diaphragm.

The MPX2010 series pressure sensor operating characteristics and internal reliability and qualification tests are based on use of dry air as the pressure media. Media other than dry air may have adverse effects on sensor

performance and long term reliability. Contact the factory for information regarding media compatibility in your application.

### LINEARITY

Linearity refers to how well a transducer's output follows the equation:  $V_{out} = V_{off} + \text{sensitivity} \times P$  over the operating pressure range. There are two basic methods for calculating nonlinearity: (1) end point straight line fit (see Figure 4.) or (2) a least squares best line fit. While a least squares fit gives the "best case" linearity error (lower numerical value), the calculations required are burdensome.

Conversely, an end point fit will give the "worst case" error (often more desirable in error budget calculations) and the calculations are more straightforward for the user.

Freescale's specified pressure sensor linearities are based on the end point straight line method measured at the midrange pressure.

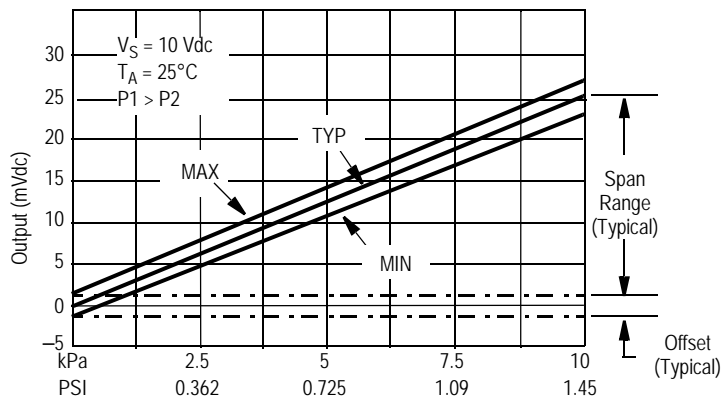


Figure 2. Output vs. Pressure Differential

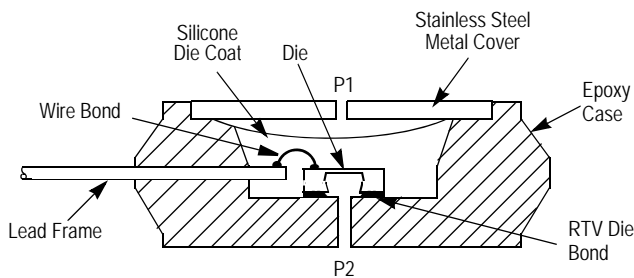


Figure 3. Unibody Package: Cross Sectional Diagram (not to scale)

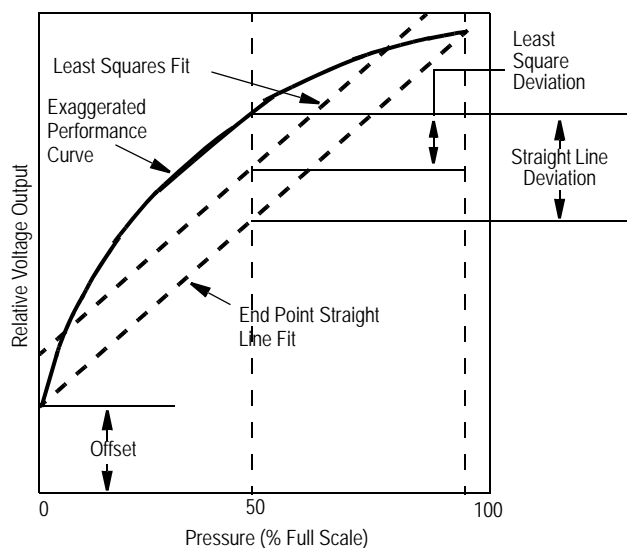


Figure 4. Linearity Specification Comparison

**PRESSURE (P1)/VACUUM (P2) SIDE IDENTIFICATION TABLE**


Freescale designates the two sides of the pressure sensor as the Pressure (P1) side and the Vacuum (P2) side. The Pressure (P1) side is the side containing silicone gel which isolates the die from the environment. The pressure sensor is designed to operate with positive differential pressure applied,  $P1 > P2$ .

The Pressure (P1) side may be identified by using the following table.

**Table 3. Pressure (P1) Side Delineation**

| Part Number     | Case Type | Pressure (P1) Side Identifier |
|-----------------|-----------|-------------------------------|
| MPX2010D        | 344       | Stainless Steel Cap           |
| MPX2010DP       | 344C      | Side with Part Marking        |
| MPX2010GP       | 344B      | Side with Port Attached       |
| MPX2010GS       | 344E      | Side with Port Attached       |
| MPX2010GSX      | 344F      | Side with Port Attached       |
| MPXV2010GP      | 1369      | Side with Port Attached       |
| MPXV2010DP      | 1351      | Side with Part Marking        |
| MPXM2010D/DTI   | 1320      | Side with Part Marking        |
| MPXM2010GS/GSTI | 1320A     | Side with Port Attached       |


**PACKAGE DIMENSIONS**

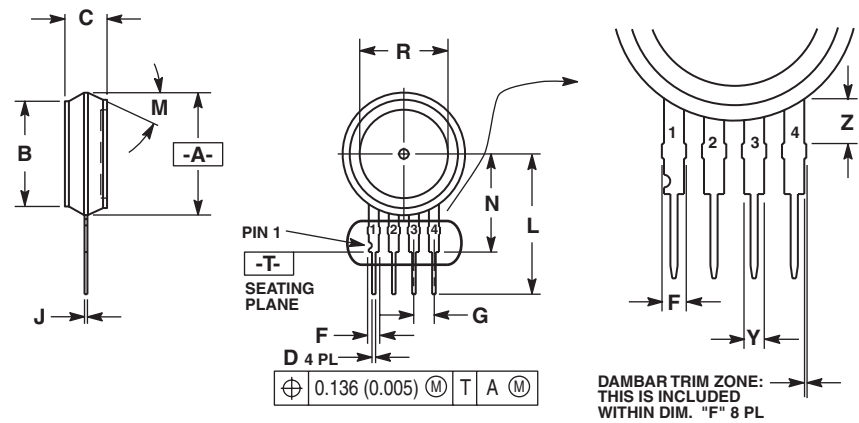

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION -A- IS INCLUSIVE OF THE MOLD STOP RING. MOLD STOP RING NOT TO EXCEED 16.00 (0.630).

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.595     | 0.630 | 15.11       | 16.00 |
| B   | 0.514     | 0.534 | 13.06       | 13.56 |
| C   | 0.200     | 0.220 | 5.08        | 5.59  |
| D   | 0.016     | 0.020 | 0.41        | 0.51  |
| F   | 0.048     | 0.064 | 1.22        | 1.63  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| J   | 0.014     | 0.016 | 0.36        | 0.40  |
| L   | 0.695     | 0.725 | 17.65       | 18.42 |
| M   | 30° NOM   |       | 30° NOM     |       |
| N   | 0.475     | 0.495 | 12.07       | 12.57 |
| R   | 0.430     | 0.450 | 10.92       | 11.43 |
| Y   | 0.048     | 0.052 | 1.22        | 1.32  |
| Z   | 0.106     | 0.118 | 2.68        | 3.00  |

**CASE 344-15  
ISSUE AA  
UNIBODY PACKAGE**

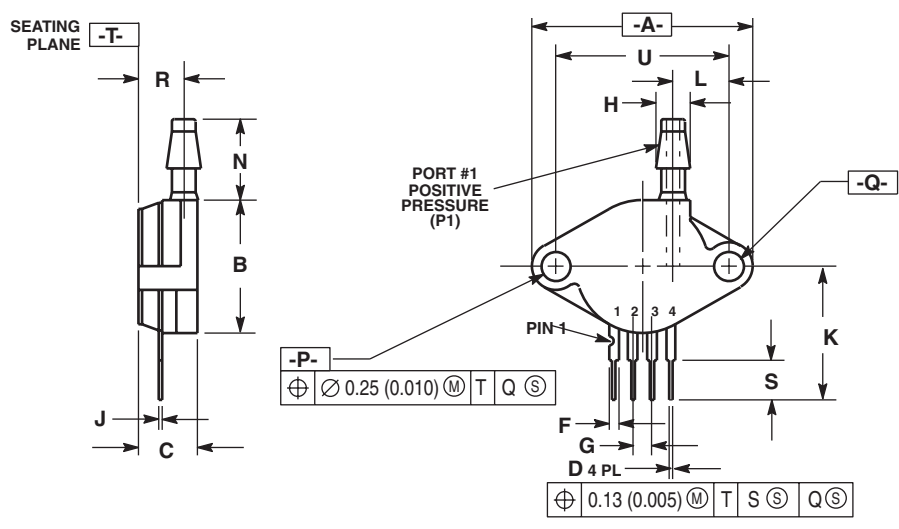


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 1.145     | 1.175 | 29.08       | 29.85 |
| B   | 0.685     | 0.715 | 17.40       | 18.16 |
| C   | 0.305     | 0.325 | 7.75        | 8.26  |
| D   | 0.016     | 0.020 | 0.41        | 0.51  |
| F   | 0.048     | 0.064 | 1.22        | 1.63  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.182     | 0.194 | 4.62        | 4.93  |
| J   | 0.014     | 0.016 | 0.36        | 0.41  |
| K   | 0.695     | 0.725 | 17.65       | 18.42 |
| L   | 0.290     | 0.300 | 7.37        | 7.62  |
| N   | 0.420     | 0.440 | 10.67       | 11.18 |
| P   | 0.153     | 0.159 | 3.89        | 4.04  |
| Q   | 0.153     | 0.159 | 3.89        | 4.04  |
| R   | 0.230     | 0.250 | 5.84        | 6.35  |
| S   | 0.220     | 0.240 | 5.59        | 6.10  |
| U   | 0.910 BSC |       | 23.11 BSC   |       |

**CASE 344B-01  
ISSUE B  
UNIBODY PACKAGE**

PACKAGE DIMENSIONS

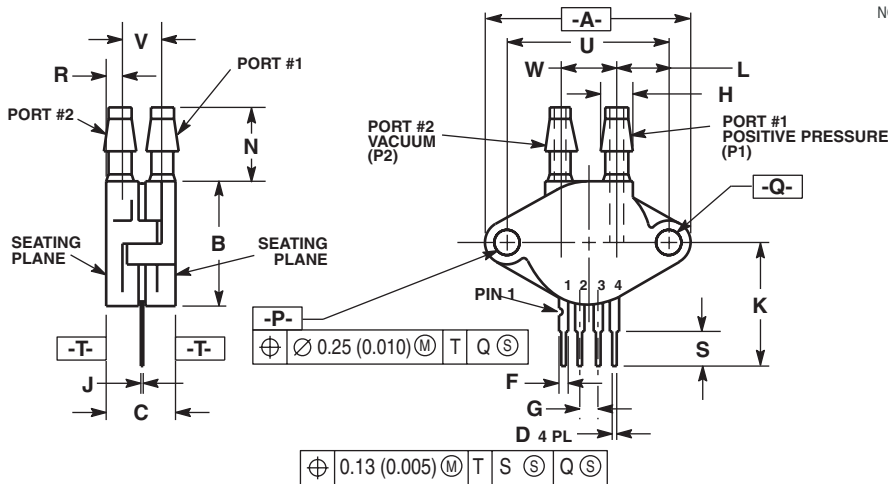


- NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 1.145     | 1.175 | 29.08       | 29.85 |
| B   | 0.685     | 0.715 | 17.40       | 18.16 |
| C   | 0.405     | 0.435 | 10.29       | 11.05 |
| D   | 0.016     | 0.020 | 0.41        | 0.51  |
| F   | 0.048     | 0.064 | 1.22        | 1.63  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.182     | 0.194 | 4.62        | 4.93  |
| J   | 0.014     | 0.016 | 0.36        | 0.41  |
| K   | 0.695     | 0.725 | 17.65       | 18.42 |
| L   | 0.290     | 0.300 | 7.37        | 7.62  |
| N   | 0.420     | 0.440 | 10.67       | 11.18 |
| P   | 0.153     | 0.159 | 3.89        | 4.04  |
| Q   | 0.153     | 0.159 | 3.89        | 4.04  |
| R   | 0.063     | 0.083 | 1.60        | 2.11  |
| S   | 0.220     | 0.240 | 5.59        | 6.10  |
| U   | 0.910 BSC |       | 23.11 BSC   |       |
| V   | 0.248     | 0.278 | 6.30        | 7.06  |
| W   | 0.310     | 0.330 | 7.87        | 8.38  |

- STYLE 1:  
 PIN 1: GROUND  
 2. + OUTPUT  
 3. + SUPPLY  
 4. - OUTPUT

CASE 344C-01  
 ISSUE B  
 UNIBODY PACKAGE

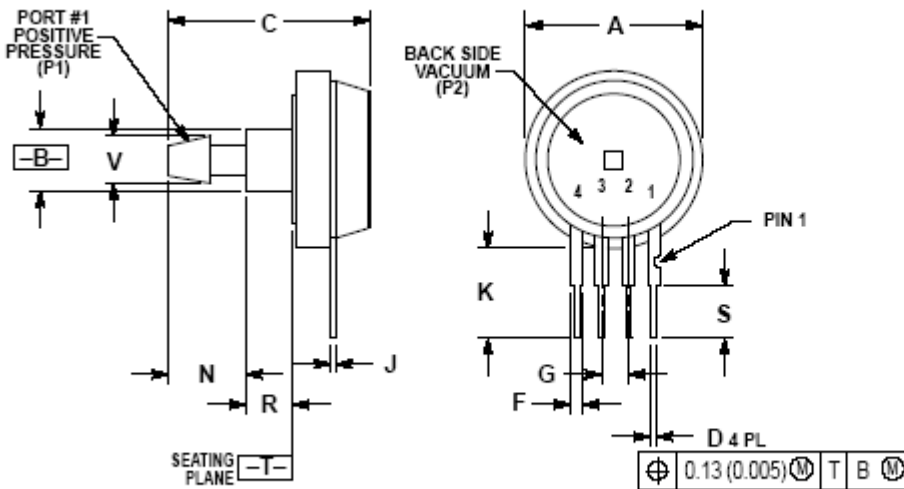


- NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.890     | 0.720 | 17.53       | 18.28 |
| B   | 0.245     | 0.255 | 6.22        | 6.48  |
| C   | 0.790     | 0.820 | 19.81       | 20.82 |
| D   | 0.018     | 0.020 | 0.41        | 0.51  |
| F   | 0.048     | 0.064 | 1.22        | 1.63  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| J   | 0.014     | 0.016 | 0.36        | 0.41  |
| K   | 0.345     | 0.375 | 8.78        | 9.53  |
| N   | 0.300     | 0.310 | 7.62        | 7.87  |
| R   | 0.178     | 0.186 | 4.52        | 4.72  |
| S   | 0.220     | 0.240 | 5.59        | 6.10  |
| V   | 0.182     | 0.194 | 4.62        | 4.93  |

- STYLE 1:  
 PIN 1: GROUND  
 2. + OUTPUT  
 3. + SUPPLY  
 4. - OUTPUT

CASE 344E-01  
 ISSUE B  
 UNIBODY PACKAGE

### PACKAGE DIMENSIONS

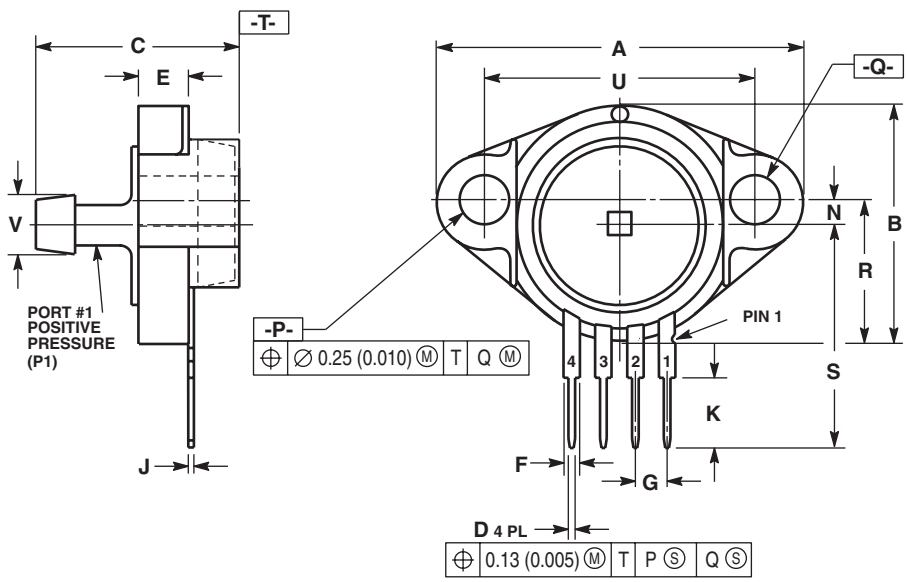

NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.


| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 1.080     | 1.120 | 27.43       | 28.45 |
| B   | 0.740     | 0.760 | 18.80       | 19.30 |
| C   | 0.630     | 0.650 | 16.00       | 16.51 |
| D   | 0.016     | 0.020 | 0.41        | 0.51  |
| E   | 0.160     | 0.180 | 4.06        | 4.57  |
| F   | 0.048     | 0.064 | 1.22        | 1.63  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| J   | 0.014     | 0.016 | 0.36        | 0.41  |
| K   | 0.220     | 0.240 | 5.59        | 6.10  |
| N   | 0.070     | 0.080 | 1.78        | 2.03  |
| P   | 0.150     | 0.160 | 3.81        | 4.06  |
| Q   | 0.150     | 0.160 | 3.81        | 4.06  |
| R   | 0.440     | 0.460 | 11.18       | 11.68 |
| S   | 0.695     | 0.725 | 17.65       | 18.42 |
| U   | 0.840     | 0.860 | 21.34       | 21.84 |
| V   | 0.182     | 0.194 | 4.62        | 4.92  |

STYLE 1:  
 PIN 1: GROUND  
 2. V (+) OUT  
 3. V SUPPLY  
 4. V (-) OUT

### CASE 344F-01 ISSUE B UNIBODY PACKAGE



PACKAGE DIMENSIONS

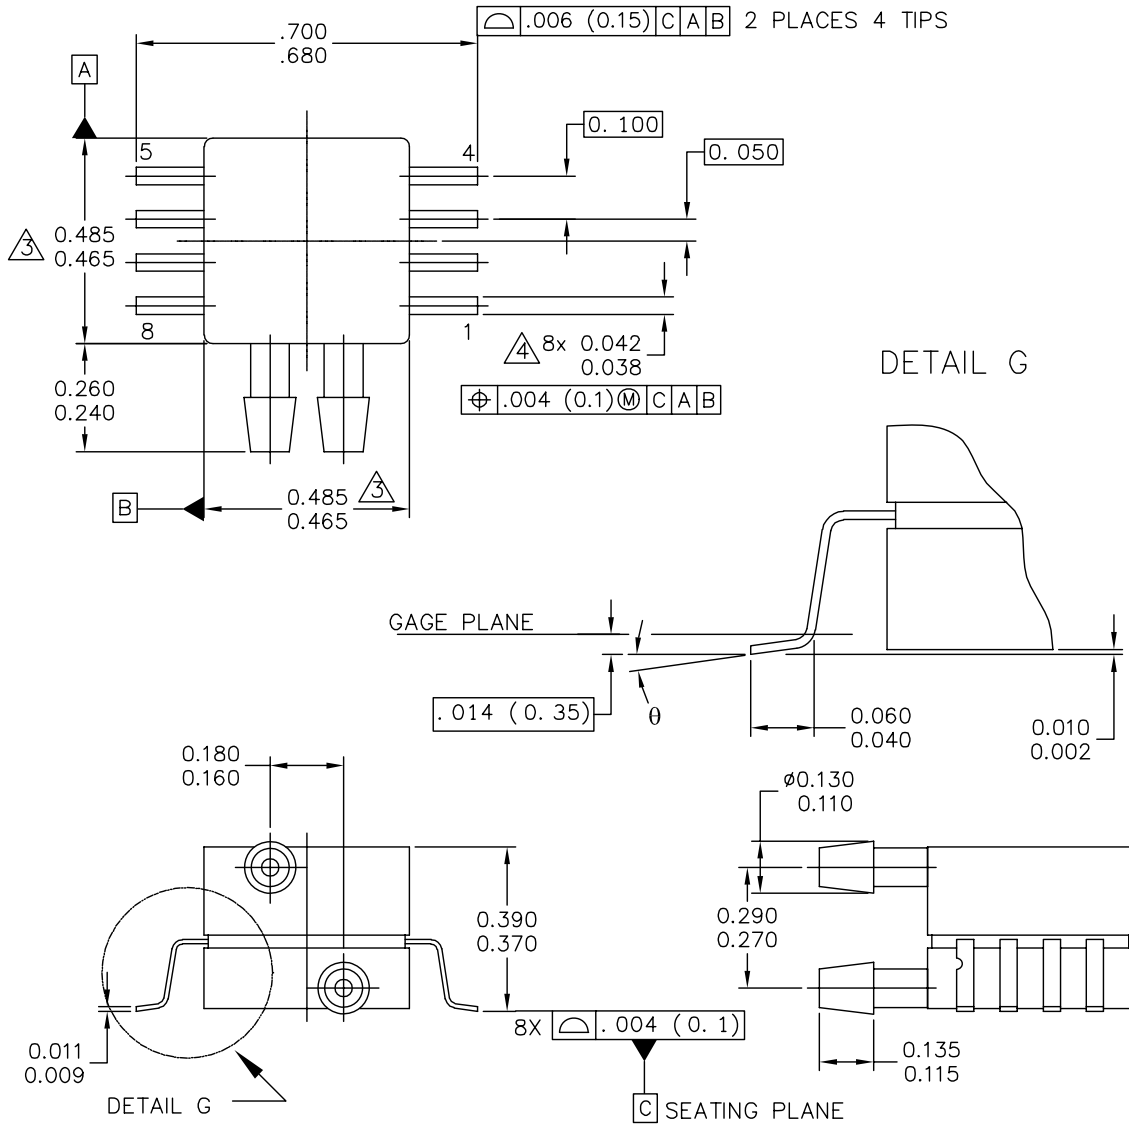

|   |                           |                            |
|---|---------------------------|----------------------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |
| TITLE:<br><br>8 LD SNSR, DUAL PORT                      | DOCUMENT NO: 98ASA99255D  | REV: A                     |
|   | CASE NUMBER: 1351-01      | 27 JUL 2005                |
|   | STANDARD: NON-JEDEC       |                            |

**CASE1351-01  
ISSUE A  
SMALL OUTLINE PACKAGE**

### PACKAGE DIMENSIONS

NOTES:

- 1. CONTROLLING DIMENSION: INCH
- 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
- 3. DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH AND PROTRUSIONS SHALL NOT EXCEED .006 PER SIDE.
- 4. DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 MAXIMUM.

STYLE 1:

PIN 1: GND  
 PIN 2: +Vout  
 PIN 3: Vs  
 PIN 4: -Vout  
 PIN 5: N/C  
 PIN 6: N/C  
 PIN 7: N/C  
 PIN 8: N/C


STYLE 2:

PIN 1: N/C  
 PIN 2: Vs  
 PIN 3: GND  
 PIN 4: Vout  
 PIN 5: N/C  
 PIN 6: N/C  
 PIN 7: N/C  
 PIN 8: N/C

|   |                           |                            |  |
|---|---------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>8 LD SNSR, DUAL PORT                      | DOCUMENT NO: 98ASA99255D  | REV: A                     |  |
|   | CASE NUMBER: 1351-01      | 27 JUL 2005                |  |
|   | STANDARD: NON-JEDEC       |                            |  |

**CASE1351-01  
 ISSUE A  
 SMALL OUTLINE PACKAGE**

PACKAGE DIMENSIONS

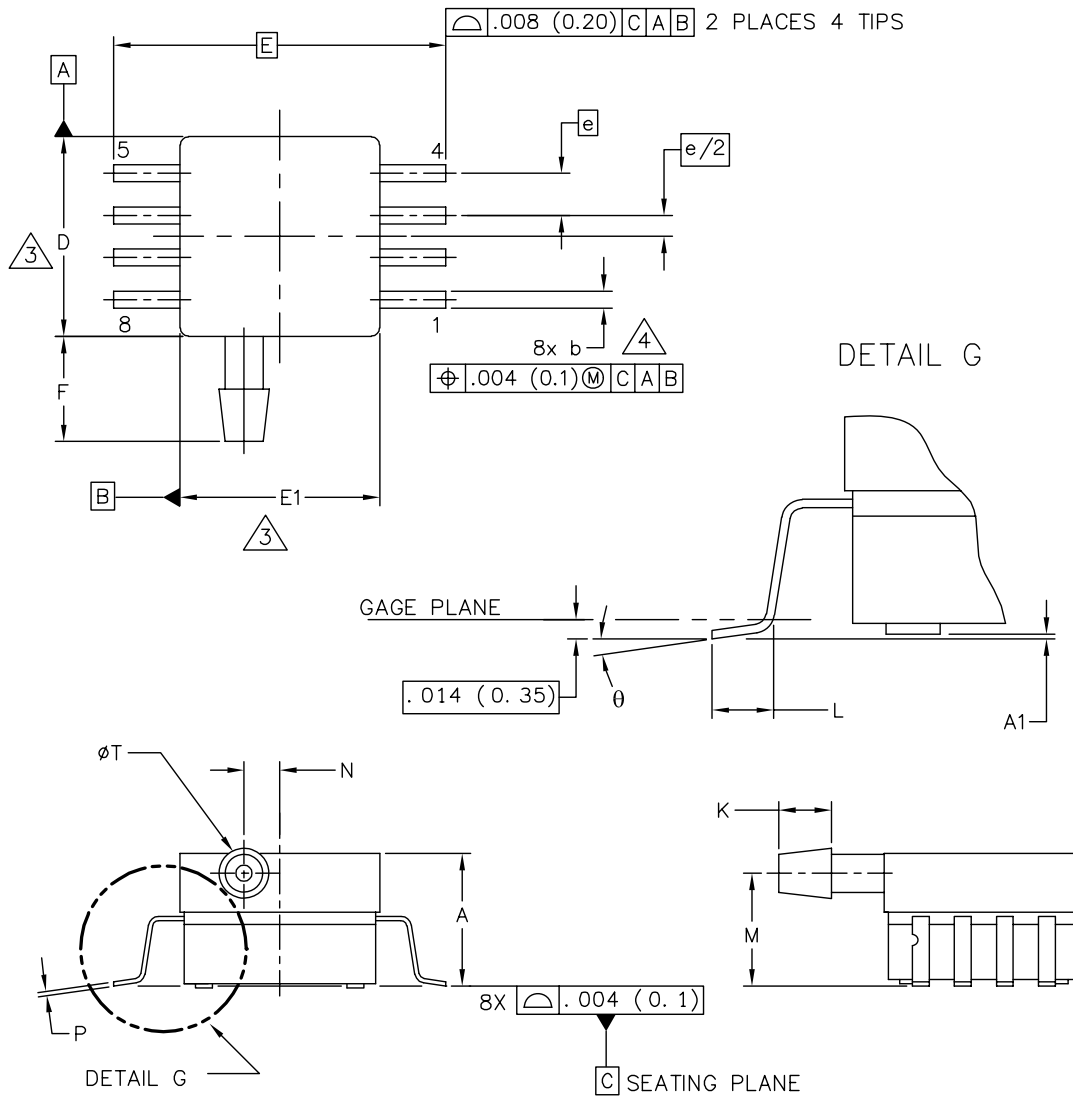

|   |                           |                            |  |
|---|---------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>8 LD SOP, SIDE PORT                       | DOCUMENT NO: 98ASA99303D  | REV: B                     |  |
|   | CASE NUMBER: 1369-01      | 24 MAY 2005                |  |
|   | STANDARD: NON-JEDEC       |                            |  |

**CASE 1369-01  
ISSUE B  
SMALL OUTLINE PACKAGE**

**PACKAGE DIMENSIONS**


NOTES:

1. CONTROLLING DIMENSION: INCH
  2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
- ⚠ DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH AND PROTRUSIONS SHALL NOT EXCEED .006 (0.152) PER SIDE.
- ⚠ DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 (0.203) MAXIMUM.

| DIM   | INCHES   |      | MILLIMETERS               |       | DIM                      | INCHES                     |     | MILLIMETERS |     |
|---|----------|------|---------------------------|-------|--------------------------|----------------------------|-----|-------------|-----|
|   | MIN      | MAX  | MIN                       | MAX   |                          | MIN                        | MAX | MIN         | MAX |
| A   | .300     | .330 | 7.11                      | 7.62  | θ                        | 0°                         | 7°  | 0°          | 7°  |
| A1  | .002     | .010 | 0.05                      | 0.25  | -                        | ---                        | --- | ---         | --- |
| b   | .038     | .042 | 0.96                      | 1.07  | -                        | ---                        | --- | ---         | --- |
| D   | .465     | .485 | 11.81                     | 12.32 | -                        | ---                        | --- | ---         | --- |
| E   | .717 BSC |      | 18.21 BSC                 |       | -                        | ---                        | --- | ---         | --- |
| E1  | .465     | .485 | 11.81                     | 12.32 | -                        | ---                        | --- | ---         | --- |
| e   | .100 BSC |      | 2.54 BSC                  |       | -                        | ---                        | --- | ---         | --- |
| F   | .245     | .255 | 6.22                      | 6.47  | -                        | ---                        | --- | ---         | --- |
| K   | .120     | .130 | 3.05                      | 3.30  | -                        | ---                        | --- | ---         | --- |
| L   | .061     | .071 | 1.55                      | 1.80  | -                        | ---                        | --- | ---         | --- |
| M   | .270     | .290 | 6.86                      | 7.36  | -                        | ---                        | --- | ---         | --- |
| N   | .080     | .090 | 2.03                      | 2.28  | -                        | ---                        | --- | ---         | --- |
| P   | .009     | .011 | 0.23                      | 0.28  | -                        | ---                        | --- | ---         | --- |
| T   | .115     | .125 | 2.92                      | 3.17  | -                        | ---                        | --- | ---         | --- |
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. |          |      | <b>MECHANICAL OUTLINE</b> |       |                          | PRINT VERSION NOT TO SCALE |     |             |     |
| TITLE:<br><br>8 LD SOP, SIDE PORT                       |          |      |                           |       | DOCUMENT NO: 98ASA99303D |                            |     | REV: B      |     |
|   |          |      |                           |       | CASE NUMBER: 1369-01     |                            |     | 24 MAY 2005 |     |
|   |          |      |                           |       | STANDARD: NON-JEDEC      |                            |     |             |     |

**CASE 1369-01  
ISSUE B  
SMALL OUTLINE PACKAGE**

PACKAGE DIMENSIONS

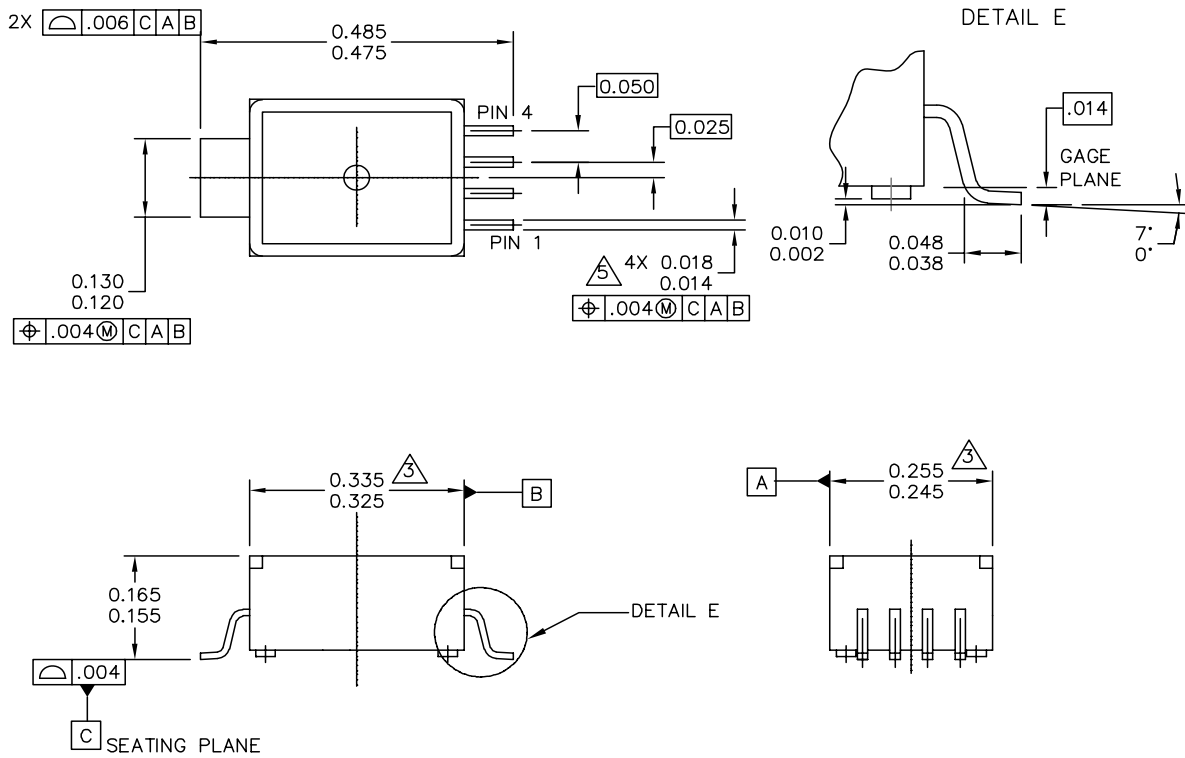


|   |                           |                            |  |
|---|---------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>5 LD M-PAC                                | DOCUMENT NO: 98ARH99088A  | REV: B                     |  |
|   | CASE NUMBER: 1320-02      | 22 JUL 2005                |  |
|   | STANDARD: NON-JEDEC       |                            |  |

**CASE 1320-02  
ISSUE B  
MPAK**

### PACKAGE DIMENSIONS

NOTES:

- 1. DIMENSIONS ARE IN INCHES.
- 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.

 DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSION. MOLD FLASH OR PROTRUSION SHALL NOT EXCEED .006" PER SIDE.

- 4. ALL VERTICAL SURFACES TO BE 5\* MAXIMUM.


 DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 MAXIMUM.

PIN 1: GND  
 PIN 2: +Vout  
 PIN 3: Vs  
 PIN 4: -Vout

|   |                           |                            |  |
|---|---------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>5 LD M-PAC                                | DOCUMENT NO: 98ARH99088A  | REV: B                     |  |
|   | CASE NUMBER: 1320-02      | 22 JUL 2005                |  |
|   | STANDARD: NON-JEDEC       |                            |  |

**CASE 1320-02  
 ISSUE A  
 MPAK**

PACKAGE DIMENSIONS

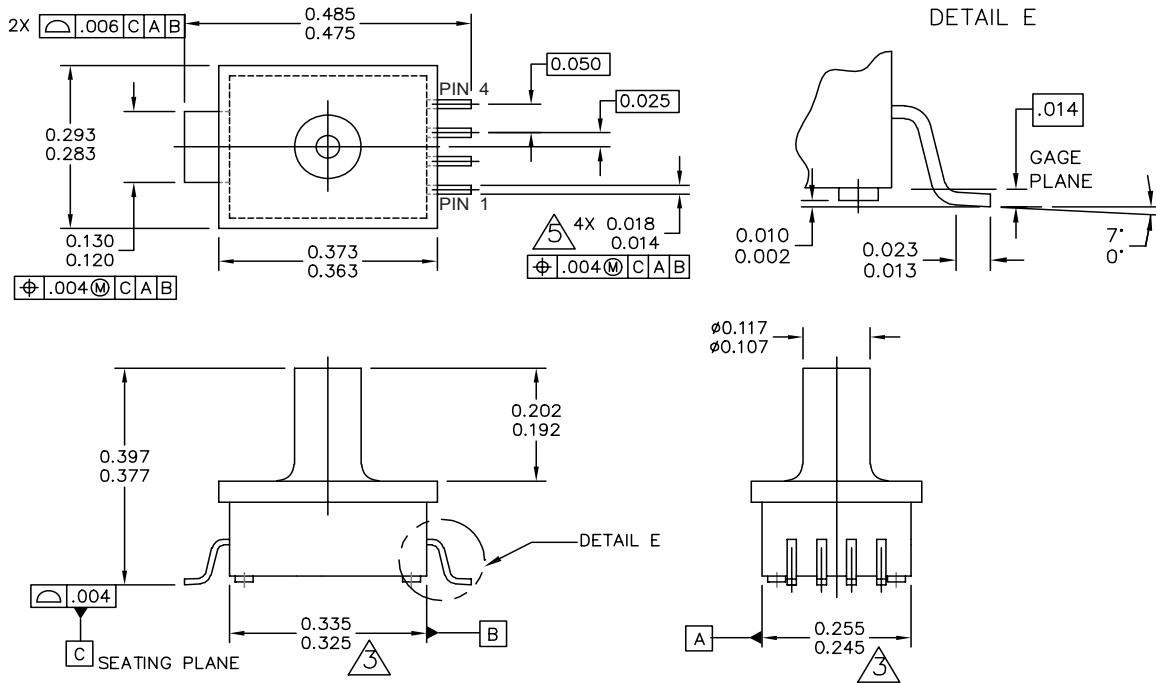

|   |                           |                            |  |
|---|---------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br>5 LD M-PAC, PORTED                            | DOCUMENT NO: 98ARH99087A  | REV: A                     |  |
|   | CASE NUMBER: 1320A-02     | 22 JUL 2005                |  |
|   | STANDARD: NON-JEDEC       |                            |  |

**CASE 1320A-02  
ISSUE A  
MPAK**

**PACKAGE DIMENSIONS**

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
3. DIMENSIONS DOES NOT INCLUDE MOLD FLASH OR PROTRUSION. MOLD FLASH OR PROTRUSION SHALL NOT EXCEED .006" PER SIDE.
4. ALL VERTICAL SURFACES TO BE 5" MAXIMUM.
5. DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 MAXIMUM.

|   |                           |                            |             |
|---|---------------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br><br>5 LD M-PAC, PORTED                        |                           | DOCUMENT NO: 98ARH99087A   | REV: A      |
|   |                           | CASE NUMBER: 1320A-02      | 22 JUL 2005 |
|   |                           | STANDARD: NON-JEDEC        |             |

**CASE 1320-02  
ISSUE A  
MPAK**



## **How to Reach Us:**

### **Home Page:**

[www.freescale.com](http://www.freescale.com)

### **Web Support:**

<http://www.freescale.com/support>

### **USA/Europe or Locations Not Listed:**

Freescale Semiconductor, Inc.  
Technical Information Center, EL516  
2100 East Elliot Road  
Tempe, Arizona 85284  
1-800-521-6274 or +1-480-768-2130  
[www.freescale.com/support](http://www.freescale.com/support)

### **Europe, Middle East, and Africa:**

Freescale Halbleiter Deutschland GmbH  
Technical Information Center  
Schatzbogen 7  
81829 Muenchen, Germany  
+44 1296 380 456 (English)  
+46 8 52200080 (English)  
+49 89 92103 559 (German)  
+33 1 69 35 48 48 (French)  
[www.freescale.com/support](http://www.freescale.com/support)

### **Japan:**

Freescale Semiconductor Japan Ltd.  
Headquarters  
ARCO Tower 15F  
1-8-1, Shimo-Meguro, Meguro-ku,  
Tokyo 153-0064  
Japan  
0120 191014 or +81 3 5437 9125  
[support.japan@freescale.com](mailto:support.japan@freescale.com)

### **Asia/Pacific:**

Freescale Semiconductor China Ltd.  
Exchange Building 23F  
No. 118 Jianguo Road  
Chaoyang District  
Beijing 100022  
China  
+86 010 5879 8000  
[support.asia@freescale.com](mailto:support.asia@freescale.com)

### **For Literature Requests Only:**

Freescale Semiconductor Literature Distribution Center  
P.O. Box 5405  
Denver, Colorado 80217  
1-800-441-2447 or +1-303-675-2140  
Fax: +1-303-675-2150  
[LDCForFreescaleSemiconductor@hibbertgroup.com](mailto:LDCForFreescaleSemiconductor@hibbertgroup.com)

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.

© Freescale Semiconductor, Inc. 2008. All rights reserved.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А